Lab Experiment-2
General Assembly Language Programming

Dr. Sanjay Kumar Singh

Associate Professor Senior, Department of Communication Engineering, School of Electronics Engineering

Winter 2025-26

Example:

WAP for basic arithmetic operations (Addition, Subtraction, Multiplication, Division, Increment and Decrement) on the 8051 microcontroller on two numbers given as: 92H and 23H. Store the results in memory locations starting from 40H to 47H.

Program:

```
ORG 0000H
MOV A, #92H     ; Load first i/p data in A register.
MOV B, #23H     ; Load second i/p data in B register.
ADD A,B         ; Add content of A and B
MOV 40H,A       ; Result Moved to 40H RAM memory location
MOV A,#92H
SUBB A,B        ; Subtract content of B from the content of A
MOV 41H,A       ; Subtraction result moved to memory location 41H
MOV A,#92H
MUL AB          ; Multiplication
MOV 42H,A       ; Lower byte of result moved to memory location 42H
MOV 43H,B       ; Higher byte of result moved to memory location 43H
MOV A, #92H
MOV B, #23H
DIV AB
MOV 44H,A        ; Quotient moved to 44H memory location
MOV 45H,B        ; Remainder moved to 45H memory location
MOV A, #92H
INC A
MOV 46H, A
MOV A,#92H
DEC A
MOV 47H, A
END
```

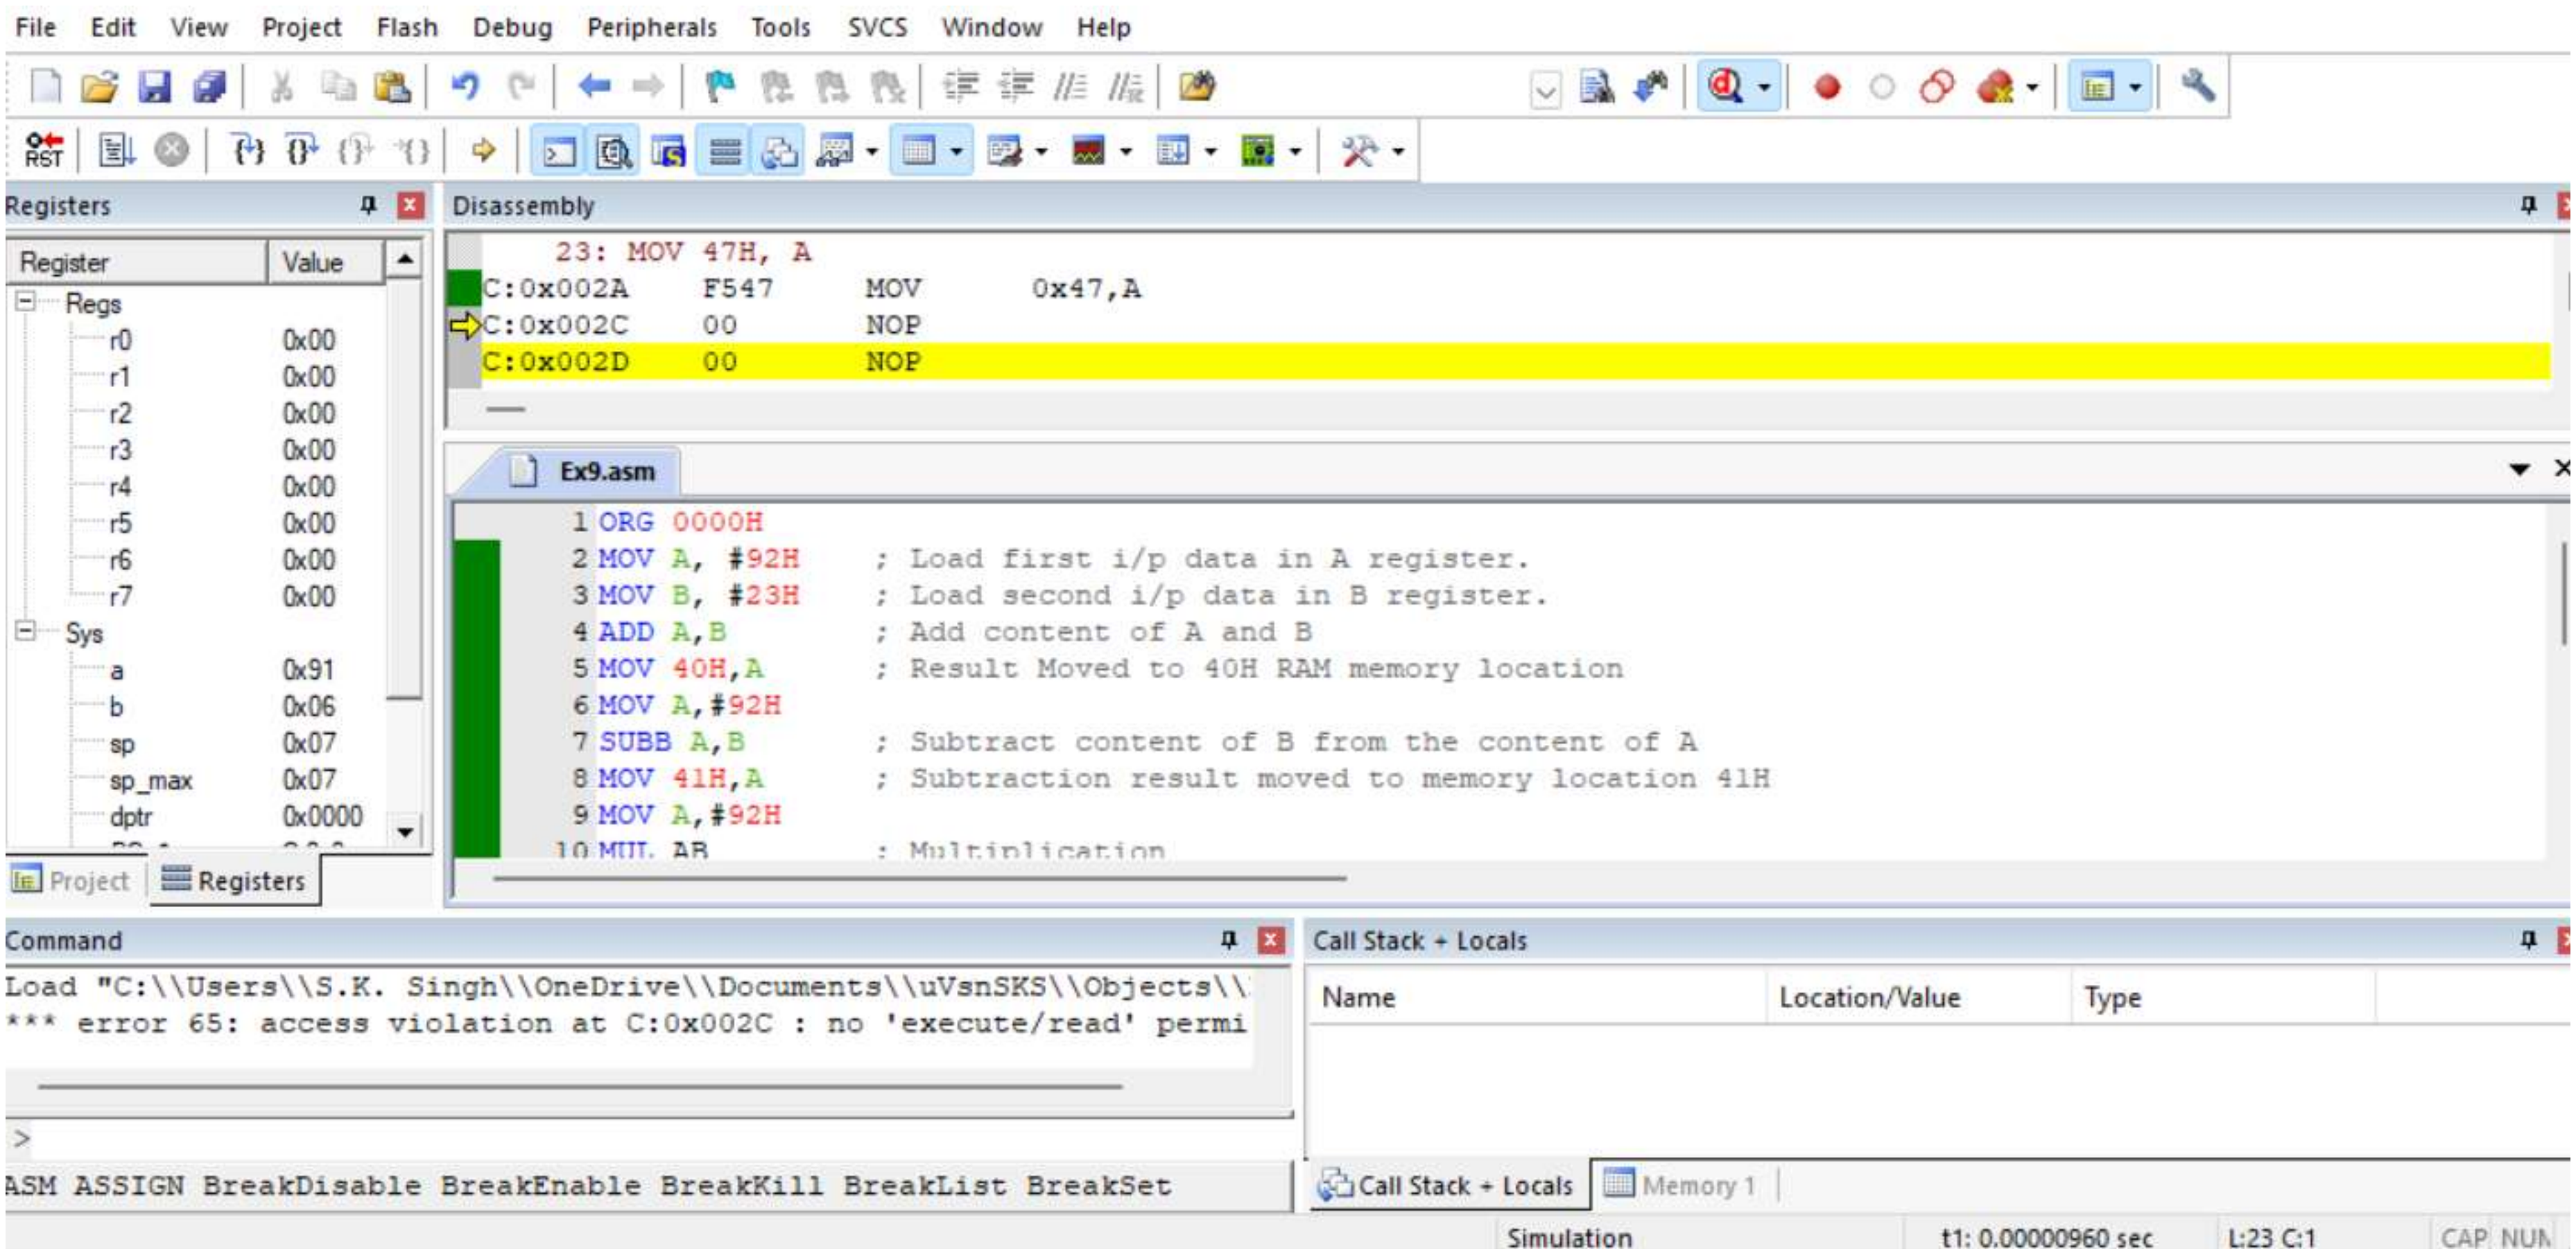
File Edit View Project Flash Debug Peripherals Tools SVCS Window Help
Registers
Register Value
Regs
r0 0x00
r1 0x00
r2 0x00
r3 0x00
r4 0x00
r5 0x00
r6 0x00
r7 0x00
Sys
a 0x91
b 0x06
sp 0x07
sp_max 0x07
dptr 0x0000
Project Registers
Disassembly
23: MOV 47H, A
C:0x002A F547 MOV 0x47,A
C:0x002C 00 NOP
C:0x002D 00 NOP
Ex9.asm
1 ORG 0000H
2 MOV A, #92H ; Load first i/p data in A register.
3 MOV B, #23H ; Load second i/p data in B register.
4 ADD A,B ; Add content of A and B
5 MOV 40H,A ; Result Moved to 40H RAM memory location
6 MOV A,#92H
7 SUBB A,B ; Subtract content of B from the content of A
8 MOV 41H,A ; Subtraction result moved to memory location 41H
9 MOV A,#92H
Command
Load "C:\\Users\\S.K. Singh\\OneDrive\\Documents\\uVsnSKS\\Objects\\
*** error 65: access violation at C:0x002C : no 'execute/read' permi
ASM ASSIGN BreakDisable BreakEnable BreakKill BreakList BreakSet
Call Stack + Locals
Name Location/Value Type
Call Stack + Locals Memory 1
Simulation t1: 0.00000960 sec L:23 C:1 CAP NUM

Example:

Add five hexadecimal numbers: 92H, 23H, 66H, 87H, F5H. Use A (Accumulator) and B register for addition. Each time an addition produces a carry, increment R0. Final sum is left in A and B. R0 = total number of carries.

Program:

```
ORG 0000H
MOV A, #92H       ; Load 1st data in A register.
MOV B, #23H       ; Load 2nd data in B register.
ADD A, B          ; Add the two data
JNC  L1           ; Check for carry
INC R0            ; Increment register R0, If CARRY occurs
L1: MOV B, A      ; Move contents of A into B register.
MOV A, #66H       ; Load 3rd data in A register.
ADD A, B
JNC L2
INC R0
L2: MOV B,A
MOV A, #87H       ; Load 4th data in A register.
ADD A,B
JNC L3
INC R0
L3: MOV B,A
MOV A, #0F5H      ; Load 5th data in A register.
ADD A, B
JNC L4
INC R0
L4: SJMP L4
END
```

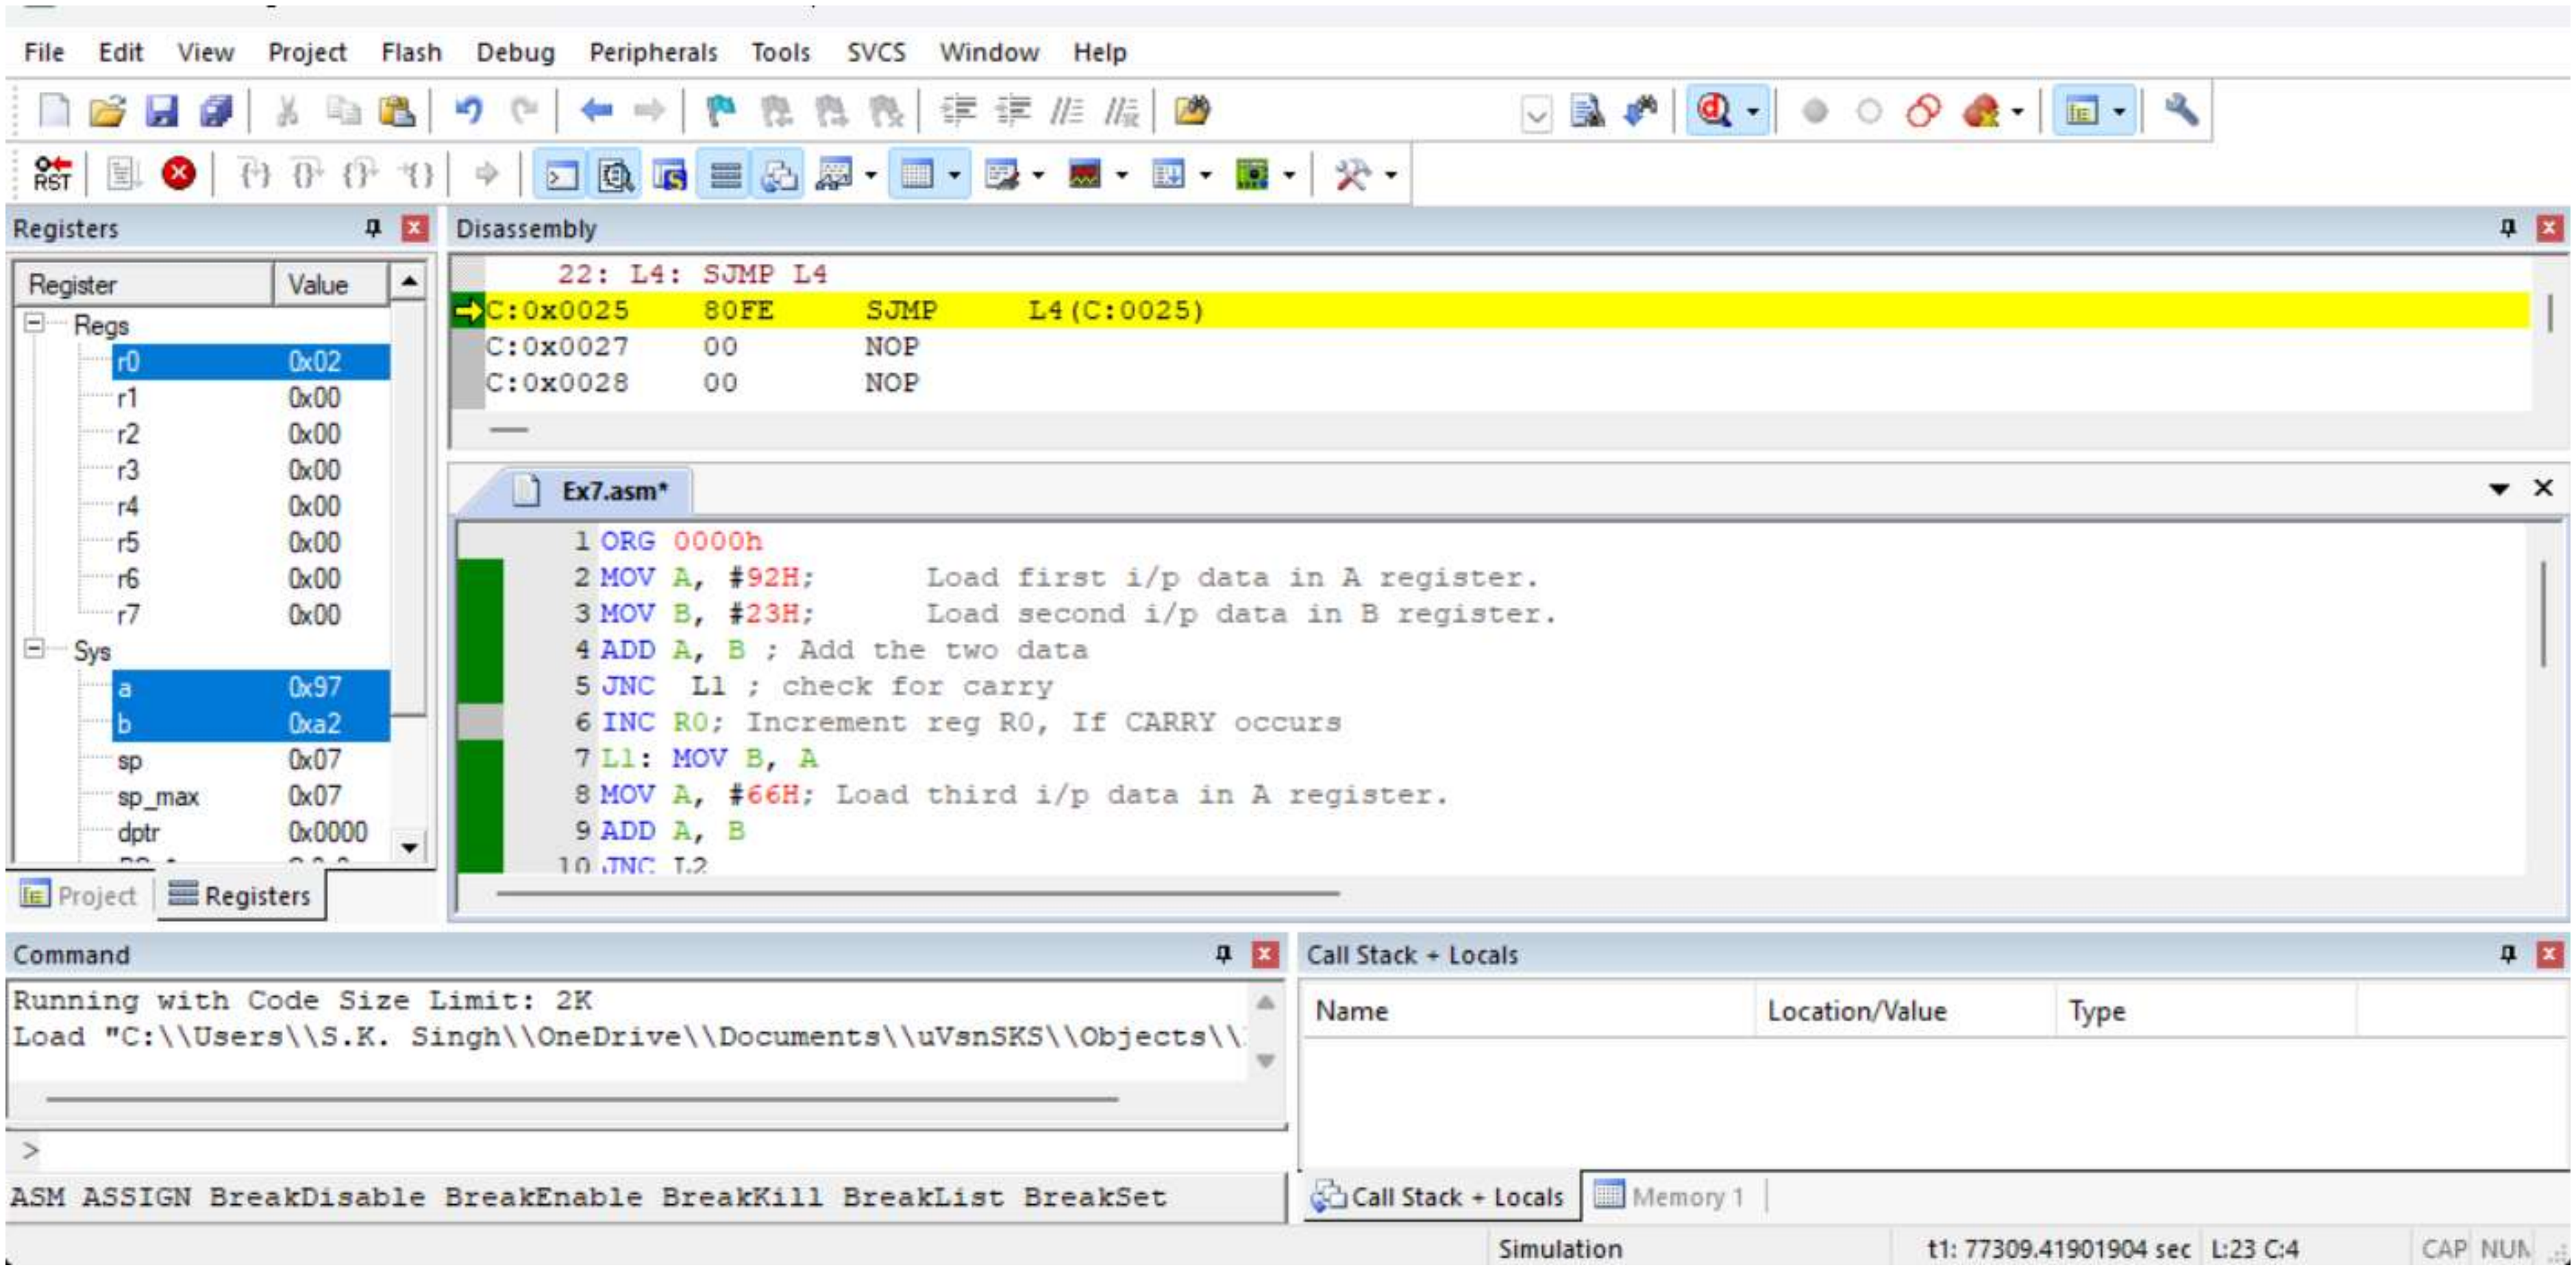
File Edit View Project Flash Debug Peripherals Tools SVCS Window Help
Registers
Register Value
Regs
r0 0x02
r1 0x00
r2 0x00
r3 0x00
r4 0x00
r5 0x00
r6 0x00
r7 0x00
Sys
a 0x97
b 0xa2
sp 0x07
sp_max 0x07
dptr 0x0000
Project Registers
Disassembly
22: L4: SJMP L4
C:0x0025 80FE SJMP L4(C:0025)
C:0x0027 00 NOP
C:0x0028 00 NOP
Ex7.asm*
1 ORG 0000h
2 MOV A, #92H; Load first i/p data in A register.
3 MOV B, #23H; Load second i/p data in B register.
4 ADD A, B ; Add the two data
5 JNC L1 ; check for carry
6 INC R0; Increment reg R0, If CARRY occurs
7 L1: MOV B, A
8 MOV A, #66H; Load third i/p data in A register.
9 ADD A, B
Command
Running with Code Size Limit: 2K
Load "C:\\Users\\S.K. Singh\\OneDrive\\Documents\\uVsnSKS\\Objects\\
ASM ASSIGN BreakDisable BreakEnable BreakKill BreakList BreakSet
Call Stack + Locals
Name Location/Value Type
Call Stack + Locals Memory 1
Simulation t1: 77309.41901904 sec L:23 C:4 CAP NUM

Example:

Write an 8051 ASM program to solve the following mathematical equation:

$$W = (4Z - Y + 2X)/3D$$

where, $D = 03H$, $X = 08H$, $Y = 25H$ and $Z = 12H$.

Program:

```
ORG 0000H    ; Start at 0
MOV R4,#03H ; Move 3 to r4 Where D=03H
MOV R3,#08H ; Where X=08H,
MOV R2,#25H ; Y=25H
MOV R1,#12H ; Z=12H
MOV A,R1
MOV B,#04H
MUL AB       ; Multiply a and b
MOV R5,A
MOV A,R3
MOV B,#02H
MUL AB
MOV R6,A
MOV A,R4
MOV B,#03H
MUL AB
MOV R7,A
MOV A,R5
ADD A,R6
MOV R0,A
MOV A,R0
SUBB A,R2
MOV B,R7
DIV AB
MOV 22H,A
END
```

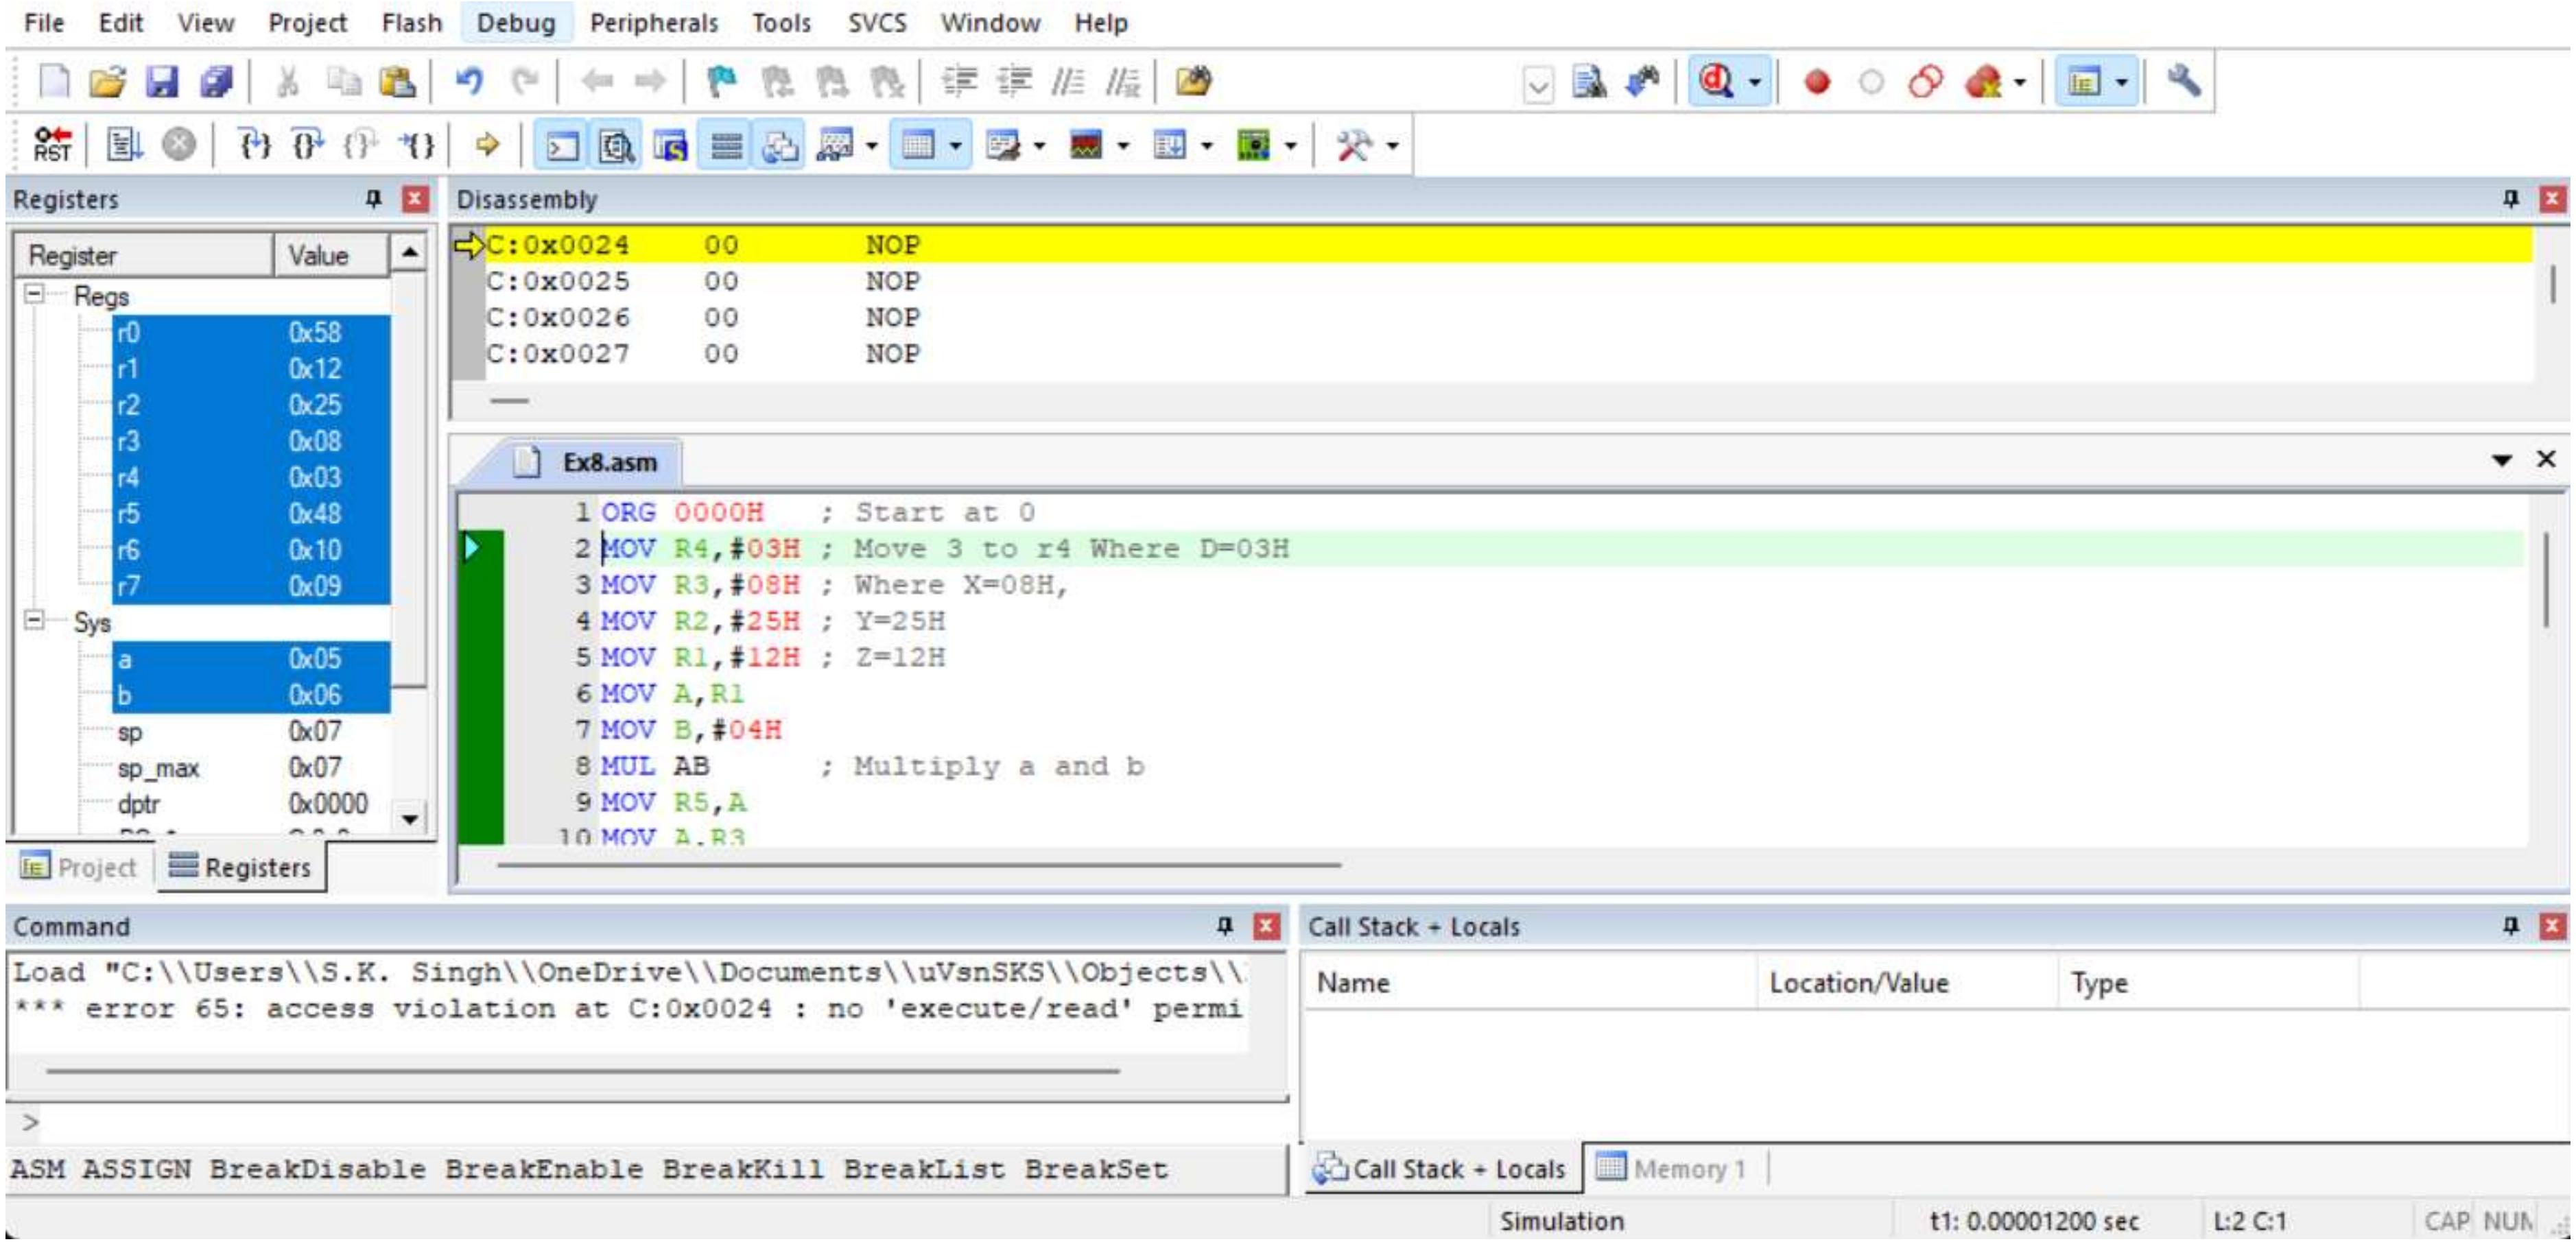

File Edit View Project Flash Debug Peripherals Tools SVCS Window Help
Registers
Register Value
Regs
r0 0x58
r1 0x12
r2 0x25
r3 0x08
r4 0x03
r5 0x48
r6 0x10
r7 0x09
Sys
a 0x05
b 0x06
sp 0x07
sp_max 0x07
dptr 0x0000
Project Registers
Disassembly
C:0x0024 00 NOP
C:0x0025 00 NOP
C:0x0026 00 NOP
C:0x0027 00 NOP
Ex8.asm
1 ORG 0000H ; Start at 0
2 MOV R4,#03H ; Move 3 to r4 Where D=03H
3 MOV R3,#08H ; Where X=08H,
4 MOV R2,#25H ; Y=25H
5 MOV R1,#12H ; Z=12H
6 MOV A,R1
7 MOV B,#04H
8 MUL AB ; Multiply a and b
9 MOV R5,A
Command
Load "C:\\Users\\S.K. Singh\\OneDrive\\Documents\\uVsnSKS\\Objects\\
*** error 65: access violation at C:0x0024 : no 'execute/read' permi
ASM ASSIGN BreakDisable BreakEnable BreakKill BreakList BreakSet
Call Stack + Locals
Name Location/Value Type
Call Stack + Locals Memory 1
Simulation t1: 0.00001200 sec L:2 C:1 CAP NUM