



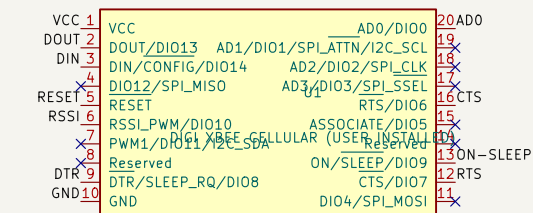


XBEE RADIO SOCKETS / USER-INSTALLED MODULE




U1 is user-installed and excluded from the assembly BOM.

TORADIX VIOLA X9 ADAPTER CONNECTIONS




DIGI CELLULAR POWER BYPASS

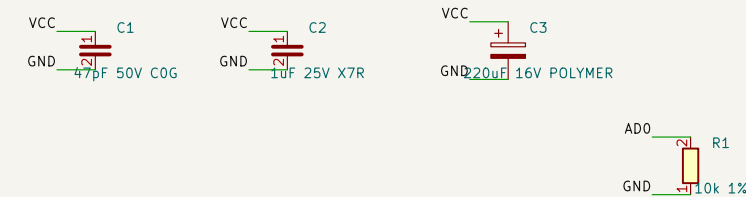

C3: 220uF, 16V polymer; pad 1 / + connects to VCC.

Digi minimum bulk capacitance for cellular inrush: 220uF at VCC.



XBee module is user-installed and excluded from assembly
220uF bulk bypass for Digi cellular radios
803-001-002-A; derived from 803-001-001-B

Sheet: /
File: 803-001-002-A.kicad_sch

Title: DIGI CELLULAR RADIO ADAPTER – TORADIX VIOLA

Size: A3	Date: 2026-10-04	Rev: A
KiCad E.D.A. 10.0.6		Id: 1/1