


VARENDRA UNIVERSITY



বরেন্দ্র
বিশ্ববিদ্যালয়

Varendra University

Dept. of Computer Science & Engineering (CSE)

Addressing Mode and Mathematical Calculation

Course Title: **Microprocessor and Assembly Language**

Course No: **CSE 3205**

Prepared By:


Md. Adnan Sami

Lecturer, Dept. of CSE, VU

Outline

1. Addressing Mode.
2. Memory Segmentation.
3. Segment and Offset.
4. Physical Address and Logical Address Calculation.
5. Address Line and Data Line Calculation.

VARENDRA UNIVERSITY

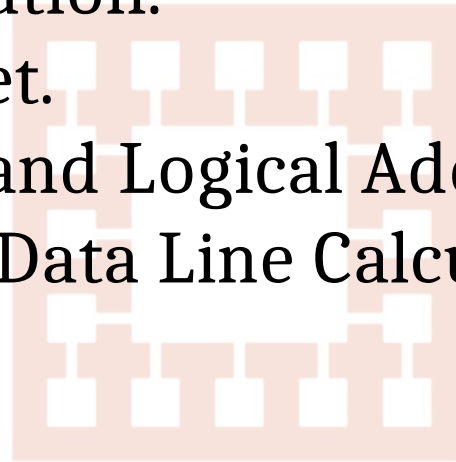

বাবু
বিশ্ববিদ্যালয়

Addressing Mode

The manner in which operand is given an instruction is called addressing mode.

Example:

MOV AX, BX


↓
Opcode

↘
Operand

MOV
ADD
SUB

> Opcode (Operation)

VARENDRA UNIVERSITY

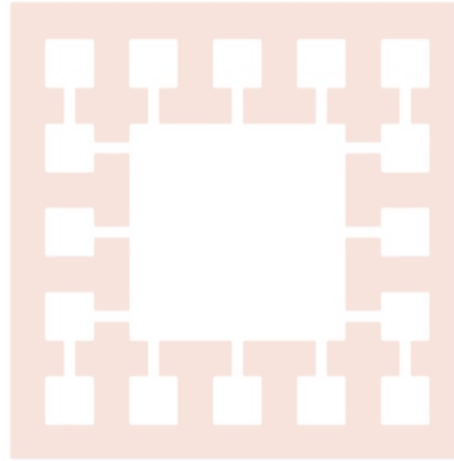

বাবু

বিশ্ববিদ্যালয়

Addressing Mode

The manner in which operand is given an instruction is called addressing mode.

i) **Immediate mode**: Data is given in instruction.

MOV AL, 25H

MOV BX, 2000H

ii) **Register mode**: Data is given in register.

MOV AL, BL

MOV AX, BX

iii) **Direct mode**: Address is given in instruction.

MOV AX, [2000H]

iv) **Indirect mode**: Address is given in register.

MOV AL, [BX]

Addressing Mode

Indirect mode:

Register mode:

Physical address = Segment address + Effective address

MOV AL, [BX]

Base indexed:

Effective address = Base register + Index register

Base register = BX, BP

Index register = SI, DI

MOV AX, [BX+SI]

MOV AL, [BP+SI]

Addressing Mode

Indirect mode:

Indexed mode:

Effective address = Index register + Displacement

MOV AX, [SI+2000]

Base mode:

Effective address = Base register + Displacement

MOV AL, [BP+2000]

Addressing Mode

Indirect mode:

Base indexed displacement:

Effective address = Index register + Base register +
Displacement

MOV AL, [SI+ BP+ 2000]

Memory Segmentation

Segmentation is the process in which the main memory of the computer is logically divided into different segments.

Total memory size is divided into segments of various sizes is called **memory segmentation**.

➤ It helps in organizing and managing memory efficiently.

Advantage

- ❖ Efficient Memory Utilization.
- ❖ Protection.
- ❖ Faster Execution.

Memory Segmentation


- In memory, data is stored as bytes.
- 8086 microprocessor has 20 lines address bus.
 - Data bus 16-bit.
 - Address bus 20-bit.
- 20 address lines the memory can be addressed as,
 $2^{20}\text{bytes} = 1 \text{ MB}$
- Address ranging from 00000H to FFFFFH.
- Each register stores the base address (Starting Address) because segment register cannot store 20 bits.

Segment and Offset

Memory address is specified using two components,

- **Segment:** Identifies the starting location (base address).
- **Offset:** Specifies the position within that segment.

8086 has 4 different types of segment,

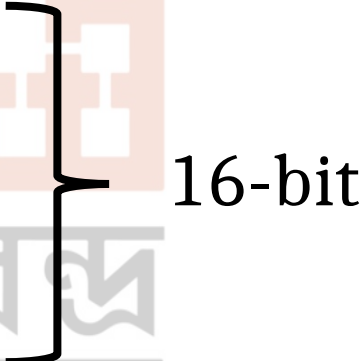1. Code Segment (CS).
 2. Data Segment (DS).
 3. Stack Segment (SS).
 4. Extra Segment (ES).
- 
- 16-bit

Segment and Offset

Segment	Offset
CS	IP
DS	BX, DI, SI
SS	SP, BP
ES	DI



Physical Address and Logical Address Calculation

Formula:

Physical Address = Base Address of Segment $\times$ 10H + Offset

Or

Physical address = Segment address of (Register Name) $\times$ 10H + Offset Address

Logical Address = Segment : Offset

Base Address (Starting Address)

Physical Address and Logical Address Calculation

Problem 1:

The content of following registers are,

CS = 1111H DS = 1678H SS = 6789H ES = 1298H
IP = 6721H BX = 7865H DI = 1235H BP = 7821H

Calculate the corresponding physical and logical address from address bytes in CS, DS, SS & ES.

Solution:

Segment: CS, DS, SS, ES

Offset: IP, BP, DI, BX

Physical Address and Logical Address Calculation

Problem 1:

Solution:

Physical address of CS = Segment address of CS $\times$ 10H + Offset Address

$$= 1111\text{H} \times 10\text{H} + 6721\text{H}$$
$$= 17831\text{H}$$

Logical address of CS = Segment : Offset

$$= \text{CS} : \text{IP}$$
$$= 1111\text{H} : 6721\text{H}$$

➤ **Logical address is generated by CPU.**

Physical Address and Logical Address Calculation

Problem 1:

Solution:

Physical address of ES = Segment address of ES $\times$ 10H + Offset Address

$$= 1298\text{H} \times 10\text{H} + 1235\text{H}$$

$$= 13\text{BB}5\text{H}$$

Logical address of ES = Segment : Offset
= ES : DI
= 1298H : 1235H

1 2 9 8 0
1 2 3 5
1 3 B B 5

Physical Address and Logical Address Calculation

Problem 1:

Physical address and Logical address of DS and SS.



Try Yourself

Physical Address and Logical Address Calculation

Problem 2:

Given a physical address and offset address. Calculate the corresponding segment address of ES.

Physical address = 13BB5H Offset address = 1235H

Solution:

Physical address = Segment address of ES $\times$ 10H + Offset
Address

$\Rightarrow$ 13BB5H = Segment address of ES $\times$ 10H + 1235H

$\Rightarrow$ Segment address of ES = 1298H

Physical Address and Logical Address Calculation

Problem 3:

Calculate the physical address for following register.

SS = 3864H SP = 1735H BP = 4826H

Solution:

Case 1:

$$\begin{aligned}\text{Physical address} &= \text{Segment address of SS} \times 10\text{H} + \text{Offset Address (SP)} \\ &= 3864\text{H} \times 10\text{H} + 1735\text{H} \\ &= 39\text{D}75\text{H}\end{aligned}$$

Physical Address and Logical Address Calculation

Problem 3:

Calculate the physical address for following register.

SS = 3864H SP = 1735H BP = 4826H

Solution:

Case 2:

$$\begin{aligned}\text{Physical address} &= \text{Segment address of SS} \times 10\text{H} + \text{Offset} \\ &\quad \text{Address (BP)} \\ &= 3864\text{H} \times 10\text{H} + 4826\text{H} \\ &= 3\text{CE}66\text{H}\end{aligned}$$

Physical Address and Logical Address Calculation

Problem 4:

Calculate the physical address for following instruction.

DS = 1000H SS = 7000H ES = 4000H

BP = 0100H SI = 0020H DI = 0200H BX = 0700H

Value (Displacement = 0500H)

Solution:

i) **MOV AX, [BX][SI]**

Physical address = Segment address of DS $\times$ 10H + [BX+SI]
= 1000H $\times$ 10H + [0700H+0020H]
= 10720H

Offset BX, SI = DS

Physical Address and Logical Address Calculation

Problem 4:

Calculate the physical address for following instruction.

DS = 1000H SS = 7000H ES = 4000H

BP = 0100H SI = 0020H DI = 0200H BX = 0700H

Value (Displacement = 0500H)

Solution:

ii) ADD AL, (BP+40H)

$$\begin{aligned}\text{Physical address} &= \text{Segment address of SS} \times 10\text{H} + (\text{BP} + 40\text{H}) \\ &= 7000\text{H} \times 10\text{H} + (0100\text{H} + 40\text{H}) \\ &= 70140\text{H}\end{aligned}$$

Offset BP = SS

Physical Address and Logical Address Calculation

Problem 4:

Calculate the physical address for following instruction.

DS = 1000H SS = 7000H ES = 4000H

BP = 0100H SI = 0020H DI = 0200H BX = 0700H

Value (Displacement = 0500H)

Solution:

iii) MOV CX, Values[BP]

$$\begin{aligned}\text{Physical address} &= \text{Segment address of SS} \times 10\text{H} + \\ &\quad [\text{BP} + \text{Values}] \\ &= 7000\text{H} \times 10\text{H} + (0100\text{H} + 0500\text{H}) \\ &= 70600\text{H}\end{aligned}$$

Offset BP = SS

Physical Address and Logical Address Calculation

Problem 4:

Calculate the physical address for following instruction.

DS = 1000H SS = 7000H ES = 4000H

BP = 0100H SI = 0020H DI = 0200H BX = 0700H

Value (Displacement = 0500H)

Solution:

iv) MOV ES:[1000H], AL

$$\begin{aligned}\text{Physical address} &= \text{Segment address of ES} \times 10\text{H} + [1000\text{H}] \\ &= 4000\text{H} \times 10\text{H} + [1000\text{H}] \\ &= 41000\text{H}\end{aligned}$$

Physical Address and Logical Address Calculation

Problem 5:

Logical address is 8000H : 0000H. Calculate the physical address.

Solution:

$$\begin{aligned}\text{Physical address} &= \text{Segment address} \times 10\text{H} + \text{Offset} \\ &= 8000\text{H} \times 10\text{H} + 0000\text{H} \\ &= 80000\text{H}\end{aligned}$$

Physical Address and Logical Address Calculation

Problem 6:

What is the physical address of 6th segment for location 250?

Solution:

Segment = 5000H (Segment starts from 0. So, 5)

Offset = 249 (Start from 0. So, 249)

= 00F9H (Hexadecimal value)

Physical address = Segment address $\times$ 10H + Offset
= 5000H $\times$ 10H + 00F9H
= 500F9H

Address Line and Data Line Calculation

Should be remembered,

$$K = 2^{10} \text{ (KB)}$$

$$M = 2^{20} \text{ (MB)}$$

$$G = 2^{30} \text{ (GB)}$$

$$T = 2^{40} \text{ (TB)}$$



Address Line and Data Line Calculation

The memory units that follows are specified by the number of **words** times, the number of **bits** per word. How many **address lines** and input output **data lines** are needed in each case?

a) $8K \times 16$

b) $2G \times 8$


c) $16M \times 32$

d) $256K \times 64$

e) $64K \times 8$

f) $2T \times 8$

Solution:

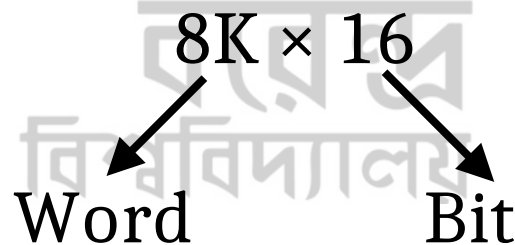

- Data line is obtained from **“bit value”**
- Address line is obtained from **“Word value”**

Address Line and Data Line Calculation

The memory units that follows are specified by the number of **words** times, the number of **bits** per word. How many **address lines** and input output **data lines** are needed in each case?

a) $8K \times 16$

b) $2G \times 8$

c) $16M \times 32$

d) $256K \times 64$

e) $64K \times 8$

f) $2T \times 8$

Solution:

Let, address line is denoted by “A” and data line is denoted by “D”.

Address Line and Data Line Calculation

Solution:


a) **8K × 16**

D = 16 (Data Line)

$$\begin{aligned} &8K \times 16 \\ &= 2^3 \times 2^{10} \times 16 \\ &= 2^{13} \times 16 \end{aligned}$$

A = 13 (Address Line)

VARENDRA UNIVERSITY

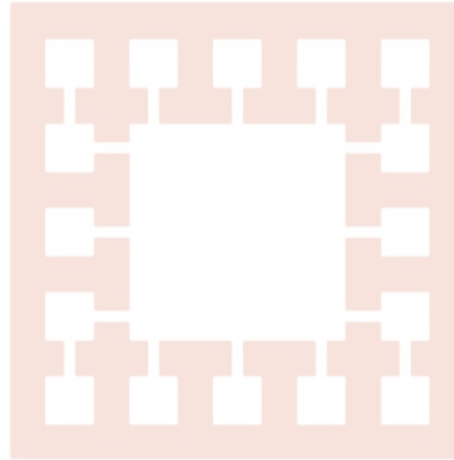

বাবু
বিশ্ববিদ্যালয়

Address Line and Data Line Calculation

Solution:


b) $2G \times 8$

$D = 8$ (Data Line)

$$\begin{aligned} 2G \times 8 \\ &= 2^1 \times 2^{30} \times 8 \\ &= 2^{31} \times 8 \end{aligned}$$

$A = 31$ (Address Line)

VARENDRA UNIVERSITY

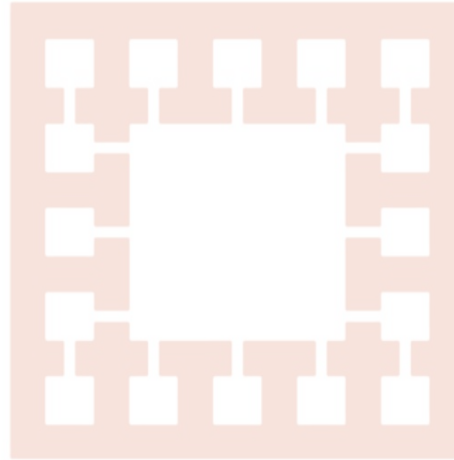

বাবু
বিশ্ববিদ্যালয়

Address Line and Data Line Calculation

Solution:


c) **16M × 32**

D = 32 (Data Line)

$$\begin{aligned} &16\text{M} \times 32 \\ &= 2^4 \times 2^{20} \times 32 \\ &= 2^{24} \times 32 \end{aligned}$$

A = 24 (Address Line)

VARENDRA UNIVERSITY

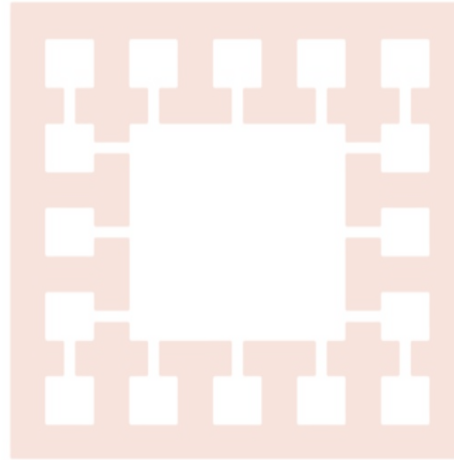

বাবু
বিশ্ববিদ্যালয়

Address Line and Data Line Calculation

Solution:


d) 256K × 64

D = 64 (Data Line)

$$\begin{aligned} 256K \times 64 \\ &= 2^8 \times 2^{10} \times 64 \\ &= 2^{18} \times 64 \end{aligned}$$

A = 18 (Address Line)

VARENDRA UNIVERSITY

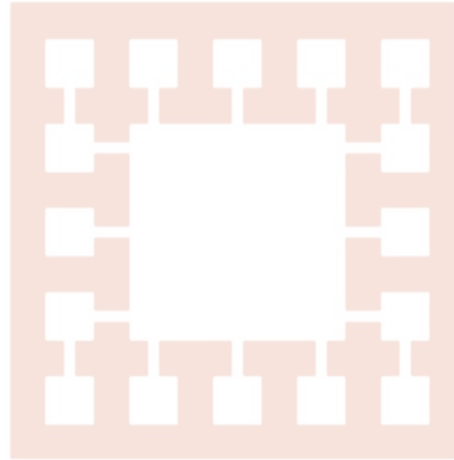

বাবু
বিশ্ববিদ্যালয়

Address Line and Data Line Calculation

Solution:


e) **64K × 8**

D = 8 (Data Line)

$$\begin{aligned} 64K \times 8 \\ &= 2^6 \times 2^{10} \times 8 \\ &= 2^{16} \times 8 \end{aligned}$$

A = 16 (Address Line)

VARENDRA UNIVERSITY

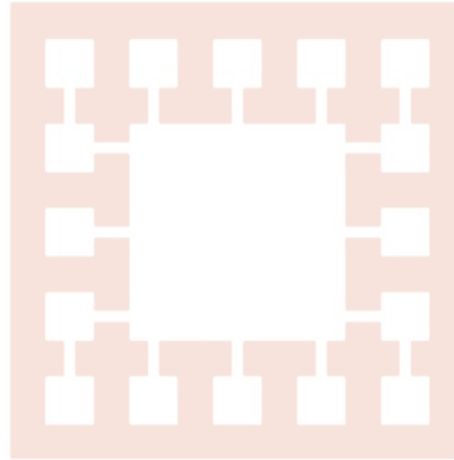

বাবু
বিশ্ববিদ্যালয়

Address Line and Data Line Calculation

Solution:


f) $2T \times 8$

D = 8 (Data Line)

$$\begin{aligned} 2T \times 8 \\ = 2^1 \times 2^{40} \times 8 \\ = 2^{41} \times 8 \end{aligned}$$

A = 41 (Address Line)

VARENDRA UNIVERSITY

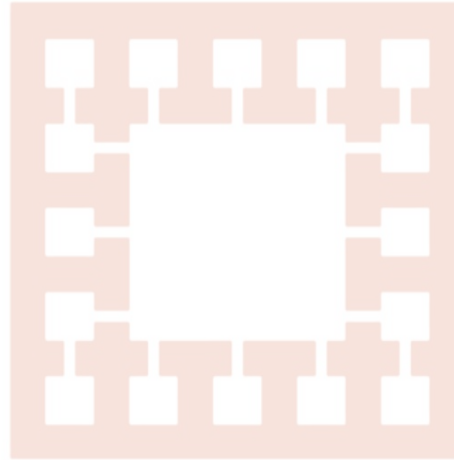

বাবু
বিশ্ববিদ্যালয়