

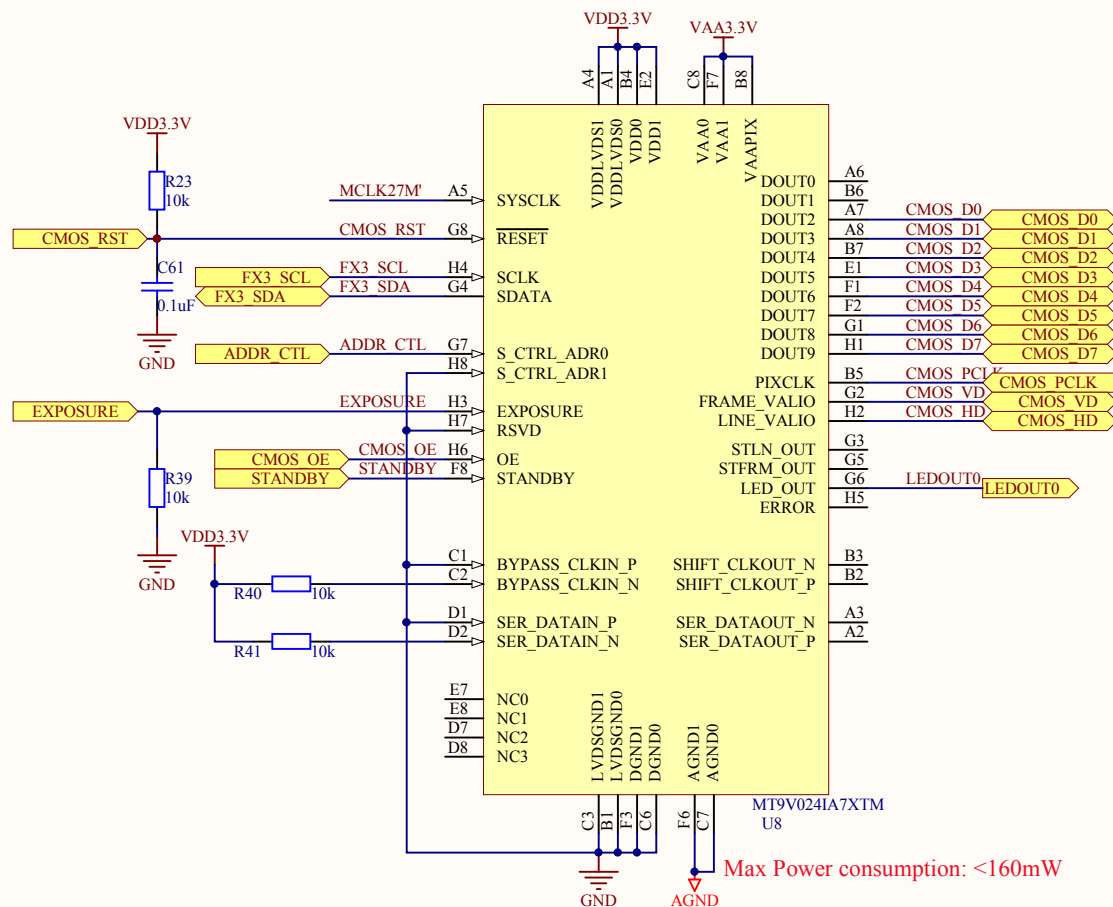




Mounting Holes for M2 Screws








I2C: ADR1 ADR0:


00: 0X90
01: 0X98
10: 0XB0
11: 0XB8




Title		
Size	Number	Revision
A4		
Date:	2017/11/10	Sheet of
File:	E:\stm32 \\.sch camera.SchDoc	Drawn By:

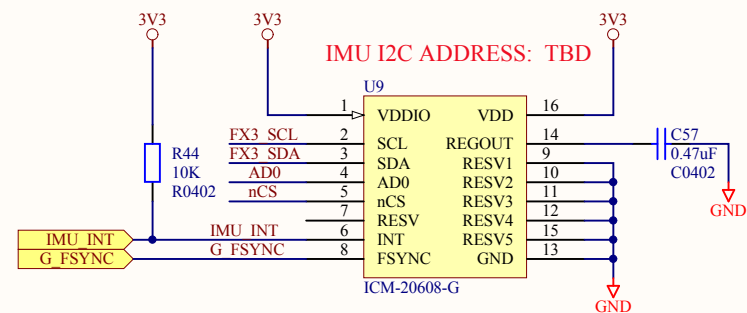

I-PEX 0.4mm pitch connector

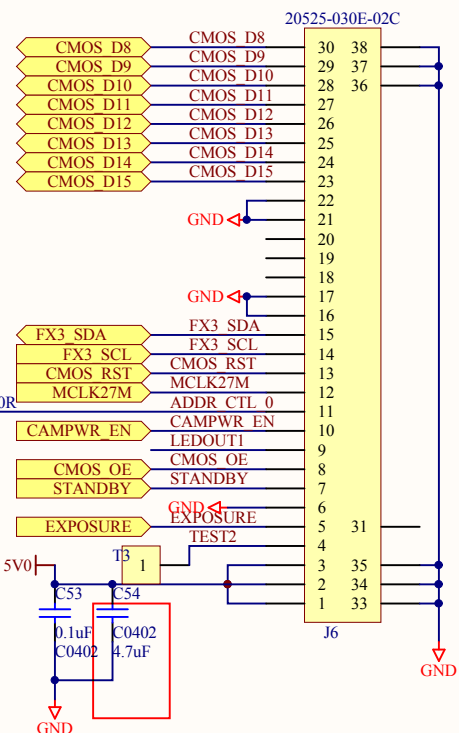

FPC connector

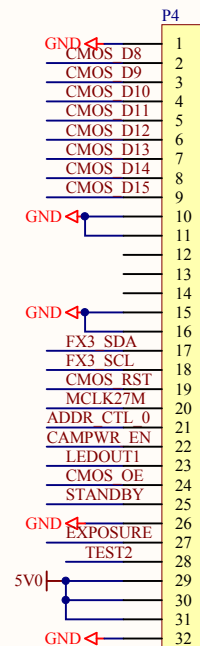


Sensors Interface & IMU

Title		
Size	Number	Revision
A4		
Date:	2017/11/10	Sheet of
File:	E:\stm32 \.sch Connet&IMU.SchDoc	Drawn By:


U1A

P- PORT SEC 1/7

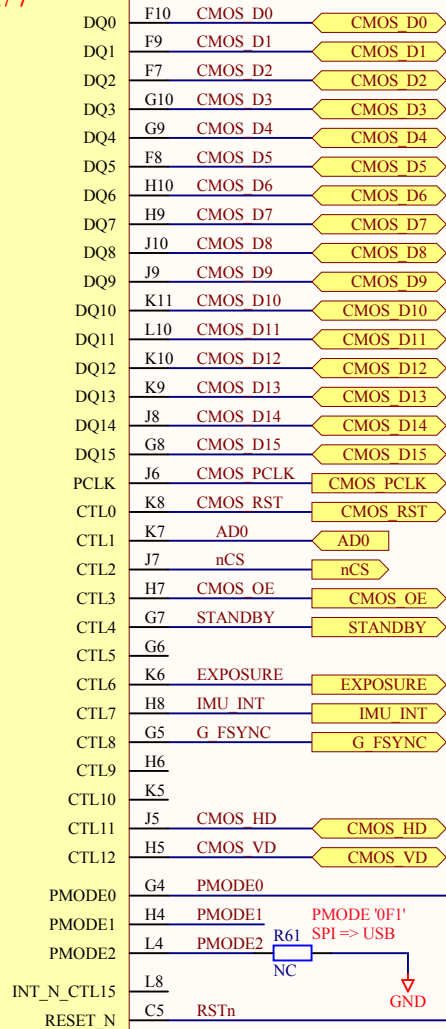

CYUSB3014

U1B

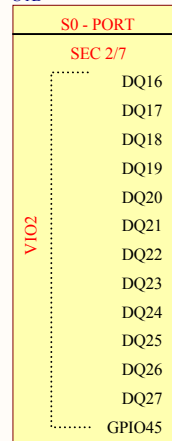

CYUSB3014

3V3

R1

R3

4.7K

4.7K

GND

R4

100K

GND

5V0

R5

1K

GND

LED1

LED0805

Q1

BC817

GND

GND

GND

GND

GND

GND

GND

GND

GND

GND

GND

GND

GND

GND

GND

GND

GND

GND

GND

GND

GND

GND

GND

GND

GND

GND

GND

GND

GND

GND

GND

GND

GND

GND

GND

GND

GND

GND

GND

GND

GND

GND

GND

GND

GND

GND

GND

GND

GND

GND

GND

GND

GND

GND

GND

GND

GND

GND

GND

GND

GND

GND

GND

GND

GND

GND

GND

GND

GND

GND

GND

GND

GND

GND

GND

GND

GND

GND

GND

GND

GND

GND

GND

GND

GND

GND

GND

GND

GND

GND

GND

GND

GND

GND

GND

GND

GND

GND

GND

GND

GND

GND

GND

GND

GND

GND

GND

GND

GND

GND

GND

GND

GND

GND

GND

GND

GND

GND

GND

GND

GND

GND

GND

GND

GND

GND

GND

GND

GND

GND

GND

GND

GND

GND

GND

GND

GND

GND

GND

GND

GND

GND

GND

GND

GND

GND

GND

GND

GND

GND

GND

GND

GND

GND

GND

GND

GND

GND

GND

GND

GND

GND

GND

GND

GND

GND

GND

GND

GND

GND

GND

GND

GND

GND

GND

GND

GND

GND

GND

GND

GND

GND

GND

GND

GND

GND

GND

GND

GND

GND

GND

GND

GND

GND

GND

GND

GND

GND

GND

GND

GND

GND

GND

GND

GND

GND

GND

GND

GND

GND

GND

GND

GND

GND

GND

GND

GND

GND

GND

GND

GND

GND

GND

GND

GND

GND

GND

GND

GND

GND

GND

GND

GND

GND

GND

GND

GND

GND

GND

GND

GND

GND

GND

GND

GND

GND

GND

GND

GND

GND

GND

GND

GND

GND

GND

GND

GND

GND

GND

GND

GND

GND

GND

GND

GND

GND

GND

GND

GND

GND

GND

GND

GND

GND

GND

GND

GND

GND

GND

GND

GND

GND

GND

GND

GND

GND

GND

GND

GND

GND

GND

GND

GND

GND

GND

GND

GND

GND

GND

GND

GND

GND

GND

GND

GND

GND

GND

GND

GND

GND

GND

GND

GND

GND

GND


GND

GND

GND


GND

GND

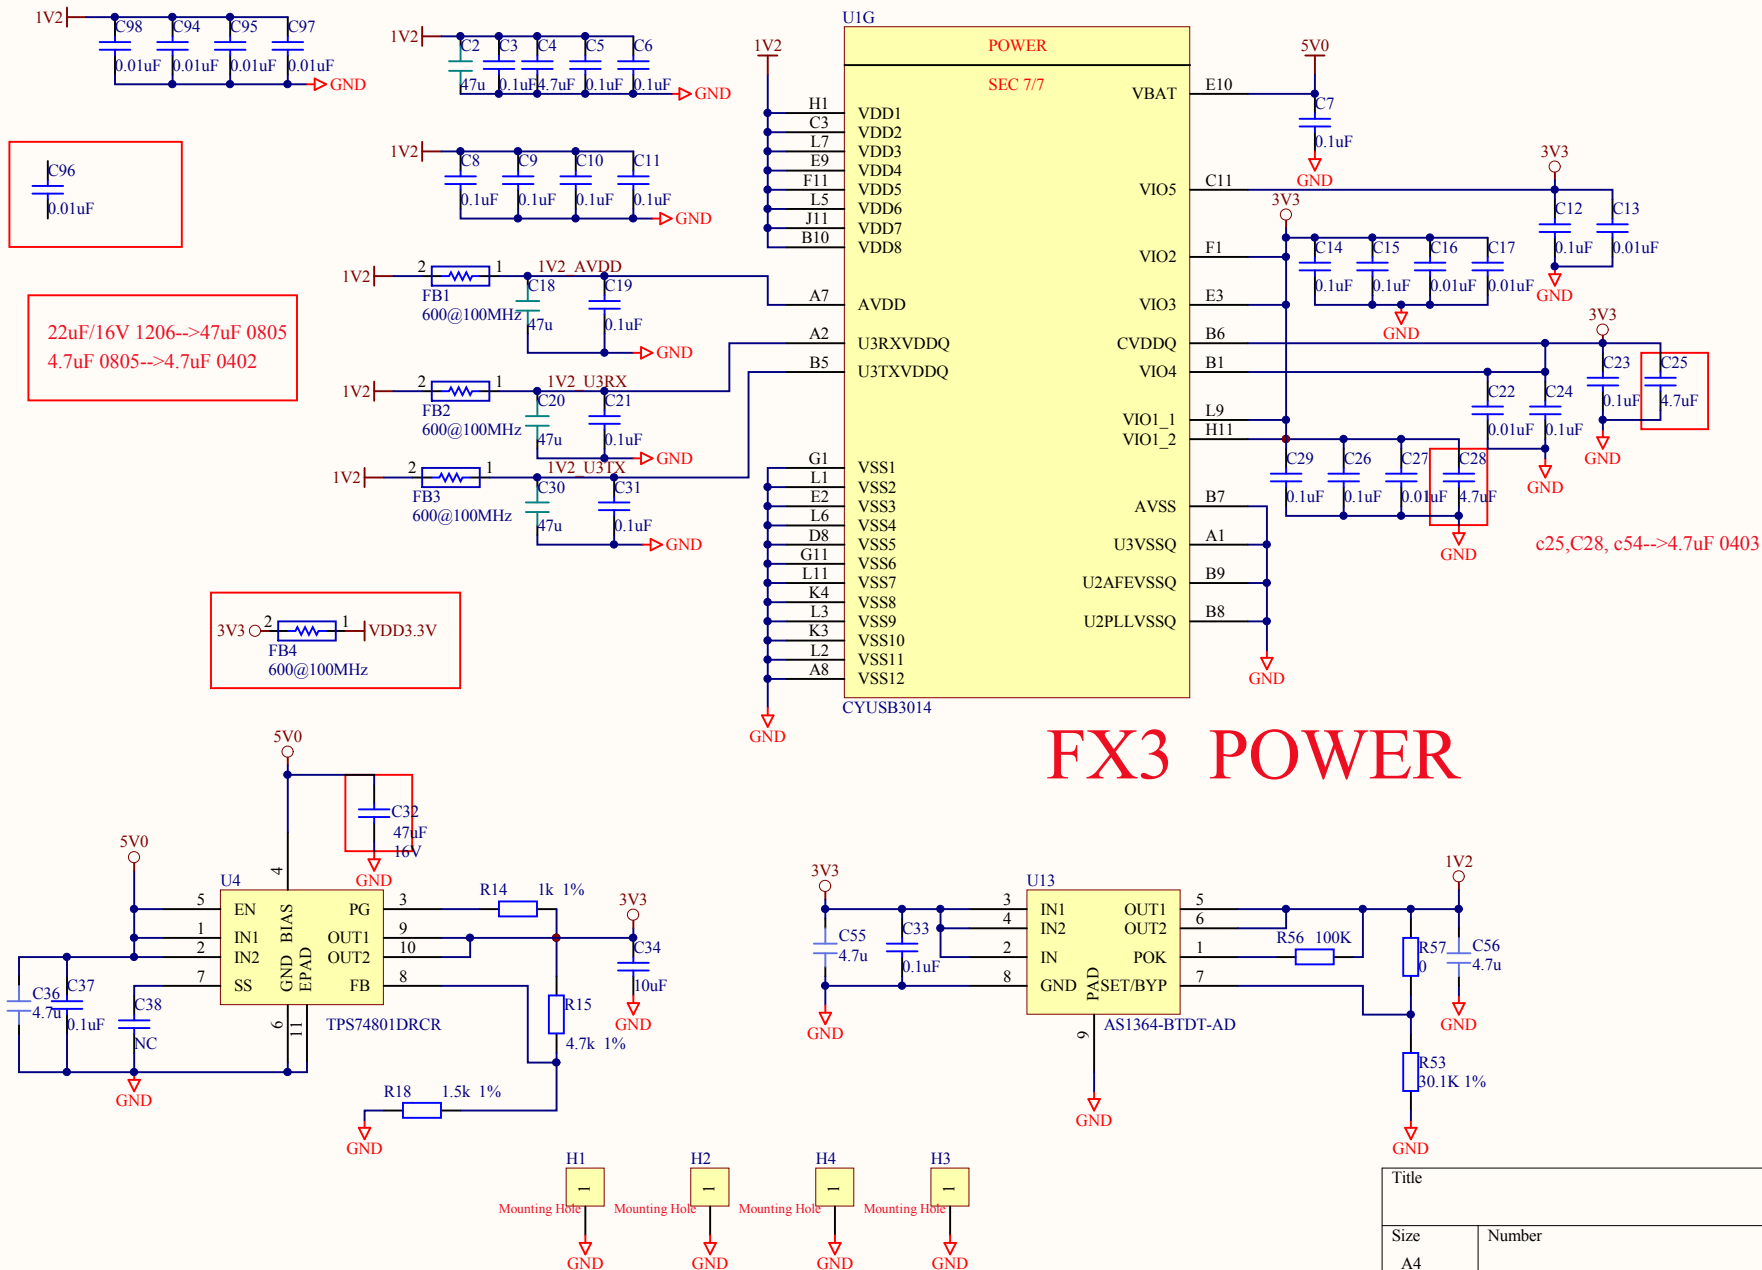



FX3 POWER

Title		
Size	Number	Revision
A4		
Date:	2017/11/10	Sheet of
File:	E:\stm32 \\.sch Power.SchDoc	Drawn By:




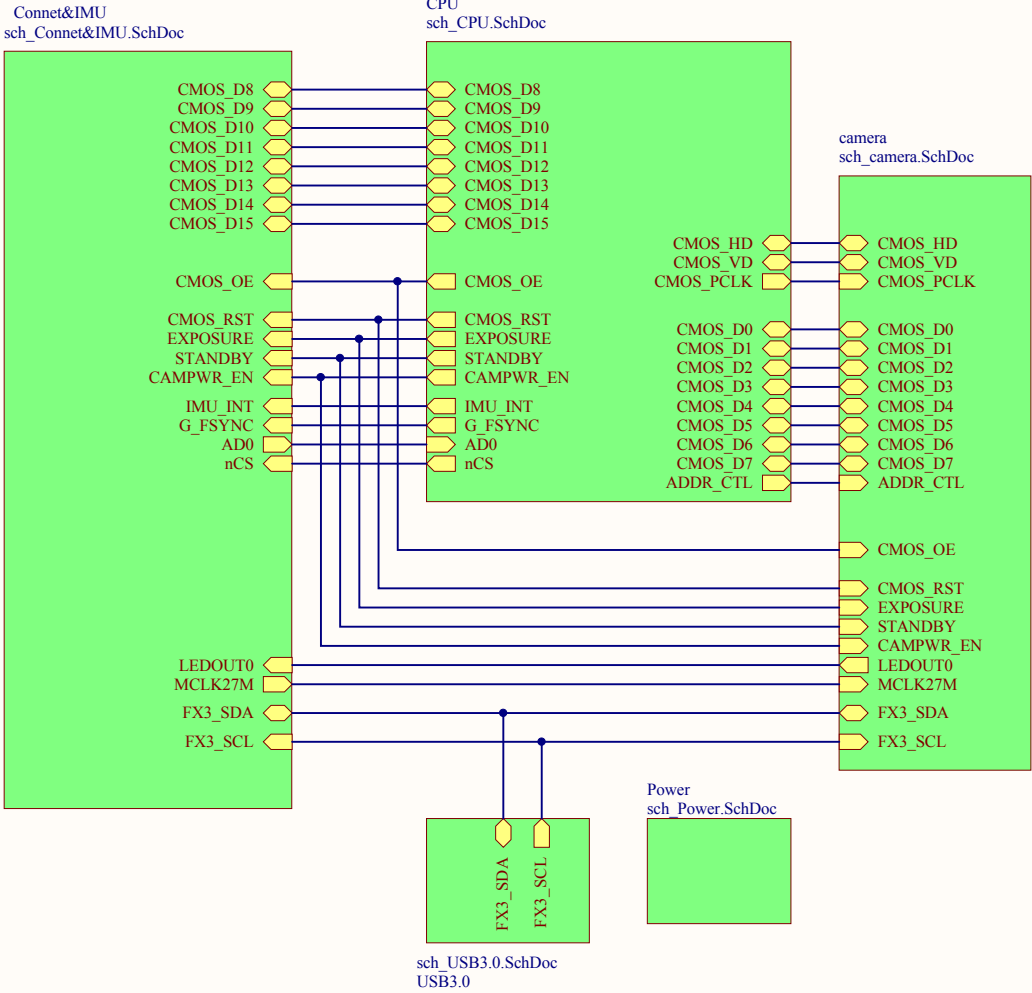


Title			
Size	Number		Revision
A4			
Date:	2017/11/10		Sheet of
File:	E:\stm32 \\.sch_Top.SchDoc		Drawn By:

J1 USB3 MICROB

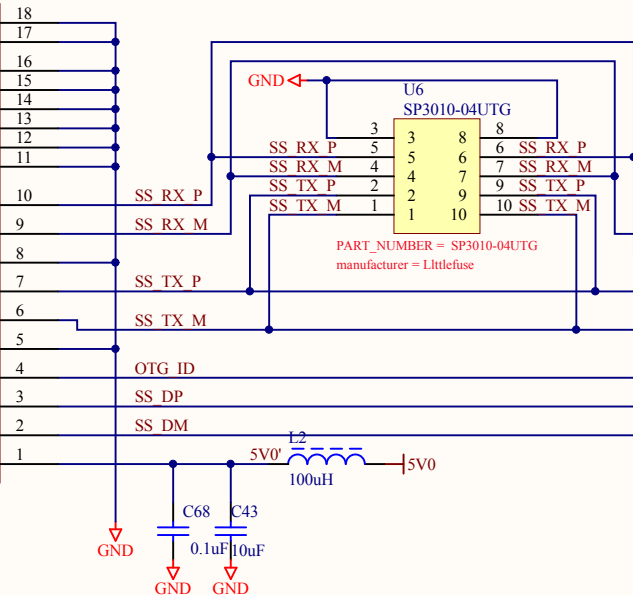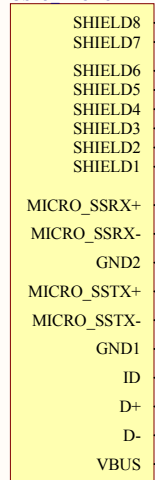

The following signal pairs:
SS_DP : SS_DM
SS_RX_P : SS_RX_M
SS_TX_P : SS_TX_M
UTXP : UTXM
are designated as differential pairs.
All differential pairs are to have differential-mode characteristic impedance of 90 Ohm.
To the fullest reasonable extent they should be length-matched, and layer changes should be minimized.

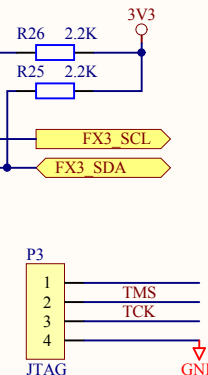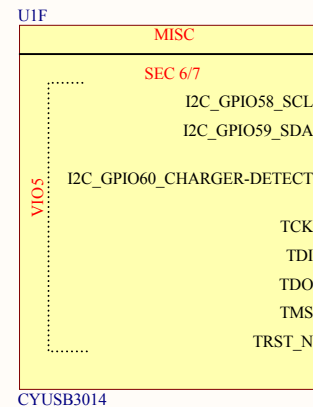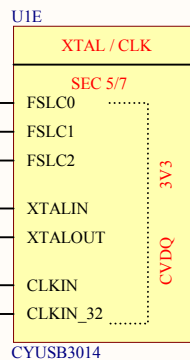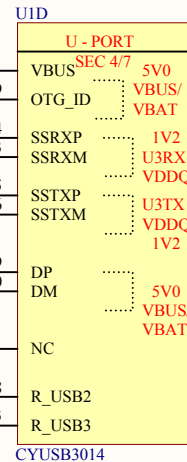

Title			
Size	Number		Revision
A4			
Date:	2017/11/10		Sheet of
File:	E:\stm32 \\.sch USB3.0.SchDoc		Drawn By: