
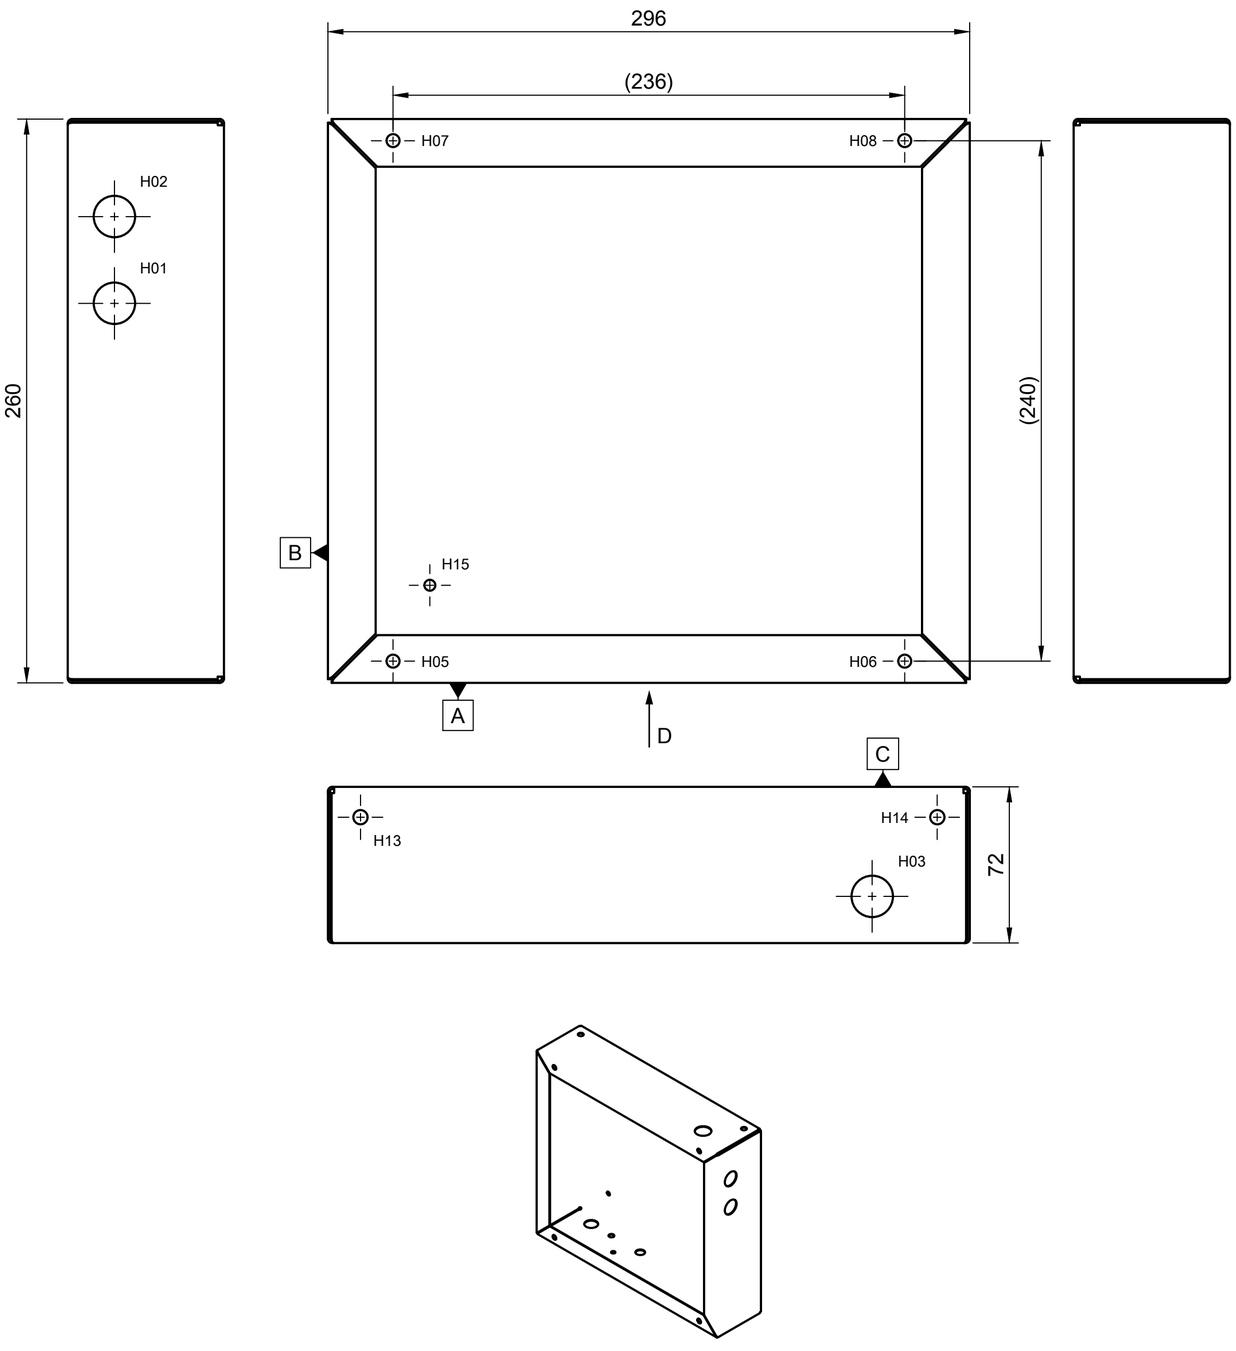


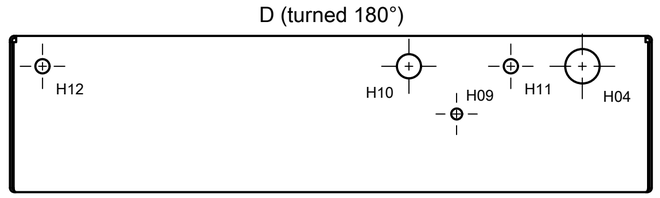

DRAWING DATA

Part: 711001 ELECTRICAL - POWER UNIT - ENCLOSURE BODY
Tên (VN): Điện - hộp nguồn - thân hộp
Rev / status: P01 / DRAFT, not for production
UNITS: mm. Scale 1:2 (iso 1:5) on A2. ISO first-angle projection (ISO 5456-2), symbol below.
MATERIAL: aluminium 5052-H32, 1.0 mm sheet (status: proposed).
FINISH: mill finish, hidden inside the pod (D-79). Deburr every edge.
SOURCE: the 711001 P01 STEP and CAD (same revision), 2026-11-02.

GENERAL NOTES

1. GENERAL TOLERANCE: ISO 2768-m. Hole positions ±0.2; hole diameters +0.1/0, the PEM holes H05-H09 and H15 +0.08/0.
2. Outside size 296 x 260 x 72 (datums A bottom, B left in the FRONT view, C back face); lips 22 inward.
3. Inside bend radius 1.0 (= thickness), K-factor 0.44, square bend reliefs. Cut from the flat pattern 711001_P01_ELECTRICAL-POWER-UNIT-ENCLOSURE-BODY_DXF.dxf (same revision).
4. Fit the Heyco 2836N bushings in H01-H03 after folding, and the Heyco snap bushings SB 625-7 in H04 and SB 437-5 in H10 from inside the box, head inside. Press the PEM CLA-M4-1 clinch nuts into H05-H08 from inside the box, head inside, so the plate's screws pull them onto the lips (PEM CL-18). Press the FHA-M5-12 studs into H09 (earth) and H15 (the cord's clamp) head outside, with PEM's anvil for sheet up to 1.5 mm (FH-18). The order with the folding is the factory's, with its tooling.
5. H11-H14 fix the unit to WALL's two cross members in B2 (IF-12): an M6 screw with a washer through each, from inside the box, into the member's rivnut. H09's place is an assumption until the unit's inside layout (the factory's).
6. (236) and (240): the H05-H08 pitch, for reference; the hole table gives the positions.
7. View D: the bottom, seen in the direction of arrow D (from below), drawn turned 180°: datum B is on its right, C at its top.

HOLE TABLE (positions from the datums A, B, C)

TAG	FACE	FROM B	FROM A	FROM C	Ø THRU	NOTE
H01	right side	—	175.0	50.5	Ø19.1	lead exit 1, Heyco 2836N bushing
H02	right side	—	215.0	50.5	Ø19.1	lead exit 2, Heyco 2836N bushing
H03	top	251.0	—	50.5	Ø19.1	light feed exit, Heyco 2836N bushing
H04	bottom	32.0	—	14.0	Ø15.9	mains cord entry, Heyco SB 625-7 bushing
H05	front lip	30.0	10.0	—	Ø5.94	M4 clinch nut, PEM CLA-M4-1
H06	front lip	266.0	10.0	—	Ø5.94	M4 clinch nut, PEM CLA-M4-1
H07	front lip	30.0	250.0	—	Ø5.94	M4 clinch nut, PEM CLA-M4-1
H08	front lip	266.0	250.0	—	Ø5.94	M4 clinch nut, PEM CLA-M4-1
H09	bottom	90.0	—	36.0	Ø5.0	M5 earth stud, PEM FHA-M5-12
H10	bottom	112.0	—	14.0	Ø11.1	LAN cable entry, Heyco SB 437-5 bushing
H11	bottom	65.0	—	14.0	Ø6.6	M6 fixing to WALL's cross member
H12	bottom	281.0	—	14.0	Ø6.6	M6 fixing to WALL's cross member
H13	top	15.0	—	14.0	Ø6.6	M6 fixing to WALL's cross member
H14	top	281.0	—	14.0	Ø6.6	M6 fixing to WALL's cross member
H15	back	47.0	45.0	—	Ø5.0	mains cord clamp stud, PEM FHA-M5-12

Dept. / Technical reference		Created by: Autonomous 2026-11-02	Approved by
		Document type	Document status: DRAFT
		Title: ELECTRICAL - POWER UNIT - ENCLOSURE BODY	DWG No.: 711001
			Rev.: P01 / Date of issue / Sheet: 1/1