ellexon

ELECTRIC VEHICLE CHARGER

Model: EVC1S-3210-A
EVC1S-3210LCD-A

READ AND SAVE THESE INSTRUCTIONS
Installer: Leave this manual with the homeowner

TABLE OF CONTENTS

SAFETY INSTRUCTIONS 2

USER INSTRUCTIONS 3

- PARAMETERS SHEET 3
- PRODUCT DESCRIPTION 4
- PRODUCT DIMENSIONS 4
- INDICATOR LIGHT 5
- LCD DISPLAY 5
- FUNCTION INSTRUCTION 6

INSTALLATION INSTRUCTIONS 7

- UNPACKING 7
- TOOLS/MATERIALS REQUIRED 7
- BEFORE INSTALLATION 7
- ATTACHMENT 8
- INSTALLATION LOCATION 8
- WARNING 9
- CONNECT ELECTRICAL WIRING 9
- INSTALLATION 10
- SET THE CHARGER POWER 16
- INSPECTION 16

APP INSTRUCTION 17

- REGISTER 17
- ADD DEVICE 17
- OPERATE INTRODUCTION 19
- FAULT INTERFACE 23

CARD REGISTRATION 24

MAINTENANCE 25

TROUBLESHOOTING 26

SAFETY INSTRUCTIONS

Important note: Please read this booklet before installing and switching on this appliance. The manufacturer assumes no responsibility for incorrect installation and usage as described in this booklet. Keep the instruction book for future reference. All the information in the manual is valid for the charging station model in this manual.

This instruction book details the install guidance for the charger. If you're unsure which model you have, please check the rating label on the charger.

The unit is designed for installations inside or outside, with the Innovative safety systems we have built into the charger ensuring its safe usage. This guidance provides information to assist when installing the unit. The charger must be professionally installed by a qualified electrician according to local and national regulations applicable at the time of installation and used in accordance with the manufacturer's instructions.

● This unit must be grounded (Earthed).
● This unit is only to be installed by a qualified electrician in accordance with local building and electrical codes and standards.
● This unit is designed to connect a electrical supply voltage of AC220V~240V 50/60Hz for Single phase series.
● The charger must be installed on a secure solid surface that can support the weight of the charger. Failure to install on a secure surface or not in accordance with electrical regulations could lead to death, personal injury, or property damage.
● This appliance is designed to be used by adults, do not allow children to play with the appliance or let them hang over the charger.
● Do not put fingers into the socket or connector.
● This unit is not suitable for use in dangerous places where there is high amounts of dust, dangerous gas or in an explosive and flammable environment.
● In order to ensure the electrical safety of the unit, the product body shell must be fixed to the correct position with fasteners that come with the product and the seals used to ensure the IP rating is maintained.
● The unit's inlet position (front face) must be tightly sealed to be waterproof and dustproof to ensure the products IP rating.
● Do not use this unit other than its intended purpose.
● Do not use if the socket or connector or cable is damaged.
● Disconnect the charging from the vehicle prior to driving off.
● To prevent electrical shock, do not plug-in or un-plug with wet hands .
● Do not use a power washer to clean or wash the car charger.
● It is recommended not to use in a location that can be reached by rain, suggest increase rain protection measures.
● Do not install in areas of high-risk chance of impact by vehicles or a high risk of trip hazard.

Important: Under no circumstances will compliance with the information in this manual relieve the user of his/her responsibility to comply with all applicable codes or safety standards.

USER INSTRUCTIONS

PARAMETERS SHEET

Item / Datasheet \ Model		EVC1S-3210-A EVC1S-3210LCD-A
Input	Power Supply	1P+N+PE
	Rated Voltage	AC220 ~ 240V 50/60Hz
	Rated current	Max 32A (6-32A adjustable)
Output	Output Voltage	AC220 ~ 240V 50/60Hz
	Maximum Current	Max 32A (6-32A adjustable)
	Rated Power	7.4 kW
User interface	Charger socket or connector	Type 2
	Material	ABS +PC Flammability Rating V - 0
	Colour	Black
	Indicator light	LED Light
Safety	Ingress Protection	IP55
	PCB protection	Over current protection , The max 32A-Recommended 36A
		Residual current protection(AC TYPE A 30mA, DC6mA)
		PEN protection
		Earth check
		Over/Under voltage protection
		Over temperature
	Certification	CE,UKCA
	Certification Standard	EN 61851,EN 62196
Power consumption	Standby power consumption	<10W
Enviroment	Installation	Wall mounted
	Work Temperature	-25℃~50℃
	Work Humidity	3%~95%
	Work Altitude	<2000m

USER INSTRUCTIONS

PRODUCT DESCRIPTION

1. Front cover
2. LCD display(just for model EVC1S-3210LCD-A)
3. RFID area
4. Working status indicator
5. Function button
6.Socket
7. Input cable

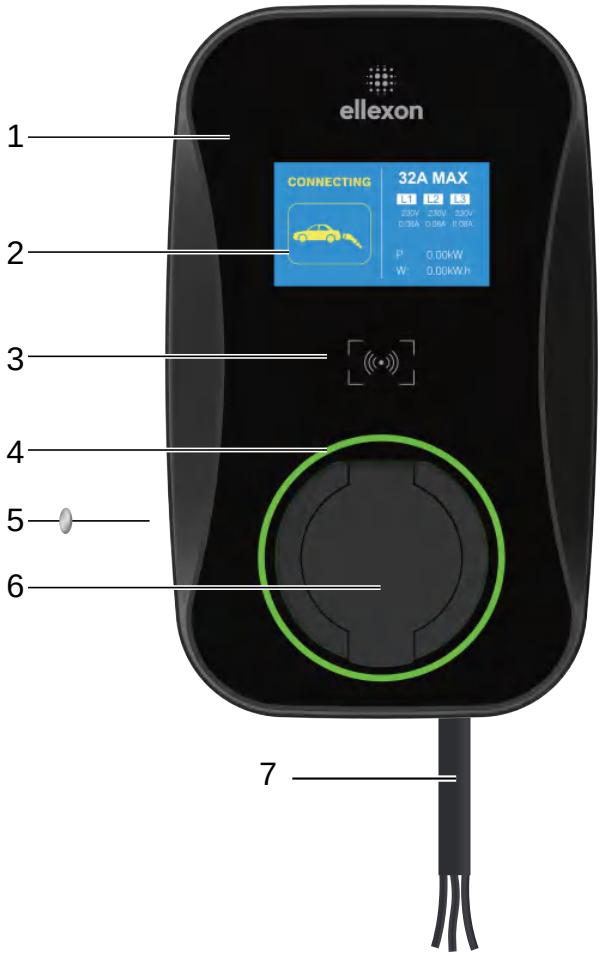

PRODUCT DIMENSIONS

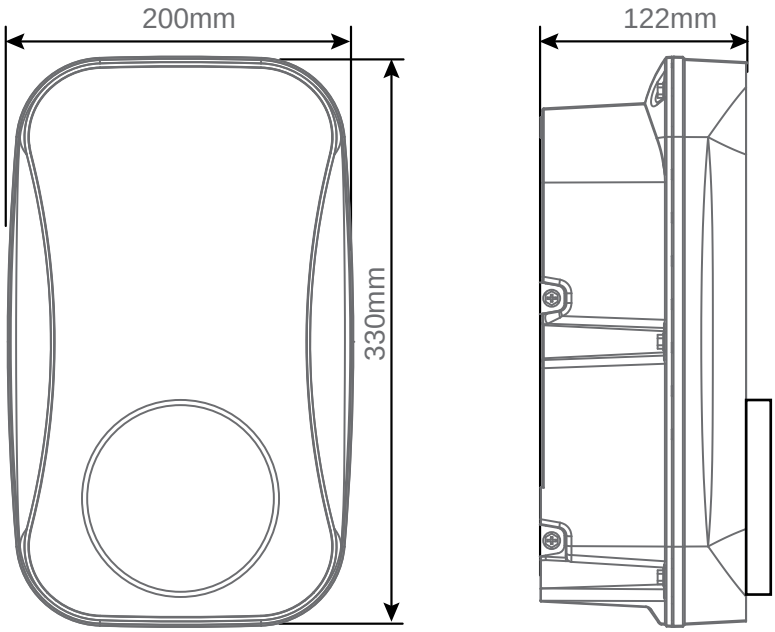

USER INSTRUCTIONS

INDICATOR LIGHT

Light Display Status	Product Status
Blue, green and red flashing alternately	Product power-on self-check
Blue light glowing	Standby
Blue light flashing	Connection confirmation
Green light glowing	Charging
Green light flashing	Disconnect charging from APP or OCPP
Red light glowing	Over temperature
Red light flashing one fast, one slow	Emergency stop
Yellow light glowing	Configuring

LCD DISPLAY

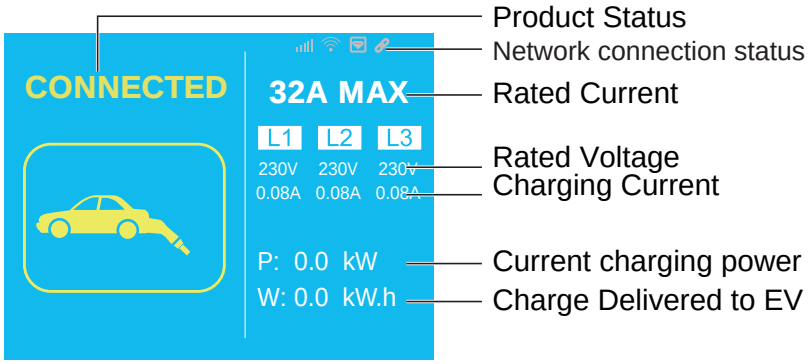









Network connection status

4G		4G is not recognized
		4G connected
WIFI		WIFI without network
		WIFI is connected to the network
Ethernet		Ethernet is plugged in
		Ethernet is not recognized
OCPP		Not connected to OCPP background
		Connected to OCPP background

USER INSTRUCTIONS

FUNCTION INSTRUCTION

Function	Operation	Status indicators	Remark
Emergency Stop	During normal charging, press once	Red light flashing One fast, one slow	Un-plug the connector
Mode Toggle	On standby state: 1.Under APP control mode, press 5 times continuously or manual mode :ON to enter plug and charge mode; 2.Under plug and charge mode, press 5 times continuously to switch the randomized delay off or on; **Note:** plug and charge mode: automatically starts charging after the connection is confirmed. Randomized delay: the unit operates with a delay of up to 600 seconds at each time.	Beep twice	If you want to cancel plug and charge mode, click schedule by APP on standby state. Or manual mode :OFF
Wifi Reset and Configuring URL/ID/APN	On standby statue, press and hold for more than 10 seconds to 1.Reset the WiFi, then re-add the device for pairing connection; 2.**Configure URL/ID/APN using Ethernet by PC**	Beep twice	1.The charger will need to be readded to the APP 2.Restart the product power supply

TELECOMMUNICATION

This product complies with the OCPP1.6J service protocol. After you set the URL and ID by the Phone/PC,
To set the URL and ID:
1(phone): Refer to the “setting” by APP ; or
2(PC): Refer to "Configure URL/ID/APN using Ethernet".
The network is connected to the Ethernet interface / 4G / WIFI, the product will automatically connect to the server to realize backstage control.
Ethernet interface:Refer to the “**Network Connection guide**”
WIFI: Refer to the "**setting**" -description of steps 11(WIFI name) and 12 (WIFI password) by APP.

POWER MANAGEMENT INSTRUCTION

Product with power management function can self-regulate the output current to keep the total household electricity load not exceeding the total household current.
Note: For three phase If the current values of the three live wires monitored by the three-phase power are not equal, the product will calculate the minimum output current by itself, and the three output lines will be executed according to this minimum output current;
To set the maximum power after the product is connected to the WIFI, open the APP and go to settings and then input numerical value into "DLB value" . For detailed settings, please refer to “DLB value”.

EV CHARGER GROUP MANAGEMENT MODEL

The EV charger group management model refers to the unified charging management of a number of EV charger. It can monitor, schedule and optimize the charging time, charging capacity and other parameters of multiple EV, ensure the maximum utilization rate of charging facilities, and ensure that users' charging needs are met, which can effectively realize the smooth operation of regional distribution networks and reduce the charging cost of power systems.
Note: Refer to **“EV charger group management model guide”**