SIGMIDI FOOT CONTROLLER

v0.1 / UNIFIED ELECTRICAL SCHEMATIC / external board pins only

Continuous wires connect every fitted terminal. Dots = junctions; arched crossings = no connection. Component placement is schematic.

Nano and LCD pins keep physical order. Nano: JP1 left 1-15, JP2 right 15-1, USB-C up. Outlines are schematic.

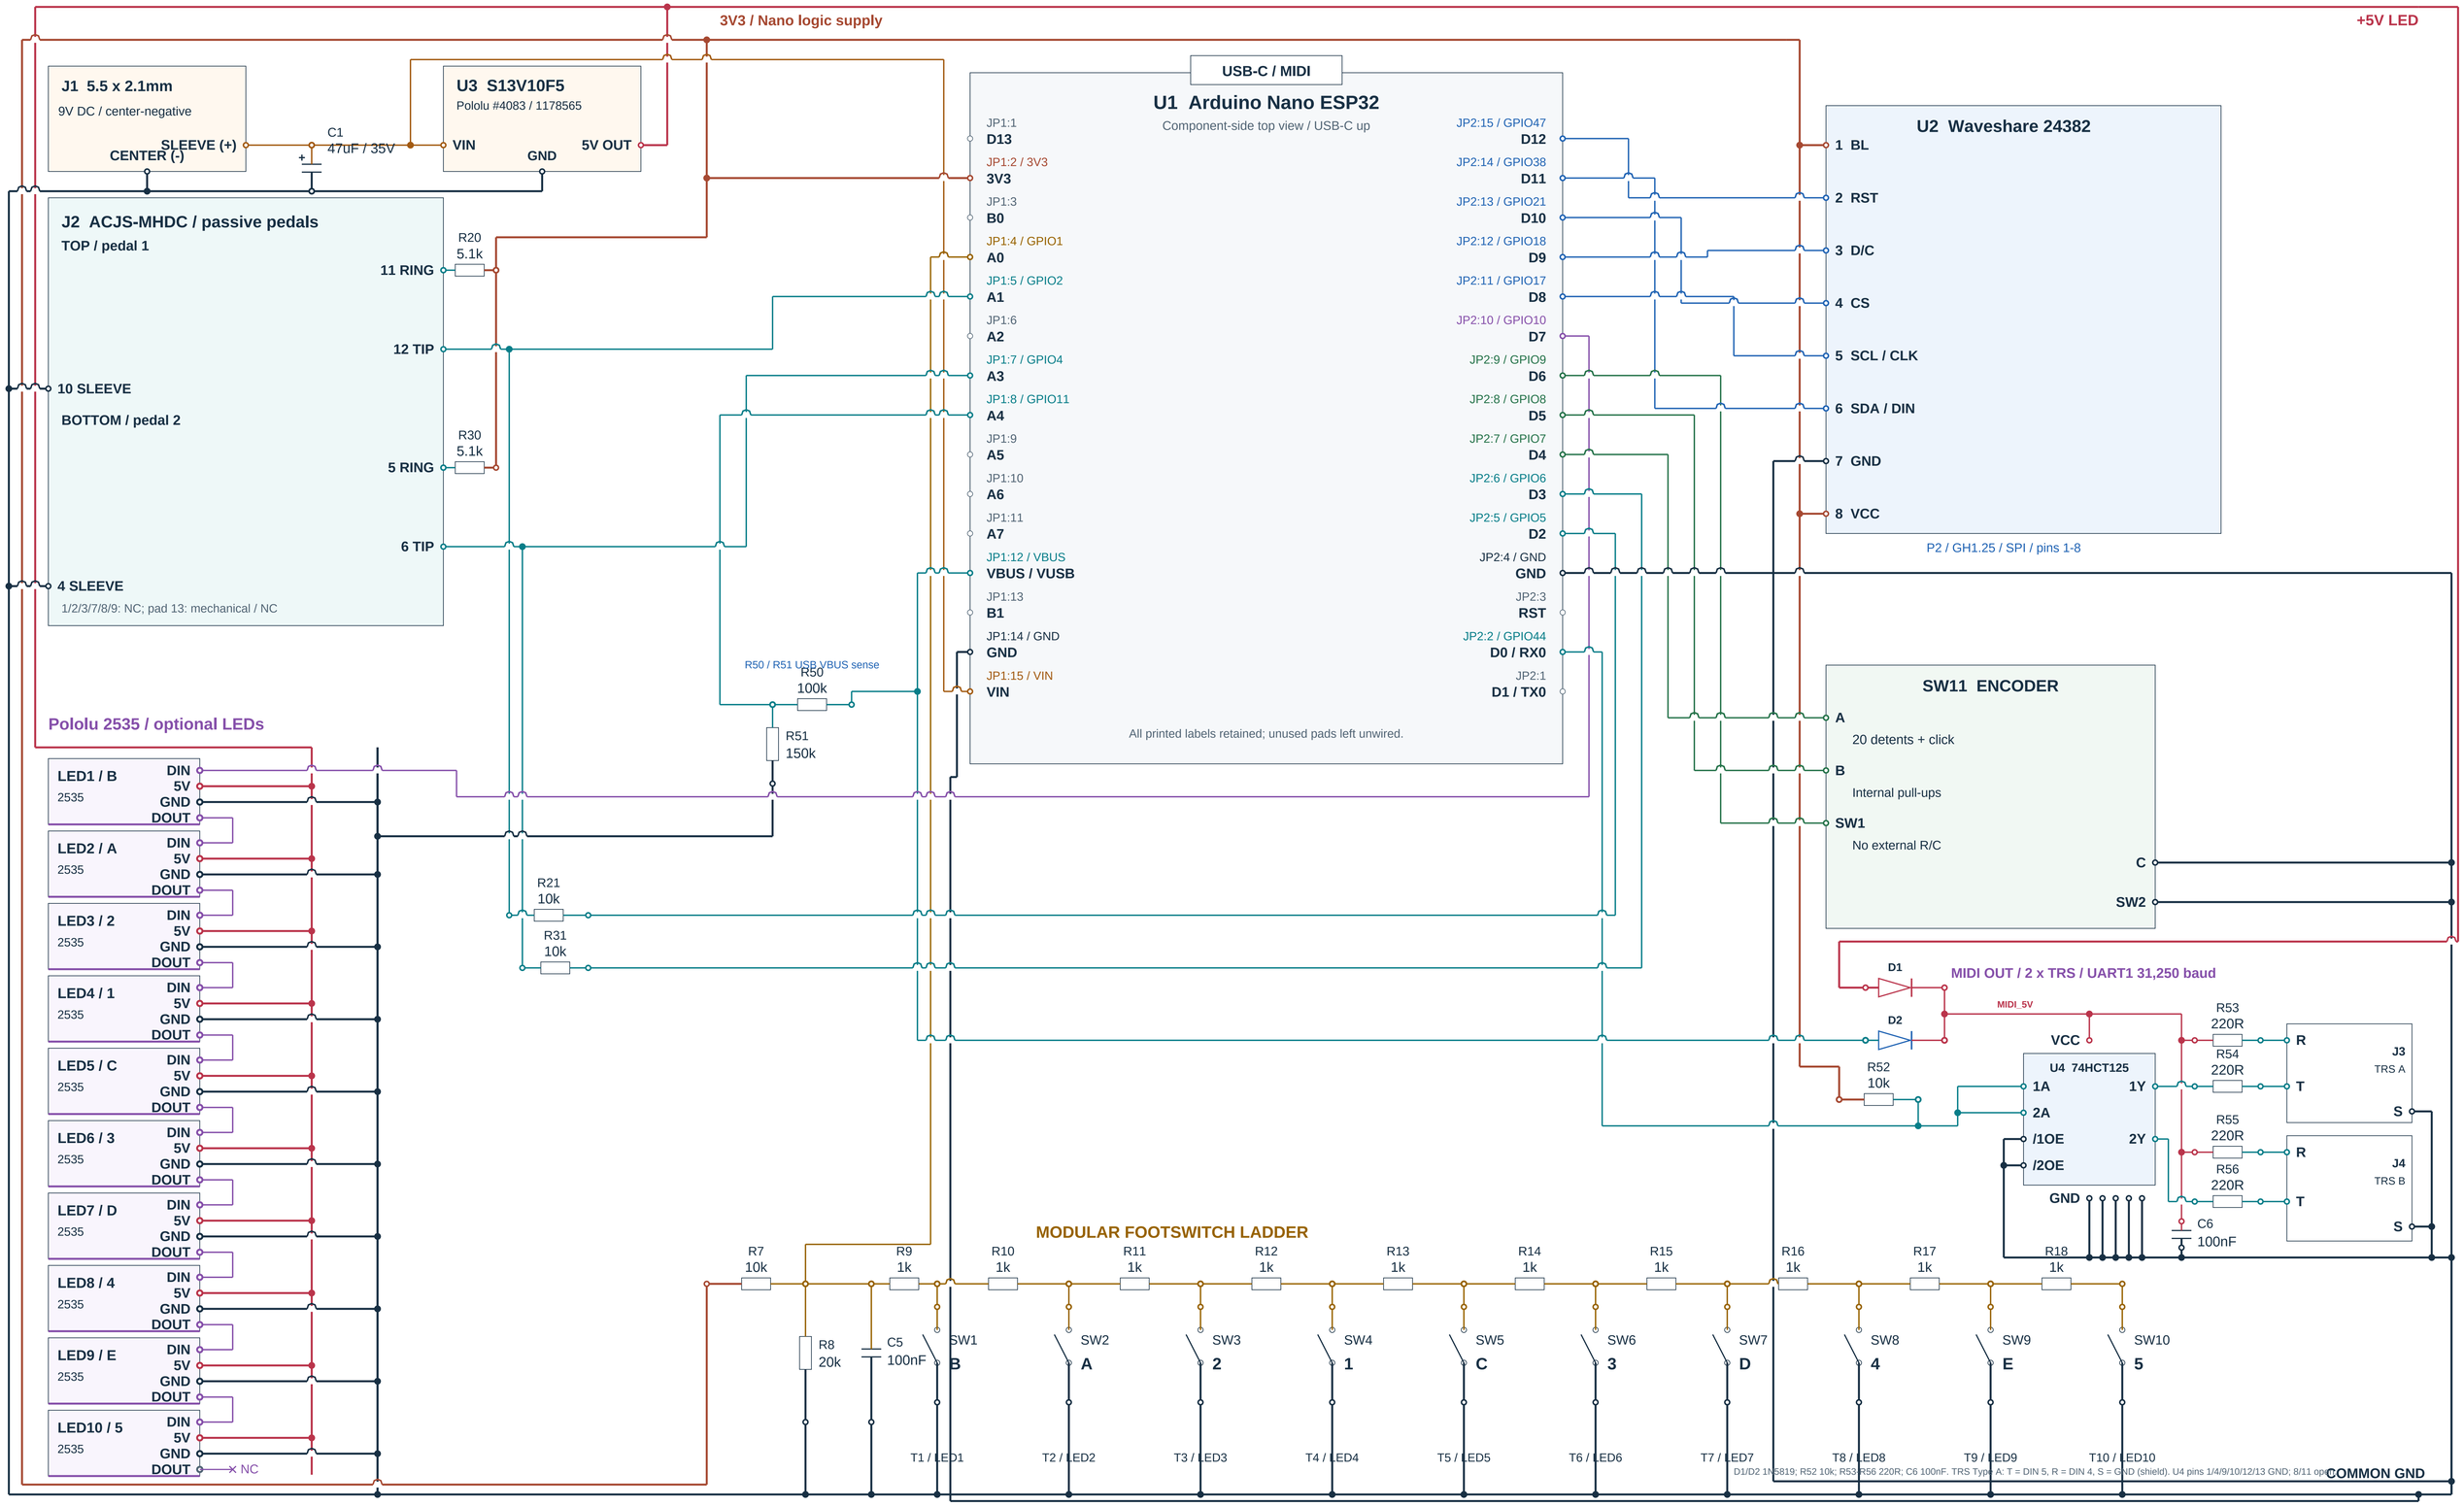

PASSIVE PEDALS

Pot: outer legs RING / SLEEVE; wiper TIP.
Variable resistor: TIP to SLEEVE; RING unused.
0-10k per input. Bias HIGH in resistor mode;
high impedance in pot / disabled / boot states.

ASSEMBLY

Set 4 / 6 / 8 / 10 switches; calibrate installed taps.
SW11 contact pin arrangement is functional.
UART1 D0/GPIO44 drives two buffered TRS MIDI OUTs; USB-C remains for USB MIDI/flashing.
MIDI_5V diode-ORs USB VBUS and converter +5V; LED rail remains converter-fed.

LED PACKAGE

Lens left, leads right, flat side down.
Top to bottom: DIN / 5V / GND / DOUT.
Only LEDs and wires; direct D7 / GPIO10 data.
Check 3.3V data acceptance on the actual LED batch.

Netlist, BOM and pin references: design/electrical/. All 57 components and 49 nets checked against the connected drawing.