College of Engineering and Information Technology

Flying Radar: A Drone-Based Software-Defined Radar

Commercial In Confidence

ENGI 4900: Final Report

13 Nov 2026

36/36 Pages

Summary of AI Use

Categories of artificial intelligence (AI) tool use in this assignment are as indicated in the following table.

AI tool use category	**Used**
Spelling	✓
Grammar	✓
Other copy editing	
Literature review support	
Visuals	
Substantive editing	
Idea generation	
Translation	
Research technical support	✓
No AI tool was used	

Acknowledgements

Contents

Summary of AI Use i

Acknowledgements ii

List of Figures v

List of Tables vi

List of Acronyms viii

Contribution Statement ix

4 Methods, Results and Discussion xi

5 Objective 4: Synchronise Logging of Flight Telemetry and Radar Measurements xii

5.1 Introduction . . . xii

5.2 Methodology . . . xii

5.2.1 Flight Controller Configuration . . . xii

5.2.2 Final System . . . xiii

5.2.3 Post-Processing . . . xv

5.3 Results and Discussion . . . xvi

5.3.1 GPS Drift . . . xvi

5.3.2 RC Switch Trigger Latency . . . xvii

5.3.3 Computational Overhead . . . xvii

5.4 Summary . . . xviii

References xviii

Statement of AI Use xix

6 System Design xx

6.1 System Architecture . . . xx

6.2 Subsystem Interfaces . . . xx

6.3 Requirements and Verification . . . xxi

A Objective 4: Supporting Material xxiv

A.1 SSH Setup . . . xxiv

A.2 GPIO Packages Install . . . xxiv

A.3 Virtual Environment and `rpi-lgpio` Install . . . xxiv

A.4 GPIO Read Script xxiv
A.5 Telemetry Data Visualisation Script xxv

List of Figures

5.1 Activation signal flow starting at the pilot transmitter and ending at the software-defined radar (SDR). xii

5.2 Captured screenshot of live data display for the MAVLink interface (Note: data has demo values). xiv

5.3 State diagram of radar control sequence xv

5.4 Flight path and radar capture locations plotted in the data visualisation script. . xv

6.1 High level diagram of drone-radar integration system architecture xx

List of Tables

5.1 MAVLink messages requested from the flight controller and their use. xiii
5.2 Mean position of each stationary window xvi
5.3 Horizontal GPS drift and satellites visible for each stationary window xvi
5.4 Trigger-to-capture latency after removing the 4 s settle-delay from logs 1–4 . . . xvii
5.5 Raspberry Pi resource usage for each test condition xvii

6.1 Interfaces between subsystems xxi
6.2 Requirements and verification status xxii

List of Acronyms

Acronym	Definition
3D	three dimensional
AC	alternating current
AI	artificial intelligence
API	application programming interface
ASA	acrylonitrile styrene acrylate
AST	Advanced Systems & Technologies
CLI	command-line interface
CPU	central processing unit
C-UAS	counter-uncrewed aerial system
CAD	computer-aided design
COTS	commercial off-the-shelf
CW	continuous wave
DC	direct current
DEM	digital elevation model
FMCW	frequency modulated continuous wave
GPIO	general purpose input/output
GPR	ground penetrating radar
GPS	global positioning system
HALE	high-altitude long-endurance
IDE	integrated development environment
IED	improvised explosive device
InSAR	interferometric synthetic aperture radar
IQ	in-phase and quadrature
JSON	JavaScript Object Notation

JST	Japan solderless terminal
LiPo	lithium-polymer
PC	personal computer
PCB	printed circuit board
PID	product identifier
PLA	polylactic acid
RAM	random-access memory
RF	radio frequency
SAR	synthetic aperture radar
SBC	single-board computer
SD	secure digital
SDR	software-defined radar
SI	International System of Units
SLD	single-line diagram
SSH	secure shell
UAV	uncrewed aerial vehicle
USB	universal serial bus
VID	vendor identifier

Contribution Statement

This contribution statement records the specific contribution of each team member to the technical work and preparation of this progress report. Contributions are grouped according to the simplified CRediT categories of Approach, Technical output, Writing, and Project management.

Table CS1: Declaration of group contributions to the report.

Author	Team Role	Approach	Technical Output	Writing	Project Management

Table CS2: Acknowledgement of AI Tool Use

Group member name	**Specific sub-sections or paragraphs where AI was used**	**AI Tool Use Category/ies**

Table CS3: Group Member Comments

Group member name	**Comments**

By signing below students are acknowledging that the contributions recorded above are a true representation of the contribution made by each individual.

Table CS4: Signature Acknowledgement of Contribution

Name	**Student ID**	**Signature**

4 Methods, Results and Discussion

5 Objective 4: Synchronise Logging of Flight Telemetry and Radar Measurements

[Make a not shit paragraph here]

Synchronising the radar captures and the telemetry is critical, as each radar capture needs a position and attitude before it can be georeferenced or used in later processing.

5.1 Introduction

To synchronise flight telemetry and radar measurements, a pilot-initiated control signal must be interpreted, processed, and transmitted through the entire drone integration system. The signal travels from the pilot transmitter to the receiver, then to the flight controller, and finally to the single-board computer (SBC), which triggers SDR logging. This signal path is shown in Figure 5.1.

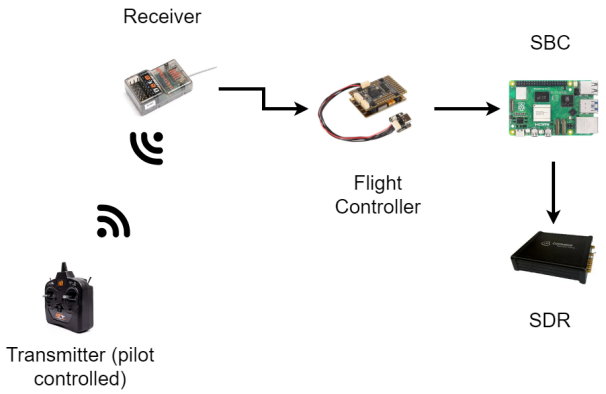


Figure 5.1: Activation signal flow starting at the pilot transmitter and ending at the SDR.

This objective included researching and procuring a suitable SBC, configuring the flight controller, designing software to interface with the flight controller and radar, implementing a post-processing script, and testing the built synchronisation system. The requirements of the system were the ability for a pilot to trigger the radar capture directly from a switch on the transmitter, and that every capture is associated with a telemetry log entry. The final system was a MAVLink-based Python program on board a Raspberry Pi 5 that interfaced with both the radar and the flight controller.

5.2 Methodology

[Put a paragraph here that doesn't suck]

5.2.1 Flight Controller Configuration

The flight controller needed to be configured to read in a signal from the transmitter and tie that signal to a specific channel. There were 8 physical switches on the transmitter. The switch that was deemed suitable was tied to RC channel 15 using the transmitter settings. The telemetry log only records global positioning system (GPS) when the drone is armed. This setting did not suit the project, as the drone needed to be disarmed for the majority of the project. To enable GPS logging while disarmed, a parameter was changed in the config file on the flight controller. Eventually the .tlog file was replaced by a .csv file on board the SBC as it was able to read all relevant telemetry status' directly.

5.2.2 Final System

A single python 3 program on the SBC handled both the flight controller and the SDR in one loop. The code was split by device, a `Drone` class, which handled the flight controller interface, a `Radar` class, which handled the radar interface, and a small `main.py` script to run the overall program.

The benefit to the program being one system was the fact that all the timing was able to use a single clock, which was `runtime` (seconds elapsed since the start of the program). Both the telemetry log and the radar used this value, and shared the same time base which is what made synchronisation possible.

MAVLink Interface

The SBC interfaced with the drone via MAVLink, a communication protocol used to interface between flight controllers and desktop computers, which the Raspberry Pi 5 running Ubuntu resembles in architecture. The physical connection was over universal serial bus (USB), and the software interface was handled by the `pymavlink` python package. The communication method was originally PWM with one of the servo channels on the flight controller, however this was replaced with MAVLink because MAVLink only required one wire to connect instead of two, and was not dependent on the safety switch of the drone (the first iteration is shown in Appendix **??**).

The script blocked until it received a `HEARTBEAT` signal which confirmed the link and gave the target system and component IDs to be used by later commands. Instead of relying on default stream rates, the script sent `MAV_CMD_SET_MESSAGE_INTERVAL` commands to request each message at a fixed rate. The message IDs of the key messages is shown in Table 5.1.

Table 5.1: MAVLink messages requested from the flight controller and their use.

Message	ID	Rate	Used for
`GPS_RAW_INT`	24	1 Hz	Fix type, satellites, latitude, longitude
`GLOBAL_POSITION_INT`	33	5 Hz	Altitude (AMSL and relative), groundspeed
`ATTITUDE`	30	5 Hz	Roll, pitch, yaw
`BATTERY_STATUS`	147	1 Hz	Voltage, current, remaining capacity
`VFR_HUD`	74	2 Hz	Requested but not parsed
`RC_CHANNELS`	65	5 Hz	Channel 15 (radar trigger)
`HEARTBEAT`	0	Default	Armed state, flight mode

On each loop in the `main.py` file, `update()` drained every queued message with non-blocking `recv_match(blocking=False)`, and so the program was never stalled by a slow link as the stored value was always the latest received. Raw MAVLink fields were converted to International System of Units (SI) units upon reception, including converting latitude and longitude from degE7 to degrees, altitude from millimetres to metres, and voltage from millivolts to volts. The armed status of the drone was read from the `MAV_MODE_FLAG_SAFETY_ARMED` bit of `HEARTBEAT.base_mode`, and the flight mode was decoded with `mode_string_v10`.

The radar was triggered from a switch on the pilot's transmitter which was mapped to channel 15. However, instead of reading in a PWM signal output from the flight controller, the signal was read through the `RC_CHANNELS` MAVLink message. The trigger logic remained the same; rising edge detection. A capture was requested by the main script to the radar only when the pulse width was above 1800 μs. The capture logic was sticky; the switch had to be seen as low before a new capture could be requested (which was a pulse width below 1200 μs). The

deadband was widened from the previous iteration as it was found via oscilloscope that a valid signal never goes above 1200 μs or below 1800 μs. The sticky logic prevented one switch from firing repeatedly, ignored the noise in the invalid range, and prevented a switch left high at startup from requesting a capture. Both pulse width parameters can be changed easily in the config file. Buffering was not used; if the radar was still busy, the request was rejected and a message printed, instead of the request being queued. The reason for this was predictability; the timespan of the radar capture is too long for buffering to be feasible.

On each script startup a telemetry log in the form of a .csv file was created from the program, named with the start date and time, so that a telemetry log never overwrote a previous log. Each row in the log held sixteen telemetry fields and five radar fields of data, in addition to the program runtime. Among the five radar fields was the file name of the radar capture (if one occurred), so that each radar capture could be matched directly to the telemetry rows.

To view live data for verification and testing, a terminal dashboard (which was viewed over secure shell (SSH)) showed flight state, GPS, attitude, battery voltage, the pulse width of the RC channel tied to the activation of the SDR, and the radar status. The display was refreshed at one Hz; a parameter changeable in the config file. A screenshot of the display with demo values is shown in Figure 5.2.

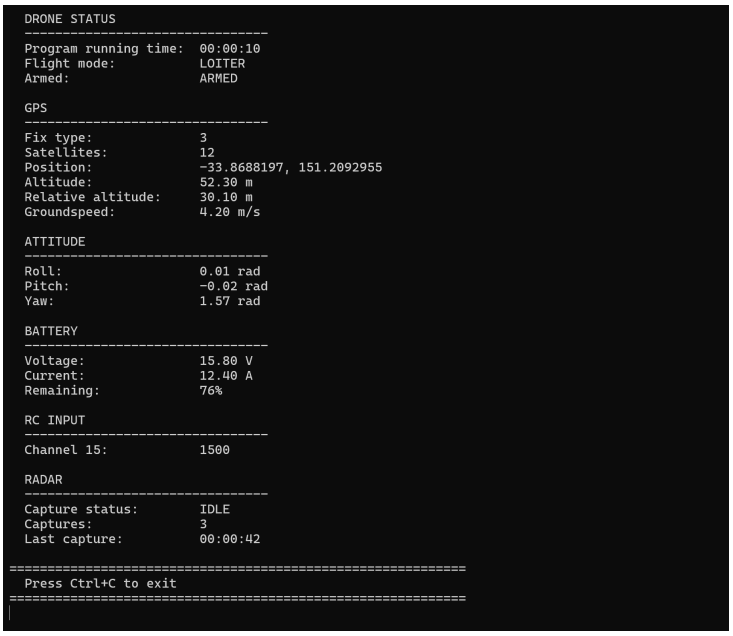


Figure 5.2: Captured screenshot of live data display for the MAVLink interface (Note: data has demo values).

SDR Interface

The SBC and radar did not communicate directly. Instead, the capture executable file was run by the `Radar` class in the program as a subprocess. This was to ensure appropriate separation between the two systems in order to minimise complexity. Under this method, the SBC was only responsible for scheduling and bookkeeping of the radar captures.

The capture settings for the radar existed in a JavaScript Object Notation (JSON) file which was read by the program at startup, so that parameters could change between flights without editing code. Among these settings were the executable and firmware paths, output folder for the radar captures, duration of capture, and sweep time. The radar capture cycle was modelled

as a state machine, the diagram is shown in Figure **??**.

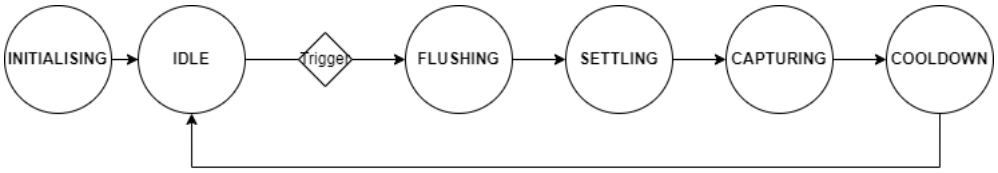


Figure 5.3: State diagram of radar control sequence

Each capture file was named according to its capture number and runtime on capture. Together with the per-row radar columns in the CSV file, this gave two independent ways to align the radar capture data with the telemetry data sets.

5.2.3 Post-Processing

A post-processing script that takes the SBC's synced .csv file and draws the flight path on an interactive map was created. The script is shown in Appendix A.5. When a new radar capture starts, a marker is placed on the interactive flight map at the location. The script erases the first row of data, as the longitude and latitude start at invalid value 0. This is because the flight controller initially outputs default values before beginning data recording. Coordinates are already in decimal degrees from the SBC program, so they are plotted directly. The script was run on a desktop personal computer (PC), not the SBC. Data visualisation was done after capturing, so using a PC was appropriate. SDR data was not processed in this stage. An example output is shown in Figure 5.4.

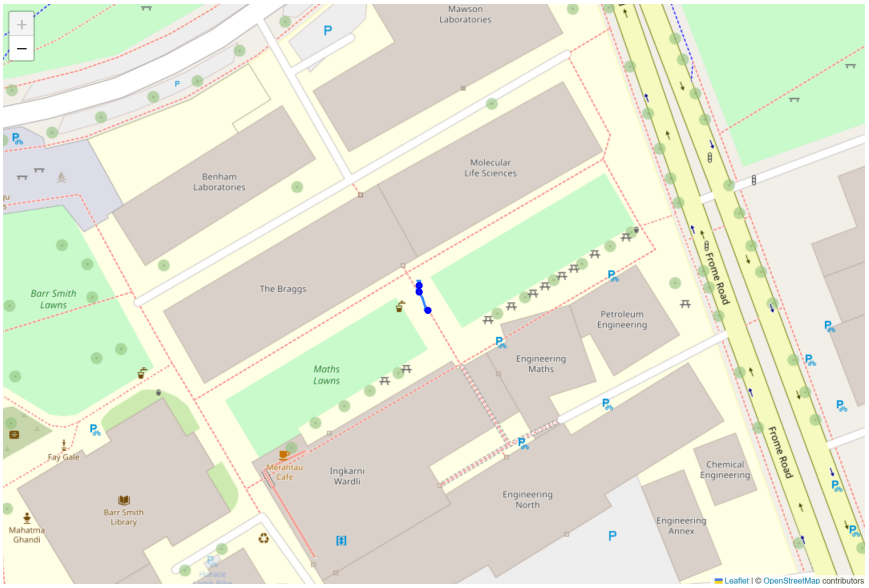


Figure 5.4: Flight path and radar capture locations plotted in the data visualisation script.

The blue line is a point-to-point line between GPS data points, and the markers indicate points where radar data was captured. The markers also contain information about each radar capture (row, capture count), and there is one marker per radar capture.

5.3 Results and Discussion

To verify the control system, three tests were conducted, evaluating the key requirements of the system; GPS, radar capture response, and computational overhead. The GPS drift and radar tests were done using existing testing data; the five tests from the ground integration testing. This was due to it being infeasible to carry the drone out for another ground integration test solely for the purpose of obtaining benchmarks on one subsystem. The computational overhead test was conducted on a separate occasion, as it was possible to do so from indoors.

5.3.1 GPS Drift

Windows of time where the drone was stationary during the ground integration tests were taken as data samples used to measure stationary GPS drift, where "stationary" was interpreted as having a ground-speed of 0.1m/s. The mean latitude and longitude of the stationary windows are shown in Table 5.2.

Table 5.2: Mean position of each stationary window

Window	Duration (s)	Mean latitude (°)	Mean longitude (°)
Log 1-A	72	−34.9183751	138.6055408
Log 2-A	33	−34.9183822	138.6055543
Log 3-A	16	−34.9183846	138.6055478
Log 3-B	125	−34.9183355	138.6055030

The standard deviation of the distance from the mean, and the maximum distance of the mean are shown in Table 5.3.

Table 5.3: Horizontal GPS drift and satellites visible for each stationary window

Window	RMS distance from mean (m)	Max. distance from mean (m)	Satellites visible, mean (min–max)
Log 1-A	0.61	1.14	30.2 (27–32)
Log 2-A	0.05	0.11	30.5 (28–32)
Log 3-A	0.07	0.17	31.8 (31–32)
Log 3-B	0.34	0.65	31.0 (23–32)

The horizontal standard deviation ranged from 0.05 to 0.61 m, with the worst case maximum distance from the mean being 1.14 m.

Log 2-A and Log 3-A had highest stability, with standard deviations of 0.05 m and 0.07 m respectively. The largest drift was shown by Log 1-A, which had standard deviation of 0.61 m. The position moved steadily away from the starting point, reaching 1.82 m after 72 s, despite ground-speed remaining below 0.03 m/s. Log 3 B was in between, with a standard deviation of 0.34 m. There is a large dip in the satellite count for log 3-B. It can be seen that Log 1-A has the same approximate satellite count as Log 2-A, yet has a standard deviation of 0.61 m against 0.05 m. From this, it is clear that the difference in drift does not correspond (in this case) to the satellite count alone.

The two shortest windows had the lowest GPS drift, so it is evident that drift may grow with window length. However, drift is not necessarily directly proportional to duration, as the highest drift was recorded by Log 1-A, which has a shorter duration than Log 3-B.

5.3.2 RC Switch Trigger Latency

An average of how long it took for the radar to capture between activating the trigger and starting the capture was taken for all five logs from the ground integration test. Between the first four tests and the last one, the settling time of the radar before capture was changed, which affected the latency. As such in the results, the first four tests the mean latency is subtracted by 4 s to offset the settling time. The results are shown in Table 5.4.

Table 5.4: Trigger-to-capture latency after removing the 4 s settle-delay from logs 1–4

Group	Events	Mean latency (s)	Std. dev. (ms)
Logs 1–4	10	2.0084	0.41
Log 5	3	2.0030	0.24
All	13	2.0071	2.4

The mean latency across all tests is approximately 2s. The low standard deviations of 0.24 ms and 0.41 ms within each configuration shows that the trigger path is stable. The higher standard deviation when all the data is combined is a reflection of the two sets being mixed despite being in different configurations. The program logged data at 1 Hz, so the switch could have flipped up to 1 second extra before the logged row, so the true latency is thus between approximately 2 and 3 seconds, and the numbers shown in Table 5.4 is a lower bound.

5.3.3 Computational Overhead

To address the tight computational requirements of the airborne system, a computational overhead test was conducted. Three seperate tests were run. The first test was recorded while the system was sitting idle and not running the program. The second test was recorded during program runtime and no radar captures were made. The third test was recorded during program runtime while continously capturing radar data. The first test provides a baseline for the system usage, the second a baseline for the program, and the third the behaviour of the system during operation. The results for the three tests are shown in Table 5.5

Table 5.5: Raspberry Pi resource usage for each test condition

Condition	Samples	Duration (s)	System CPU (%)	Script CPU (%)	RAM used (%)	Temp. (°C)
Baseline (script off)	313	313.5	0.07	–	3.60	48.17
Script running	163	163.3	0.12	0.16	3.77	47.00
Script running, capturing	171	171.3	0.30	0.17	3.85	47.57

Each test made a continual recording of the percentage CPU used by the system, percentage CPU used by the program, percentage RAM used by the system, and the temperature of the system. The system CPU usage increases steadily across the three tests, but remains at less than 1% usage. The script central processing unit (CPU) usage is higher than the system CPU usage on one occasion. This is not an error, and is due to the system CPU usage being averaged over all four CPU cores, while the script is measured against one core. The RAM usage increases from 3.6% to 3.85%, and the average temperature remains approximately constant. From this it can be concluded that the program utilises a substantially small amount of computational

resources, and so downsizing the SBC in a future iteration is a feasible option, saving mass of the system.

5.4 Summary

Objective 4 aimed at implementing the full control cycle for the airborne SDR system. Where a switch from the transmitter propagates though the system and activates a radar capture. Objective 4 also aimed at synchronising the radar and telemetry data sets, allowing the radar capture to be georeferenced. A Raspberry Pi 5 was chosen due to the SDR USB 2.0 requirement and for room for future onboard processing. The interface was designed at three phases, and ultimately ended with a MAVLink connection over USB. The MAVLink version of the program simplified the wiring and removed the safety switch dependency present in the previous two versions. Logging of telemetry and radar state was done by one Python 3 program and data was logged to one .csv file per program run. The activation logic was a latched trigger which runs a flush, settle, capture and cooldown sequence of radar capture. Capture locations of radar data were plotted on a separate PC program on an HTML map for visualisation. The stationary GPS drift of the system had a standard deviation of 0.05 to 0.61 m and a worst case of 1.14 m from the mean. The trigger to capture latency averaged 2.007 seconds across 13 documented capture events, however due to the refresh cycle of the system the true capture latency is 2-3 seconds (which can be adjusted). The computational overhead of the program was negligible, the CPU usage remained below 1% and the random-access memory (RAM) usage rose from 3.6% to 3.85%, which suggests feasibility for a smaller SBC system. The limitations are the settle-delay setting error in the first four logs, and the reused ground data tests. Future work involves either downscaling the hardware or creating a more sophisticated program that allows the full use of the computational power.

Statement of AI Use

Spelling and Grammar

The project team used ChatGPT (https://chat.openai.com/) and Claude (https://claude.ai/) for this Progress Report to check spelling and grammar in selected text drafted by the team. The use of AI tool was limited to identifying spelling and grammar errors. The tools were not used to draft new report sections, produce summaries or paraphrases, restructure the report, interpret results, draw conclusions. The project team reviewed all suggestions before making any changes and retained copies of the original text submitted to the AI tools.

The following prompt was used in May 2026:

> Please review the following paragraph and identify spelling and grammar errors only. Do not rewrite the text, change the meaning, improve the flow, shorten sentences, add content, or make style or substantive editing suggestions.

Initials of group members who used this support: HL, LT, KM, AS.

Research Technical Support

The project team used Claude Code to analyse the legacy MATLAB driver, implement radar commands, and produce code documentation. All code and documentation generated by AI underwent human review and approval. AI use in this form was approved verbally by Dr Brian Ng. The following prompt was used in April 2026:

> Document all functions in the following file using Doxygen-style comments:
>
> `C:\Users\eliza\SDR_main\SDR_main\linux\src\UsbDevice.cpp`
>
> Documentation requirements:
>
> - Add a Doxygen comment block above every function definition.
> - Include:
>   - `@brief`
>   - `@param` for all parameters
>   - `@return` where applicable
>   - `@note` or `@warning` if relevant
> - Keep descriptions concise but technically clear.

Initials of group members who used this support: HL

6 System Design

This section covers the overall design of the built system, the interfaces between subsystems, and the system requirements of the project. The purpose is to provide an overview of the design and the constraints, and demonstrate where the four objectives of the project are in the overall system. This section concludes with a short summary of the status of the system requirements after completing the project.

6.1 System Architecture

A diagram of the overall system architecture is shown in Figure 6.1. The system shows the key subsystems and their interactions, as well as their physical locations. The pilot's switch signal goes from the transmitter to the flight controller (via a receiver). This signal is further propagated to the SBC via the MAVLink connection. Then the program on the SBC launches the capture executable, which drives the SDR over USB 2.0. The same MAVLink connection carries GPS, position, attitude, battery, and flight mode. Both the capture signal and telemetry data sets, as one program stamps both the data streams with a single runtime clock and writes each capture filename into a dataset row. The SDR and SBC are both powered by a 22.2 V auxiliary power supply that is converted to 6 V for the SDR and 5 V for the SBC. The SDR, SBC, and power module are enclosed in a 3D-Printed compartment underneath the battery box from the drone, and the antenna is fixed on an external 45° mount.

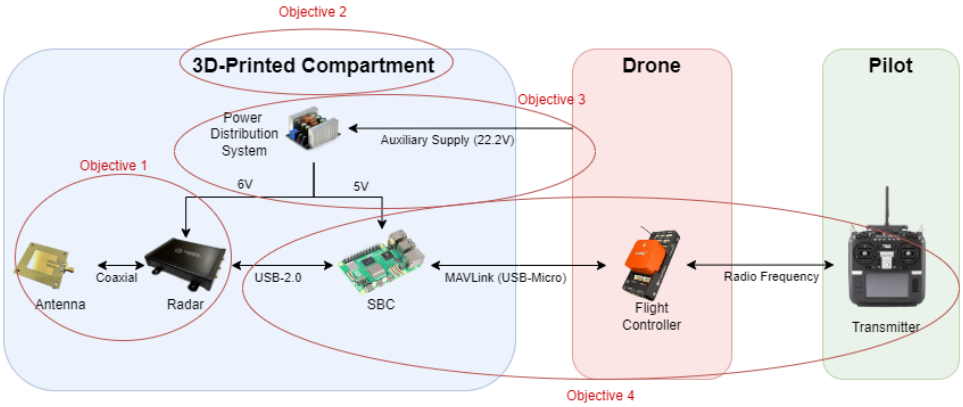


Figure 6.1: High level diagram of drone-radar integration system architecture

6.2 Subsystem Interfaces

Each subsystem interface is listed in Table 6.1. The interfaces I6 and I7 share the same physical connection and are read by a single program on one clock. The 480 Mb/s requirement from I2 determined the choice of using a Raspberry Pi 5 as the SBC.

Table 6.1: Interfaces between subsystems

ID	From	To	Data / signal	Link, protocol, rate	Objective
I1	SDR	Antennas	RF transmit / receive	Coaxial	1
I2	Pi 5	SDR	Capture control, IQ samples	USB 2.0 high-speed	1, 4
I3	Auxiliary Supply	Power Module	Power (22.2V)	XT60	3
I4	Power Module	Pi 5	Power (5V)	USB-C	3
I5	Power Module	SDR	Power (6V)	Barrel-Jack	3
I6	Flight Controller	Pi 5	GPS position, fix, satellites	USB-Micro, MAVLink, 1 Hz	4
I7	Flight Controller	Pi 5	RC capture switch state	USB-Micro, MAVLink, 5 Hz	4
I8	Flight controller	Transmitter	Telemetry, commands	radio, MAVLink	4

6.3 Requirements and Verification

The system requirements are derived from the specifications for technical objectives 1.1 to 1.6 in the project plan, and from its scope constraints. The requirements are regrouped in this section under the four objectives. Each requirement has an ID, a definition, a written account of its result, and the requirement's status. The status "Met" means the requirement was verified by test, inspection or demonstration. The status "Partly Met" the requirement was met in some partial capacity by test, demonstration or inspection. The status "Not Verified" means a test, demonstration, or inspection was not possible to verify the requirement and no analysis was conducted. The status "Not Met" means the requirement was confirmed to be not met by test, demonstration, or inspection.

Table 6.2: Requirements and verification status

ID	Requirement	Result	Status
System			
R0.1	Not impede the drone's flight	No flight test conducted	Not verified
R0.2	Total mass within MTOW	0.957 kg estimated, not weighed	Partly met
R0.3	Capture and synchronise radar and GPS data in flight	Demonstrated in ground tests only	Partly met
R0.4	Command-line interface only	Terminal dashboard over SSH	Met
Objective 1: Radar capture			
R1.1	Capture radar data using the SDR	Raw IQ captured; output matched MATLAB reference in loopback	Met
R1.2	Store radar data	Capture files saved on SBC, named by capture number and runtime	Met
R1.3	Radar data can be time-synchronised with GPS data	Shared SBC runtime clock; capture filename logged in each telemetry row	Met
R1.4	Radar range measurements verified against a known reference target	Range accuracy not yet assessed; anechoic test pending	Not verified
R1.5	Configure radar operating parameters from the SBC	Commands accepted; channel change must be sent twice	Partly met
Objective 2: Mechanical integration			
R2.1	Mechanically fit the SDR system to the drone	Fitted to X6 Standard within landing-gear envelope	Met
R2.2	Mechanically stable in flight and protects the radar	Fit-up only; no loading or vibration test; enclosure not sealed	Not verified
R2.3	Not impede accurate radar or GPS measurement	Field of view not checked; fixed 45° mount used	Not verified
R2.4	Gimbal-mounted radar antenna	Replaced by fixed mount after gimbal jitter	Not met (descoped)
Objective 3: Power			
R3.1	Correct voltage and current to each component	SDR 5.94–6.18 V; SBC 5.04–5.13 V; converters loaded to ≈5 A	Met
R3.2	At least 30 minutes on-time in flight	11.7 Wh by calculation; no endurance test	Not verified
R3.3	At least 80% power conversion efficiency	89.8% in simulation	Met (sim.)
R3.4	Independent and detachable from drone power system	Draws from drone 22.2 V auxiliary supply; JST disconnect tested	Partly met
R3.5	Supply all payload hardware safely	Fuse held at 4 A and blew at 6 A	Met
Objective 4: Telemetry synchronisation			
R4.1	Capture and store GPS data	Logged at 1 Hz to one CSV per run; files never overwritten	Met
R4.2	GPS position error characterised while stationary	Stationary drift: RMS 0.05–0.61 m, max 1.14 m	Met
R4.3	Synchronise GPS and radar data without significant loss	All 13 captures linked to telemetry rows; no rows dropped; resolution limited by 1 Hz logging	Met
R4.4	Pilot can operate the system remotely from the ground	RC switch read over MAVLink; 13/13 events captured; mean latency 2.007 s	Met
R4.5	Pilot can turn radar and GPS capture on and off	Switch starts a fixed-length radar capture; GPS logs continuously	Partly met
R4.6	Low SBC resource use	CPU ≤0.30%, RAM ≤3.85%	Met

Overall, thirteen requirements were met, five requirements were partly met, five were not verified, and one was not met. For the partly met requirements, R0.2 was a mass estimation, the drone was never weighed. R0.3 could only be partly met because only ground tests were conducted. For

R3.4, the power is drawn from the drone's auxiliary supply, so it is technically not independent. For R4.5, the switch starts at a fixed caputure length, however the GPS logs continuously. R0.1, R2.2, and R3.2 require a flight test, so they are unverified. R1.4 is dependent on pending anachoic tests. R2.3 was not checked during testing, as the ground integration test was aimed at verifying base functionality, and so it was out of scope. R2.4 was not met, as the gimbal was descoped after jitter confirmed its infeasibility, and replaced by a 45° mount. The core functional chain from pilot trigger to radar capture synchronised with the drone telemetry log is met. The remaining gaps in the project are items dependent on flight tests, and items that are predicated on accuracy. The remaining gaps are characterised by all functional requirements not listed as "Met".

A Objective 4: Supporting Material

A.1 SSH Setup

Listing A.1: The commands used to setup SSH connection between the Raspberry Pi and a remote computer.

```
sudo apt install openssh-server
sudo systemctl enable ssh
sudo ufw allow ssh
```

A.2 GPIO Packages Install

Listing A.2: Bash command used to install python general purpose input/output (GPIO) library.

```
sudo apt install python3-lgpio gpiod
```

A.3 Virtual Environment and `rpi-lgpio` Install

Listing A.3: Commands used to create the python virtual environment and install `rpi-lgpio`.

```
wget http://abyz.me.uk/lg/lg.zip
unzip lg.zip
cd lg
make
sudo make install
python3 -m venv gpio-env
source gpio-env/bin/activate
pip install rpi-lgpio
```

A.4 GPIO Read Script

Listing A.4: Python script used to run on the Raspberry Pi to monitor one of the GPIO pins.

```
#!/usr/bin/env python3
import RPi.GPIO as GPIO # Uses rpi-lgpio backend automatically
from time import sleep
import signal

# Setup
GPIO_PIN = 17
GPIO.setmode(GPIO.BCM)
GPIO.setup(GPIO_PIN, GPIO.IN, pull_up_down=GPIO.PUD_DOWN)

print("Sensing 3.3V High...")

try:
    while True:
        if GPIO.input(GPIO_PIN):
            print("Pin High")
            sleep(1)
except KeyboardInterrupt:
    print("Stopping...")
```

```
finally:
    GPIO.cleanup()
pause()
```

A.5 Telemetry Data Visualisation Script

Listing A.5: Python script used to plot and visualise syncrhonised radar and telemetry data

```
import folium
import pandas as pd
import os

# parameters
filename = "flight_log_5.csv"


# Code
df = pd.read_csv(filename)

# first lat/lon sample is invalid, drop it and reindex from 0
df = df.iloc[1:].reset_index(drop=True)

output_file = os.path.splitext(filename)[0] + ".html" # -> "flight_log_4.html"
os.remove("synced_data.html") if os.path.exists("synced_data.html") else None

m = folium.Map(location=[df.at[0, "latitude"], df.at[0, "longitude"]], zoom_start=100)

# Create list of [latitude, longitude] points
points = list(zip(df["latitude"], df["longitude"]))

# Draw flight path
folium.PolyLine(points, weight=3).add_to(m)

capture_count = 0
for i, row in df.iterrows():
    tooltip_html = (
        f"<b>#{i}</b><br>"
        f"Latitude: {row['latitude']:.6f}<br>"
        f"Longitude: {row['longitude']:.6f}<br>"
        f"Capture Count: {row['radar_capture_count']}<br>"
    )

    if row["radar_capture_count"] == capture_count + 1:
        folium.CircleMarker(
            location=[row["latitude"], row["longitude"]],
            radius=3,
            color="blue",
            fill=True,
            fill_opacity=0.8,
            tooltip=tooltip_html,
        ).add_to(m)
        capture_count = 1 + capture_count
# Save map
```

```
46 m.save(output_file)
```