
STM32
CubeMX

1. Description

1.1. Project

Project Name	KinetiCoreDC
Board Name	custom
Generated with:	STM32CubeMX 6.15.0
Date	10/30/2026


1.2. MCU

MCU Series	STM32G0
MCU Line	STM32G0x0 Value line
MCU name	STM32G070CBTx
MCU Package	LQFP48
MCU Pin number	48

1.3. Core(s) information

Core(s)	ARM Cortex-M0+

2. Pinout Configuration

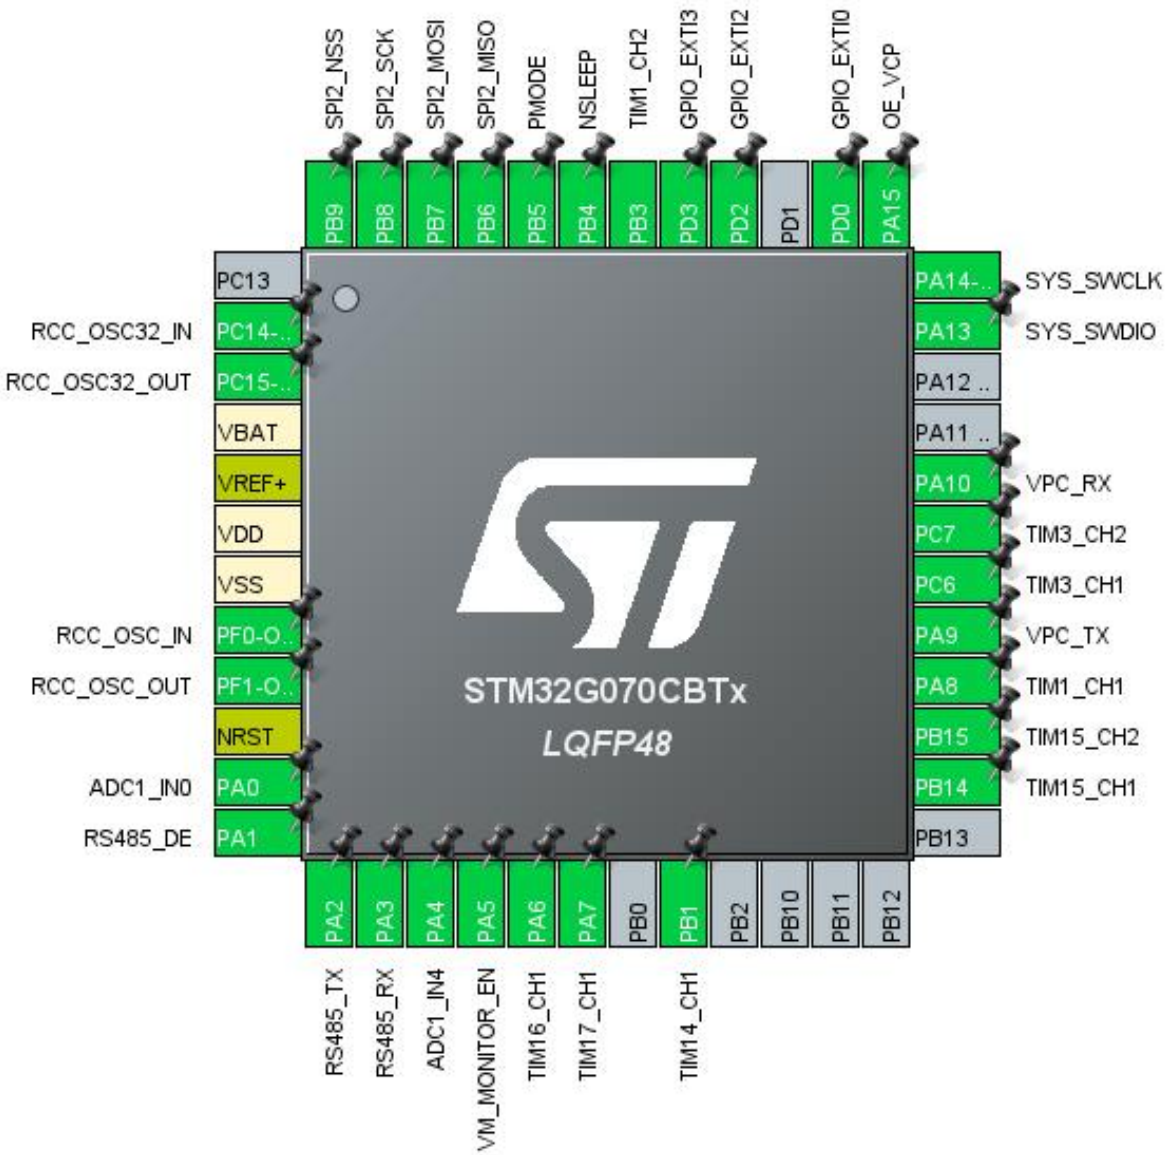


3. Pins Configuration

Pin Number LQFP48	Pin Name (function after reset)	Pin Type	Alternate Function(s)	Label
2	PC14-OSC32_IN (PC14)	I/O	RCC_OSC32_IN	
3	PC15-OSC32_OUT (PC15)	I/O	RCC_OSC32_OUT	
4	VBAT	Power		
5	VREF+	MonoIO		
6	VDD	Power		
7	VSS	Power		
8	PF0-OSC_IN (PF0)	I/O	RCC_OSC_IN	
9	PF1-OSC_OUT (PF1)	I/O	RCC_OSC_OUT	
10	NRST	Reset		
11	PA0	I/O	ADC1_IN0	
12	PA1	I/O	USART2_DE	RS485_DE
13	PA2	I/O	USART2_TX	RS485_TX
14	PA3	I/O	USART2_RX	RS485_RX
15	PA4	I/O	ADC1_IN4	
16	PA5 *	I/O	GPIO_Output	VM_MONITOR_EN
17	PA6	I/O	TIM16_CH1	
18	PA7	I/O	TIM17_CH1	
20	PB1	I/O	TIM14_CH1	
26	PB14	I/O	TIM15_CH1	
27	PB15	I/O	TIM15_CH2	
28	PA8	I/O	TIM1_CH1	
29	PA9	I/O	USART1_TX	VPC_TX
30	PC6	I/O	TIM3_CH1	
31	PC7	I/O	TIM3_CH2	
32	PA10	I/O	USART1_RX	VPC_RX
35	PA13	I/O	SYS_SWDIO	
36	PA14-BOOT0	I/O	SYS_SWCLK	
37	PA15 *	I/O	GPIO_Output	OE_VCP
38	PD0	I/O	GPIO_EXTI0	
40	PD2	I/O	GPIO_EXTI2	
41	PD3	I/O	GPIO_EXTI3	
42	PB3	I/O	TIM1_CH2	
43	PB4 *	I/O	GPIO_Output	NSLEEP
44	PB5 *	I/O	GPIO_Output	PMODE
45	PB6	I/O	SPI2_MISO	
46	PB7	I/O	SPI2_MOSI	

Pin Number LQFP48	Pin Name (function after reset)	Pin Type	Alternate Function(s)	Label
47	PB8	I/O	SPI2_SCK	
48	PB9	I/O	SPI2_NSS	

* The pin is affected with an I/O function

4. Clock Tree Configuration

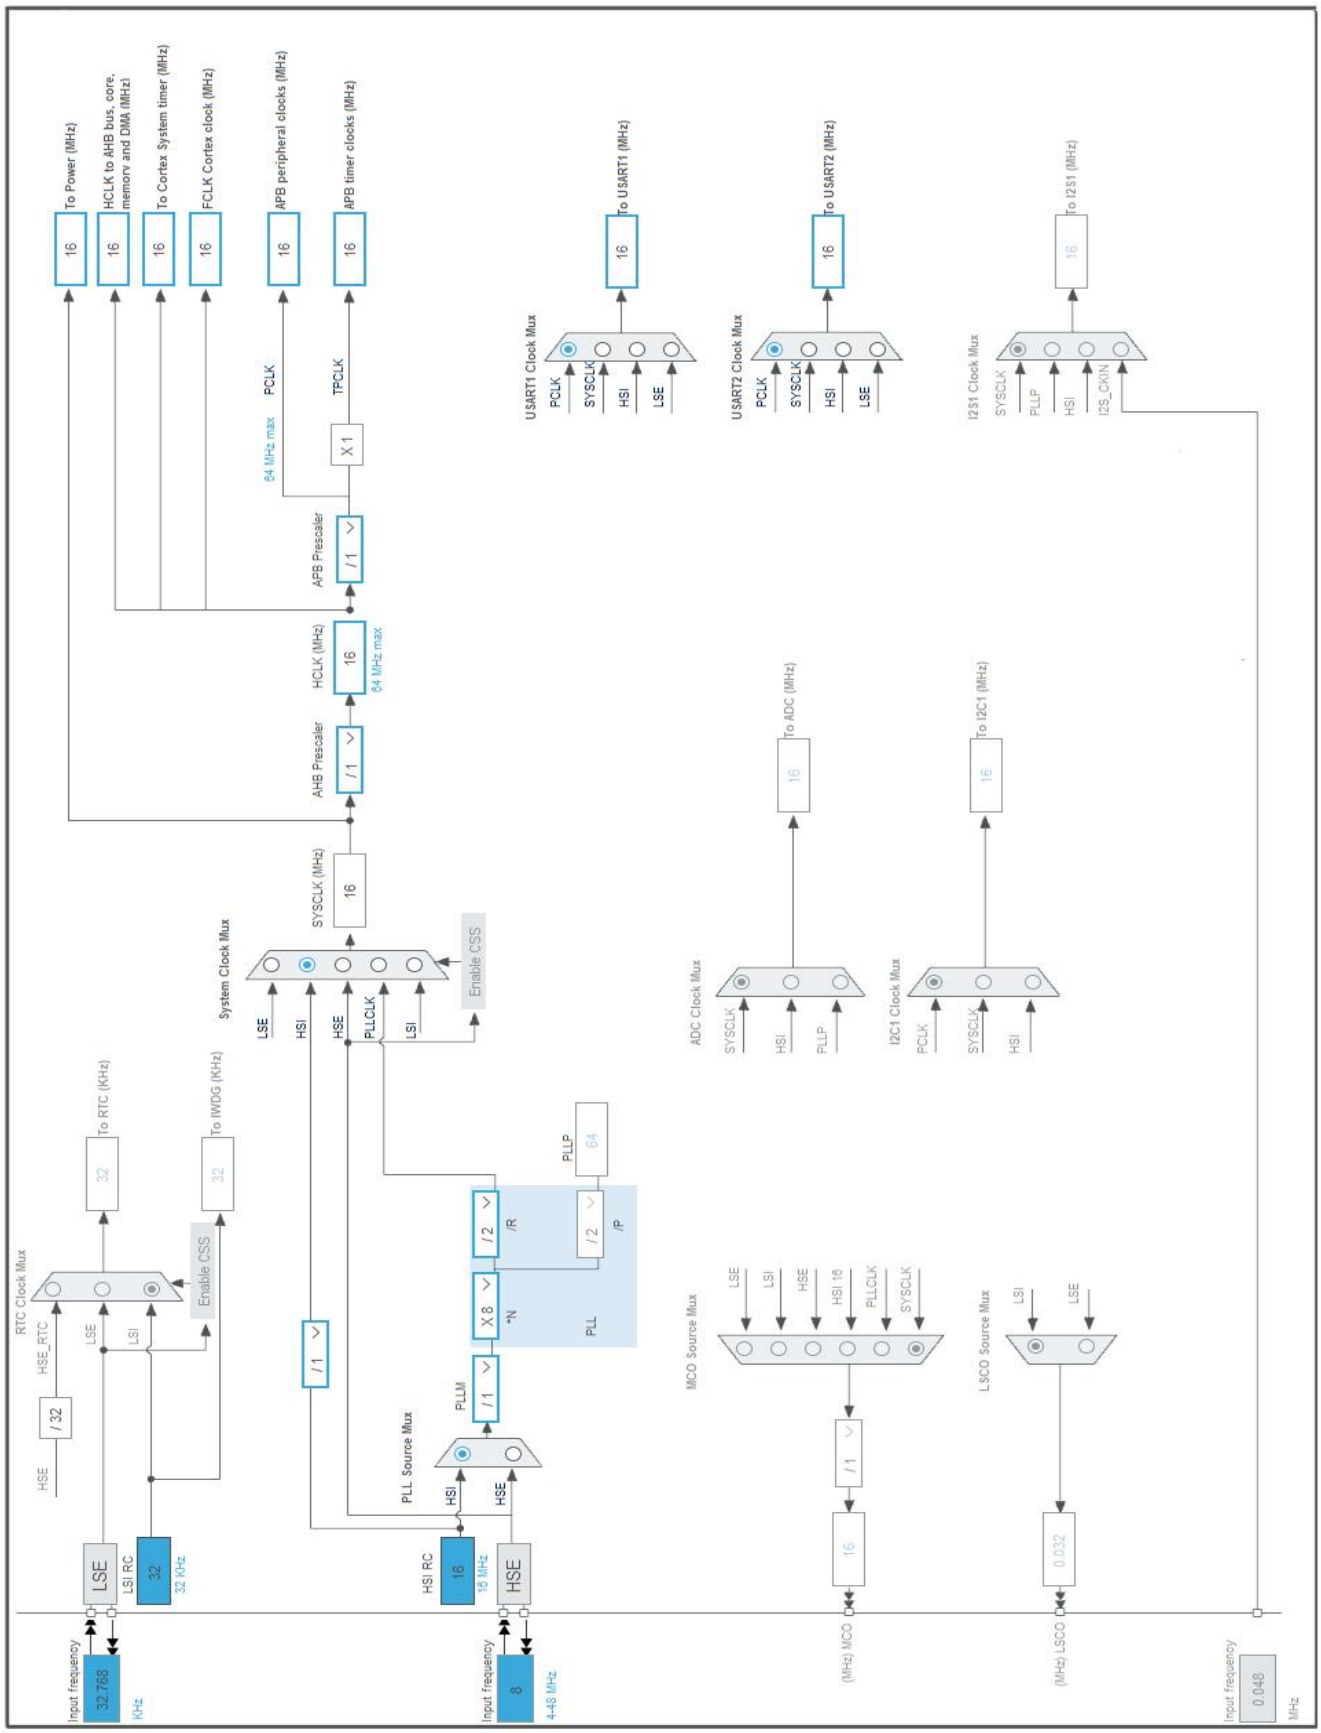

1. Power Consumption Calculator report

1.1. Microcontroller Selection

Series	STM32G0
Line	STM32G0x0 Value line
MCU	STM32G070CBTx
Datasheet	DS12766_Rev0

1.2. Parameter Selection

Temperature	25
Vdd	3.0

1.3. Battery Selection

Battery	Li-SOCL2(AAA700)
Capacity	700.0 mAh
Self Discharge	0.08 %/month
Nominal Voltage	3.6 V
Max Cont Current	10.0 mA
Max Pulse Current	30.0 mA
Cells in series	1
Cells in parallel	1


1.4. Sequence

Step	Step1	Step2
Mode	RUN	STOP1
Vdd	3.0	3.0
Voltage Source	Battery	Battery
Range	Range1-High	NoRange
Fetch Type	FLASH	Flash-PowerDown
CPU Frequency	64 MHz	16 MHz
Clock Configuration	HSI PLL	HSI
Clock Source Frequency	16 MHz	16 MHz
Peripherals		
Additional Cons.	0 mA	0 mA
Average Current	7.04 mA	3.74 µA
Duration	0.1 ms	0.9 ms
DMIPS	80.0	0.0
Ta Max	128.42	130
Category	In DS Table	In DS Table

1.5. Results

Sequence Time	1 ms	Average Current	707.37 µA
Battery Life	1 month, 10 days, 18 hours	Average DMIPS	80.0 DMIPS

1.6. Chart

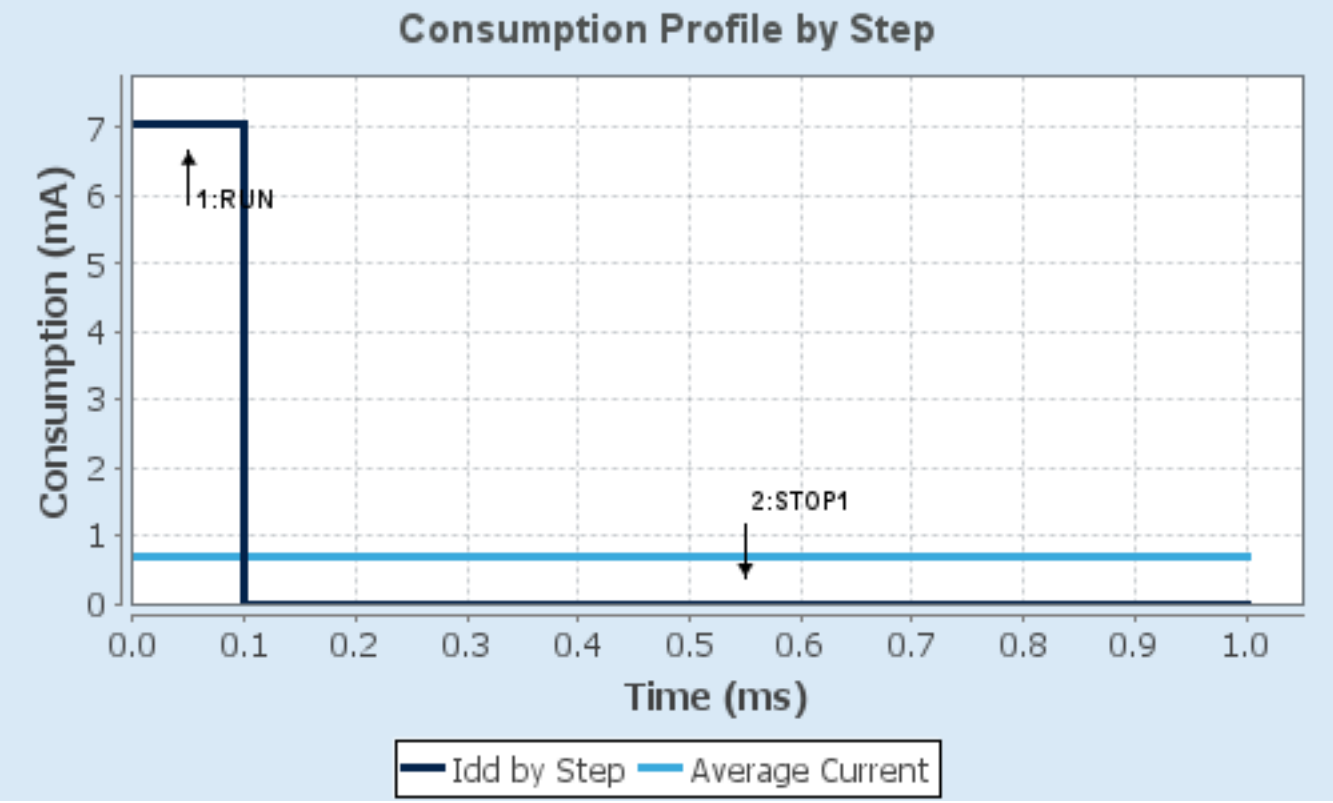
Consumption Profile by Step
Consumption (mA)
0
1
2
3
4
5
6
7
1:RUN
2:STOP1
0.0
0.1
0.2
0.3
0.4
0.5
0.6
0.7
0.8
0.9
1.0
Time (ms)
Idd by Step
Average Current

2. Software Project

2.1. Project Settings

Name	Value
Project Name	KinetiCoreDC
Project Folder	C:\Users\paulm\OneDrive\Bureau\KinetiCoreDC
Toolchain / IDE	EWARM V8.50
Firmware Package Name and Version	STM32Cube FW_G0 V1.6.3
Application Structure	Advanced
Generate Under Root	No
Do not generate the main()	No
Minimum Heap Size	0x200
Minimum Stack Size	0x400

2.2. Code Generation Settings

Name	Value
STM32Cube MCU packages and embedded software	Copy all used libraries into the project folder
Generate peripheral initialization as a pair of '.c/.h' files	No
Backup previously generated files when re-generating	No
Keep User Code when re-generating	Yes
Delete previously generated files when not re-generated	Yes
Set all free pins as analog (to optimize the power consumption)	No
Enable Full Assert	No

2.3. Advanced Settings - Generated Function Calls

Rank	Function Name	Peripheral Instance Name
1	SystemClock_Config	RCC
2	MX_GPIO_Init	GPIO
3	MX_DMA_Init	DMA
4	MX_ADC1_Init	ADC1
5	MX_SPI2_Init	SPI2
6	MX_TIM1_Init	TIM1
7	MX_TIM3_Init	TIM3
8	MX_USART1_UART_Init	USART1
9	MX_USART2_UART_Init	USART2
10	MX_TIM14_Init	TIM14
11	MX_TIM15_Init	TIM15

Rank	Function Name	Peripheral Instance Name
12	MX_TIM16_Init	TIM16
13	MX_TIM17_Init	TIM17

3. Peripherals and Middlewares Configuration

3.1. ADC1

mode: IN0

mode: IN4

3.1.1. Parameter Settings:

ADC_Settings:

Clock Prescaler	Synchronous clock mode divided by 2
Resolution	ADC 12-bit resolution
Data Alignment	Right alignment
Sequencer	Sequencer set to fully configurable
Scan Conversion Mode	Disabled
Continuous Conversion Mode	Disabled
Discontinuous Conversion Mode	Disabled
DMA Continuous Requests	Disabled
End Of Conversion Selection	End of single conversion
Overrun behaviour	Overrun data preserved
Low Power Auto Wait	Disabled
Auto Off	Disabled
Oversampling Mode	Disabled

ADC_Regular_ConversionMode:

SamplingTime Common 1	1.5 Cycles
SamplingTime Common 2	1.5 Cycles
Number Of Conversion	1
External Trigger Conversion Source	Regular Conversion launched by software
External Trigger Conversion Edge	None
Trigger Frequency	High frequency
Rank	1
Channel	Channel 0
Sampling Time	Sampling time common 1

Analog Watchdog 1:

Enable Analog WatchDog1 Mode	false

Analog Watchdog 2:

Enable Analog WatchDog2 Mode	false

Analog Watchdog 3:

Enable Analog WatchDog3 Mode	false

3.2. RCC

High Speed Clock (HSE): Crystal/Ceramic Resonator

Low Speed Clock (LSE) : Crystal/Ceramic Resonator

3.2.1. Parameter Settings:

System Parameters:

VDD voltage (V)	3.3
Instruction Cache	Enabled
Prefetch Buffer	Enabled
Data Cache	Enabled
Flash Latency(WS)	0 WS (1 CPU cycle)

RCC Parameters:

HSI Calibration Value	64
HSE Startup Timout Value (ms)	100
LSE Startup Timout Value (ms)	5000

Power Parameters:

Power Regulator Voltage Scale	Power Regulator Voltage Scale 1

Peripherals Clock Configuration:

Generate the peripherals clock configuration	TRUE

3.3. SPI2

Mode: Full-Duplex Master

Hardware NSS Signal: Hardware NSS Output Signal

3.3.1. Parameter Settings:

Basic Parameters:

Frame Format	Motorola
Data Size	4 Bits
First Bit	MSB First

Clock Parameters:

Prescaler (for Baud Rate)	2
Baud Rate	**8.0 MBits/s ***
Clock Polarity (CPOL)	Low
Clock Phase (CPHA)	1 Edge

Advanced Parameters:

CRC Calculation	Disabled
NSSP Mode	Enabled
NSS Signal Type	Output Hardware

3.4. SYS

mode: Debug

Timebase Source: SysTick

3.5. TIM1

Trigger Source: ITR0

Channel1: PWM Generation CH1

Channel2: PWM Generation CH2

3.5.1. Parameter Settings:

Counter Settings:

Prescaler (PSC - 16 bits value)	0
Counter Mode	Up
Counter Period (AutoReload Register - 16 bits value)	65535
Internal Clock Division (CKD)	No Division
Repetition Counter (RCR - 16 bits value)	0
auto-reload preload	Disable
Slave Mode Controller	Slave mode disable

Trigger Output (TRGO) Parameters:

Master/Slave Mode (MSM bit)	Disable (Trigger input effect not delayed)
Trigger Event Selection TRGO	Reset (UG bit from TIMx_EGR)
Trigger Event Selection TRGO2	Reset (UG bit from TIMx_EGR)

Break And Dead Time management - BRK Configuration:

BRK State	Disable
BRK Polarity	High
BRK Filter (4 bits value)	0
BRK Sources Configuration	
- Digital Input	Disable

Break And Dead Time management - BRK2 Configuration:

BRK2 State	Disable
BRK2 Polarity	High
BRK2 Filter (4 bits value)	0
BRK2 Sources Configuration	
- Digital Input	Disable

Break And Dead Time management - Output Configuration:

Automatic Output State	Disable
Off State Selection for Run Mode (OSSR)	Disable
Off State Selection for Idle Mode (OSSI)	Disable

Lock Configuration	Off

Clear Input:

Clear Input Source	Disable

PWM Generation Channel 1:

Mode	PWM mode 1
Pulse (16 bits value)	0
Output compare preload	Enable
Fast Mode	Disable
CH Polarity	High
CH Idle State	Reset

PWM Generation Channel 2:

Mode	PWM mode 1
Pulse (16 bits value)	0
Output compare preload	Enable
Fast Mode	Disable
CH Polarity	High
CH Idle State	Reset

3.6. TIM3

Combined Channels: Encoder Mode

3.6.1. Parameter Settings:

Counter Settings:

Prescaler (PSC - 16 bits value)	0
Counter Mode	Up
Counter Period (AutoReload Register - 16 bits value)	65535
Internal Clock Division (CKD)	No Division
auto-reload preload	Disable

Trigger Output (TRGO) Parameters:

Master/Slave Mode (MSM bit)	Disable (Trigger input effect not delayed)
Trigger Event Selection TRGO	Reset (UG bit from TIMx_EGR)

Encoder:

Encoder Mode	Encoder Mode TI1
____ Parameters for Channel 1 ____	
Polarity	Rising Edge
IC Selection	Direct
Prescaler Division Ratio	No division
Input Filter	0
____ Parameters for Channel 2 ____	
Polarity	Rising Edge

IC Selection	Direct
Prescaler Division Ratio	No division
Input Filter	0

3.7. TIM14

mode: Activated

Channel1: PWM Generation CH1

3.7.1. Parameter Settings:

Counter Settings:

Prescaler (PSC - 16 bits value)	0
Counter Mode	Up
Counter Period (AutoReload Register - 16 bits value)	65535
Internal Clock Division (CKD)	No Division
auto-reload preload	Disable

PWM Generation Channel 1:

Mode	PWM mode 1
Pulse (16 bits value)	0
Output compare preload	Enable
Fast Mode	Disable
CH Polarity	High

3.8. TIM15

Channel1: Input Capture direct mode

Channel2: Input Capture direct mode

3.8.1. Parameter Settings:

Counter Settings:

Prescaler (PSC - 16 bits value)	0
Counter Mode	Up
Counter Period (AutoReload Register - 16 bits value)	65535
Internal Clock Division (CKD)	No Division
Repetition Counter (RCR - 8 bits value)	0
auto-reload preload	Disable

Trigger Output (TRGO) Parameters:

Master/Slave Mode (MSM bit)	Disable (Trigger input effect not delayed)
Trigger Event Selection	Reset (UG bit from TIMx_EGR)

Input Capture Channel 1:

Polarity Selection	Rising Edge
IC Selection	Direct
Prescaler Division Ratio	No division
Input Filter (4 bits value)	0

Input Capture Channel 2:

Polarity Selection	Rising Edge
IC Selection	Direct
Prescaler Division Ratio	No division
Input Filter (4 bits value)	0

3.9. TIM16

mode: Activated

Channel1: PWM Generation CH1

3.9.1. Parameter Settings:

Counter Settings:

Prescaler (PSC - 16 bits value)	0
Counter Mode	Up
Counter Period (AutoReload Register - 16 bits value)	65535
Internal Clock Division (CKD)	No Division
Repetition Counter (RCR - 8 bits value)	0
auto-reload preload	Disable

Break And Dead Time management - BRK Configuration:

BRK State	Disable
BRK Polarity	High
BRK Filter (4 bits value)	0
BRK Sources Configuration	
- Digital Input	Disable

Break And Dead Time management - Output Configuration:

Automatic Output State	Disable
Off State Selection for Run Mode (OSSR)	Disable
Off State Selection for Idle Mode (OSSI)	Disable
Lock Configuration	Off

PWM Generation Channel 1:

Mode	PWM mode 1
Pulse (16 bits value)	0
Output compare preload	Enable
Fast Mode	Disable

CH Polarity	High
CH Idle State	Reset

3.10. TIM17

mode: Activated

Channel1: PWM Generation CH1

3.10.1. Parameter Settings:

Counter Settings:

Prescaler (PSC - 16 bits value)	0
Counter Mode	Up
Counter Period (AutoReload Register - 16 bits value)	65535
Internal Clock Division (CKD)	No Division
Repetition Counter (RCR - 8 bits value)	0
auto-reload preload	Disable

Break And Dead Time management - BRK Configuration:

BRK State	Disable
BRK Polarity	High
BRK Filter (4 bits value)	0
BRK Sources Configuration	
- Digital Input	Disable

Break And Dead Time management - Output Configuration:

Automatic Output State	Disable
Off State Selection for Run Mode (OSSR)	Disable
Off State Selection for Idle Mode (OSSI)	Disable
Lock Configuration	Off

PWM Generation Channel 1:

Mode	PWM mode 1
Pulse (16 bits value)	0
Output compare preload	Enable
Fast Mode	Disable
CH Polarity	High
CH Idle State	Reset

3.11. USART1

Mode: Asynchronous

3.11.1. Parameter Settings:

Basic Parameters:

Baud Rate	115200
Word Length	8 Bits (including Parity)
Parity	None
Stop Bits	1

Advanced Parameters:

Data Direction	Receive and Transmit
Over Sampling	16 Samples
Single Sample	Disable
ClockPrescaler	1
Fifo Mode	Disable
Txfifo Threshold	1 eighth full configuration
Rxfifo Threshold	1 eighth full configuration

Advanced Features:

Auto Baudrate	Disable
TX Pin Active Level Inversion	Disable
RX Pin Active Level Inversion	Disable
Data Inversion	Disable
TX and RX Pins Swapping	Disable
Overrun	Enable
DMA on RX Error	Enable
MSB First	Disable

3.12. USART2

Mode: Asynchronous

mode: Hardware Flow Control (RS485)

3.12.1. Parameter Settings:

Basic Parameters:

Baud Rate	115200
Word Length	8 Bits (including Parity)
Parity	None
Stop Bits	1

Advanced Parameters:

Data Direction	Receive and Transmit
Over Sampling	16 Samples
Single Sample	Disable
ClockPrescaler	1

Fifo Mode	Disable
Txfifo Threshold	1 eighth full configuration
Rxfifo Threshold	1 eighth full configuration
Polarity	High
Assertion Time	0
Deassertion Time	0

Advanced Features:

Auto Baudrate	Disable
TX Pin Active Level Inversion	Disable
RX Pin Active Level Inversion	Disable
Data Inversion	Disable
TX and RX Pins Swapping	Disable
Overrun	Enable
DMA on RX Error	Enable
MSB First	Disable

*** User modified value**

4. System Configuration

4.1. GPIO configuration

IP	Pin	Signal	GPIO mode	GPIO pull/up pull down	Max Speed	User Label
ADC1	PA0	ADC1_IN0	Analog mode	No pull-up and no pull-down	n/a	
	PA4	ADC1_IN4	Analog mode	No pull-up and no pull-down	n/a	
RCC	PC14-OSC32_IN (PC14)	RCC_OSC32_IN	n/a	n/a	n/a	
	PC15-OSC32_OUT (PC15)	RCC_OSC32_OUT	n/a	n/a	n/a	
	PF0-OSC_IN (PF0)	RCC_OSC_IN	n/a	n/a	n/a	
	PF1-OSC_OUT (PF1)	RCC_OSC_OUT	n/a	n/a	n/a	
SPI2	PB6	SPI2_MISO	Alternate Function Push Pull	No pull-up and no pull-down	Low	
	PB7	SPI2_MOSI	Alternate Function Push Pull	No pull-up and no pull-down	Low	
	PB8	SPI2_SCK	Alternate Function Push Pull	No pull-up and no pull-down	Low	
	PB9	SPI2_NSS	Alternate Function Push Pull	No pull-up and no pull-down	Low	
SYS	PA13	SYS_SWDIO	n/a	n/a	n/a	
	PA14-BOOT0	SYS_SWCLK	n/a	n/a	n/a	
TIM1	PA8	TIM1_CH1	Alternate Function Push Pull	No pull-up and no pull-down	Low	
	PB3	TIM1_CH2	Alternate Function Push Pull	No pull-up and no pull-down	Low	
TIM3	PC6	TIM3_CH1	Alternate Function Push Pull	No pull-up and no pull-down	Low	
	PC7	TIM3_CH2	Alternate Function Push Pull	No pull-up and no pull-down	Low	
TIM14	PB1	TIM14_CH1	Alternate Function Push Pull	No pull-up and no pull-down	Low	
TIM15	PB14	TIM15_CH1	Alternate Function Push Pull	No pull-up and no pull-down	Low	
	PB15	TIM15_CH2	Alternate Function Push Pull	No pull-up and no pull-down	Low	
TIM16	PA6	TIM16_CH1	Alternate Function Push Pull	No pull-up and no pull-down	Low	
TIM17	PA7	TIM17_CH1	Alternate Function Push Pull	No pull-up and no pull-down	Low	
USART1	PA9	USART1_TX	Alternate Function Push Pull	No pull-up and no pull-down	Low	VPC_TX
	PA10	USART1_RX	Alternate Function Push Pull	No pull-up and no pull-down	Low	VPC_RX
USART2	PA1	USART2_DE	Alternate Function Push Pull	No pull-up and no pull-down	Low	RS485_DE
	PA2	USART2_TX	Alternate Function Push Pull	No pull-up and no pull-down	Low	RS485_TX
	PA3	USART2_RX	Alternate Function Push Pull	No pull-up and no pull-down	Low	RS485_RX
GPIO	PA5	GPIO_Output	Output Push Pull	No pull-up and no pull-down	Low	VM_MONITOR_EN
	PA15	GPIO_Output	Output Push Pull	No pull-up and no pull-down	Low	OE_VCP
	PD0	GPIO_EXTI0	External Interrupt Mode with Rising edge trigger detection	No pull-up and no pull-down	n/a	

IP	Pin	Signal	GPIO mode	GPIO pull/up pull down	Max Speed	User Label
	PD2	GPIO_EXTI2	External Interrupt Mode with Rising edge trigger detection	No pull-up and no pull-down	n/a	
	PD3	GPIO_EXTI3	External Interrupt Mode with Rising edge trigger detection	No pull-up and no pull-down	n/a	
	PB4	GPIO_Output	Output Push Pull	No pull-up and no pull-down	Low	NSLEEP
	PB5	GPIO_Output	Output Push Pull	No pull-up and no pull-down	Low	PMODE

4.2. DMA configuration

DMA request	Stream	Direction	Priority
USART2_RX	DMA1_Channel1	Peripheral To Memory	Low

USART2_RX: DMA1_Channel1 DMA request Settings:

Mode:	Normal
Peripheral Increment:	Disable
Memory Increment:	**Enable ***
Peripheral Data Width:	**Word ***
Memory Data Width:	**Word ***

4.3. NVIC configuration

4.3.1. NVIC

Interrupt Table	Enable	Preenmption Priority	SubPriority
Non maskable interrupt	true	0	0
Hard fault interrupt	true	0	0
System service call via SWI instruction	true	0	0
Pendable request for system service	true	0	0
System tick timer	true	3	0
EXTI line 0 and line 1 interrupts	true	0	0
EXTI line 2 and line 3 interrupts	true	1	0
DMA1 channel 1 interrupt	true	0	0
TIM15 global interrupt	true	2	0
USART2 global interrupt / USART2 wake-up interrupt through EXTI line 26	true	1	0
Flash global interrupt	unused		
RCC global interrupt	unused		
ADC1 interrupt	unused		
TIM1 break, update, trigger and commutation interrupts	unused		
TIM1 capture compare interrupt	unused		
TIM3 global interrupt	unused		
TIM14 global interrupt	unused		
TIM16 global interrupt	unused		
TIM17 global interrupt	unused		
SPI2 global interrupt	unused		
USART1 global interrupt / USART1 wake-up interrupt through EXTI line 25	unused		

4.3.2. NVIC Code generation

Enabled interrupt Table	Select for init sequence ordering	Generate IRQ handler	Call HAL handler
Non maskable interrupt	false	true	false
Hard fault interrupt	false	true	false
System service call via SWI instruction	false	true	false
Pendable request for system service	false	true	false
System tick timer	false	true	true
EXTI line 0 and line 1 interrupts	false	true	true
EXTI line 2 and line 3 interrupts	false	true	true
DMA1 channel 1 interrupt	false	true	true
TIM15 global interrupt	false	true	true
USART2 global interrupt / USART2 wake-	false	true	true


Enabled interrupt Table	Select for init sequence ordering	Generate IRQ handler	Call HAL handler
up interrupt through EXTI line 26			

*** User modified value**

5. System Views

5.1. Category view

5.1.1. Current

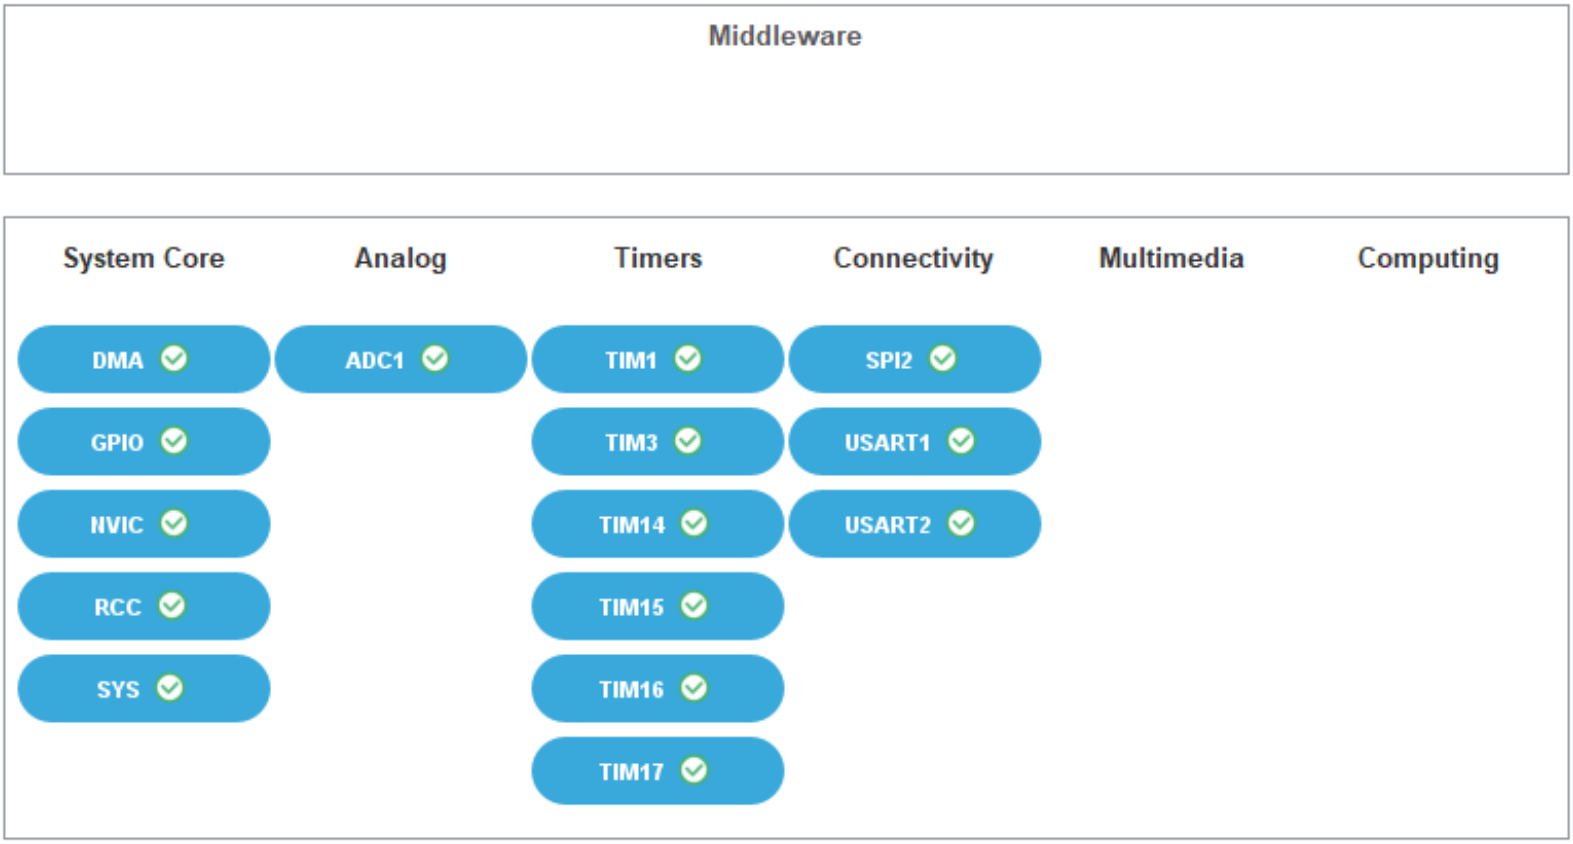

6. Docs & Resources

Type	Link
IBIS models	https://www.st.com/resource/en/ibis_model/stm32g0_ibis.zip
System View Description	https://www.st.com/resource/en/svd/stm32g0-svd.zip
Presentations	https://www.st.com/resource/en/product_presentation/stm32-stm8_embedded_software_solutions.pdf
Presentations	https://www.st.com/resource/en/product_presentation/stm32_eval-tools_portfolio.pdf
Presentations	https://www.st.com/resource/en/product_presentation/stm32_stm8_functional-safety-packages.pdf
Presentations	https://www.st.com/resource/en/product_presentation/stm32g0_marketing_pres.pdf
Presentations	https://www.st.com/resource/en/product_presentation/stm32-usb-c-pd-solutions-presentation.pdf
Presentations	https://www.st.com/resource/en/product_presentation/stm32-stm8_software_development_tools.pdf
Presentations	https://www.st.com/resource/en/product_presentation/microcontrollers-stm32-family-overview.pdf
Presentations	https://www.st.com/resource/en/product_presentation/microcontrollers-stm32-entry-level-graphics.pdf
Brochures	https://www.st.com/resource/en/brochure/humanoid-robot-reference-guide.pdf
Flyers	https://www.st.com/resource/en/flyer/flstm32g0.pdf
Flyers	https://www.st.com/resource/en/flyer/flstm32nucleo.pdf
Flyers	https://www.st.com/resource/en/flyer/flstm32trust.pdf
Flyers	https://www.st.com/resource/en/flyer/flstm32c5.pdf
Security Bulletin	https://www.st.com/resource/en/technical_note/tn1489-security-bulletin-tn1489stpsirt-physical-attacks-on-stm32-and-stm32cube-firmware-stmicroelectronics.pdf
Application Notes	https://www.st.com/resource/en/application_note/an1709-emc-design-

	guide-for-stm8-stm32-and-legacy-mcus-stmicroelectronics.pdf
Application Notes	https://www.st.com/resource/en/application_note/an4221-i2c-protocol-used-in-the-stm32-bootloader-stmicroelectronics.pdf
Application Notes	https://www.st.com/resource/en/application_note/an4655-virtually-increasing-the-number-of-serial-communication-peripherals-in-stm32-applications-stmicroelectronics.pdf
Application Notes	https://www.st.com/resource/en/application_note/an4750-handling-of-soft-errors-in-stm32-applications-stmicroelectronics.pdf
Application Notes	https://www.st.com/resource/en/application_note/an4803-highspeed-si-simulations-using-ibis-and-boardlevel-simulations-using-hyperlynx-si-on-stm32-mcus-and-mpus-stmicroelectronics.pdf
Application Notes	https://www.st.com/resource/en/application_note/an5027-interfacing-pdm-digital-microphones-using-stm32-mcus-and-mpus-stmicroelectronics.pdf
Application Notes	https://www.st.com/resource/en/application_note/an5110-stm32cube-firmware-examples-for-stm32g0-series-stmicroelectronics.pdf
Application Notes	https://www.st.com/resource/en/application_note/an5145-migration-of-applications-from-stm32f0-series-to-stm32g0-series--stmicroelectronics.pdf
Application Notes	https://www.st.com/resource/en/application_note/an4899-stm32-microcontroller-gpio-hardware-settings-and-lowpower-consumption-stmicroelectronics.pdf
Application Notes	https://www.st.com/resource/en/application_note/an5612-esd-protection-of-stm32-mcus-and-mpus-stmicroelectronics.pdf
Application Notes	https://www.st.com/resource/en/application_note/an4991-how-to-wake-up-an-stm32-microcontroller-from-lowpower-mode-with-the-usart-or-the-lpuart-stmicroelectronics.pdf
Application Notes	https://www.st.com/resource/en/application_note/an4838-introduction-to-memory-protection-unit-management-on-stm32-mcus-stmicroelectronics.pdf
Application Notes	https://www.st.com/resource/en/application_note/an5225-introduction-to-usb-typec-power-delivery-for-stm32-mcus-and-mpus-stmicroelectronics.pdf
Application Notes	https://www.st.com/resource/en/application_note/an4777-how-to-

	optimize-power-consumption-on-stm32-mcus-stmicroelectronics.pdf
Application Notes	https://www.st.com/resource/en/application_note/an4894-how-to-use-eeprom-emulation-on-stm32-mcus-stmicroelectronics.pdf
Application Notes	https://www.st.com/resource/en/application_note/an5537-how-to-use-adc-oversampling-techniques-to-improve-signaltonoise-ratio-on-stm32-mcus-stmicroelectronics.pdf
Application Notes	https://www.st.com/resource/en/application_note/an5405-how-to-use-fdcan-bootloader-protocol-on-stm32-mcus-stmicroelectronics.pdf
Application Notes	https://www.st.com/resource/en/application_note/an5690-how-to-use-vrefbuf-peripheral-on-stm32-mcus-and-mpus-stmicroelectronics.pdf
Application Notes	https://www.st.com/resource/en/application_note/an4230-introduction-to-random-number-generation-validation-using-the-nist-statistical-test-suite-for-stm32-mcus-and-mpus-stmicroelectronics.pdf
Application Notes	https://www.st.com/resource/en/application_note/an2548-introduction-to-dma-controller-for-stm32-mcus-stmicroelectronics.pdf
Application Notes	https://www.st.com/resource/en/application_note/an4013-introduction-to-timers-for-stm32-mcus-stmicroelectronics.pdf
Application Notes	https://www.st.com/resource/en/application_note/an4277-how-to-use-pwm-shutdown-for-motor-control-and-digital-power-conversion-on-stm32-mcus-stmicroelectronics.pdf
Application Notes	https://www.st.com/resource/en/application_note/an4635-how-to-optimize-lpuart-power-consumption-on-stm32-mcus-stmicroelectronics.pdf
Application Notes	https://www.st.com/resource/en/application_note/an4908-getting-started-with-usart-automatic-baud-rater-detection-for-stm32-mcus-stmicroelectronics.pdf
Application Notes	https://www.st.com/resource/en/application_note/an5156-introduction-to-security-for-stm32-mcus-stmicroelectronics.pdf
Application Notes	https://www.st.com/resource/en/application_note/an5224-introduction-to-dmamux-for-stm32-mcus-stmicroelectronics.pdf
Application Notes	https://www.st.com/resource/en/application_note/an5543-guidelines-for-enhanced-spi-communication-on-stm32-mcus-and-mpus-stmicroelectronics.pdf

Application Notes	https://www.st.com/resource/en/application_note/an5348-introduction-to-fdcan-peripherals-for-stm32-mcus-stmicroelectronics.pdf
Application Notes	https://www.st.com/resource/en/application_note/an5969-migrating-between-stm32g0-and-stm32c0-mcus-stmicroelectronics.pdf
Application Notes	https://www.st.com/resource/en/application_note/cd00211314-how-to-optimize-the-adc-accuracy-in-the-stm32-mcus-stmicroelectronics.pdf
Application Notes	https://www.st.com/resource/en/application_note/an2639-soldering-recommendations-and-package-information-for-leadfree-ecopack2-mcus-and-mpus-stmicroelectronics.pdf
Application Notes	https://www.st.com/resource/en/application_note/an6226-migrating-between-stm32g0-and-stm32u0-mcus-stmicroelectronics.pdf
Application Notes	https://www.st.com/resource/en/application_note/an4566-how-to-extend-the-dac-performance-on-stm32-mcus-stmicroelectronics.pdf
Application Notes	https://www.st.com/resource/en/application_note/an5647-the-goertzel-algorithm-to-compute-individual-terms-of-the-discrete-fourier-transform-dft-in-stm32-products-stmicroelectronics.pdf
Application Notes	https://www.st.com/resource/en/application_note/an2606-introduction-to-system-memory-boot-mode-on-stm32-mcus-stmicroelectronics.pdf
Application Notes	https://www.st.com/resource/en/application_note/an5096-getting-started-with-stm32g0-mcus-hardware-development-stmicroelectronics.pdf
Application Notes	https://www.st.com/resource/en/application_note/an5036-guidelines-for-thermal-management-on-stm32-mcus-and-mpus-stmicroelectronics.pdf
Application Notes	https://www.st.com/resource/en/application_note/an3126-how-to-use-dac-for-audio-and-waveform-generation-on-stm32-mcus-and-mpus-stmicroelectronics.pdf
Application Notes	https://www.st.com/resource/en/application_note/an3155-how-to-use-usart-protocol-in-bootloader-on-stm32-mcus-stmicroelectronics.pdf
Application Notes	https://www.st.com/resource/en/application_note/an3156-how-to-use-usb-dfu-protocol-in-bootloader-on-stm32-mcus-stmicroelectronics.pdf
Application Notes	https://www.st.com/resource/en/application_note/an4286-how-to-use-spi-protocol-in-bootloader-on-stm32-mcus-stmicroelectronics.pdf
Application Notes	https://www.st.com/resource/en/application_note/an4759-introduction-to-using-the-hardware-realtime-clock-rtc-and-the-tamper-management-unit-

	tamp-for-stm32-mcus-stmicroelectronics.pdf
Application Notes	https://www.st.com/resource/en/application_note/an4776-how-to-use-generalpurpose-timer-peripheral-on-stm32-mcus-stmicroelectronics.pdf
Application Notes	https://www.st.com/resource/en/application_note/an4989-introduction-to-debug-toolbox-for-stm32-mcus-stmicroelectronics.pdf
Application Notes	https://www.st.com/resource/en/application_note/an6363-introduction-to-clock-requirements-and-calibration-for-stm32-mcus-stmicroelectronics.pdf
Errata Sheets	https://www.st.com/resource/en/errata_sheet/es0468-stm32g070cbkbrb-device-errata-stmicroelectronics.pdf
Datasheet	https://www.st.com/resource/en/datasheet/dm00542744.pdf
Programming Manuals	https://www.st.com/resource/en/programming_manual/pm0223-stm32-cortexm0-mcus-programming-manual-stmicroelectronics.pdf
Reference Manuals	https://www.st.com/resource/en/reference_manual/rm0454-stm32g0x0-advanced-armbased-32bit-mcus-stmicroelectronics.pdf
Technical Notes & Articles	https://www.st.com/resource/en/technical_note/tn1163-description-of-wlcsp-for-microcontrollers-and-recommendations-for-its-use-stmicroelectronics.pdf
Technical Notes & Articles	https://www.st.com/resource/en/technical_note/tn1205-tape-and-reel-shipping-media-for-stm8-and-stm32-microcontrollers-in-fpn-packages-stmicroelectronics.pdf
Technical Notes & Articles	https://www.st.com/resource/en/technical_note/tn1206-tape-and-reel-shipping-media-for-stm8-and-stm32-microcontrollers-in-qfp-packages-stmicroelectronics.pdf
Technical Notes & Articles	https://www.st.com/resource/en/technical_note/tn1207-tape-and-reel-shipping-media-for-stm8-and-stm32-microcontrollers-in-so-packages-stmicroelectronics.pdf
Technical Notes & Articles	https://www.st.com/resource/en/technical_note/tn1208-tape-and-reel-shipping-media-for-stm8-and-stm32-microcontrollers-in-tssop-and-ssop-packages-stmicroelectronics.pdf
Technical Notes & Articles	https://www.st.com/resource/en/technical_note/tn1433-reference-device-marking-schematics-for-stm32-microcontrollers-and-microprocessors-stmicroelectronics.pdf
Technical Notes	https://www.st.com/resource/en/technical_note/tn1204-tape-and-reel-

& Articles	shipping-media-for-stm32-devices-in-bga-packages-stmicroelectronics.pdf
User Manuals	https://www.st.com/resource/en/user_manual/um3083-stm32g0-series-iec-60730-selftest-library-user-guide-stmicroelectronics.pdf