

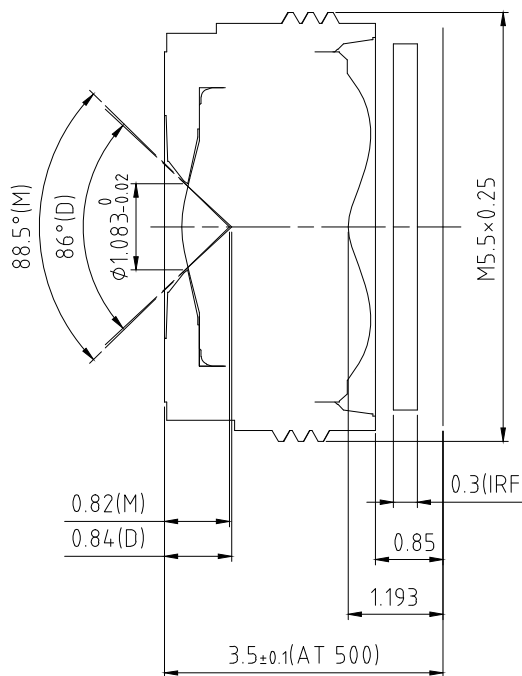
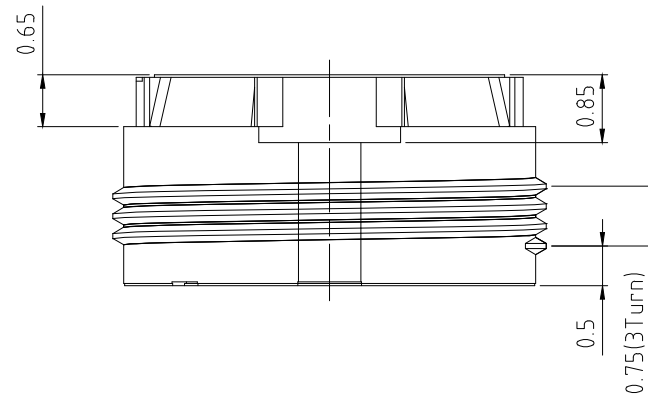


COB

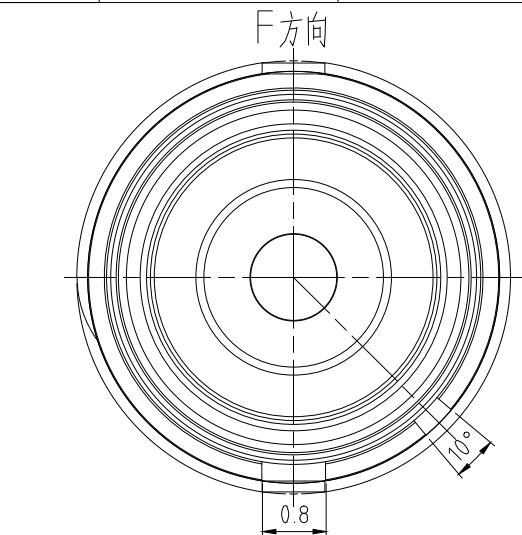


F方向

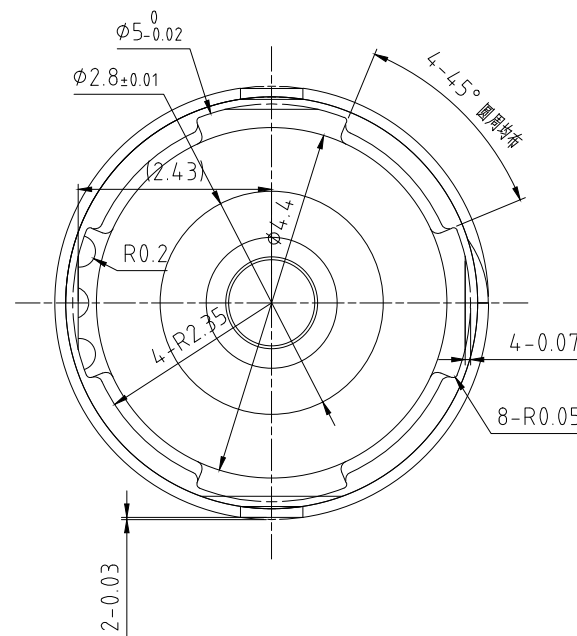

3832B-400:

LENS	
●Total Track	3.5±0.1(AT 500.)
●E.F.L	2.42
●B.F.L	1.193
●F.F.L	0.85
●F.NO	2.2 ±5%
●Field of view	
VERTICAL	58.3°,(Y'=1.371)
HORIZONTAL	73.7°,(Y'=1.828)
DIAGONAL	86.0°,(Y'=2.285)
●ENTRANCE PUPIL	
Position	0.077(Right to from surface)
Diameter	φ1.083
●TV-Distortion I	<1.5%
●REL. illumination	>31.7% (Y'=2.285)
●CHIEF RAY ANGLE	<32.8°
●Max image	φ4.8
●COMPOSITION	4 ELEMENTS (4 Plastic )
●SENSOR	1/4" CMOS (3.656×2.742, DIA.=4.57)
IR-Filter	
●Thickness	
●Cut Off	
Barrel Material	PC
Appearance Quality	
●Center	20-10
●Edge	40-20



材料 ( HSF )



浙江舜宇光学有限公司  
ZHEJIANG SUNNY OPTICS CO., LTD.

名称  
3832B-400

号  
3832B-0JG

REV  
00

??	数	更改文件号	字	日期
尺寸?位:	未注尺寸公差: ±0.1; ±0.02; 0.1%; ±0.05; ±1; ±0.1; 未注角度公差: ±1°			
mm				
??	校?	工?	核	准化
黄林	2015-08-24			

位	mm	比例	15:1
??	1/1	数量	1
??	定	???	??
S			