
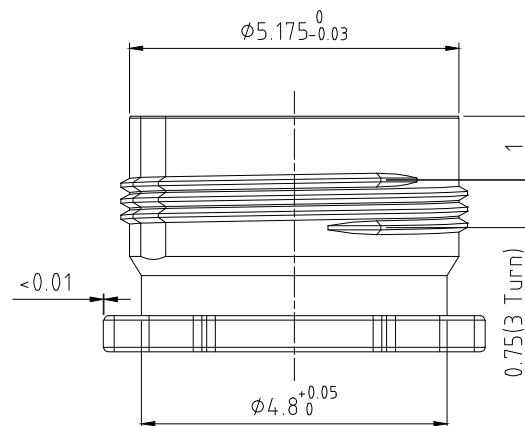
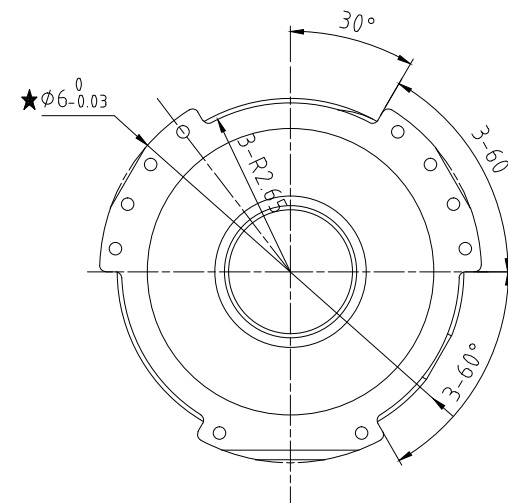


COB

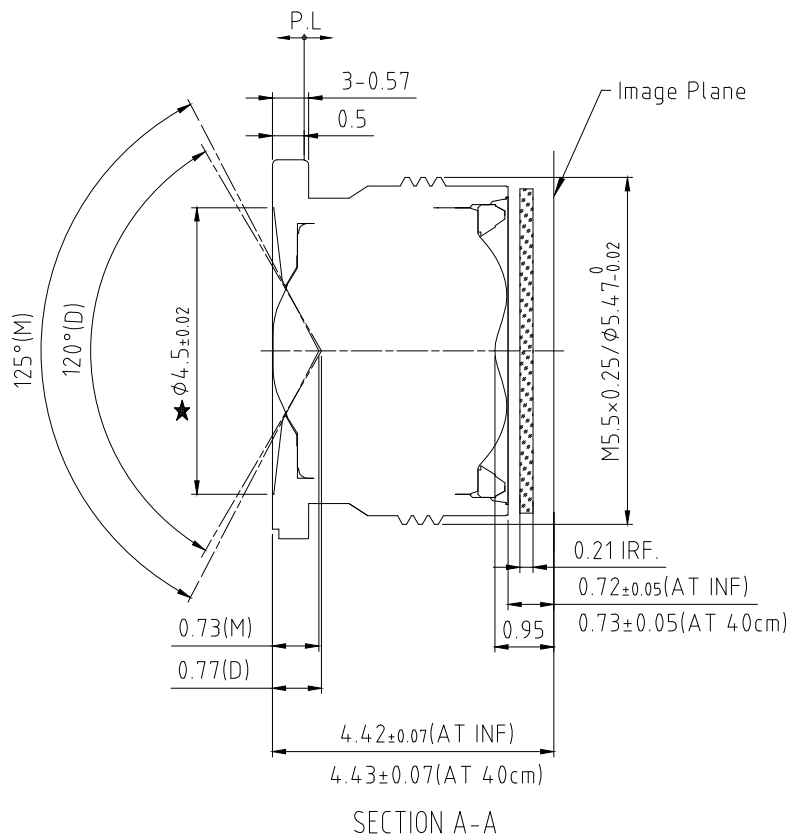

3852A-400:

● Total Track	4.42±0.07(AT INF)
● E.F.L	1.78
● B.F.L(Optical)	0.95
● F.F.L	0.72±0.05(AT INF)
● F.NO	2.4±3%
● Field of view	
VERTICAL	78°,(Y'=1.371)
HORIZONTAL	98°,(Y'=1.828)
DIAGONAL	120°,(Y'=2.285)
● ENTRANCE PUPIL	
Position	0.576(Right to from surface)
Diameter	φ0.745
● I TV-Distortion	<13%
● REL. illumination	>33%(Y'=2.285)
● CHIEF RAY ANGLE	<34°
● Max image	φ4.81
● COMPOSITION	6P ELEMENTS
● SENSOR	1/4" Sensor (3.656×2.742, DIA.=4.57)
IR-Filter	
● Thickness	
● Cut Off	
Barrel Material	PC
Appearance Quality	
● Center	20-10
● Edge	40-20

??用?
2016-12-21

??	数	更改文件号	字	日期	材料 (HSF)				浙江舜宇光学有限公司 ZHEJIANG SUNNY OPTICS CO., LTD.			
尺寸?位:	mm	未注尺寸公差: ± 0.1 ± 0.02 ; 0.1% ± 0.05 ; ≥ 1 ± 0.1 ;			位	mm	比例	12.1	名称			
??		未注角度公差: $\pm 1^\circ$??	1/1	数量	1	3852A-400			
??		校?	工?	核	准化	定	???	?	?号		REV	
人建料	2016-12-21						S		3852A-0JG			00