

Inca 500



A compact 4-channel amplifier delivering up to 125 W per channel for installed audio applications.

**POWER**

125 W per channel
(4 Ω /8 Ω)

**INPUT TYPE**

Analog, Digital

**COMPUTER CONTROL**

DSP

**NUMBER OF CHANNELS**

4 channels

The Inca 500 is a half-rack width amplifier designed for space-conscious installations, supplied in a compact 1U format with flexible mounting options. It is ideal for distributed audio systems, supporting both low-impedance and 70V/100V applications within a single unit.

Sharing the same platform as the larger Inca models, the Inca 500 provides a consistent user experience across the Inca Series, alongside updated styling for a more cohesive look.

With integrated DSP and automatic power sharing, the Inca 500 distributes power efficiently across outputs according to the needs of each system.

A shared DSP architecture, unified web interface and common networking features make setup, configuration and control straightforward across a wide range of installation environments.

KEY FEATURES

Full matrix DSP embedded and controlled via Web Browser

Leader/Follower functionality with S/PDIF link to multiple amplifiers

Compatibility with 70/100 V Hi-Z or low impedance loads

Automatic power sharing to optimise power for asymmetric loads

Compact form factor with versatile wall/desktop or rack mounting options

Integrated GPIO control

Pre-loaded with the Void Acoustics preset library

Built-in Wi-Fi for fast installation

Quick configuration and reliable operation across a wide range of installation environments

SPECIFICATIONS

Channel Handling

Number of output channels:	4
Number of input channels:	6 (4 analogue, 2 digital)

Audio

Frequency Response	20 Hz - 20 kHz (+/- 0.5 dB, 8 Ω load, 3 dB below rated power)
Signal To Noise-Ratio	>106 dB (A-weighted, 20 Hz - 20 kHz, 8 Ω load)
Output Circuitry	UMAC™ Class D - full bandwidth PWM modulator with ultra-low distortion
THD+N (typical)	< 0.05% (20 Hz - 20 kHz, 8 Ω load, 3 dB below rated power)
Protection Circuits	Short circuit -, DC -, Undervoltage -, Temperature - and Overload protection

Construction

Dimensions	44.5 x 220 x 322 mm 1.8 x 8.7 x 12.7 in
Weight	2.8 kg (6.2 lbs)

Output Stage





Total System Power	500 W
Output Power @ 4/8 Ω	4 x 125 W
Output Power @ 70/100 V*	2 x 250 W
Powershare (up to) Across all channel**	2 x 250 W
Output Voltage	45 Vrms (S.E) - 70/100 V (Hi-Z)

*100 V line mode operates @ -1 dB ($\approx$ 90V)

**Inca 500 may only Powershare across Ch1/2 and Ch3/4

AC Mains Power

Power supply	UREC™ universal mains switch mode power supply with Power Factor Correction (PFC) and standby converter
Nominal voltage	Universal Mains, 100 V - 240 V, 50 Hz - 60 Hz
Power Consumption	150 W
Standby Consumption	< 0.5 W
Operating Temperature	0-40°C
Power Ratings	1% THD @ 120 Vac and 230 Vac

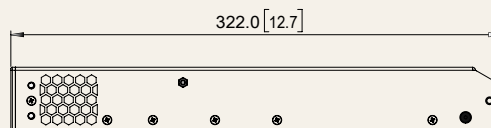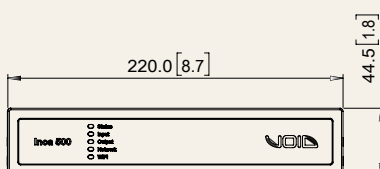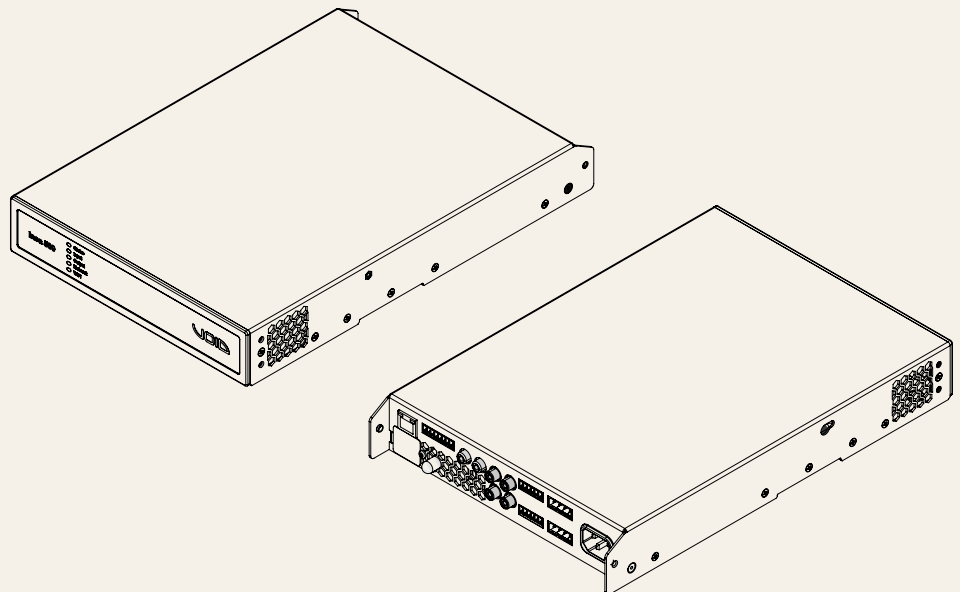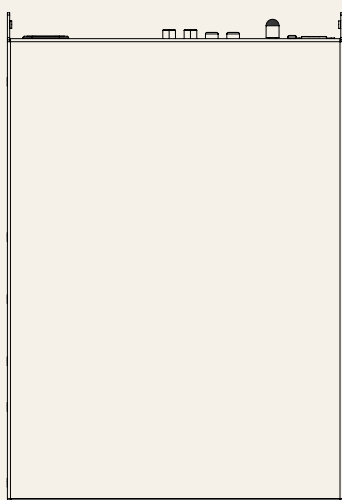

© 2026 Void Acoustics Research Ltd.

This information is subject to change without notice. For the latest online version, visit: voidacoustics.com Void Acoustics and the Void logo are registered trademarks of Void Acoustics Research Ltd. in the United Kingdom, USA and other countries; all other Void trademarks are the property of Void Acoustics Research Ltd.