

Isolated MIDI input / 3.3 V UART / HAND ASSEMBLY

T1 | HAND ASSEMBLY | SEE PIN GUIDE AT RIGHT


PIN GUIDE: IN = into this board / OUT = out / I/O = both / GND = 0 V

J202 / MIDI IN
1: DIN4 IN 2: DIN5 IN


J203 / CASE BOND
1: CASE 2: GND 0V

J101 / PWR IN / UART OUT
1: 5V IN 2: 3V3 IN
3: GND 0V 4: UART OUT

U201.3: NC – LEAVE OPEN

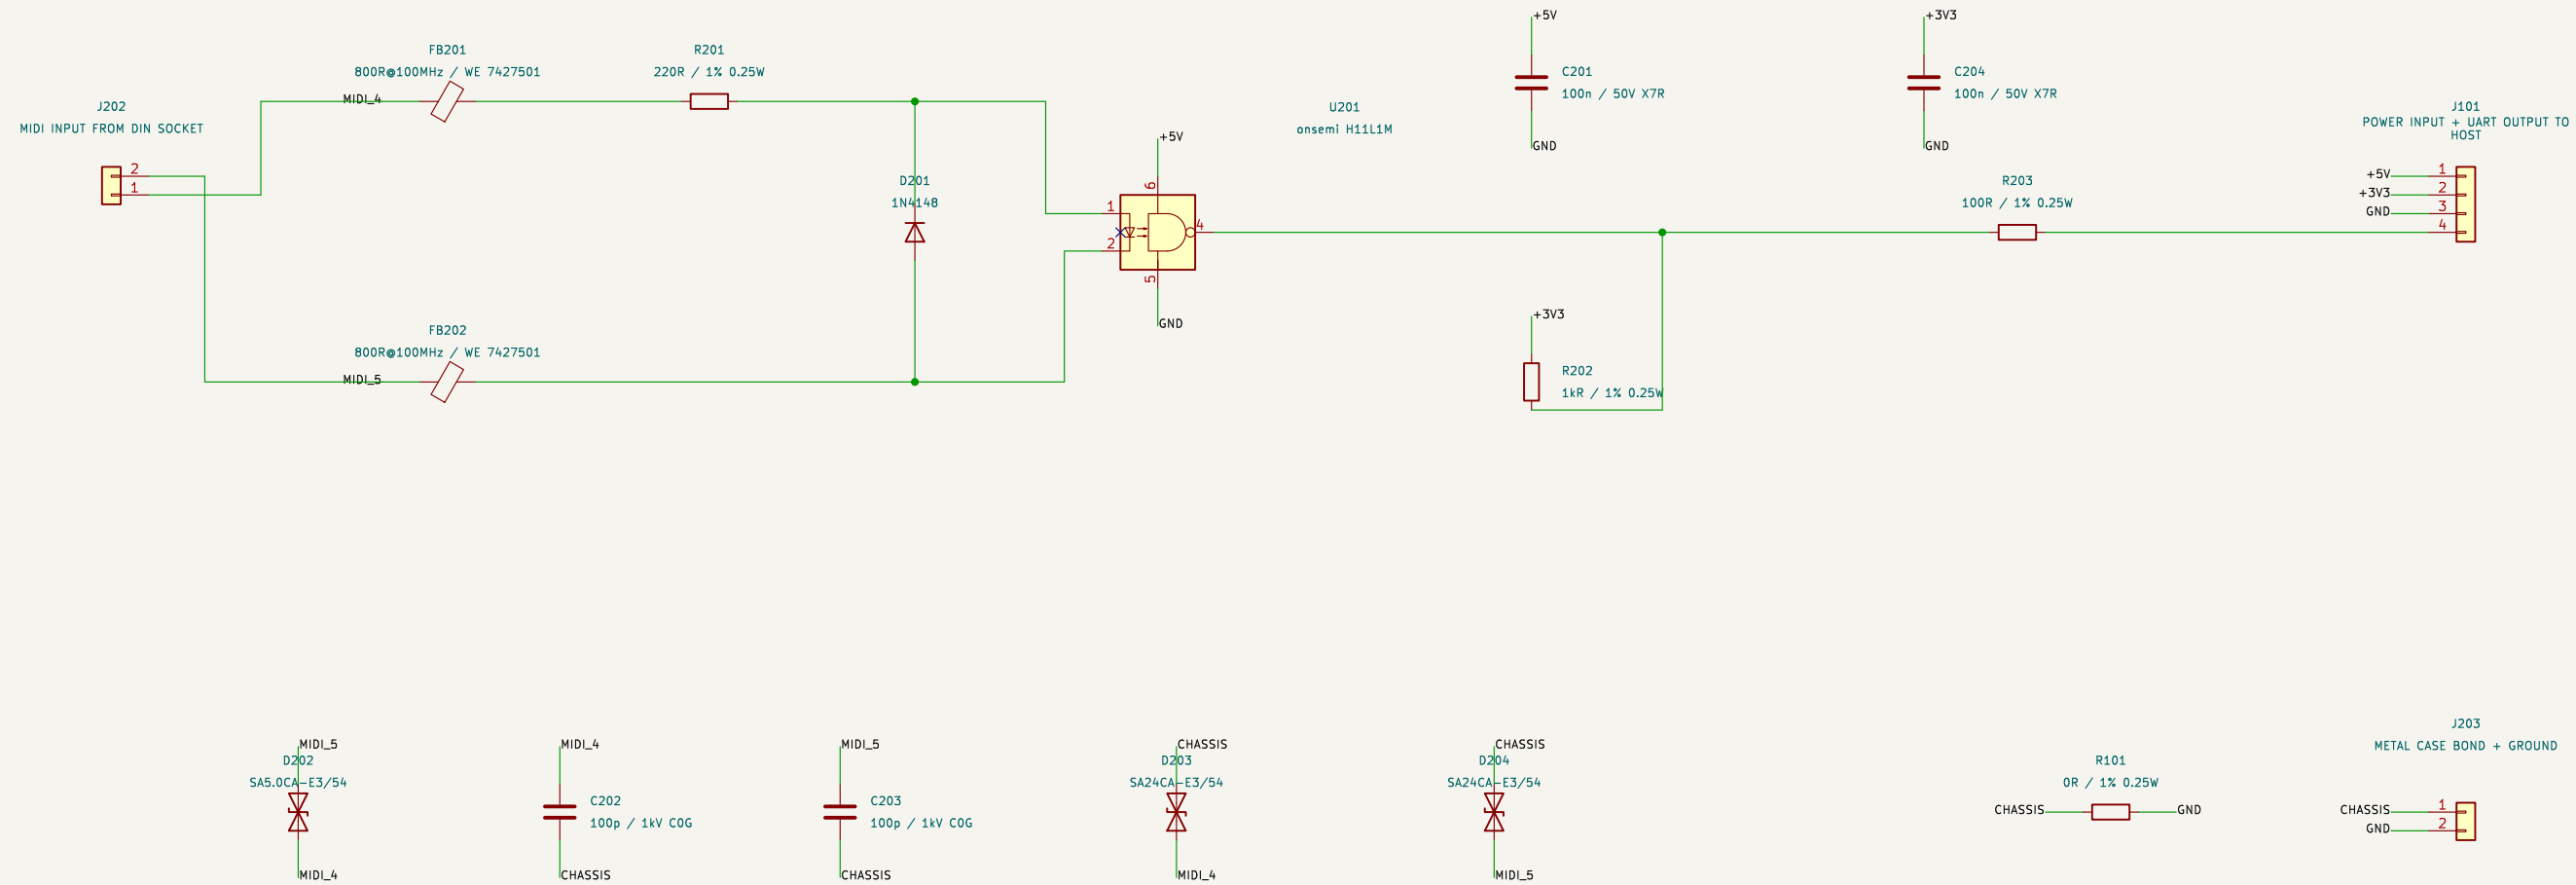

DIN panel socket: contact 4 -> J202.1; contact 5 -> J202.2. Pins 1/2/3 and shell unconnected.
 Insulate DIN shell. J203.1 bonds the enclosure; R101 returns ESD to local GND.
 Optocoupler LED current -> UART low. The output pull-up is 3.3 V, never 5 V.
 Functional ground-loop isolation; transient clamps limit common-mode range. Not a safety isolator.



Engineering prototype – bench validation required

Ardor

Sheet: /
File: Ardor_MIDI_THT.kicad_sch

Title: Isolated MIDI input / 3.3 V UART / HAND ASSEMBLY

Size: A3	
KiCad E.D.A. 9.0.2	

Date: 2026-10-08

Rev: T1

Id: 1/1