


Isolated MIDI input / 3.3 V UART / PIN GUIDE

IN = into this board OUT = from this board I/O = both directions GND = 0 V 3V3 = 3.3 V

BACK / READ FROM THIS SIDE

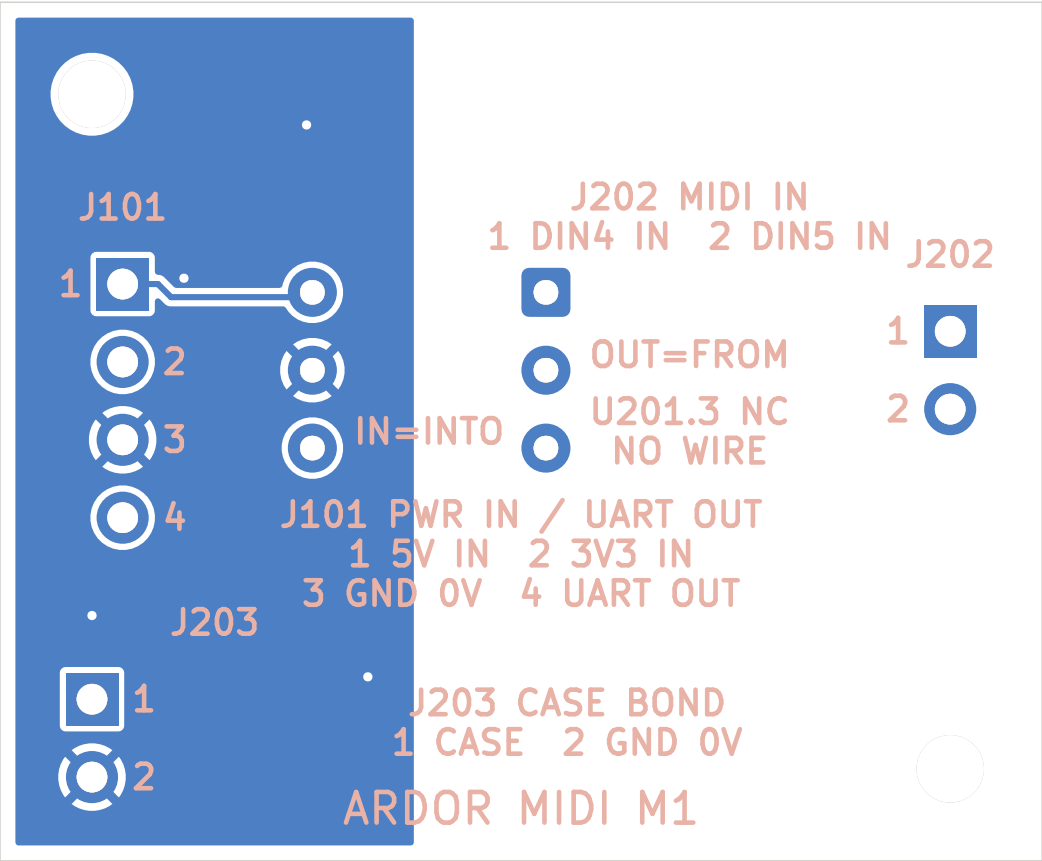

J202 / MIDI INPUT FROM DIN SOCKET

1: DIN4 IN / MIDI INPUT

Female DIN socket numbered contact 4.

2: DIN5 IN / MIDI INPUT

Female DIN socket numbered contact 5.

J203 / METAL CASE BOND + GROUND

1: CASE / BOND

Aluminium enclosure bonding point; insulate the MIDI DIN shell.

2: GND 0V / GROUND

Host or cable ground / 0 V.

J101 / POWER INPUT + UART OUTPUT TO HOST

1: 5V IN / POWER INPUT

Positive output of the matching regulated supply.

2: 3V3 IN / POWER INPUT

Positive output of the matching regulated supply.

3: GND 0V / GROUND

Host or cable ground / 0 V.

4: UART OUT / OUTPUT

Host UART RX input, 31250 baud, 8-N-1. Do not connect to host TX.

The square connector pad is pin 1.

Match the connector name and pin number.

Connector assignments differ between modules.

UNUSED COMPONENT PINS

U201.3 / NC - LEAVE OPEN

H1 / H2: mounting holes; no electrical connection.

Small via holes are not wire connectors.

Use the connector pin table before you connect power.

Use ASSEMBLY.md for the short procedure. Disconnect the power supply before solder work or jumper changes.