



REV.	ECN.NO.	MODIFY.CONTENT

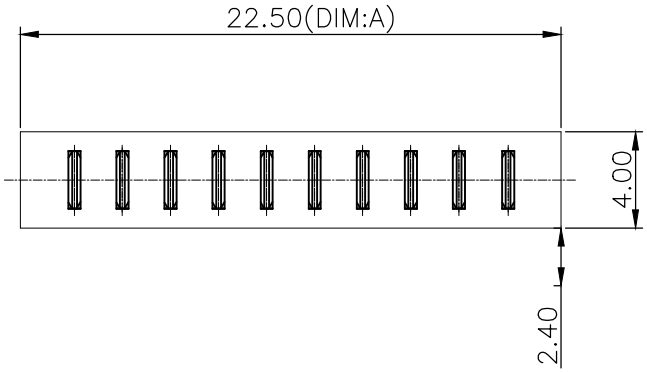

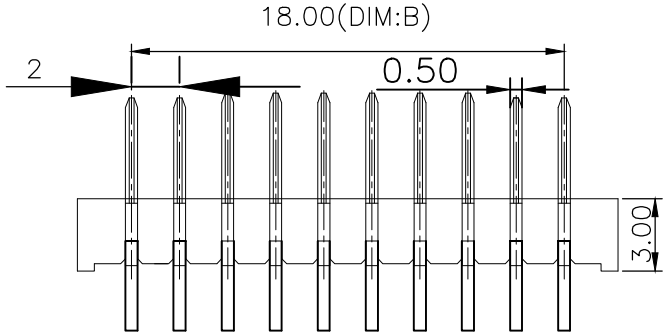



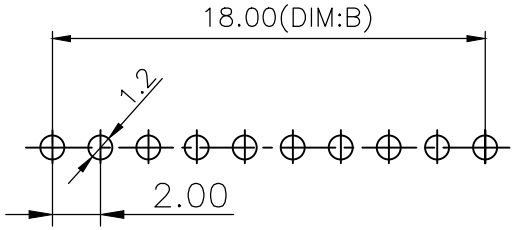

Recommended P.C.B Layout

Layout Tolerance=+/−0.05mm

No. of Pins	Dimension	
	DIM.B	DIM.A
03	4.00	8.50
04	6.00	10.50
05	8.00	12.50
06	10.00	14.50
07	12.00	16.50
08	14.00	18.50
09	16.00	20.50
10	18.00	22.50
11	20.00	24.50

Material
Insulator:Nylon 9T(UL94V−0)
TERMINAL: C2680
TERMINAL:Plated Gold over Nickel or Tin
Specification
Current rating:8A
instant CURRENT:12A
Contact Resistance:30mΩ
Insulation Resistance:100MΩ
Dielectric Voltage:500V
Operdting Temperature:−40°~105°

GENERAL	TOLERANCE	DWG.NO.	LYD-BATTERY-2.0	PART.NO.	C01M−NP−R1−A	DRAWN	JSM 2021.6.18	UNIT	mm	SCALE	1:1
X.±0.25	x. °± 2 °	REV.	A	TITLE	Battery 180° 2.0mm Pitches 4腳	CHECKED	Andy 2021.6.18	深圳市力揚達電子科技有限公司			
.X±0.20	.x °± 1 °	SIZE									
.XX±0.15	.xx± 1 °	A4		SHEET	1 OF 1	APPROVED	michael 2021.6.18				