CP1608 Series

Multilayer Chip Couplers

ACX
Advanced Ceramic X

Features

❖ Monolithic SMD with ultra-small, low-profiled, and light-weight type.

Applications

❖0.8 ~ 6 GHz wireless communication systems, including DECT/PACS/PHS/GSM/DCS phones, WLAN card, Bluetooth modules, etc.

Specifications

Part Number	Passband (MHz)	Insertion Loss (dB)	VSWR	Coupling (dB)	Isolation (dB)
CP1608-10A2450_	2400 ~ 2500	0.74 max.	1.8 max.	10.0 ± 1.0	22.0 min.

Q'ty/Reel (pcs) : 4000
Operating Temperature Range : -40 ~ +85 °C
Storage Temperature Range : +5 ~ +35 °C, Humidity 45~75%RH
Storage Period : 12 months max.
Power Capacity : 2W max.

Part Number

CP ① 1608 ② - 10 ③ A ④ 2450 ⑤ □ ⑥ /LF ⑦

① Type	CP : Coupler	② Dimensions (L × W)	1.6 × 0.8 mm
③ Coupling	10 : 10 dB	④ Specification Code	A
⑤ Central Frequency	2450 : 2450MHz	⑥ Packaging	T: Tape & Reel B: Bulk
⑦ Soldering	=lead-containing /LF=lead-free		

Terminal Configuration



No.	Terminal Name	No.	Terminal Name
①	IN	④	Termination
②	GND	⑤	GND
③	Coupled Out	⑥	Main Out

Dimensions and Recommended PC Board Pattern

Unit : mm

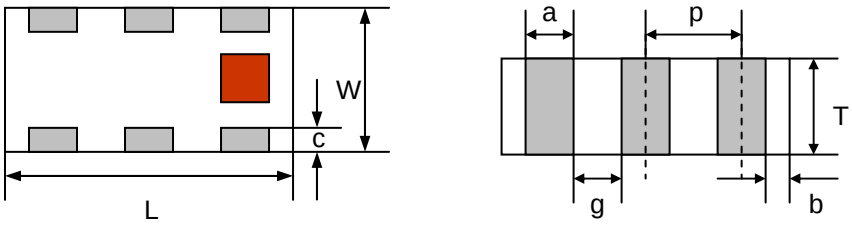

Mark	L	W	T	a	b	c	g	p
Dimensions	1.6 ± 0.1	0.8 ± 0.1	0.6 ± 0.1	0.2 ± 0.1	0.2+0.1 /-0.15	0.15 ± 0.1	0.3 ± 0.1	0.50 ± 0.05

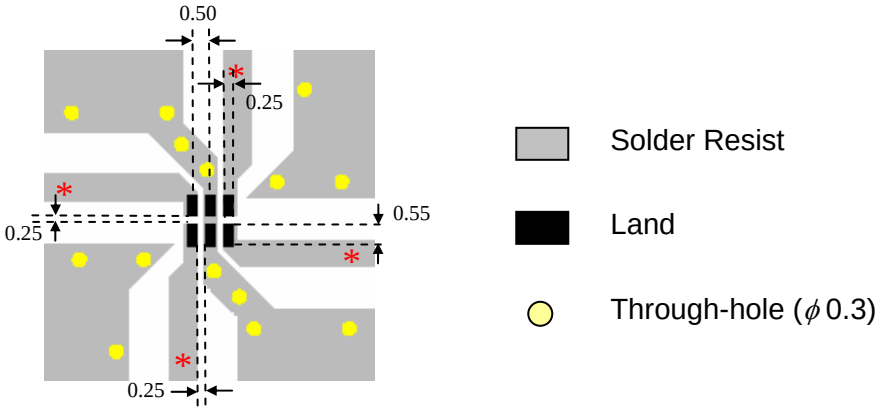

* Line width should be designed to match 50Ω characteristic impedance, depending on PCB material and thickness.

Measuring Diagram

Attenuation

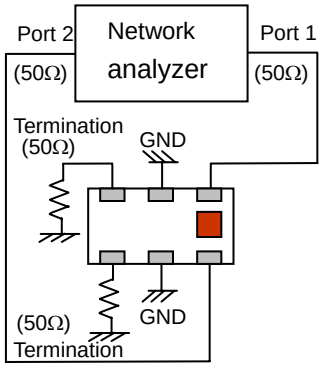

Coupling

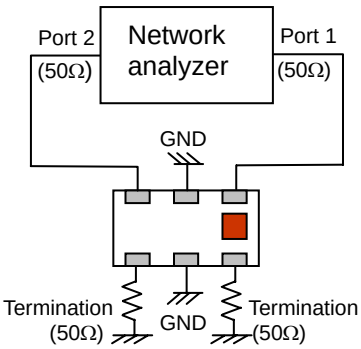

Isolation

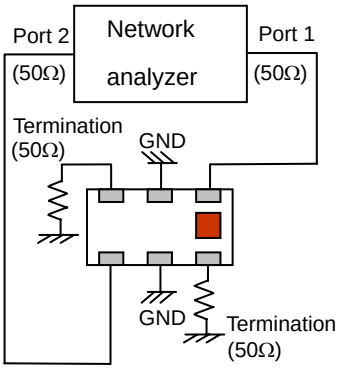

Typical Electrical Characteristics (T=25°C)

Attenuation
Return Loss

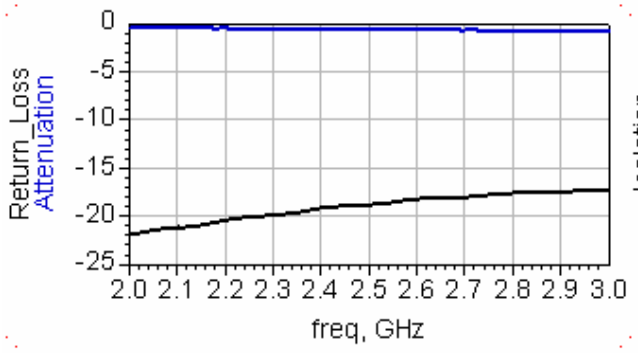

Coupling
Isolation

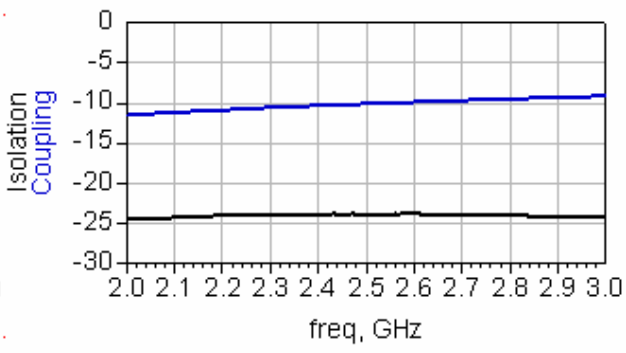

Notes

❖The contents of this data sheet are subject to change without notice. Please confirm the specifications and delivery conditions when placing your order.

Advanced Ceramic X Corp.
16 Tzu Chiang Road, Hsinchu Industrial District Hsinchu Hsien 303, Taiwan
TEL:886-3-5987008 FAX:886-3-5987001
E-mail: acx@acxc.com.tw
http://www.acxc.com.tw