```
// include the library code:
#include <LiquidCrystal.h>

// initialize the library by associating any needed LCD interface pin
// with the arduino pin number it is connected to
const int rs = 11, en = 9, d4 = 6, d5 = 5, d6 = 4, d7 =3;
LiquidCrystal lcd(rs, en, d4, d5, d6, d7);

void setup() {
  // set up the LCD's number of columns and rows:
  lcd.begin(16, 2);
  // Print a message to the LCD.

}

void loop() {
  int i;
  String name="SHREYA PATHAK";
for(i=1;i<=name.length();i++)
{
  lcd.clear();
  lcd.setCursor(0,0);
  lcd.print(name.substring(0,i));
  delay(400);
  }
  delay(1000);
  lcd.clear();
}
```

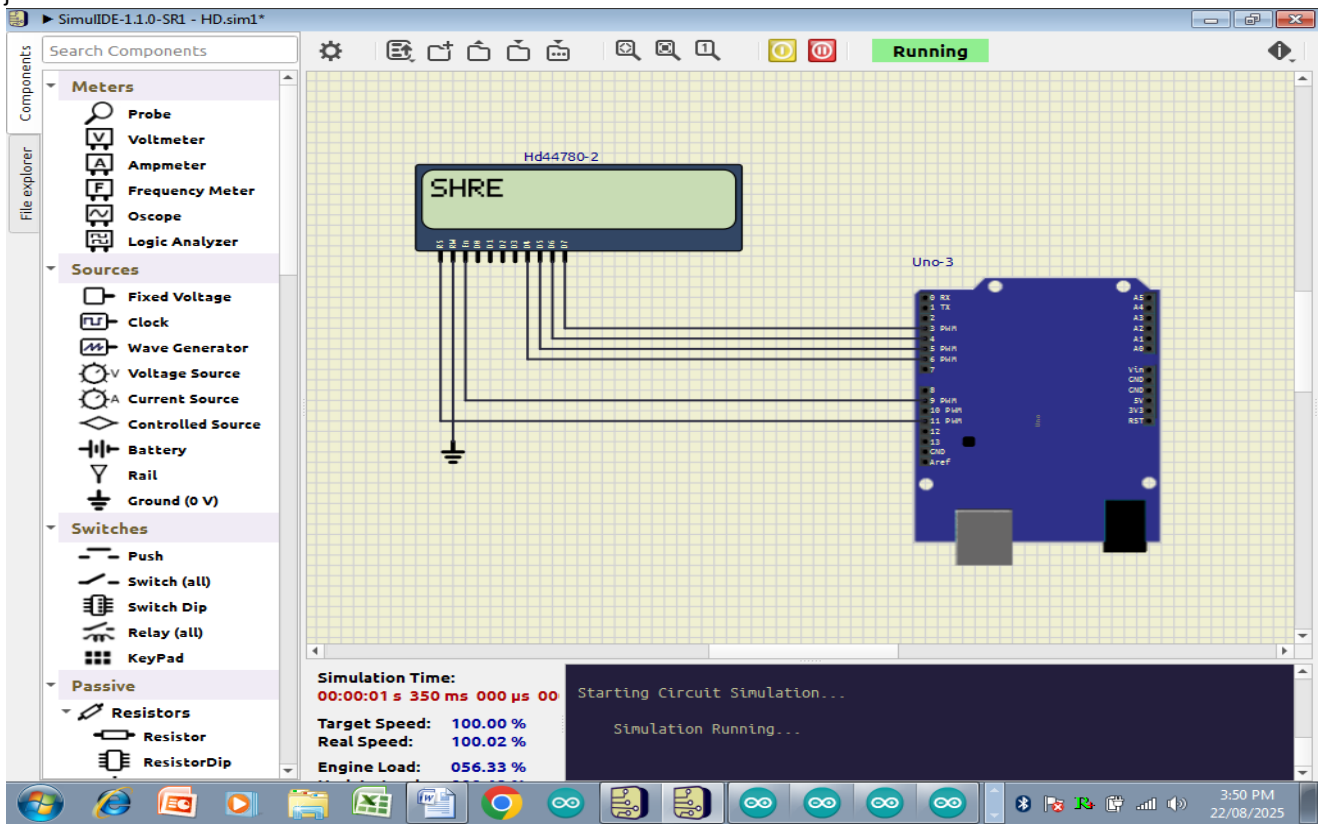

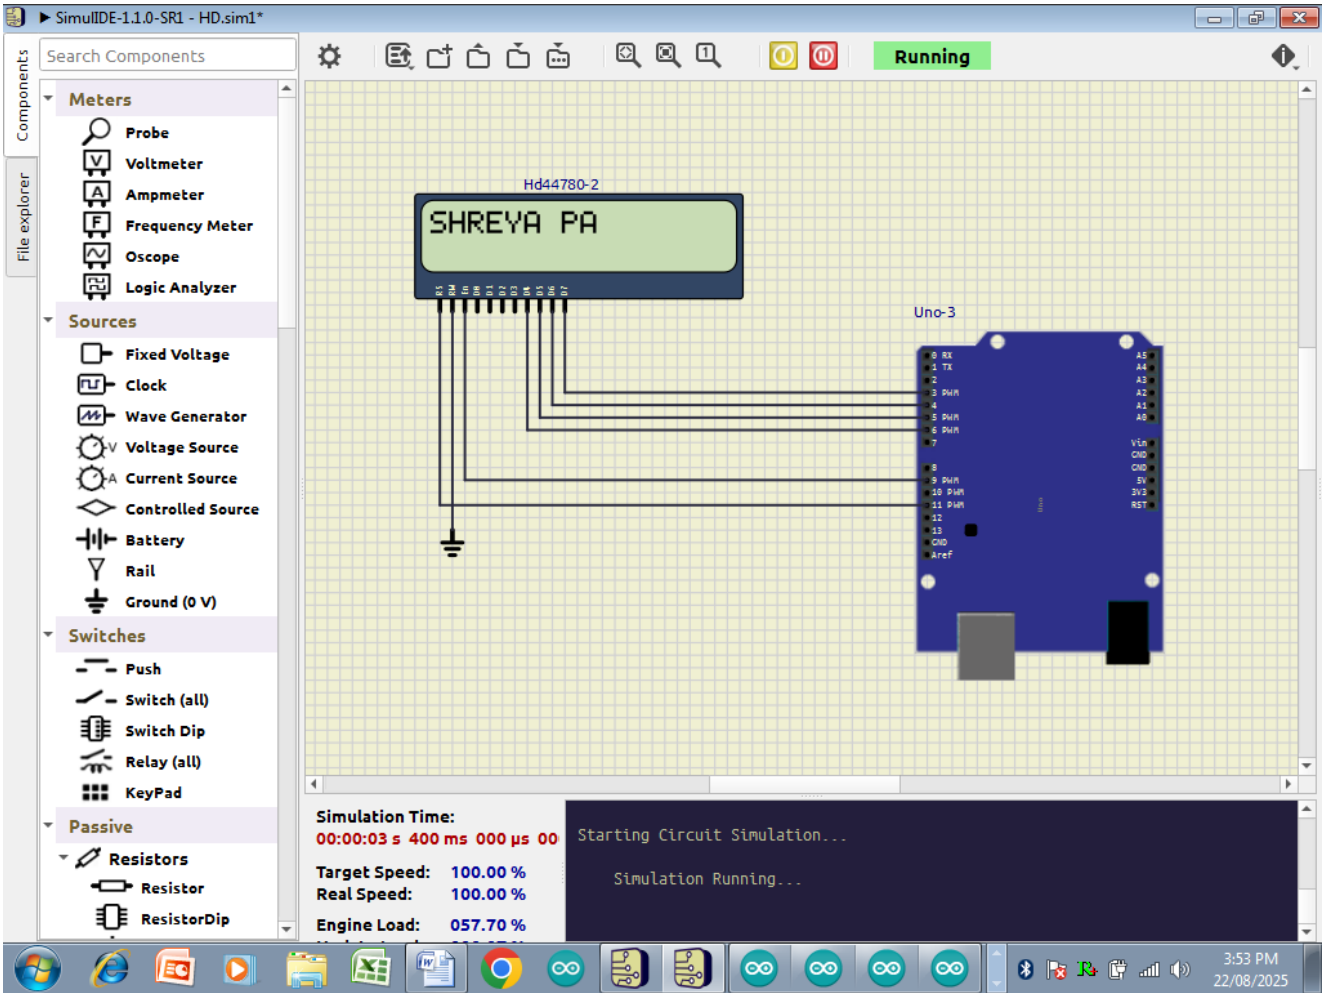
SimulIDE-1.1.0-SR1 - HD.sim1*
Components
File explorer
Search Components
Meters
Probe
Voltmeter
Ampmeter
Frequency Meter
Oscope
Logic Analyzer
Sources
Fixed Voltage
Clock
Wave Generator
Voltage Source
Current Source
Controlled Source
Battery
Rail
Ground (0 V)
Switches
Push
Switch (all)
Switch Dip
Relay (all)
KeyPad
Passive
Resistors
Resistor
ResistorDip
Running
Hd44780-2
SHREYA PA
Uno-3
Simulation Time:
00:00:03 s 400 ms 000 µs 00
Target Speed: 100.00 %
Real Speed: 100.00 %
Engine Load: 057.70 %
Starting Circuit Simulation...
Simulation Running...
3:53 PM
22/08/2025