
FRC
Sensor CAN

Revision D-2 SC12 · Prototype engineering and assembly guide

Three industrial / logic sensor inputs
Regulated 12 V and 5 V sensor power

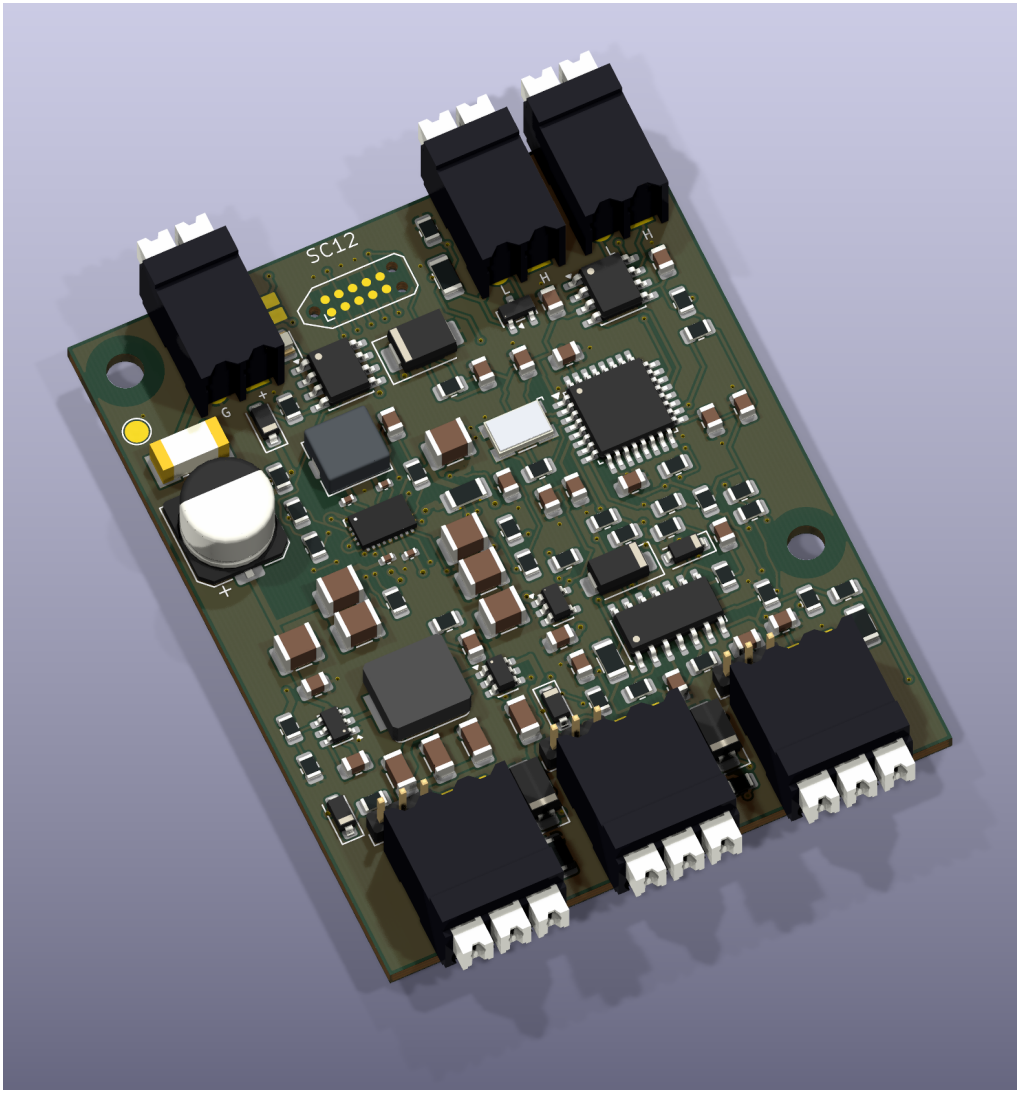

2026-09-08

Editable KiCad files, split factory/hand-solder BOMs, firmware, robot examples and verification records accompany this guide. No physical prototype has been tested. Electrical ratings are design targets pending the included qualification plan.

Contents

1 Product overview 3

2 Simplification 6

3 Wiring and programming contacts 8

4 Hand assembly 11

5 Firmware 12

6 CAN protocol 13

7 Robot integration 15

8 Purchasing and factory quote 16

9 Validation and qualification 18

10 Connector evidence 20

11 Tools and reproduction 21

12 Sources and notices 22

13 Cost reduction 23

14 Optimization plan - proposed work 25

1 Product overview

Source: README.md

Rev D-2 preserves Rev D's circuit and firmware identity (hardware 4, protocol 3). It changes 27 passive placements to specified equivalents, adds three removable power-selection headers, and separates factory SMT assembly from your through-hole work. Cost basis and remaining costs.

Three industrial digital inputs, selectable **regulated 12 V or 5 V sensor power**, and classic CAN for FRC team projects. The **52 × 64 mm** PCB keeps horizontal Weidmüller push terminals and the compact TC2050 programming contacts. **Every component mounts on the top side.** It uses four copper layers, with both inner layers reserved for ground.

Engineering prototype release. CAD, source, manufacturing files and checks are provided for review and prototype fabrication. No physical Rev D-2 board has been assembled or qualified. Production release and competition use require the tests in VALIDATION.md; CAD checks do not establish either.

Item	Rev D-2 design target
Board input	6-22 V DC at J1, protected distribution branch required
Sensor supplies	12.01 V nominal buck-boost and 5 V nominal; 300 mA shared per rail
Inputs	Three PNP, NPN or push-pull inputs; positive signal range 0-30 V
Logic thresholds	LOW ≤1.2 V, HIGH ≥2.4 V targets; supports 3.3/5 V logic, not guaranteed 1.8 V
Connectors	Weidmüller LSF-SMT 3.50/90; 1824420000 and 1824430000
MCU / CAN	STM32F042K6T6 LQFP32 + TCAN3413 SO8; 1 Mbit/s
Power stage	TPS552872-Q1, synchronous buck-boost; 3.3 µH shielded inductor
Assembly	107 fitted parts: 98 top-side factory SMT; six terminals and three headers hand soldered; three loose caps
Parts estimate	$40.50 / $34.69 / $32.23 per board in lots of 5 / 10 / 25, including purchase minimums; PCB/assembly/freight/tax extra
Firmware	0.4.0, hardware 4, original protocol v3; Java, C++ and Python interfaces

12 V remains regulated when the battery is above or below 12 V within the qualified input/load envelope. It is intended for compatible three-wire Omron/Banner sensors; verify the exact model, current, output type and residual/leakage voltage. A brand name alone is not a compatibility guarantee. Sensor power is hardware-enabled; removable 2 mm jumper caps choose each port's supply. No raw battery output is exposed on Rev D-2.

Firmware reports qualified 12 V power-good and 5 V switch fault status. Counts pause on either rail fault and resume only after 100 ms of continuous good indications. Drivers provide a health-checked input helper. These indications are not calibrated voltage measurements and cannot detect every cable or sensor failure.

The integrated switches, current limiting, shared 5 V driver bias and PCB Kelvin taps avoid extra purchased power devices. Most passives remain 0805 or larger. Four local 0402 capacitors and the 21-pad HotRod QFN require a stencil and controlled reflow/heatbed; inspect the power IC joints. Hand soldering the remaining parts is practical. See design choices.

Order and finish a board

1. Request top-side SMT assembly using the Gerber ZIP, JLCPCB BOM and CPL. Match all 98 placements against Factory_BOM.csv; a blank factory part ID still needs exact-MPN sourcing. Follow the factory instructions.

2. Buy and hand solder the six terminals and three headers, and buy three closed-top caps. The factory leaves these nine through-hole positions empty. A complete placement drawing also shows these user-fitted parts, so use the SMT-only CPL for the factory order.

3. Leave the caps off during initial bring-up. Follow assembly and programming, then configure voltage, bias and termination with power disconnected. Use the firmware and drivers supplied here; D-2 retains D's hardware-4/protocol-v3 identity.

Board quantity	Parts purchase cost per board
1	$55.27
5	$40.50
10	$34.69
25	$32.23

These estimates include all fitted parts, loose caps and supplier minimums, using observations from September 7-8, 2026. PCB, assembly, attrition, freight and tax are extra; **a delivered price below $50 has not been established**. The $44.16 first-tier consumed-parts figure is a different basis from purchasing enough parts for one board. Calculation and assumptions.

Confirm component allocation and a destination-specific express-delivery estimate against the one-month target. The factory guide treats 2-4 weeks as a planning allowance, subject to sourcing, production and customs; no order or delivery date is confirmed.

Removable sensor-voltage selection

JP101, JP201 and JP301 select power for J4, J5 and J6 respectively. Fit **one 2 mm cap per header** with input power disconnected:

Cap position	Sensor power
Pins 1-2	Regulated 5 V
Pins 2-3	Regulated 12 V
Cap removed	Port power disconnected


Pins run 1-2-3 left to right when viewed from the component side; pin 1 has a square PCB pad. Bias selectors JP103/JP203/JP303 and CAN termination JP2 remain solder settings. The caps are friction-retained, with retention/vibration qualification still required for the actual robot installation. Full wiring and retention instructions.

Files and verification

The SC12 optimization plan applies lessons from LaserCAN to CAN commissioning, firmware updates, manufacturing cost and qualification. CAN discovery, persistent ID changes and firmware updates are **planned, not available in firmware 0.4.0**. Current setup uses UART and firmware flashing uses SWD; the plan starts with the existing PCB.

Deliverable	Link
Native KiCad PCB / schematic	PCB, schematic
Manufacturing / assembly	Gerbers and drills, interactive BOM, schematic PDF
Ordering	Gerber ZIP, SMT BOM, JLCPCB BOM, CPL
User-fitted parts	Hand-solder BOM, loose caps, DigiKey import
Prototype factory packet	ZIP
Complete source/review release	ZIP, hashes
Mechanical handoff	STEP, dimensioned drawing

Deliverable	Link
Setup and operation	wiring, assembly, protocol, drivers
Engineering checks	Consolidated report, D-to-D-2 comparison, SMT file checks, qualification plan
Printable handbook	PDF

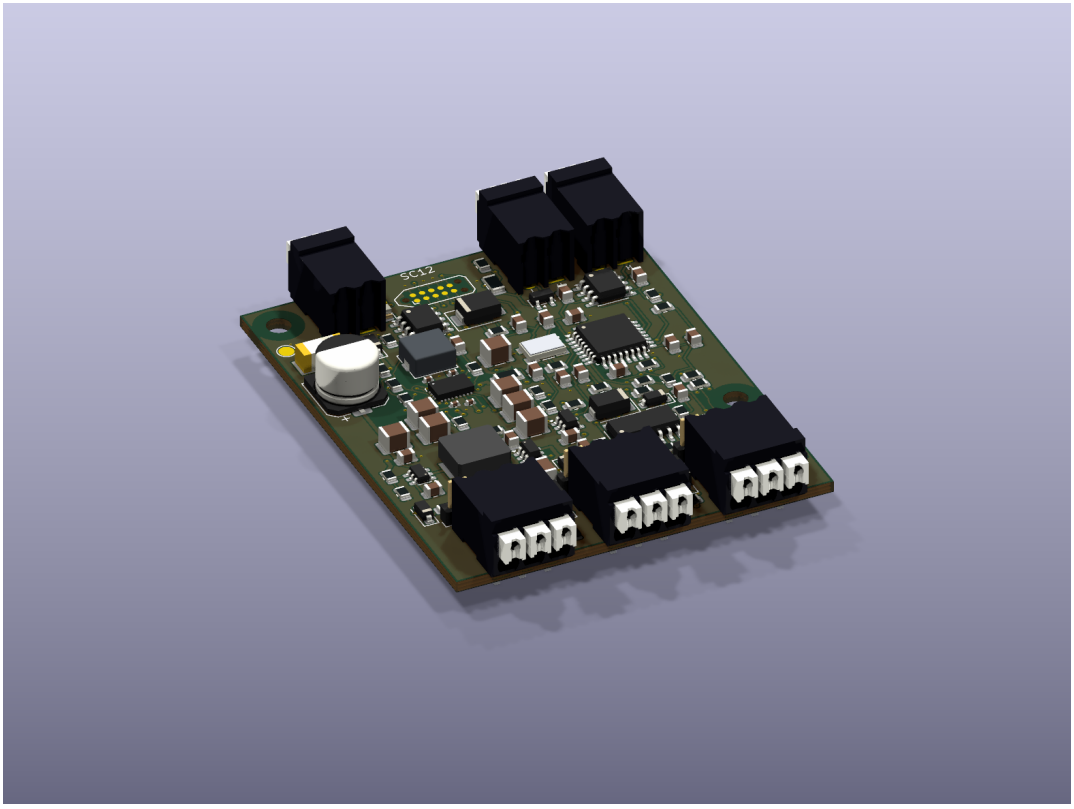

Connector geometry and official model provenance. Case design is a subsequent task after review of this revision; the mechanical files are a nominal handoff, not an enclosure fit test. Earlier A/B/B-2/C/D designs remain available in the repository.

2 Simplification

Source: docs/SIMPLIFICATION.md

Rev D-2 retains Rev D’s regulated 12 V while retaining three inputs and a 52 × 64 mm PCB. Compared with Rev C's 52 × 56 mm, area grows 14.3%; it is still 18.4% smaller than the 60 × 68 mm B versions. Rev C has 89 fitted parts; D has 104 and D-2 has 107 plus three loose caps. The increase buys regulation across the battery's 12 V crossing and explicit power-health handling.

What saves space and parts

• A four-switch synchronous TPS552872-Q1 integrates the buck-boost switches and output-current-limit control. It replaces the raw-battery rail and its separate TPS1H200A switch, current-set resistor and three capacitors.

• Its driver uses the existing internal 5 V buck rail, avoiding the high-input-voltage loss of its internal linear bias regulator. The 5 V design reserves 100 mA for this supply. Startup and brownout sequencing must be checked on the prototype.

• One 0.1 ohm 1206 resistor sets the 12 V current limit. Separate PCB Kelvin taps carry the feedback signals; they are copper features, not extra components. This resistor dissipates about 9 mW at 300 mA.

• Both internal copper layers are ground. Signal and power routing stay on the outer layers. The return planes and local ground vias help a compact switching layout; this is not a measured EMI claim.

• MCU internal pullups read the two open-drain health outputs without two external resistors. The converter's unused current-limit and cable-compensation status/functions are omitted.

• 10k compensation resistance reuses an existing BOM line. Firmware inversion/debounce, fixed input thresholds and one status LED retain Rev C's simpler interface.

Why the remaining capacitors matter

The converter has two bootstrap capacitors, two high-frequency supply bypasses, input/output energy-storage banks, a driver-bias capacitor and compensation capacitor. They serve different current paths. Moving or merging a bootstrap/bypass capacitor into a distant bulk capacitor is not equivalent.

The six added 10 µF 50 V X7R 1210 capacitors share one MPN. Samsung's typical bias curves plus explicit tolerance, temperature and aging allowances give approximately 7.10 µF for the two-cap input bank at 22 V, 15.32 µF for the three-cap output bank at 12.22 V, and 6.20 µF for driver bypass at 5.22 V. TI calls for at least 4.7 µF effective input, 10 µF output and 4.7 µF bias capacitance. These are engineering budgets from typical curves, not manufacturer-guaranteed minima. Substitution needs the same review.

The existing three 22 µF capacitors on the 5 V buck retain its effective-capacitance budget. Input TVS/filter/feedback parts handle industrial wiring and noise. Each MCU/CAN/comparator bypass remains at its local supply pins. Numerical checks record the assumptions.

Assembly compromise

There are 39 resistors, 37 capacitors and 31 other fitted parts. Only four capacitors are 0402; other small passives are largely 0805, with 1206/1210 parts where power or effective capacitance requires them. The converter is a 5 × 3 mm HotRod QFN with five long electrical power pads, not a generic exposed-pad QFN. Its footprint follows TI drawing RYQ0021B. A laser stencil, controlled reflow and joint inspection are required for repeatable assembly. This is less forgiving than Rev C's mostly leaded packages.

No per-port electronic power switch, output driver, encoder interface, ADC voltage/current telemetry, wireless radio or USB connector is added. All three ports share each rail's load budget. There are three removable 2 mm power headers, three bias solder selectors and one optional CAN termination bridge. The user hand solders all nine through-hole parts; the factory places 98 SMT parts. Procurement changes and cost basis.

Efficiency and stability scope

Nominal switching frequency is 781.25 kHz; automatic light-load mode is enabled. The shielded 3.3 µH inductor is sized for converter peak-current protection, not just the 300 mA load rating. The low-value shunt and external 5 V gate bias reduce avoidable loss. No measured efficiency percentage is claimed.

The boost continuous-conduction analytical model screens 192 corners using TI equations 19-26, capacitor derating, inductance tolerance, a ±20% transconductance allowance and an assumed full-cycle delay. It is not a switching simulation. PFM, current limiting, line steps, load steps, startup and the buck/boost transition still require measurement. See loop report and plot.

At these modest sensor loads, operation can enter discontinuous/light-load mode; the 192-corner CCM model is a screening model rather than a prediction of the normal light-load waveform. The 3.3 µH choice keeps the inductor small with adequate saturation margin, while automatic light-load operation avoids unnecessary circulating current. Measure ripple and input power with the actual sensors.

3 Wiring and programming contacts

Source: docs/WIRING.md

Use the included hardware-4/protocol-v3 firmware and tools; these remain compatible with Rev D. Board coordinates below are viewed from the component side, origin at the top-left PCB corner. Bottom silkscreen is read after turning the board over. Do not infer pin numbering from left/right after flipping.

Connector	Pin 1	Pin 2	Pin 3
J1 power	Positive input, 6-22 V	GND	-
J2, J3 CAN	CAN H	CAN L	-
J4 input 1	Selected sensor power	GND	Signal
J5 input 2	Selected sensor power	GND	Signal
J6 input 3	Selected sensor power	GND	Signal

Each terminal pole has two solder legs; they are one electrical contact. J2/J3 are connected in parallel for bus continuation, with no onboard CAN ground terminal. Common ground comes through robot power. Use twisted H/L wiring; keep branches short. Strip 8 mm using the conductor range specified by Weidmüller for the exact terminal. Press the white release button for removal and for conductor types requiring it. Provide cable strain relief independently of the terminal.

Feed J1 from appropriately fused robot distribution. F1 is secondary board protection. Do not backfeed J4-J6 power pins, parallel the two sensor rails, or apply external power to the programming rail. The board is not galvanically isolated.

Voltage jumpers and bias solder settings

The factory ships the board with JP101/JP201/JP301 **unpopulated**. Hand solder the specified 2 mm headers, then leave their caps off for initial bring-up. With power disconnected, fit ONE closed-top cap across pins 1-2 for 5 V or 2-3 for 12 V. No cap disconnects port power.

The three bias selectors and JP2 remain solder bridges with no stencil paste. Use an iron to configure bias/termination; remove the old bridge before changing it.

Channel	Power selector	Bias selector	Center X, mm
1 / J4	JP101	JP103	Power 7; bias 13
2 / J5	JP201	JP203	Power 23; bias 29
3 / J6	JP301	JP303	Power 39; bias 45

The three headers and three bias selectors are at Y=51.5 mm, just above the sensor connectors. **Pads 1, 2, 3 run left to right when viewed from the component side.** The square pad identifies pin 1. Use the detailed assembly drawing/interactive BOM to identify a selector before configuring it.

Selector	Connect 1-2	Connect 2-3	Open
Power: removable cap	Regulated 5 V	Regulated 12 V	Port power disconnected
Bias: solder bridge	10 kΩ pullup to selected port supply, through diode: NPN/open collector	10 kΩ pulldown: PNP	Push-pull or external pullup

One cap per power header, one bridge per bias selector. Connecting all three power pins shorts 12 V to 5 V.

Use Harwin M22-2010305 headers and Sullins SPN02SVEN-RC closed-top caps (2 mm pitch; not 2.54 mm). Caps are friction-retained, not mechanically latched. After voltage/functional verification, support retention with a small removable bead of electronics-grade neutral-cure silicone between the cap exterior and header body, clear of the contacts. This is a proposed retention method; qualify it for your robot vibration/impact environment and enclosure. Allow full cure before use and inspect seating during service. Do not claim these are vibration-qualified merely because there is no slider. Bridge JP2 only at a CAN bus end that needs a 120 Ω termination. Leave it open at intermediate nodes; normally there are two terminations on the entire bus.

Examples:

• Industrial NPN: select the sensor's required supply; bias 1-2. Output current from the pullup is below about 1.3 mA at 12 V. Select inversion in firmware if asserted means pulled low.

• Industrial PNP: select supply; bias 2-3. Verify the sensor's OFF leakage cannot raise the input above the LOW target through 10 kΩ (1.2 V / 10 kΩ ≈120 µA before margin).

• 3.3/5 V push-pull: bias open; select power only if the board powers that sensor. Always connect signal ground.

• 3.3 V open drain that is not 5 V tolerant: bias open, external pullup to the sensor's own 3.3 V rail. There is no onboard 3.3 V sensor supply selector.

Design targets: 0-30 V positive input, LOW ≤1.2 V / HIGH ≥2.4 V, common-ground offset budget ±0.1 V. Do not use as an analog input, quadrature encoder, IO-Link port or continuous negative-voltage input. Sampling is 1 ms with 1-100 ms debounce; short pulses can be missed. Sensor power budgets are shared, 300 mA per rail. Rail-health indications are available; they are not calibrated voltage/current measurements. A fault on either rail makes the health-checked driver input unavailable. See protocol.

Representative industrial sensors

Regulated 12 V is a suitable nominal supply for the following families, subject to exact model and cable checks. Connect the selected output only; insulate unused complementary output wires separately. Brown/blue/black is common supply/ground/output coloring, but follow the specific datasheet rather than assuming colors.

Family	Published limits	Rev D-2 setup / limitation
Omron E3Z three-wire NPN/PNP	12-24 V ±10%; typically 30 mA maximum, through-beam pair 35 mA; residual ≤1 V below 10 mA	Power 2-3 for 12 V. NPN bias 1-2; PNP bias 2-3. Residual voltage fits the LOW target at this board's small load
Banner QS18 standard o pposed/diffuse/retroreflective variants	10-30 V; <25 mA excluding output load; standard outputs <1 V at 10 mA	12 V supply is in range. Select NPN or PNP bias to match model; use one output. Account for its 100 ms power-up delay
Banner QS18 DVS/DL/FF variants	NPN residual specified up to 1.5 V at 10 mA	This exceeds the board's design LOW target. Prefer a compatible PNP variant or qualify actual NPN residual at the ~1.2 mA pullup load; do not assume all QS18 NPN models work

Sources: Omron E3Z specifications, Banner QS18 manual. PNP OFF leakage must also meet the input pulldown budget. Observe manufacturer cable/fusing requirements. Two-wire current-loop, AC, analog, IO-Link and safety/OSSD sensors are not supported as interchangeable three-wire inputs.

12 V is specified at the board, not guaranteed at the remote cable end under every transient. The analytical DC divider/reference budget is approximately 11.80-12.22 V before dynamic/distribution allowances; check ≥10.8 V at an E3Z during startup and worst battery/load conditions. Three 30 mA sensors are comfortably within the 300 mA shared design target, but include emitters, indicator loads, cable losses and inrush. The board's 100 ms rail qualification is not proof that every sensor has completed its own startup.

Programming contacts

J8 uses the **TC2050-IDC-NL mechanical pattern and a custom electrical mapping**, centered at (24, 5.75) mm. Use a mapped adapter, not an assumed ARM/STDC ribbon pinout. Ten 0.7874 mm contact pads are on 1.27 mm pitch, with three mechanical guide holes. In the component-side view, the upper row runs **10, 9, 8, 7, 6** left to right at Y=5.115 mm; the lower row runs **1, 2, 3, 4, 5** at Y=6.385 mm. Pin 1 is at X=21.46 mm, Y=6.385 mm. Use this U-shaped numbering, not an odd/even ribbon numbering assumption.

J8 pin	Signal	Connection
1	NRST	Probe reset, optional
2	MCU UART RX	3.3 V UART adapter TX
3	MCU UART TX	UART adapter RX
4	SWCLK	SWD clock
5	SWDIO	SWD data
6	+3V3	Probe VTref sense **only**, board output
7	GND	Probe ground
8	GND	UART ground
9	BOOT0	Normally leave open; onboard pulldown
10	GND	Ground

Power the board through J1 during programming. Leave adapter/probe power disconnected. BOOT0 is normally low. SWD programming and custom pogo-adapter fit require bench verification. The intended clip-free probe is held perpendicular by a fixture; the no-legs pattern does not retain itself.

4 Hand assembly

Source: docs/ASSEMBLY.md

Factory: fit only the 98 SMT references in Factory_BOM.csv using CPL_JLCPCB.csv. User: buy the nine through-hole parts and three closed-top caps.

Use the exact BOM, assembly drawing, interactive BOM and placement files. Reference labels are in these drawings; dense placement does not leave room to print every reference legibly on the actual top silkscreen.

1. Order the 52 ×64 mm, four-layer, 1.6 mm board with 1 oz finished copper target. Use the exported Gerbers and separate plated/nonplated drill files. Have the fabricator review its actual stackup, annular rings, mask registration and minimum features. Gold finish is useful at the programming contacts; keep solder and paste off them.

2. Check bare-board continuity and orientation. Apply paste to SMT pads only. A 0.10 mm stencil is a starting point; the assembler must review release and the exact QFN apertures. Through-hole header pads, solder selectors, TC2050 contacts and the test point deliberately have no paste.

3. Place 0402/0805/1206/1210 passives, diodes and ICs. Verify C1 polarity, TVS/diode cathodes, pin 1 on each IC and the exact latch-off TPS2553DBVR-1 suffix. U8 TPS552872-Q1 has five long electrical power lands and fine-pitch perimeter pads; it is not a generic single-exposed-pad package. Use its supplied paste pattern, a controlled reflow profile and suitable joint inspection. There are no components on the bottom.

4. Inspect joints and measure for supply shorts. Hand solder the six horizontal Weidmüller terminals after SMT reflow as the user assembly step. Then fit JP101/JP201/JP301: 2 mm headers on the top side, straight and fully seated, with pin 1 at the square pad. Use a removable cap temporarily as an alignment aid with the board unpowered; remove it afterward. Fill both plated holes per terminal pole. Support the board without loading fresh SMT joints. The terminal pins extend below the board.

5. Leave all selectors open for initial bring-up. Supply J1 from a current-limited bench supply, starting at 12 V and a modest current limit. Confirm input polarity, protected input, approximately 5.07 V internal, 3.3 V logic and 12.01 V regulated rails. Sensor headers remain unpowered while power selectors are open.

6. Program through the custom TC2050 mapping, verify flash and configure a unique CAN ID over UART. Then power off, choose each port's supply/bias and termination settings, inspect the one-cap-per-header settings and bias bridges, and check that 5 V and 12 V are not shorted.

7. Perform the qualification checks before connecting a robot harness. Begin with a known load and known logic source, then the actual sensor/cable.

Use M3 hardware at (3.5,4) and (48.5,42.5) mm. Holes are 3.2 mm NPTH. The copper keepout has at least 3.30 mm radius; use hardware whose contact area stays within a 6.4 mm diameter, with insulating washers/spacers as appropriate. Account for component bodies, connector overhang and protruding pins. Do not clamp the PCB between conductive surfaces. The mechanical drawing gives nominal geometry, not a fitted enclosure.

The compact board still benefits from magnification and a fine iron. Rev D-2 restores removable voltage shunts and retains large passives where possible. See the retention and vibration qualification notes in WIRING.md. The buck-boost QFN and four 0402 capacitors make stencil/reflow work more demanding than Rev C; it is not a through-hole beginner kit.

5 Firmware

Source: firmware/README.md

Bare-metal STM32F042K6T6 firmware for three digital inputs. Build allocation is recorded by the current linker map/build report; stack depth has not been measured. The final two 1 KiB flash pages hold redundant 32-byte versioned configuration with CRC and commit-last writes.

Rev D-2 uses the same firmware sources, **hardware identity 4** and **protocol v3** as Rev D; D-2 is an assembly/procurement variant, not a new CAN firmware identity. Use the matching SensorCan12 drivers. The new voltage headers select 5 V / 12 V in hardware; firmware does not control their settings.

CAN servicing is planned, not implemented: this release has no CAN bootloader, discovery or persistent CAN-ID command. The optimization plan defines the proposed memory/protocol work, recovery tests and one-time SWD migration. Its candidate flash layout does not apply to these binaries.

From `rev_d2/`:

```
source tools/env.sh
make -C firmware
bash scripts/test_firmware.sh
```

Outputs: `build/sensor_can.elf`, `.hex`, `.bin`, `.map`. No ADC, sensor rail GPIO control or per-input LED logic remains. The 8 MHz external crystal and PLL generate 48 MHz; bxCAN uses 16 time quanta with an 87.5% sample point at 1 Mbit/s. Auto bus-off recovery is enabled; automatic transmit retry is disabled.

Power through J1 from a bench supply. Use the custom TC2050 wiring: VTref sense→6, SWDIO→5, SWCLK→4, ground→7, optional reset→1. Leave probe power disconnected.

```
openocd -f interface/stlink.cfg -f target/stm32f0x.cfg \
  -c 'adapter speed 1000' \
  -c 'program firmware/build/sensor_can.elf verify reset exit'
```

This command has not been exercised on physical D or D-2 hardware. Verify MCU identity, supply and flash readback. Normal application programming should preserve the two configuration pages; full-chip erase removes them. Version-1/2 configuration is rejected.

UART: adapter TX→J8.2, RX→J8.3, ground→J8.8; 3.3 V, 115200 baud, 8N1; adapter power disconnected.

```
python host/sensor_can.py info --port /dev/ttyUSB0
python host/sensor_can.py configure --port /dev/ttyUSB0 \
  --device 17 --invert 1 --debounce 2
```

Device IDs 0-63 must be unique in this Team Use address space. Invert is a 3-bit mask; debounce is 1-100 ms. UART `SET id invert debounce_ms` persists and resets; CAN configuration is volatile. Unconfigured boards stay CAN-silent. **Hardware sensor power is enabled independently of firmware**, including during reset or programming. On D-2, leave the caps off JP101/JP201/JP301 to disconnect port power during initial bring-up; configure them only with input power disconnected. Bias and CAN termination remain solder settings. See assembly.

The independent watchdog is serviced only after the full 1 ms foreground cycle. A >20 ms foreground delay, clock failure, hard fault or PVD low-voltage detection puts CAN into standby; the watchdog provides reset recovery. The single LED pulses approximately 100 ms per second when configured and healthy, or 100 ms per 200 ms for configuration/clock/CAN errors. Rail faults also trigger the fast fault indication. PA3 reads 12 V PG and PA4 reads 5 V FAULT_N, both with internal pullups. A fault clears qualification immediately; recovery needs 100 ms continuously good indications. Counts freeze and debounce is re-baselined during this interval.

Broadcast Disable ID 0 stops telemetry and aborts pending transmissions. Local sampling and hardware sensor power continue. An explicit `RESUME` UART command or CAN resume command re-enables telemetry; reads never do this automatically. See protocol v3. Host tests cover firmware logic and mocked peripheral boundaries, not actual oscillator startup, electrical timing or STM32 peripheral behavior.

6 CAN protocol

Source: docs/CAN_PROTOCOL.md

1 Mbit/s classic CAN, extended 29-bit identifiers, 8-byte telemetry. This is an original Team Use protocol, not CTRE Phoenix. Device type=10 (Miscellaneous), manufacturer=8 (Team Use), unique device ID=0-63. Address = `(10 << 24) | (8 << 16) | (API << 6) | device`.

The APIs differ from A/B/B-2; Rev C shares these API numbers but uses protocol v2, which Rev D-2 drivers reject. The version and capability checks prevent drivers from interpreting the wrong revision's payload. Provision each board over 3.3 V UART before connecting multiple boards. An unconfigured board remains CAN-silent; its sensor power hardware is still enabled.

All multibyte fields are little endian. Masks use bits 0-2 for inputs 1-3. Unsupported versions, reserved bits, wrong lengths or stale frames must be reported as unavailable.

API	Period	Eight-byte payload
0x120 status	10 ms	version=3, sequence, debounced input mask, raw mask, channels=3, capabilities=0x3F, flags, reset flags
0x121 counts 1/2	100 ms	two uint32 rising-edge totals
0x122 count 3	100 ms	uint32 total, uint32 reserved=0
0x130 diagnostics	100 ms	uint32 transmit drops, TEC byte, REC byte, LEC byte, CAN flags byte
0x131 identity	1000 ms	3, firmware major=0, minor=4, patch=0, hardware=4, device ID, debounce ms, inversion mask

Status flags: configured=1, clock healthy=2, CAN initialized=4, bus-off=8, qualified 12 V power-good=16, qualified 5 V no-fault=32. Reset flags: power-on=1, pin reset=2, watchdog=4, software=8. Capabilities bits 0-4 indicate edge counts, runtime configuration, UART persistence, standalone hardware power and broadcast disable. Bit 5 indicates rail-health reporting capability. Capabilities are static; flags bits 4/5 carry live qualified indications. The raw mask is the uninverted sampled comparator state. The debounced mask applies configured logical inversion and debounce. Sequence is an unsigned byte and wraps. Counters wrap at 2^32 and clear on reset; runtime configuration preserves totals.

Diagnostic LEC is the STM32 three-bit last-error code (0-7); CAN flags are bus-off=1 and error-passive=2. There is no calibrated sensor voltage/current telemetry. The 12 V PG signal has the converter's typical threshold and tolerances; 5 V no-fault is an overcurrent-switch indication, not proof of voltage. Raw masks remain diagnostic data during faults.

A bad rail indication clears its flag at the next 1 ms sample; restoration needs 100 consecutive good samples. During faults and recovery, firmware re-baselines input debounce and freezes edge totals, preventing supply collapse/recovery from adding counts. All ports require both rail indications because solder-selector positions are not readable. Java/C++ input helpers also require fresh telemetry, configuration, clock health and CAN health. They cannot detect every failed/disconnected sensor or open cable.

Command API	Payload	Effect
0x220 runtime input config	`53 43 03 invert debounce_lo debounce_hi 00 00`	invert 0-7; debounce 1-100 ms; volatile, does not change ID
0x221 resume telemetry	`53 43 03 00 00 00 00 00`	Explicitly resume after broadcast disable

Extended arbitration ID **0** is the FRC broadcast disable. Firmware stops telemetry and aborts pending transmit mailboxes immediately on processing it. Sampling and standalone sensor power continue; there are no actuator outputs. Resume requires the explicit command above, UART `RESUME`, or reset. Drivers never resume from a read loop. Integrate explicit resume with a reviewed robot lifecycle policy; this implementation still requires robot-bus testing and does not establish competition approval. See WPILib CAN addressing.

Read timeouts: status 100 ms, counters/diagnostics 350 ms, identity 1500 ms. Counters 1/2 and 3 are separate snapshots. Sampling is 1 kHz; debounce requires a continuously stable logical state for the selected interval. This is not a high-speed pulse counter or encoder.

UART: 115200 baud, 8N1, 3.3 V logic. Commands `INFO`, `HELP`, `SET id invert debounce_ms`, `RESUME`. `SET` saves a version-3 redundant CRC-protected record and resets. The old four-argument command and v1/v2 flash records are rejected; provision Rev D-2 explicitly. No power-control command exists.

7 Robot integration

Source: examples/README.md

Java 17 and C++ examples target WPILib 2026.2.1. D and D-2 share protocol **3**, firmware **0.4.0**, hardware **4** and the same driver interface. D-2's passive substitutions and removable voltage jumpers do not change the CAN messages. Rev C Lite frames and the earlier four-input protocols are rejected. Copy the relevant `SensorCan12` and `SensorCan12Codec` files into a robot project, then set the same unique device ID provisioned over UART.

Choose each sensor's 5 V / 12 V supply using the physical jumper before operation; the drivers do not select port voltage. See the D-2 setup guide and wiring.

CAN discovery, persistent ID changes, firmware uploading and a roboRIO maintenance bridge are future work in the optimization plan. The current host utility and drivers do not provide those operations. A separately tested 2027 adapter is also planned; these examples remain pinned to 2026.2.1.

```
private final SensorCan12 sensorBoard = new SensorCan12(17);
// In periodic(): absent means unavailable or a reported fault.
var detected = sensorBoard.input(1);
if (detected.isPresent()) {
  boolean sensorActive = detected.get();
  // Use a reviewed subsystem policy for this observation.
}
```

C++: `sensorcan12::SensorCan12 board{17};` then `board.ReadInput(1)` returns `std::optional<bool>`. Construct the driver once; an empty result must not silently become a valid “no object” observation. The helper requires fresh status, configured identity state, healthy clock/CAN and both qualified power indications. Raw `status()` / `ReadStatus()` remains available to diagnose faults. Counts are frozen during power faults and wrap at 2^32; compare/reset policy in the robot application.

Reads do not transmit or resume telemetry. `configureRuntime` / `ConfigureRuntime` sends volatile input inversion/debounce; it does not set persistent ID. `resumeTelemetry` / `ResumeTelemetry` is an explicit action after investigating broadcast disable, not a periodic automatic retry. Status timeout is 100 ms; count/diagnostic timeout 350 ms; identity timeout 1500 ms.

The Python host tool supports UART `info`, `configure`, `resume` and passive CAN `monitor`. UART uses 3.3 V levels at 115200 8N1; disconnect adapter power. CAN monitor requires a suitable external CAN interface; a UART adapter is not a CAN interface. Run the following from `rev_d2/`:

```
source tools/env.sh
python host/sensor_can.py configure --port /dev/ttyUSB0 --device 17 --invert 1 --debounce 2
python host/sensor_can.py monitor --interface socketcan --channel can0 --device 17
bash scripts/test_drivers.sh
```

Tests cover codec boundaries, all reserved status bits, stale/malformed responses, fault rejection, unsigned counts and explicit-only writes. The C++ example compiles against the actual pinned WPILib headers; Java compiles against pinned WPILib jars. Hardware bus behavior and competition acceptance remain open qualification steps. See protocol, wiring, and validation.

8 Purchasing and factory quote

Source: docs/FACTORY_ORDER.md

Use RevD2_SC12_Factory_Upload.zip for a **prototype lot**, after reviewing the validation plan. No board has been physically qualified, no factory quotation is included and no order has been placed. The exact-MPN BOM is intended for a Chinese or other assembler that accepts customer-specified sourcing; it is not a pre-approved JLCPCB/LCSC turnkey basket.

For a JLCPCB upload, start with the fabrication-only Gerber ZIP, then supply BOM_JLCPCB.csv and CPL_JLCPCB.csv. Keep Factory_BOM.csv alongside for exact-MPN matching. The larger factory packet is a complete reference handoff.

Fabrication

Setting	Requirement
Board	52 × 64 mm, four copper layers, FR-4, 1.6 mm nominal
Layer order	F.Cu signal/power, In1.Cu GND, In2.Cu GND, B.Cu signal/power
Copper	35 µm nominal each layer; verify finished copper with supplier
Dielectric	Symmetric four-layer stack; target outer-to-inner dielectric ≤0.25 mm; supplier must confirm final stack
Finish	ENIG specified for exposed programming contacts and fine-pitch QFN
Minimum trace	0.18 mm
Clearance	0.20 mm general; U8 package pad-to-pad 0.15 mm local minimum
Vias	Through vias, minimum 0.30 mm drill / 0.60 mm pad; no blind/buried vias
Drills	Separate PTH and NPTH Excellon; no plated mounting or alignment holes
Solder mask	Both sides; preserve fine-pitch openings; review U8 mask webs with CAM
Stencil	Top only, nominal 0.10 mm laser-cut; use supplied paste apertures
Panels	Factory rails/fiducials may be added outside the delivered outline; preserve connector overhang

Native nominal stack: 0.035 mm copper on all four layers, 0.20 / 1.04 / 0.20 mm dielectric and 0.01 mm solder mask per side, totaling 1.60 mm. These are planning thicknesses; final fabrication tolerances and material selection belong to the approved supplier stack.

This stack is an order requirement, not a confirmed laminate/impedance quotation. CAN is short board-level routing; no fabricated impedance coupon has been qualified. Get the supplier's CAM/stackup review before fabrication.

Assembly

Factory scope: 98 SMT components on the top side only. Use `bom/Factory_BOM.csv` (exact MPNs) and `output/assembly/CPL_JLCPCB.csv`. The simplified `bom/BOM_JLCPCB.csv` is a matching aid; blank LCSC numbers require exact-MPN matching against Factory_BOM, never an automatic substitution.

User scope: six terminal blocks plus three voltage headers (nine through-hole parts), then three loose caps. The factory must leave J1-J6 and JP101/JP201/JP301 empty. `positions_all_top.csv`, the complete BOM and drawings describe the finished board, not additional factory placements.

CPL coordinates are mm from the PCB lower-left, positive X right and Y up, with native KiCad counterclockwise rotation. Match the uploaded preview to the assembly drawing and check IC/diode pin 1; machine-library rotation conventions can differ. R64 is physically a normal two-terminal 1206 resistor; its four numbered PCB

pads include two copper-only Kelvin taps. NT1 is a copper ground tie and is not a purchased component. Do not interpret pad count as component termination count.

Power headers are unpopulated; all bias/termination solder bridges and all J8 contacts are **unbridged/unpasted as supplied**. The factory must not add solder across selectors unless a separate reviewed port-configuration work instruction is supplied. The user will hand solder all through-hole parts after delivery. The family name “LSF-SMT” does not make these exact connectors ordinary two-pad SMT parts.

Do not replace U8 with a generic 21-pin QFN, substitute a lower-saturation inductor, change the precision divider grade, or replace the 1210 capacitor bank with a nominally equal capacitance without approval of the actual electrical/footprint data. DigiKey substitute labels alone are insufficient. Maintain 0.1 ohm shunt value, tolerance and terminal orientation.

Include inspection of fine-pitch joints and the five long QFN power pads with suitable inspection/X-ray for the prototype lot. Perform unpowered shorts/selector tests, current-limited staged bring-up, firmware programming/readback and functional rail/input/CAN tests before accepting units. Track lot and component substitutions.

Sourcing, cost and delivery

Cost reduction and batch estimates separates parts procurement from assembly. LCSC inventory is not proof of JLCPCB factory allocation. No SMT part allocation, complete cart or final quotation has been confirmed. Request exact-MPN matching and incoming date confirmation before paying; the STM32 and TPS552872-Q1 may require outside procurement. Any unapproved item must remain unresolved rather than being silently substituted.

Request Economic PCBA first if the exact parts and four-layer board qualify; compare Standard PCBA with the same SMT-only scope. Avoid paying for bottom-side assembly or through-hole work. Standard assembly still charges feeder loading for all 46 SMT types. No programming or functional-test service is included by this package unless separately quoted; the user performs bring-up and programming.

A delivery within one month is plausible with allocated parts and tracked air express. Budget 2-4 weeks as a planning allowance, not a carrier promise; procurement, review holds and customs can exceed it. Country/postcode and order quantity are needed for an actual delivered quote. Have the manual parts arrive in parallel. Do not select a long supplier lead time to obtain a lower component price when the one-month target matters.

9 Validation and qualification

Source: docs/VALIDATION.md

No Rev D-2 prototype has been assembled, powered or tested. The files support engineering review and prototype fabrication. The production/competition qualification gates below remain open, even when every automated check passes.

Automated evidence

The release contains native KiCad electrical/design-rule reports, explicit pin-model/schematic/PCB parity, placement/selector/programming-contact checks, manufacturing-file parsing and copper checks, host firmware tests, and Java/C++/Python protocol tests. These check design consistency and modeled behavior. Mocked peripheral tests do not prove STM32 timing or CAN electrical operation.

Electrical checks sweep input-threshold tolerances, divider accuracy, resistor stress, fuse/load budgets and manufacturer-curve capacitor derating. The separate converter model screens boost CCM loop corners only. Neither substitutes for hardware measurement. Reports state their assumptions rather than treating typical values as guaranteed bounds.

Prototype gates before production release

Gate	Measurement / acceptance intent
Assembly	Confirm exact horizontal terminals, pin-to-hole fit, polarity, U8 long-pad joints, R64 Kelvin layout, selector isolation and no solder shorts
Staged power	No sensors first; current-limited 12 V source, verify 5 V/3.3 V before full operation, then regulated 12 V and low-load input current
Regulation	Sweep 6-22 V with 0-300 mA on each rail separately and together; verify 12 V remains within the selected sensors' supply limits at their cable ends
External bias	Scope V5_INTERNAL, BB_EN, V12_RAW and 3V3 during slow/fast input ramps, repeated starts and brownouts. Confirm converter bias never causes unsafe switching or back-powering; review operation below 6 V
Transients	6↔14↔22 V line steps; 0↔300 mA load steps; representative sensor startup/inrush and cable lengths; check ringing/undershoot through the buck/boost crossing
Stability	Measure loop response or justified equivalent transient qualification in buck, boost, transition and light-load/PFM modes; target >45° phase and >10 dB gain margin where measured
Faults	Short each sensor supply and each port; verify current-limit behavior, 12 V automatic recovery versus 5 V latch, firmware flags, no spurious counts and safe temperatures. Do not assume every 12 V short enters hiccup
Electrical protection	Reverse input, realistic protected-branch fault energy, fuse clearing/I^2t, inductive transients and TVS stress using suitable test equipment. Not automotive load-dump qualified
Temperature	Both rails fully loaded at 6/12/22 V, intended ambient and later enclosure; measure U8/U1/L1/L2/Q1/fuse/terminal and MCU temperatures, hot-start/restart and surface safety
Inputs	0-30 V PNP/NPN/push-pull thresholds, off-state leakage/residual voltage, ground offset, sensor disconnection, wiring transients and all intended sensor models
CAN/firmware	Real roboRIO bus at 1 Mbit/s with correct end termination; startup silence before provisioning, unique IDs, bus-off, clock faults, watchdog, broadcast disable, explicit resume, stale data and power-fault handling
EMC/mechanical	Motor-noise environment, ESD at terminals, cable retention, vibration, mounting insulation and programming-adapter fit; repeat after enclosure design
Production process	Approved stackup/CAM, stencil/profile, supplier alternates, test fixture, serial/lot records, programming/provisioning and final functional limits

FRC integration

Use a single appropriate protected power-distribution branch and wiring sized for its protection. The 0451 3 A fuse has a published 300 A interrupt rating at 32 V DC; confirm prospective branch fault current and clearing energy for the actual harness. The onboard fuse is secondary protection, not permission to bypass the robot distribution rules. Sensor grounds are common with the board; isolate conductive sensor cases where required by frame-ground rules. Do not use dedicated radio/roboRIO power outputs as a convenient supply.

The custom Team Use CAN address uses manufacturer 8 and miscellaneous device type 10. The implementation processes broadcast disable ID 0; it has no actuator outputs. It is not a CTRE Phoenix device. Robot inspection and the current season's rules still apply. Commercial CAN product acceptance, assigned identifiers and required ecosystem support are separate outstanding steps; Java/C++ examples alone do not establish approval.

Primary references: 2026 FIRST manual, especially custom-circuit voltage, distribution/wire and frame-ground rules; WPILib CAN addressing and acceptance requirements. Recheck applicable rules for the actual event/season.

D-2-specific prototype checks

Verify the exact 2 mm header and cap fit, both 5 V / 12 V positions and unpowered open state on every channel. Verify no connection between the two rails in either position. Check solder fill on all 39 user-fitted through-hole joints. Fit/retention, vibration and impact testing must include the actual caps, chosen removable retention compound, enclosure and robot harness; these headers have no positive latch. Compare the substituted passive values/ratings against the supplied BOM. Factory BOM and CPL must contain exactly 98 SMT references, with all nine through-hole components omitted. Firmware identity intentionally remains hardware 4 / protocol 3.

10 Connector evidence

Source: docs/CONNECTORS.md

References	Exact MPN	Series description	DigiKey
J1-J3	**1824420000**	LSF-SMT 3.50/02/90 3.5SN BK TU	281-2020-ND
J4-J6	**1824430000**	LSF-SMT 3.50/03/90 3.5SN BK TU	281-2021-ND

Manufacturer pages: 2-pole, 3-pole. `/90` gives horizontal wire entry parallel to the PCB. `/135` is the angled version and is not used. Phoenix PTSM is not fitted.

These are through-hole/THR parts despite “SMT” in the family name. Pitch is 3.5 mm, with two solder legs per pole and 7 mm row spacing. PCB drills are 1.1 mm. Housing widths are 7.7 mm / 11.2 mm. Manufacturer CAD is 14.3 mm deep; the footprint conservatively reserves 14.75 mm. Height is 8.5 mm above the mounting surface; nominal pin tips reach 3.5 mm below that surface (about 1.9 mm beyond a 1.6 mm PCB).

Current renders use the official STEP solids with a rigid translation (-2.13,-12.625,-3.5) mm into the footprint origin. They are not approximate connector boxes. Display colors are assigned by the project. Original files, transformed files, URLs, hashes, pin/drill checks and nominal bounds are in vendor_connectors.json. Script `import_connector_models.py` checks all six placed pad patterns and the two vendor models. Do not regenerate models merely to change routing: STEP exporters can alter file headers without changing geometry.

Top terminals face outward at the power/CAN edge; three sensor terminals face outward at the opposite edge. Conservative complete footprint envelope is 52 ×72.1 mm; add room for cable bend, strain relief and button access. Renders do not validate conductor retention, tool clearance in an enclosure, molding tolerances or actual solder fit.

Rev D-2 voltage headers

JP101/JP201/JP301 use Harwin M22-2010305: 2 mm pitch, 0.50 mm square pins, 6 × 2 mm body, nominal 5 mm height above the PCB and 3.4 mm tails. The project’s 2 mm header footprint uses 0.8 mm drills and a 0.25 mm nominal body courtyard margin. Pads 1-3 run left-to-right at Y=51.5 mm; pin-1 positions are X=5, 21 and 37 mm.

The Sullins SPN02SVEN-RC drawing specifies a closed top, 2 mm pitch, 0.50 mm square mating pins and nominal 4 × 2 × 4.92 mm body. Contact height is 2.45 mm from the entry, within the header’s 3.5 mm mating pin length. Nominal mating geometry agrees; physical fit and retention remain untested. Caps are delivered loose and not included in the assembled-board STEP model. Use the finished cap envelope for enclosure access/clearance and allow room to remove them.

The generic local header STEP represents the nominal pin/body geometry, not manufacturer-qualified tolerances. Vendor connector hashes continue to cover the unchanged six terminal models. See wiring for one-cap-per-header configuration and vibration retention qualification.

11 Tools and reproduction

Source: TOOLS.md

The saved native KiCad schematic/PCB are authoritative. Generation/placement/router scripts record design construction; they are not a one-command reroute of the reviewed board. Editing the circuit requires matching schematic, BOM, PCB and new checks. Earlier revisions remain separate.

Tested toolchain: KiCad 10.0.6, its matching Python/pcbnew interpreter, Python 3.12, Arm GNU GCC 13.2.1, GNU make, host GCC/G++, Java 17, Poppler, InteractiveHtmlBom 2.11.2 and the packages pinned in `tools-requirements.lock`. Tool binaries/caches are external to the repository. Install those native tools for the host operating system. The `kicad-python` wrapper must use the interpreter matching the KiCad binary bindings, not an arbitrary venv Python.

```
# In rev_d2/, after installing native tools:
uv venv --python python3.12 .venv
uv pip sync --python .venv/bin/python tools-requirements.lock
source tools/env.sh
python tools/fetch_driver_dependencies.py
bash scripts/validate_release.sh
```

`tools/env.sh` uses a revision-local venv, or the repository venv when working in the full checkout. It prepends `$CANDI_TOOLS_ROOT/bin` (default `$HOME/.local/share/candi-tools/bin`). Wrappers expected there are `kicad-cli`, `kicad-python`, `host-gcc`, `host-g++`, `ibom`, and Arm compiler commands. Java is under the configured tools root or selected with `CANDI_JDK`. Fonts for the PDFs are DejaVu Sans/Mono.

The validation script checks the saved design and refreshes manufacturing evidence, firmware and host tests; it does not move or reroute components. A visual/documentation refresh is separate:

```
bash scripts/render_board.sh
python scripts/build_documents.py
python scripts/build_handbook.py
python scripts/review_documents.py
python scripts/build_release.py
```

The factory packet is built by `build_documents.py`. Rebuild it after any BOM/placement/fabrication change. `build_release.py` selects authoritative files and writes a manifest plus ZIP checksum. Check an extracted archive with `verify_archive.py`; the release manifest deliberately excludes itself and the enclosing ZIP from its file hashes.

Use `python scripts/import_connector_models.py` only when restoring/reviewing vendor models. It checks the original STEP hashes and all six native connector pad patterns, then writes translated local models. It can change STEP headers, requiring a fresh STEP export, renders and release. Keep the originals and provenance JSON together.

`hardware/design/circuit.py` is the explicit component/net model; `generate_schematic.py` rebuilds the schematic. Construction helpers such as `pack_compact.py`, `route_critical.py` and `apply_routes.py` operate on intermediate files and can overwrite placement/routing. They are not part of release validation. The boost CCM analytical loop screen is in `check_converter_loop.py`. It is not a switching simulation or thermal qualification. Do not reuse older revision reports as evidence for this changed supply.

In the full repository, `kicad-python scripts/check_variant.py` compares D-2 component pin nets, passive values/footprints, critical routes and firmware sources with the preserved neighboring `rev_d/`. The dated result is included in variant_verification.json; a standalone D-2 archive does not contain the older D baseline.

12 Sources and notices

Source: docs/SOURCES_AND_LICENSES.md

KiCad library/model notices are retained under `licenses/`, together with Arm CMSIS, ST device-header and WPILib notices. Firmware third-party directories and InteractiveHtmlBom output retain their notices. Original project work has no selected blanket license. Manufacturer documents/CAD remain their owners' material; retaining a file is not a redistribution-license grant.

Subject	Primary reference
Input fuse interruption / derating	Littelfuse 451/453
Buck and capacitors	TI LMR51420
Regulated 12 V converter / exact RYQ0021B package	TI TPS552872-Q1, SLVSHF9 August 2023
Shielded 3.3 µH inductor	Bourns SRP5030TA
Input/output/bias capacitor curve	Samsung CL32B106KBJNNW
Banner supply/residual voltage exceptions	QS18 product manual
5 V latch-off limiter	TI TPS2553, -1 variant
Comparator/leakage caveats	TI LM339LV
CAN interface / bypass	TI TCAN3413
STM32 pinout, supplies, clock	ST STM32F042
Example industrial output residual levels	Omron E3Z specifications
Terminal geometry and exact MPNs	Weidmüller 1824420000, 1824430000
CAN addressing / broadcast disable	WPILib

Samsung CL31A226KAHNNNE typical characteristic data is retained in `sources/datasheets/samsung_CL31A226_characteristics.json`, inherited from the earlier design's manufacturer retrieval. Typical curves do not establish guaranteed capacitance. DigiKey URLs, exact codes and dated observations are in `bom/catalog_selected.json`. Vendor STEP URLs, hashes and transforms are in `hardware/library/3d/vendor_connectors.json`.

Equivalent parts need engineering review; distributor substitution suggestions do not establish electrical/mechanical equivalence. Availability and season rules can change after these observations.

Rev D-2 retains the retrieved Samsung CL32B106 characteristic JSON and TI converter datasheet under `sources/datasheets/`. The project-created converter footprint/model is documented in `hardware/library/converter_package.json`; its STEP representation is parametric package geometry, not official manufacturer CAD. The horizontal connector STEP models are official vendor geometry.

D-2 sourcing URLs and tiers are in catalog_china.json. Header/cap geometry links the Harwin and Sullins manufacturer drawings; cost assumptions links the assembly fee and lead-time sources. Stock observations are not factory allocations.

13 Cost reduction

Source: docs/COST_REDUCTION.md

Pricing basis: USD supplier observations collected 2026-09-07 through 2026-09-08. These are parts budgets, not a factory quote or a reserved basket. Some unchanged-part observations are carried forward from the D/B-2 catalogs. The selected sources and price breaks are recorded in catalog_china.json.

Implemented changes

1. Sixteen ordinary 0805 resistors change to same-value UNI-ROYAL 1%, 125 mW equivalents; eleven 100 nF 0805 bypass capacitors change to Samsung CL21B104KCFNNNE, X7R, 10%, 100 V (formerly 50 V). Footprints and electrical values remain unchanged. Precision resistor grades, power ratings, bulk banks, converter bypass capacitance/compensation values and protection are retained. Per-reference substitutions.

2. Unchanged active/power MPNs use lower supplier observations when available: these are procurement changes, not unreviewed circuit substitutions. LCSC candidates include the fuse, reverse-polarity MOSFET, 5 V switch, buck, CAN transceiver and selected capacitors.

3. Factory scope is only 98 SMT placements on the top side. The user fits six terminals plus three voltage headers and supplies three closed-top caps. This avoids factory through-hole labor and connector procurement while retaining the existing connector geometry and quality. It does not eliminate the cost of buying connectors.

4. Three removable 2 mm voltage selectors replace D's permanent solder settings. No slide switches or bottom-side components are introduced. Four copper layers remain: assembly side count and copper layer count are separate choices.

There are still **46 SMT MPN types**. Substituting cheaper resistors lowers component cost but does not by itself reduce feeder count or establish Basic-part status.

Batch parts budget

Boards	Parts purchase cash per board	Parts purchase cash for lot
1	$55.27	$55.27
5	$40.5	$202.49
10	$34.69	$346.87
25	$32.23	$805.83

Includes all SMT parts, six terminal blocks, three headers, three caps, and distributor minimum-order/multiple rounding. At ten boards, SMT purchasing is $26.10 per board and manual parts/caps are $8.59. The calculation uses the price break earned by the actual purchase quantity; details show every line and leftover quantity. No attrition allowance is included because the factory's requirements are unknown.

D's $54.89 figure was a quantity-one consumed-parts estimate. D-2's consumed-parts figure at each supplier's first saleable tier is $44.16, about 19.5% lower, including the new headers/caps. Buying distributor minimums for just ONE D-2 board instead costs $55.27 in this model. **A single board is not a good cost target with this BOM.** Batch pricing is the larger saving; comparing D's one-board figure to D-2's ten-board figure would exaggerate the substitution savings.

PCB fabrication, stencil, setup/feeders, placement, inspection, sourcing fees, attrition, programming, functional testing, freight, duties/taxes and your assembly time are excluded. The exact factory unit price may differ from these public distributor prices.

Assembly allowance

JLCPCB's published assembly fees, updated 2026-08-20, separate Economic and Standard service. For this one-sided board, Standard's $25.56 setup, $8.21 stencil and 46 × $1.53 feeder loading total **$104.15 per order** before placement and other charges. Their two-fixture allowance for 1-29 boards is another $16.42. At ten boards these two items alone allocate $12.06 per board.

Placement, leadless-package X-ray, packing and quote-specific adjustments add to that. Hand soldering avoids the published $3.58 order labor charge plus $0.0164 per manual joint (39 finished-board joints per board), if those charges otherwise apply. It is a useful process simplification, not a $10-per-board saving by itself. Confirm the factory's final scope and fee calculation.

Economic service has lower setup costs but charges extended-part feeder fees and depends on exact inventory/eligibility. Do not budget zero extended fees until every factory part is matched. Request both quotes for the same SMT-only scope. With ten boards, roughly $35 in purchased parts plus about $12 in Standard setup/feeder/fixture allocation already approaches $47 before other assembly charges, bare PCB and freight. A delivered sub-$50 board is therefore **not established** by this revision.

Remaining major costs

At ten-board quantities the six specified Weidmüller terminals are about $7.85 per board; TPS552872-Q1 is $5.42 and STM32F042K6T6 is $3.28. Together they account for about $16.55 before the inductor, regulators, protection and passives. Large further savings would need a reviewed connector or power/MCU redesign, or a materially better factory quote; passives alone cannot remove those costs.

The public listings used include Weidmüller 1824420000, 1824430000, TPS552872-Q1, STM32F042K6T6, Samsung bulk capacitor, and selected 100 nF capacitor. Sources can change without notice.

China sourcing and one-month delivery

Start with an exact-MPN SMT quote and the factory package. The JLCPCB MCU listing identifies a library part, but does not confirm allocation for this order. MCU and converter procurement are potential schedule bottlenecks. LCSC stock is distinct from JLCPCB factory inventory. The observed bulk-cap stock was only 220 pieces against seven fitted per board; larger lots plus attrition need fresh confirmation.

JLCPCB's lead-time explanation describes assembly time after bare boards are ready and explicitly calls out review and component-preparation dependencies. Fast SMT alone is not the complete delivery time.

Planning judgment: delivery within a month is plausible with all parts allocated, prompt review and tracked air express. Allow 2-4 weeks for planning, subject to a destination-specific quote; procurement delays, customs or production holds can push it beyond a month. Order quantity and destination/postcode are still unspecified, so no shipping price or arrival date is claimed. Buy the manual components in parallel. No order, payment or supplier message has been sent.

14 Optimization plan - proposed work

Source: docs/OPTIMIZATION_PLAN.md

Planning document, 2026-09-08. No proposed feature below is implemented by this change. The delivered D-2 firmware remains 0.4.0 / protocol v3: SWD flashing, UART persistent setup and volatile CAN input configuration. CAN discovery, persistent CAN-ID changes, a CAN bootloader and a roboRIO maintenance bridge are missing today.

The objective is a board that teams can configure and update through the robot's CAN wiring, with lower delivered cost and demonstrated FRC reliability. Start with D-2's existing hardware; prove the software and manufacturing opportunities before choosing a circuit redesign. Retain three industrial digital inputs, regulated 5 V / 12 V at 300 mA shared per rail, top-side-only assembly, no sliders and user-fitted through-hole parts. The current prototype is unbuilt.

Lessons and limits of the reference

LaserCAN separates its application and CAN bootloader, retaining SWD contacts for initial programming/recovery. Its STM32F103 bootloader reserves 20 KiB; that allocation and its interrupt-vector handling are not a direct fit for our STM32F042. See the pinned bootloader, memory layout and programming instructions.

GrappleHook addresses identification and ID changes by device serial. Its newer upload path uses offsets and request acknowledgements. The roboRIO provider bridges TCP to CAN; its deployment mode stops robot code and later restarts it. Our tool must make maintenance transitions explicit and verify recovery after disconnects. Sources: management/upload code, roboRIO provider.

These are architectural references. GrappleHook's current device support does not recognize SC12, and SC12 must retain its own identifiers and protocol. Both reference repositories carry GPL-3.0 notices; this plan imports no code. Any later code reuse must retain its applicable notices and license requirements. Their integrated distance sensor also serves a different electrical function from our three externally powered industrial inputs; its size or cost is not an equivalent SC12 target.

Priorities and completion gates

Order	Work and expected benefit	Completion gate
1	Define service protocol and prove STM32 memory budget; avoid an unnecessary MCU/PCB change	Bootloader/application link successfully in separate regions, with documented RAM/stack allowance and interrupt handoff
2	CAN discovery, identify LED, persistent ID/inversion/debounce; eliminate normal UART setup	Several blank and duplicate-ID boards can be individually selected, configured and verified after power cycling
3	Recoverable CAN firmware update; eliminate normal SWD reflashing	Interrupted/corrupt transfers never boot an incomplete image; the same board remains discoverable for retry
4	Laptop tool and robot bridge; make the features usable through existing wiring	End-to-end discovery, ID change and update through a real roboRIO, including cable loss and maintenance exit
5	Physical qualification and repeatable programming/test fixture; reduce field failures and rework	Rail, CAN, power-cut, sensor, thermal and mechanical tests recorded for the prototype lot
Parallel	Exact-MPN factory quotes and connector/harness study; reduce delivered cost	Itemized totals for identical quantities and scope, with stock, test labor and delivery assumptions visible
After evidence	Select any connector, converter or MCU redesign	Savings justify redesign/qualification effort and the affected requirements still pass

Protocol design, memory proof and quote preparation can begin together. Freeze the protocol before integrating uploader and device. Physical qualification precedes production. Quantity, destination and exact sensor models are required for final quotes and bench limits.

1. CAN commissioning and maintenance

Use the STM32's full 96-bit unique ID as the permanent service identity, separate from the changeable 0-63 CAN ID. Initialize a service receive path on unconfigured boards while suppressing normal telemetry. Define bounded discovery and collision resolution so multiple blank or duplicate-ID boards do not transmit conflicting replies indefinitely; a shortened UID hash or random delay alone is not a uniqueness guarantee.

Provide discover/info, blink, set ID, set inversion/debounce, explicit save, enter bootloader and update-status operations. Target destructive state changes to one full UID and a transaction/session. Confirm ID availability, acknowledge the operation and rediscover the same UID at its new ID. Duplicate/lost requests must not repeatedly erase flash. Reuse the two redundant configuration pages with CRC and commit-last writes; save only on explicit changes, then verify persistence after reset. Preserve existing broadcast-disable behavior and keep read operations free of writes/resume actions.

Measure normal CAN traffic before optimizing it. The current schedule sends 131 frames/s: 100 status, 20 counter, 10 diagnostic and one identity frame. At an illustrative 160 bits per fully stuffed extended eight-byte frame, that is about 2.1% of a 1 Mbit/s bus per board before faults or retransmissions. Later evaluate configurable 10/20/50 ms status periods and slower diagnostics, preserving the 1 ms sampler. Bound driver freshness timeouts to the selected period and measured jitter; retain today's default until verified.

2. Compact bootloader and interrupted-update recovery

The current build uses 6,148 bytes of flash. The MCU has 32 KiB total, with the last two 1 KiB pages already assigned to configuration. This leaves a plausible budget for a small C bootloader, but compilation and measured stack use must establish fit.

One candidate allocation is **8 KiB bootloader + 21 KiB application + 1 KiB image manifest + 2 KiB configuration**. This is a planning allocation, not the current linker layout. Reserve SRAM for relocated interrupt vectors and a validated boot request. Implement the Cortex-M0 SRAM vector-remap/handoff described by ST RM0091, including stack, interrupts, clocks and watchdog state. Verify flash write-protection granularity before fixing the layout. Normal CAN updates must have no erase/write path into the bootloader, option bytes or configuration pages.

Use one application image for the first implementation. Validate product/hardware identifier, format, size, vector bounds and whole-image CRC. Invalidate and read back the boot-valid marker before erasing application pages; write a new valid marker only after full flash readback and verification. Give chunks explicit session/offset information, bounded retries and acknowledgements. Handle duplicates without advancing twice; reject gaps, stale sessions and out-of-range writes. Pace transfers around flash erase/program stalls and other CAN traffic.

After interrupted flashing, stay in the protected bootloader and accept a fresh upload. Automatic rollback to a previous image is outside this first design. Add a bounded boot-time recovery opportunity and repeated-watchdog-failure recovery so entry does not depend entirely on a working application. Preserve configuration across updates and report bootloader/application versions separately. CRC detects corruption; it does not authenticate an uploader. Restrict the tool/bridge to explicit trusted maintenance sessions, and do not claim signed-update security.

First installation still uses the existing SWD contacts. Deliver distinct factory-combined and CAN-application update files with manifests, and prevent the tool from confusing them. Preserve the original 0.4.0 package; migrate existing boards through SWD once, since that firmware cannot install a CAN bootloader remotely. No extra USB connector or external flash is planned. Reconsider the MCU only if the measured memory budget or a separately chosen CAN-FD requirement demands it.

3. Tooling and robot integration

Implement a reusable host protocol library and command-line tool first, with a SocketCAN/USB-CAN transport for development and a roboRIO TCP/CAN bridge for normal team use. Both transports need the same transaction and recovery tests; a SocketCAN-only tool does not fulfill the robot-connected workflow. Keep transfer buffers, receive work and bus utilization bounded.

The user flow is: connect to controller, discover, select serial, blink to confirm, edit/save settings or select firmware, verify result. Show old/new CAN ID, hardware/application/bootloader versions and actionable failures. A transfer progress bar reaching 100% is insufficient: reconnect to the same UID and verify the running version. Add a small GUI after this path works.

Require an explicit maintenance session with robot enable inhibited; enforce that at the bridge/controller, since the sensor does not independently know Driver Station enable state. Measurements are unavailable during flashing, and sensor power remains hardware-enabled. Restore and verify normal robot-code operation after bridge exit, timeout and disconnection. First target the pinned 2026 environment, then add a separately compiled/tested 2027 adapter with explicit bus selection. WPILib's 2027 changes already replace integer CAN ports with `CANPort`; do not freeze the implementation to the earlier forum example. SC12 remains classical CAN and must use a compatible bus.

4. Cost reductions in order of expected return

The dated D-2 purchasing model gives $34.69/board at ten: $26.10 SMT plus $8.59 manually fitted parts/caps. PCB, assembly, programming/test, freight and tax are additional. The Standard-service setup/feeder/fixture allowance is about $12.06/board at ten before placement and other charges. These are baseline estimates, not new quotations or a confirmed sub-$50 delivered price.

Candidate	Action and decision rule
Factory service and batch size	Compare Economic and Standard SMT-only quotes at 5/10/25 boards using identical exact MPNs. Include PCB, setup, feeders, attrition, inspection, programming/test and freight. Resolve stock allocation; LCSC stock alone is insufficient.
Connector/harness cost	The six terminals account for about $7.85/board at ten. Compare the existing parts against a keyed, latched crimp family using the complete cost of headers, housings, contacts, crimp labor/tools and spare harnesses. Verify wire gauge, current, strain relief, mating cycles, polarity and vibration before adoption.
Feeder/part consolidation	Match electrically identical passives and verify factory Basic/Extended classifications. At the cited Standard rate, removing five MPN types saves only $7.65/order, about $0.77/board at ten. Do not change precision or compensation values merely to share a feeder. Fee basis.
Assembly and test labor	Keep all SMT on top and hand-fit the nine through-hole parts. Use a reusable SWD/CAN fixture and one scripted report per UID. CAN setup reduces repeated service access; initial programming and functional testing still cost time.
Power-stage redesign	The present 12 V converter is about $5.42/board at ten. Compare any alternative using total converter circuit cost, availability, losses, PCB area and qualification effort. Preserve regulated output through 6-22 V input, current protection and startup behavior.
MCU redesign	The present MCU is about $3.28/board at ten. First measure the bootloader/application budget. A cheaper chip that adds a controller, regulator, external memory or difficult assembly may increase total cost.

No specific replacement connector, converter or MCU is approved by this plan. Retain four copper layers and the reviewed power layout for the first prototypes. Smaller PCB area or fewer copper layers must show a quoted saving while preserving return paths, thermal behavior and access. Retain effective bulk capacitance and local bypassing. The internal 5 V rail supplies logic and converter bias as well as the 5 V sensor branch. Supplying sensors directly from the battery would change the regulated-12 V product requirement; assess that only as a separate variant.

5. Reliability and release evidence

Extend the existing qualification plan with these service-specific gates:

• Inject power loss at manifest invalidation, every erase/program boundary and final commit; test lost/duplicate/reordered chunks, wrong hardware images, oversize files, bus-off and host disappearance. Confirm recovery and preserved configuration. Exercise blank, duplicate-ID and mixed application/bootloader nodes.

• Measure boot/startup time, flash/RAM/stack headroom, update duration and bus utilization. Verify CAN/SysTick/UART/PVD interrupts and watchdog resets after the bootloader handoff on the real STM32, not only in host mocks. Acceptance requires reliable return to healthy telemetry and no false counts.

• Test representative sensors at their cable ends, both rails separately/together up to 300 mA, 6/12/22 V input, brownouts, startup and shorts. Record converter/inductor/input-device temperatures in the intended enclosure. MCU temperature alone cannot qualify the power stage.

• Test the actual jumper caps, retention compound, terminals, mounting and harness under vibration/impact. An open power cap or disconnected sensor may appear as a valid inactive input; show that limitation. Assess an external CAN bypass harness for board replacement, preserving termination and short branches.

• Build a pilot with enough units for normal measurements, repeatability and a dedicated fault-test unit. Record component lots, MCU UID, images/hashes, protection settings, rail/input/CAN results and programming/test time. Quotes must distinguish assembled-only boards from programmed/tested boards; production size and a one-month arrival date require allocated parts and a destination-specific schedule.

Qualify the new features for product use only after the service tests and applicable physical gates pass. Update firmware/protocol capability reporting and drivers together; do not mark older binaries as CAN-updatable. Refresh the READMEs, wiring/assembly instructions, factory programming scope and release manifest with the implemented behavior and remaining limitations. Hardware changes require a separately traceable revision and matching native CAD/BOM/manufacturing evidence.