SC12 - nominal mechanical drawing

Rev D-2 / component-side view / 1:1 at 100% print / dimensions in mm

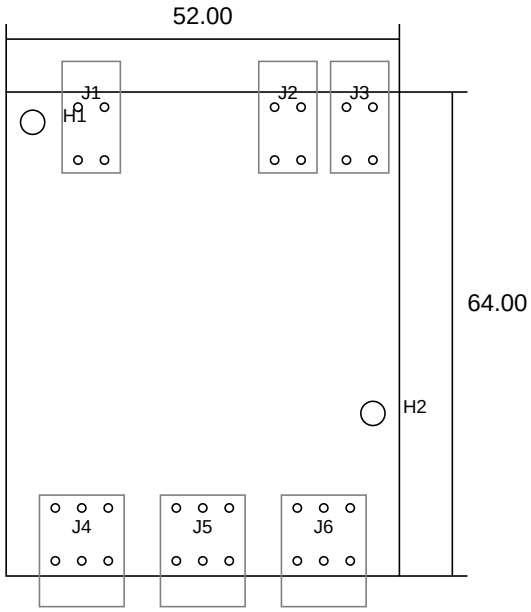

PCB: 52 x 64 x 1.6 mm. Four layers, nominal 1 oz copper.

Mounts: H1 (3.5, 4.0), H2 (48.5, 42.5); diameter 3.2 NPTH.

Keep hardware contact diameter <=6.4 mm; use insulating supports as needed.

Conservative terminal envelope: 52 x 72.1 mm, before wires/button clearance.

Terminal height: 8.5 above mounting face; pin tips 3.5 below that face.

On a 1.6 mm PCB, pin tips project nominally 1.9 mm beyond the bottom.

Housing geometry is manufacturer nominal CAD. Physical fit untested.

Origin: top-left PCB corner. X right; Y down in this drawing.

Service contacts and voltage jumpers

Component-side view / enlarged, not 1:1 / no stencil paste on these contacts

J8: custom TC2050-IDC-NL mapping; use a mapped adapter

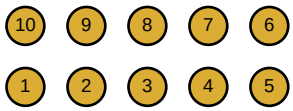

1 NRST
2 UART RX
3 UART TX
4 SWCLK
5 SWDIO
6 +3V3 VTref sense only
7 GND
8 GND
9 BOOT0
10 GND

Power through J1; adapter/probe power disconnected. Lower row 1-5; upper row 10-6.

JP101 POWER

2 mm cap: 1-2 = 5V; 2-3 = 12V; no cap = off

JP103 BIAS

Solder: 1-2 = NPN; 2-3 = PNP; open = push-pull

JP201 POWER

2 mm cap: 1-2 = 5V; 2-3 = 12V; no cap = off

JP203 BIAS

Solder: 1-2 = NPN; 2-3 = PNP; open = push-pull

JP301 POWER

2 mm cap: 1-2 = 5V; 2-3 = 12V; no cap = off

JP303 BIAS

Solder: 1-2 = NPN; 2-3 = PNP; open = push-pull

ONE CAP PER POWER HEADER. Joining all three pins shorts the rails.

JP2: bridge for 120 ohm CAN end termination; open at intermediate nodes.

User fits power headers/caps. Bias uses solder. Configure only with power off.