A Resident-Streaming Roofline Model for Compute-in-Memory

Hanyong Shao[1,2], Kechao Tang[†1,3], and Ru Huang[†1,3]
[1]School of Integrated Circuits & [2]Academy for Advanced Interdisciplinary Studies, Peking University, Beijing 100871, China [3]Beijing Advanced Innovation Center for Integrated Circuits, Beijing 100871, China [†]Corresponding authors Email: {tkch, ruhuang}@pku.edu.cn

***Abstract*—From CPUs to GPUs, the Roofline model has become a textbook tool for revealing a platform's performance ceiling and how well a workload matches it. Compute-in-memory (CIM), however, falls outside this picture because it violates the core assumption of the classical model. Here, we present a resident-streaming Roofline model for CIM, in which streaming-activation and resident-weight throughputs replace compute throughput and memory bandwidth, respectively. This follows from a symmetry we observe: conventional CPU/GPUs pair separated hardware with homogeneous data, whereas CIM pairs unified hardware with heterogeneous data—operands residing in the array and operands streaming through it. We simulate various CIM technologies on this Roofline and quantify the demands of mainstream large language models using NeuroSim. With similar periphery, the streaming throughputs of these technologies differ by a factor of only about 10^2, whereas their resident throughputs differ by over 10^4. The memory thus decides mainly how much reuse CIM needs, from about 2-10 input vectors per weight load on SRAM and eDRAM to about 4×10^4 on NOR flash, making the reuse a workload offers a clear criterion for choosing among technologies.**

***Index Terms*—Compute-in-memory, roofline model, streaming intensity, data reuse, large language models.**

I. Introduction

The textbook Roofline model [1] relates hardware capability to workload demand through Arithmetic Intensity (AI) and reveals bottlenecks arising from their mismatch. It characterizes computation and data transfer by the compute capability π and memory bandwidth β, respectively. AI represents the number of operations a workload supports per byte of data transferred; comparing it with the hardware ridge point $\mathrm{AI}^* = \pi/\beta$ distinguishes the memory-bound region from the compute-bound region and provides guidance for optimization [2], [3].

The validity of this model rests on an assumption implicit in the von Neumann architecture: memory and compute are separate units [4]. Fig. 1(a) shows the familiar picture. Storage and computation are carried out by different hardware, and although activations A and weights W play different roles in the algorithm, the hardware treats both simply as operands delivered to the compute units: neither has a distinct identity, and the two are interchangeable.

However, this assumption no longer holds in Compute-in-Memory (CIM), a non-von Neumann architecture [5]. In Fig. 1(b), the CIM macro that stores W also evaluates A against it, so the two hardware units are unified [6]. The ***weights*** take part in computation as ***resident state***, while each new ***activation*** enters through the read path and ***streams across*** the macro, where it is evaluated against that state. CIM turns one class of operands, the weights, into stored state at the very site of calculation, while the other class, the activations, flows through the macro as inputs served by that state. The separate hardware units of memory and compute in CPU/GPU disappear, but new roles of streaming and resident operands emerge in CIM.

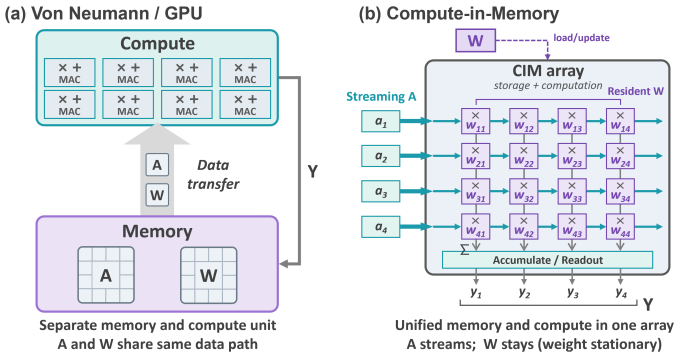


Fig. 1. Hardware schematics: (a) CPU/GPU: separated hardware with homogeneous data; (b) CIM: unified hardware with heterogeneous data.

This change calls for a new Roofline model that rethinks how compute capability and data transfer relate in CIM. The need has two roots. First, the hardware fusion of the CIM architecture dissolves the concept of compute capability π: the capability of a CIM macro to complete multiply-accumulate (MAC) is, in essence, the "transfer rate" of A. Second, the split of operand roles creates two distinct throughputs: weights enter through the write path, which erases, programs, or refreshes the cells, whereas activations enter through the read path, which applies them as inputs and accumulates their products with the weights as outputs. Hence, whereas AI captures the GPU bottleneck as an imbalance between computation and memory access, the CIM bottleneck is the imbalance between these two operand throughputs. Prior studies have recognized this problem [7] and proposed several Roofline analyses for CIM [2], [8]–[14], yet none of them reveals this difference.

Therefore, we propose a resident-streaming Roofline model for CIM. This model separately counts the input bytes Q_S consumed by streaming calculation and the write bytes Q_R that update or reload resident state, and defines the Streaming Intensity $\mathrm{SI} = Q_S/Q_R$ as the streaming demand supported per byte of resident write. Q_S is served by the streaming throughput ρ and Q_R by the resident throughput τ, so the model keeps the form of the classical Roofline, with ρ, τ, and SI taking the places of π, β, and AI. By distinguishing the two operand roles, streaming A and resident W, the model quantifies the imbalance between resident updates and streaming calculation: its ridge $\mathrm{SI}^* = \rho/\tau$ marks where the bottleneck shifts from resident updates to streaming calculation.

Building on this model, we carry out a quantitative analysis from two sides: hardware capability and algorithm demand. On the hardware side, we characterize the streaming and resident throughputs of ten CIM technologies through NeuroSim simulations calibrated with parameters extracted from the literature. On the algorithm side, we examine the matrix multiplications (GEMM) in mainstream large language models (LLM) and

characterize the demands posed by model weights and by key-value (KV) caches. The analysis shows that, with similar periphery, the streaming throughputs of the ten technologies differ by a factor of only about 10^2, whereas their resident throughputs differ by over 10^4. The write mechanism therefore strongly shapes each technology's ridge SI*. Comparing a workload's SI with SI* identifies whether resident updates or streaming calculation impose the tighter bound, guiding hardware-technology and algorithm-workload matching.

II. Proposed Resident-Streaming Roofline

A. Workload Demands and Hardware Throughputs

The classical Roofline describes a workload by its operation count (OPs) and data-transfer volume (Bytes). Following the operand roles in Fig. 1(b), we instead describe a CIM workload through its streaming inputs and resident writes. We count both over an explicit *workload window*, which specifies the work under analysis and the resident state at its start.


We measure streaming calculation by the logical input bytes evaluated using resident state, with each evaluation (*multiplication*) producing the specified outputs (*partial sums*). The streaming demand Q_S is the number of such bytes served at the chosen logical input boundary; it thus represents completed calculation work rather than input/output traffic alone, and it is directly comparable with resident writes. In Fig. 1(b), Q_S counts logical input bytes entering the CIM I/O and *broadcast* along wordlines (WLs), without counting broadcast copies. The resident demand Q_R is the number of logical bytes written within the window to load or update the resident state that this work requires. An initial load completed before the window is excluded; all updates and reloads within the window are counted. The resident operand may be a static model weight or the dynamic KV cache of earlier tokens.

We characterize two hardware services, streaming-input calculation and resident-state loading, by their throughputs. The streaming throughput ρ is the maximum rate, in logical input bytes per second, at which the hardware completes streaming calculations and produces the specified outputs. The resident throughput τ is the maximum rate at which logical resident bytes become ready for calculation. Both rates refer to the CIM hardware under analysis, with bytes counted at the same interfaces and operand precisions used for Q_S and Q_R, respectively. We define Streaming Intensity and average streaming-input throughput as

$$\mathrm{SI} = \frac{Q_S}{Q_R}, \qquad P = \frac{Q_S}{T} \quad [\mathrm{Byte/s}], \tag{1}$$

where T is the window duration, P is the average streaming-input throughput over the window, and SI is the streaming demand per byte of resident write.

The workload's SI describes the relative demand for streaming calculation and resident writes, while ρ and τ describe how quickly the hardware can perform each. These service constraints apply whether resident updates and streaming calculation overlap in time or execute sequentially on shared hardware. The throughput bound therefore follows from the time required to complete these two kinds of work.

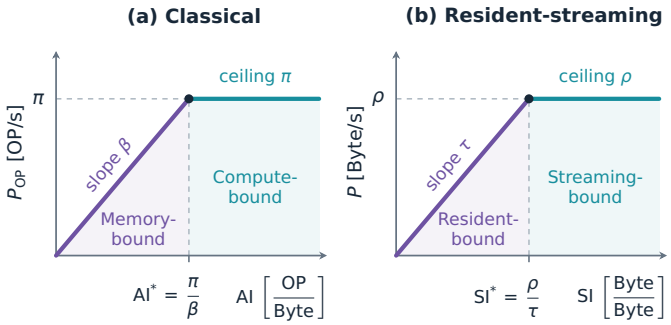

Aspect	GPU (a)	CIM (b)
Decomposition	Hardware resources	Data roles
Workload	OP, Byte	Q_S, Q_R
Service rates	π [OP/s], β [Byte/s]	ρ, τ [Byte/s]
Intensity	AI = OP/Byte	SI = Q_S/Q_R
Vertical axis	P_{OP} = OP/T	P = Q_S/T
Upper bound	$P_{OP} \le \min(\pi, \beta\,\mathrm{AI})$	$P \le \min(\rho, \tau\,\mathrm{SI})$
Left regime	Memory-bound	Resident-bound
Right regime	Compute-bound	Streaming-bound
Ridge	AI* = π/β	SI* = ρ/τ

Fig. 2. Classical GPU [1] and resident-streaming CIM Rooflines with their accounting correspondence. Panels use independent linear scales; curves are upper bounds. OP and Byte denote operation and transferred-byte counts.

B. Theoretical Model and Correspondence

Fig. 2 compares the proposed resident-streaming Roofline with the classical model. Streaming calculation and resident writes require at least Q_S/ρ and Q_R/τ of service time, respectively. The execution must satisfy both constraints, giving

$$P \le \min(\rho, \tau \cdot \mathrm{SI})\,. \tag{2}$$

The two service requirements balance at the hardware ridge $\mathrm{SI}^* = \rho/\tau$. A workload is resident-bound on this hardware when $\mathrm{SI} < \mathrm{SI}^*$ and streaming-bound when $\mathrm{SI} > \mathrm{SI}^*$.

The same bound can be expressed in the familiar GPU-style operation and byte rates. For a window containing O useful operations, the equivalent compute throughput π_{eq} and aggregate bandwidth β_{eq} of CIM are

$$\pi_{\mathrm{eq}} = \frac{O}{Q_S} \cdot \min(\rho, \tau \cdot \mathrm{SI})\,, \tag{3}$$

$$\beta_{\mathrm{eq}} = \left(1 + \frac{Q_R}{Q_S}\right) \cdot \min(\rho, \tau \cdot \mathrm{SI})\,. \tag{4}$$

These are workload-specific projections of the same upper bound: β_{eq} counts the combined logical volume $Q_S + Q_R$, rather than traffic through a GPU memory interface.

Whether a hardware metric is workload-independent depends on the coordinates used to describe it. In GPUs, compute

TABLE I
Streaming Intensity after One Complete Weight Load

Weight shape	Reuse count U					
$N \times K$	128	1K	16K	128K	1M	$\to \infty$
128×128	1.0	8.0	128.0	1024.0	8192.0	∞
1024×1024	0.125	1.0	16.0	128.0	1024.0	∞
4096×4096	0.0313	0.250	4.0	32.0	256.0	∞
1024×4096	0.125	1.0	16.0	128.0	1024.0	∞
4096×1024	0.0313	0.250	4.0	32.0	256.0	∞

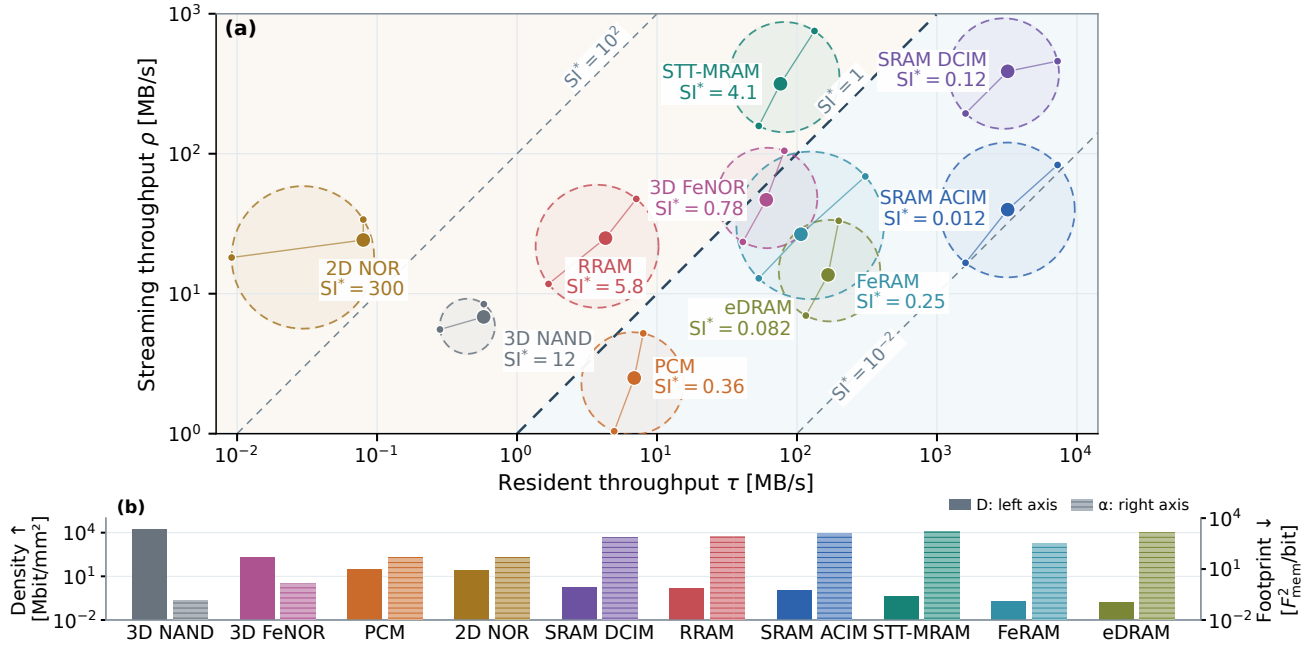


Fig. 3. Throughput and storage density of ten CIM technologies. (a) Streaming throughput ρ and resident throughput τ estimated with NeuroSim using literature-extracted parameters. The wider variation in τ drives balance intensities $\mathrm{SI}^* = \rho/\tau$ and reuse requirements. Large dots mark reference configurations; smaller dots and circles show scenario spread. (b) Binary storage density and normalized bit footprint from independent cell/tile geometry references.

and memory units provide distinct services, matched to operation counts and data-transfer volumes. In CIM, storage and computation are combined, but streaming calculation and resident-state loading remain distinct services, matched to streaming-input and resident-write bytes. Each model therefore decomposes hardware services and workload demands along the same dimension—by hardware function for GPUs and by operand role for CIM. This alignment gives each architecture its native capabilities, (π, β) or (ρ, τ), which are fixed for a given configuration. Translating between the two descriptions requires additional information: how many operations the inputs support and how much resident writing is needed. The hardware remains unchanged, but its projected metrics become workload-dependent because the relationship between operations and operand bytes is determined by the workload.

C. Analytical Case Studies

Consider an illustrative 28 nm SRAM ACIM macro serving a logical 128×128 INT8 matrix, with preloaded weights and an assumed input-vector service interval $\Delta_S = 10\,\mathrm{ns}$. Each matrix-vector multiplication consumes 128 input bytes and performs 2×128^2 useful operations, counting two operations per MAC. Thus $Q_R = 0$ and $O/Q_S = 256\,\mathrm{OP/Byte}$, giving

$$\begin{aligned} \beta_{\mathrm{eq}} = \rho &= \frac{128\,\mathrm{Byte}}{10\,\mathrm{ns}} = 12.8\,\mathrm{GB/s}, \\ \pi_{\mathrm{eq}} &= (256\,\mathrm{OP/Byte}) \cdot \rho \approx 3.28\,\mathrm{TOPS}. \end{aligned} \tag{5}$$

The familiar TOPS value is therefore the streaming ceiling expressed in operation units.

We next evaluate SI for GEMM workloads. For a logical matrix $W[N, K]$ with N outputs and K inputs, let U be the number of input vectors served after one complete load, including the first use and allowing reuse across batches or requests. With one byte per input and weight element, $Q_S = UK$, $Q_R = NK$, and $\mathrm{SI} = U/N$. For full-load time T_R and vector service interval Δ_S, the corresponding balance occurs at $U^* = T_R/\Delta_S = N\mathrm{SI}^*$. Table I lists the resulting SI for five matrix shapes and representative reuse counts.

III. Hardware and Workload Characterization

Fig. 3(a) presents ρ and τ estimated using NeuroSim [15], [16] with literature-extracted parameters for SRAM DCIM [17]–[19], SRAM ACIM [7], [20], [21], 2D NOR [22]–[24], 3D NAND [25]–[27], RRAM [28]–[30], STT-MRAM [31]–[33], PCM [34]–[36], FeRAM [37]–[39], eDRAM [40]–[42], and 3D FeNOR [43]–[45]. Common peripheral assumptions [46]–[48] and logical-byte accounting provide a consistent comparison while retaining native array sizes and update organizations. These are macro-level calculation and update rates, including required erase, verification and refresh costs, rather than the aggregate I/O bandwidth of a multi-bank system. Three paired scenarios per configuration reflect literature-informed parameter ranges. In log space, each circle passes through the two alternative points with its center nearest the reference point; it visualizes scenario spread rather than a capability boundary.

Points toward the upper right provide higher throughputs for both services, while the diagonal guides mark constant SI^*. Above $\rho = \tau$ (yellow), resident updates are slower per byte than streaming calculation; below it (blue), the reverse holds. 3D FeNOR lies close to this diagonal, with relatively balanced streaming and resident throughputs.

Within each scenario, ρ varies across technologies by about 10^2, but τ by over 10^4: similar peripheral conditions constrain streaming calculation, whereas write mechanisms and update parallelism differ greatly. Reference SRAM ACIM and NOR illustrate this distinction: their streaming rates are about 40 and 24 MB/s, but resident rates are 3200 and 0.080 MB/s,

TABLE II
STREAMING INTENSITIES OF REPRESENTATIVE INFERENCE MATRIX STAGES

	Weight projections						Attention					
	QKV (U)			FFN/MoE (U)			Prefill (L)			Decode (L)		
Model	1K	128K	1M	16	1K	16K	1K	8K	64K	1K	8K	64K
Qwen3.5-2B	0.200	25.6	204.8	0.00347	0.222	3.6	6.0	34.0	258.0	10.0	66.0	514.0
Ministral 3 8B	0.167	21.3	170.7	0.00167	0.107	1.7	10.0	66.0	514.0	18.0	130.0	1026.0
Qwen3.6-35B-A3B	0.111	14.2	113.8	0.0130	0.833	13.3	12.0	68.0	516.0	20.0	132.0	1028.0
Hy3 (295B)	0.100	12.8	102.4	0.00477	0.306	4.9	20.0	132.0	1028.0	36.0	260.0	2052.0
Ling-1T (1000B)	0.100	12.8	102.4	0.00326	0.208	3.3	20.0	132.0	1028.0	36.0	260.0	2052.0
MiMo-V2.5-Pro (1020B)	0.0377	4.8	38.6	0.00347	0.222	3.6	35.2	214.4	1648.0	60.8	419.2	3286.4

Entries are SI (one byte/element; $1\text{K} = 1024$, $1\text{M} = 1024^2$). QKV includes any gate but excludes O; FFN/MoE covers one dense FFN or routed expert. Prefill starts with an empty KV cache; decode appends one token to reach visible length L. Ling-1T uses YaRN context extension at 64K.

respectively, leading to very different reuse requirements. Storage density, however, also matters in technology selection. Fig. 3(b) adds independent binary cell/tile density and normalized footprint estimates from reported geometry and conditional models [49]–[51], including a 500-layer projection of NAND geometry [25]. Compact storage can make slower-updating technologies attractive for retaining large resident states, so the upper-right position alone is not a sufficient selection criterion.

Table II reports SI for 72 matrix-stage operating points derived from six fixed model configurations [52]–[57], using one byte per element. Weight projections and FFN/MoE follow the one-load accounting of Section II-C, counting shared branch inputs once and each subsequent stage's new input separately. For causal grouped-query attention (GQA), H_q and H_{kv} denote query and KV head counts, and d_{QK} and d_V the query/key and value dimensions. Counting queries and attention coefficients as streaming inputs and writing each token's KV once, prefill from an empty cache to length L gives

$$Q_S = LH_q[d_{\text{QK}}+(L+1)/2], \quad Q_R = LH_{\text{kv}}(d_{\text{QK}}+d_V). \quad (6)$$

Decode appends one token to reach L: omit the leading L in both counts and replace $(L+1)/2$ by L in Q_S.

The increases in SI in Table II have different origins. For weight stages, larger U spreads a fixed load over more input vectors, reducing resident writes per use. For attention decode, larger L increases streaming work per token, while the logical KV write volume per token remains fixed. The resulting higher SI therefore accompanies more calculation and a larger cache: sustaining the same token rate requires greater streaming throughput and storage capacity.

IV. WORKLOAD MATCHING AND DESIGN IMPLICATIONS

Fig. 4 compares six Qwen3.6-35B-A3B operating points from Table II with the native hardware balance intensities shown in Fig. 3(a). The SI–SI* comparison identifies the tighter service requirement for each stage and window. Increasing weight reuse can shift the bottleneck from resident updates to streaming calculation, while near-ridge matches remain sensitive to hardware conditions. These are reference comparisons; deployment requires aligned accounting for input sharing, replay and resident updates.

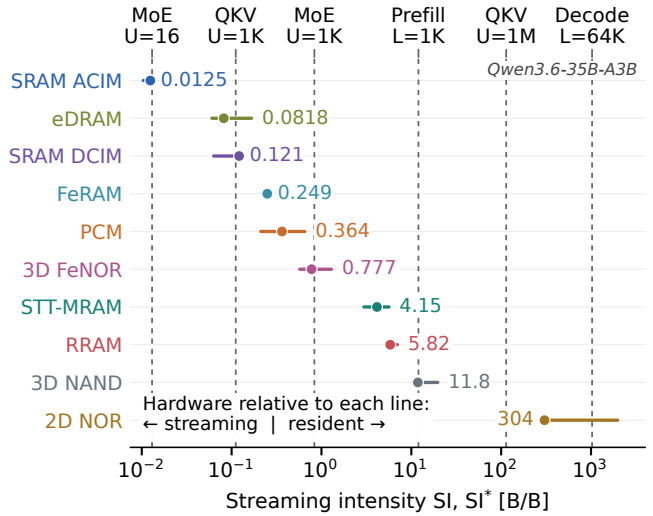


Fig. 4. CIM–workload matching. Dots and ranges show hardware balance intensities SI*; dashed lines show workload SI. Technologies left of each line are streaming-bound; those to its right are resident-bound.

Technology selection must consider absolute throughput and storage density, rather than SI* alone: a low SI* may reflect slow streaming calculation rather than fast resident updates. For resident-bound work, faster updates (program/erase) or greater SI through fewer reloads raise the bound, whereas improving ρ alone does not. For streaming-bound work, the priority is to reduce the delays limiting evaluation throughput, such as ADC conversion time, adder-tree latency, or array/interconnect RC delay. Compact storage (3D stacking) can help sustain weight reuse by keeping more state resident, but the benefit depends on usable capacity and the weight eviction policy. Growing KV caches during attention acceleration also require an update organization suited to incremental writes.

V. CONCLUSION

We presented a resident-streaming Roofline that connects CIM capability and workload demand through operand roles. Our analysis shows much greater variation in resident than streaming throughput, making reuse requirements a key consequence of memory choice. The model provides a quantitative basis for matching CIM technologies to how workloads use and update resident state, considering service balance, throughput and storage density rather than compute peak alone.

REFERENCES

[1] S. Williams *et al.*, "Roofline: An Insightful Visual Performance Model for Multicore Architectures," *Commun. ACM*, vol. 52, no. 4, pp. 65–76, 2009.

[2] M. Verhelst *et al.*, "How to Keep Pushing ML Accelerator Performance? Know Your Rooflines!" *IEEE J. Solid-State Circuits*, vol. 60, no. 6, 2025.

[3] G. Gerogiannis *et al.*, "DECA: A Near-Core LLM Decompression Accelerator Grounded on a 3D Roofline Model," in *Proc. IEEE/ACM Int. Symp. Microarchitecture (MICRO)*, 2025, pp. 184–200.

[4] S. Rheindt *et al.*, "X-Centric: A Survey on Compute-, Memory- and Application-Centric Computer Architectures," in *Proc. Int. Symp. Memory Syst. (MEMSYS)*, 2020, pp. 178–193.

[5] Z. Sun *et al.*, "A Full Spectrum of Computing-in-Memory Technologies," *Nature Electron.*, vol. 6, no. 11, pp. 823–835, 2023.

[6] N. Verma *et al.*, "In-Memory Computing: Advances and Prospects," *IEEE Solid-State Circuits Mag.*, vol. 11, no. 3, pp. 43–55, 2019.

[7] H. Jia *et al.*, "Scalable and Programmable Neural Network Inference Accelerator Based on In-Memory Computing," *IEEE J. Solid-State Circuits*, vol. 57, no. 1, pp. 198–211, 2022.

[8] G. Krishnan *et al.*, "Design Limits of In-Memory Computing: Beyond the Crossbar," in *Proc. IEEE Electron Devices Technol. Manuf. Conf. (EDTM)*, 2021, pp. 1–3.

[9] A. Garofalo *et al.*, "A Heterogeneous In-Memory Computing Cluster for Flexible End-to-End Inference of Real-World Deep Neural Networks," *IEEE J. Emerg. Sel. Topics Circuits Syst.*, vol. 12, no. 2, pp. 422–435, 2022.

[10] J. Sun *et al.*, "Analog or Digital In-Memory Computing? Benchmarking Through Quantitative Modeling," in *Proc. IEEE/ACM Int. Conf. Comput.-Aided Des. (ICCAD)*, 2023, pp. 1–9.

[11] F.-H. Meng *et al.*, "Compute-In-Memory Technologies for Deep Learning Acceleration," *IEEE Nanotechnol. Mag.*, vol. 18, no. 1, pp. 44–52, 2024.

[12] T. Sharma *et al.*, "What, When, Where to Compute-in-Memory for Efficient Matrix Multiplication During Machine Learning Inference," *IEEE Trans. Emerg. Topics Comput.*, vol. 13, no. 3, pp. 1215–1229, 2025.

[13] K. Zhou *et al.*, "A Full-System, Programmable, and Extensible In-Memory Computing Simulation Framework for Deep Learning," in *Proc. ACM/IEEE Design Autom. Conf. (DAC)*, 2025, pp. 1–7.

[14] H. Liu *et al.*, "Harnessing Memory Technology Innovations for On-Device Large Language Models in Augmented Reality SoCs: Cooptimizing System Architecture with Model Characteristics," *IEEE Solid-State Circuits Mag.*, vol. 17, no. 4, pp. 39–46, 2025.

[15] J. Lee *et al.*, "NeuroSim V1.4: Extending Technology Support for Digital Compute-in-Memory Toward 1nm Node," *IEEE Trans. Circuits Syst. I, Reg. Papers*, vol. 71, no. 4, pp. 1733–1744, 2024.

[16] X. Peng *et al.*, "DNN+NeuroSim: An End-to-End Benchmarking Framework for Compute-in-Memory Accelerators with Versatile Device Technologies," in *Proc. IEEE Int. Electron Devices Meeting (IEDM)*, 2019, pp. 32.5.1–32.5.4.

[17] J. Oh *et al.*, "D6CIM: 60.4-TOPS/W, 1.46-TOPS/mm^2, 1005-Kb/mm^2 Digital 6T-SRAM-Based Compute-in-Memory Macro Supporting 1-to-8b Fixed-Point Arithmetic in 28-nm CMOS," in *Proc. ESSCIRC*, 2023, pp. 413–416.

[18] B. Yan *et al.*, "A 1.041-Mb/mm^2 27.38-TOPS/W Signed-INT8 Dynamic-Logic-Based ADC-less SRAM Compute-in-Memory Macro in 28nm with Reconfigurable Bitwise Operation for AI and Embedded Applications," in *Proc. IEEE Int. Solid-State Circuits Conf. (ISSCC)*, 2022, pp. 188–190.

[19] Y. Yuan *et al.*, "A 28-nm Digital Transpose SRAM Compute-in-Memory Macro With Accurate/Approximate Dual Mode for Floating-Point Edge Training and Inference," *IEEE J. Solid-State Circuits*, vol. 61, no. 9, pp. 5098–5110, 2026.

[20] K. Xiao *et al.*, "A 28nm 32Kb SRAM Computing-in-Memory Macro With Hierarchical Capacity Attenuator and Input Sparsity-Optimized ADC for 4b Mac Operation," *IEEE Trans. Circuits Syst. II, Exp. Briefs*, vol. 70, no. 6, 2023.

[21] J.-W. Su *et al.*, "8-Bit Precision 6T SRAM Compute-in-Memory Macro Using Global Bitline-Combining Scheme for Edge AI Chips," *IEEE Trans. Circuits Syst. II, Exp. Briefs*, vol. 71, no. 4, pp. 2304–2308, 2024.

[22] Infineon Technologies, *S29GL01GS, S29GL512S, S29GL256S, S29GL128S — 128 Mb / 256 Mb / 512 Mb / 1 Gb GL-S MIRRORBIT Flash, Parallel, 3.0 V, Military*, 2024, datasheet 002-18741 Rev. *E.

[23] Winbond Electronics, *W25Q128JV — 3V 128M-Bit Serial Flash Memory with Dual/Quad SPI*, 2019, datasheet Rev. G.

[24] X. Guo *et al.*, "Fast, Energy-Efficient, Robust, and Reproducible Mixed-Signal Neuromorphic Classifier Based on Embedded NOR Flash Memory Technology," in *Proc. IEEE Int. Electron Devices Meeting (IEDM)*, 2017, pp. 6.5.1–6.5.4.

[25] W. Shim *et al.*, "System-Technology Codesign of 3-D NAND Flash-Based Compute-in-Memory Inference Engine," *IEEE J. Explor. Solid-State Comput. Devices Circuits*, vol. 7, no. 1, pp. 61–69, 2021.

[26] H.-T. Lue *et al.*, "Optimal Design Methods to Transform 3D NAND Flash into a High-Density, High-Bandwidth and Low-Power Nonvolatile Computing in Memory (nvCIM) Accelerator for Deep-Learning Neural Networks (DNN)," in *Proc. IEEE Int. Electron Devices Meeting (IEDM)*, 2019, pp. 38.1.1–38.1.4.

[27] Macronix International Co., Ltd., *MX30LF1G18AC: 3V, 1G-bit NAND Flash Memory*, 2016, datasheet PM2133 Rev. 1.2.

[28] W. Ye *et al.*, "A 28-nm RRAM Computing-in-Memory Macro Using Weighted Hybrid 2T1R Cell Array and Reference Subtracting Sense Amplifier for AI Edge Inference," *IEEE J. Solid-State Circuits*, vol. 58, no. 10, 2023.

[29] W. Wan *et al.*, "A compute-in-memory chip based on resistive random-access memory," *Nature*, vol. 608, no. 7923, pp. 504–512, 2022.

[30] Y.-C. Chiu *et al.*, "A 40nm 2Mb ReRAM Macro with 85% Reduction in FORMING Time and 99% Reduction in Page-Write Time Using Auto-FORMING and Auto-Write Schemes," in *Proc. Symp. VLSI Technol.*, 2019.

[31] H. Li *et al.*, "A lossless and fully parallel spintronic compute-in-memory macro for artificial intelligence chips," *Nature Electron.*, vol. 8, no. 11, 2025.

[32] Q. Dong *et al.*, "A 1-Mb 28-nm 1T1MTJ STT-MRAM With Single-Cap Offset-Cancelled Sense Amplifier and In Situ Self-Write-Termination," *IEEE J. Solid-State Circuits*, vol. 54, no. 1, pp. 231–239, 2019.

[33] T.-H. Yang *et al.*, "A 28nm 32Kb Embedded 2T2MTJ STT-MRAM Macro with 1.3ns Read-Access Time for Fast and Reliable Read Applications," in *Proc. IEEE Int. Solid-State Circuits Conf. (ISSCC)*, 2018, pp. 482–484.

[34] W.-S. Khwa *et al.*, "A 40-nm, 2M-Cell, 8b-Precision, Hybrid SLC-MLC PCM Computing-in-Memory Macro with 20.5–65.0TOPS/W for Tiny-AI Edge Devices," in *Proc. IEEE Int. Solid-State Circuits Conf. (ISSCC)*, 2022, pp. 1–3.

[35] M. Le Gallo *et al.*, "A 64-core mixed-signal in-memory compute chip based on phase-change memory for deep neural network inference," *Nature Electron.*, vol. 6, no. 9, pp. 680–693, 2023.

[36] P. Narayanan *et al.*, "Fully On-Chip MAC at 14 nm Enabled by Accurate Row-Wise Programming of PCM-Based Weights and Parallel Vector-Transport in Duration-Format," *IEEE Trans. Electron Devices*, vol. 68, no. 12, 2021.

[37] J. Okuno *et al.*, "SoC Compatible 1T1C FeRAM Memory Array Based on Ferroelectric $Hf_{0.5}Zr_{0.5}O_2$," in *Proc. Symp. VLSI Technol.*, 2020, pp. 1–2.

[38] N. Ramaswamy *et al.*, "NVDRAM: A 32Gb Dual Layer 3D Stacked Non-volatile Ferroelectric Memory with Near-DRAM Performance for Demanding AI Workloads," in *Proc. IEEE Int. Electron Devices Meeting (IEDM)*, 2023.

[39] M. Sung *et al.*, "Low Voltage and High Speed 1Xnm 1T1C FE-RAM with Ultra-Thin 5nm HZO," in *Proc. IEEE Int. Electron Devices Meeting (IEDM)*, 2021, pp. 33.3.1–33.3.4.

[40] J. Song *et al.*, "A 4-bit Calibration-Free Computing-In-Memory Macro With 3T1C Current-Programed Dynamic-Cascode Multi-Level-Cell eDRAM," *IEEE J. Solid-State Circuits*, vol. 59, no. 3, pp. 842–854, 2024.

[41] R. Giterman *et al.*, "An 800-MHz Mixed-V_{T} 4T IFGC Embedded DRAM in 28-nm CMOS Bulk Process for Approximate Storage Applications," *IEEE J. Solid-State Circuits*, vol. 53, no. 7, pp. 2136–2148, 2018.

[42] P.-C. Wu *et al.*, "An Integer-Floating-Point Dual-Mode Gain-Cell Computing-in-Memory Macro for Advanced AI Edge Chips," *IEEE J. Solid-State Circuits*, vol. 60, no. 1, pp. 158–170, 2025.

[43] Y. Zhou *et al.*, "3D Vertical FeFET Array with Record Endurance ($> 10^{12}$), Fast Writing ($\pm$2V, 20 ns), Disturb Immunity, and Kb-scale Verification for High Density 1T RAM," in *Proc. Symp. VLSI Technol. Circuits*, 2026, T11.1.

[44] Y. Zhou *et al.*, "3D NOR-Type FeFETs with Record Endurance of 10^{11}, Fast Erase of 50 ns, and Immediate Read-After-Write for In-Memory Learning," in *Proc. Symp. VLSI Technol. Circuits*, 2025, pp. 1–3.

[45] Y. Feng *et al.*, "Efficient Large Scale Neural Network Acceleration With 3-D FeNOR-Based Computing-in-Memory Design," *IEEE Trans. Electron Devices*, vol. 72, no. 5, pp. 2319–2326, 2025.

[46] F. Tang *et al.*, "A 28 nm CMOS 10 bit 100 MS/s Asynchronous SAR ADC with Low-Power Switching Procedure and Timing-Protection Scheme," *Electronics*, vol. 10, no. 22, p. 2856, 2021.

[47] B. Zimmer *et al.*, "SRAM Assist Techniques for Operation in a Wide Voltage Range in 28-nm CMOS," *IEEE Trans. Circuits Syst. II, Exp. Briefs*, vol. 59, no. 12, pp. 853–857, 2012.

[48] Y. Yokoyama *et al.*, "Disturbance Aware Dynamic Power Reduction in Synchronous 2RW Dual-Port 8T SRAM by Self-Adjusting Wordline Pulse Timing," *IEEE J. Solid-State Circuits*, vol. 58, no. 7, pp. 2098–2108, 2023.

[49] GlobalFoundries, "GlobalFoundries and Microchip Announce Microchip's 28nm SuperFlash Embedded Flash Memory Solution in Production," Press release, Sep. 2023.

[50] J. H. Q. Palhares *et al.*, "28 nm FDSOI embedded PCM exhibiting near zero drift at 12 K for cryogenic SNNs," *npj Unconventional Computing*, vol. 1, 2024, art. no. 8.

[51] J. Okuno *et al.*, "1T1C FeRAM Memory Array Based on Ferroelectric HZO With Capacitor Under Bitline," *IEEE J. Electron Devices Soc.*, vol. 10, 2022.

[52] Qwen Team, "Qwen3.5: Towards Native Multimodal Agents," Qwen blog, Feb. 2026.

[53] A. H. Liu *et al.*, "Ministral 3," arXiv:2601.08584, Jan. 2026.

[54] Qwen Team, "Qwen3.6-35B-A3B: Agentic Coding Power, Now Open to All," Qwen blog, Apr. 2026.

[55] Tencent Hy Team, "Introducing Hy3," Tencent Hy research blog, Jul. 2026.

[56] Ling Team *et al.*, "Every Activation Boosted: Scaling General Reasoner to 1 Trillion Open Language Foundation," arXiv:2510.22115, Oct. 2025.

[57] Xiaomi MiMo Team, "MiMo-V2.5-Pro," Model card, Hugging Face, 2026.