Maquina de anestesia

Configurations

Dimensions	Height（With casters） 146cm±1cm Width 90cm±1cm Depth 71cm±1cm Safe shelf loading 25kg±0.5kg
Screen	8 inch TFT LCD screen, 800x480 pixels (12 inch optional)
Gas supply	O2, N2O, AIR
Selectatec bar	Dual positions
ACGO	Standard
Mechanical Flowmeter	6 flow tubes for 3 gas
By-pass	Standard
Ventilator Software	V-CMV, P-CMV, V-SIMV, P-SIMV, PRVC, PRVC-SIMV, Manual/Spont, CPAP, PSV, HLM
Spirometry loop	P-V,P-F,F-V,reference Loop
Spare Cylinder yoke	Optional(O2, N2O)
Li-ion Battery	1 battery,4800mAh, Optional(2 batteries,9600mAh)
AGSS	Optional
Waveforms	Up to 3 waveforms, user configurable 3 Four
Auxiliary power outlets	wheels(125mm) with 2 separate brakes
Wheels	2, optional 3 drawers
Drawers	LED lighting Included
Reading lamp	Optional(CO2, AG)
Gas monitor module	Standard
Built-in Heater	Optional
O2 cell	Optional (Drager/Penlon/Northern)
Vaporizer	Optional
Patient monitor	Optional
Suction Device	



Anesthesia Machine

GAMA SERVICES GROUP

Committed to Excellence



Pediatrics applicable breathing circuit


Autoclavable Metallic and PPSU material.
Featured with stable pressuretightness.
Visual observation bellows.
Breathing system with upward or downward bellows.





Exellent CO2 absorber

One-hand operation designed CO2 absorber.
By-pass design ensures the safety of replacing soda lime Canister during the operation.Canister on-line detector.
Autoclavable PPSU material (up to 134°C).

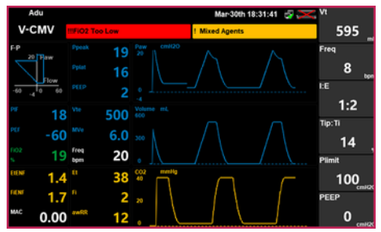

8”/12.1” Screen display

Accurate ventilator

Fresh gas with compliance and leakage compensation
V-CMV, P-CMV, V-SIMV, P-SIMV, PRVC, SIMV-PRVC, Standby, Manual/Spont, CPAP, PSV, HLM, Manual ventilation modes
Alarms of incorrect installation of breathing system and soda lime canister.



Anesthesia Machine

- 8”color TFT screen, optional touchscreen.
- User friendly interface.
- Tidal volume 10~1500 ml .
- Up to 6 flow tubes for 3 gas.
- PPSU/Metallic material of breathing circuit.
- By-pass Tech for soda lime canister.
- All ventilation modes to satisfy neonate, pediatric and adult patients.
- Integrated breathing circuit with built-in heater.
- Highly visible ACGO.

Large workbench

Two-sided guide rails(optional) for patient monitor, support arm and injection bump.
Stainless steel material can stand any chemical sterilization agent.
LED lights equipped to provide lighting for the workbench.



ACGO



Flush O2



CO2