



SK-EM005

MATERNAL AND CHILD
HEALTH MONITORING DEVICE



SAIKANG Medical

Healthier
your life

SK-EM005

FEATURES AND HIGHLIGHTS

Technical parameters

- 12.1-inch non-touch screen, foldable 90°, high resolution 800 × 600
- Standard parameters: SpO₂, HR, NIBP, TEMP, ECG, RESP, FHR, TOCO, FM
- Standard 5-lead ECG cable
- Built-in 4400 mAh rechargeable battery
- 152 mm imported thermal array printer
- One set of adult accessories

ECG

- Lead configuration Standard three-lead or five-lead cable
- Gain '0.25, '0.5, '1, '2
- Heart rate range Adults: 15bpm to 300bpm
Newborns/children: 15bpm to 350bpm
- Electrode polarization voltage range ±300mV
- Baseline recovery time <3 seconds after defibrillation

Respiration

- Measurement method RA-LL (R-F) impedance method
- Respiration rate range Adults: (0-120) BrPM
Children and newborns: (0-150) BrPM
- Apnea alarm (10-40) seconds

Measurement range of blood oxygen saturation

- 0-100%
- Resolution: 1%
- Accuracy: 70%-100%: ±2
- 0%-69%: undefined

Measurement range of pulse rate

- 20bpm-300bpm resolution: 1bpm accuracy: ±3bpm

Temperature measurement range

- (5-50)°C, resolution: 0.1°C

Non-invasive blood pressure

- Operating modes manual/automatic/continuous
- Measurement interval time in automatic measurement mode 1-480 minutes.
- Measuring range systolic pressure (60-240)mmHg
- Diastolic pressure (30-180)mmHg
- Mean pressure (40-200)mmHg
- Static pressure range (0-300) mmHg, static pressure accuracy: ±3 mmHg

Standard configuration

- ☒ Heart rate
- ☒ SPO₂
- ☒ NIBP
- ☒ RESP
- ☒ TEMP
- ☒ PR
- ☒ Uterine contraction pressure
- ☒ Fetal heart rate
- ☒ Fetal movement (manual/automatic)
- ☒ Automatic scoring
- ☒ Automatic analysis

Optional feature

- ☐ Twin Monitoring
- ☐ FAS (Fetal Acoustic Simulator)
- ☐ CMS
- ☐ Trolley
- ☐ Wired or Wireless Network

Design

The highly compact and lightweight body design allows for easy portability and flexible installation in all directions.



Material

Newly designed with ABS engineering plastic mold injection molding. Adopting aluminum-magnesium alloy bracket, stable and reliable, with good shock resistance and easy to move.



Screen design

12.1-inch non-touch screen, folding 90 degree, 800 × 600 high resolution.



Ultrasound probe

The multi-chip waterproof probe is highly sensitive, resistant to interference, and has extremely low ultrasonic dosage, making fetal monitoring safer and more reliable.




Power supply

The wide power supply design makes it suitable for use in a wide range of regions. The dual AC/DC power supply ensures high adaptability of the instrument to different environments. With low power consumption, it maintains stable and continuous monitoring of pregnant women and fetuses for extended periods of time.



Built-in printer

The 152mm imported thermal array printer has an extended lifespan and can print and store real-time curves, parameter values, and monitoring status.

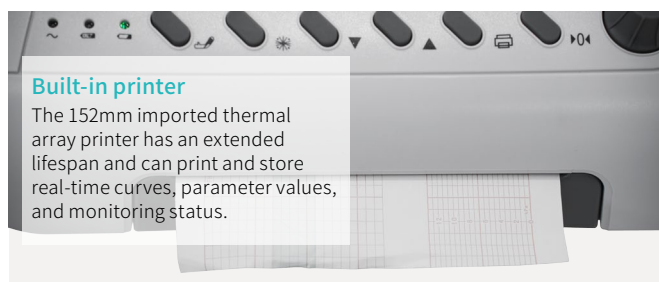

Handle

Fixed handle design, comfortable to hold, stable and easy to move.



Operation display

The device has two specialized display interfaces for fetal and maternal monitoring, and is operated with shuttle rotary buttons for convenient and efficient operation.



Alarm function

The device has multiple alarm functions, including alarms for fetal tachycardia, low battery, bradycardia, and printer paper shortage.

Counting function

The device can automatically and manually count fetal movements and display fetal activity curves and data in a clear and intuitive manner.

Interface settings

The device supports both wired and wireless network connections and has USB and network interfaces for integration into a central monitoring system, allowing for dynamic, timely, and comprehensive observation of monitoring conditions.


Analyzing Storage Functions

The device has automatic fetal scoring and analysis functions, which can perform ACOG, FISCHER, and KREBS scoring, providing professional reference data for clinical diagnosis. It can continuously store monitoring curves and data for up to 39 hours, and can be easily searched, replayed and printed at any time.





CONSTANT INNOVATION




Design



Research



Manufacturing



Maintenance



Service

WORLDWIDE BRANCHES

Portugal Showroom

Av. da Liberdade, nº 101
8150-101
São Brás de Alportel
Portugal
TEL: +351 289 090 212

Brazil Showroom

Rua Lauro Muller 116, Sala
1503 - Botafogo, Rio de
Janeiro - RJ, 22290-160
E-mail: mehecobrasil@
gmail.com

Indian Showroom

1460 M.I.E, Bahadurgarh,
Haryana-124507, INDIA
TEL: +91 96677 70747
E-mail: ind@saikangmedical.
com

China Headquarter

No.35 Lehong Road,
Zhangjiagang City,
Jiangsu Province, China.
TEL: +86 18021231901
E-mail: export@
saikangmedical.com

South East Asia Branch

**SAIKANG Medical
(Thailand) Co., Ltd.**
Ample Tower 909 Room 11/3
Debaratana Road,
Bangna Nuea, Bangkok
10260 Thailand
TEL: +66-936-569469

US Branch

**Healthward Technology,
INC**
17800 castleton st ste 180,
Los Angeles
TEL: +1 (380) 254 4913

SAIKANG Medical

Jiangsu Saikang Medical Equipment Co., Ltd.
STOCK CODE: 870098

 No. 35, Lehong Road · Zhangjiagang (Jiangsu) · China
 +86 18021231901 ·  24/7
 export@saikangmedical.com
 www.saikangmedical.com



Company video



General catalogue