




SK-EM006

FETAL MONITOR

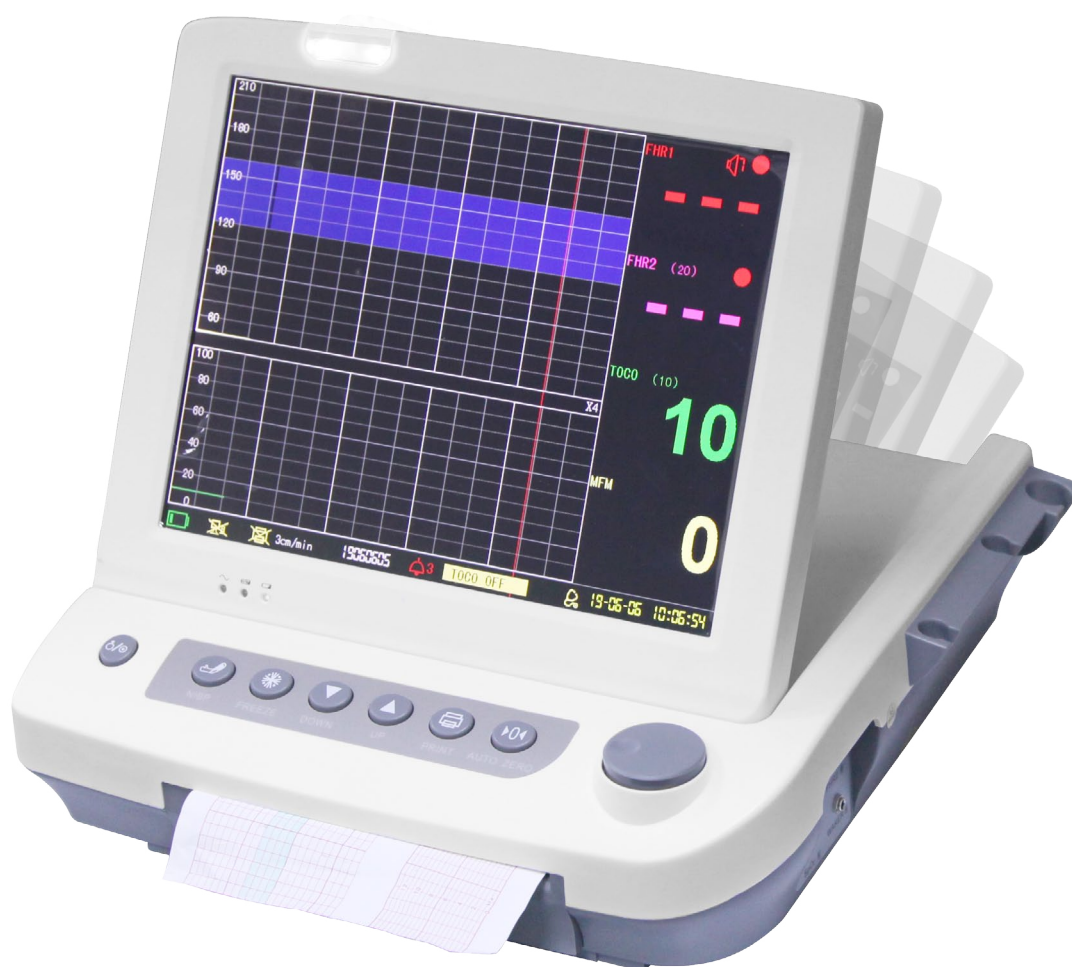

SAIKANG Medical

Healthier
your life

SK-EM006

FEATURES AND HIGHLIGHTS

Technical Parameters

- 12.1-inch non-touch screen, foldable 90°, high resolution 800 × 600
- Standard parameters: FHR, TOCO, FM
- 4400mAh built-in battery
- 152mm imported thermal array printer
- One set of adult accessories

Technical specifications

☒ FHR	
☒ Transducer:	
☒ Strength	Multi-crystals, wide wave beam, pulsed-wave working method, high sensitivity <5mW/cm ²
☒ Working Frequency	1.0MHz
☒ Signal Processing	Special DSP system and modern recognition
☒ Measurement Range	50~240bpm
☒ Alarm Range:High Limit	160, 170, 180, 190 bpm
☒ Low Limit	90, 100, 110, 120 bpm
☒ Maximum Audio Output Power	1.5 Watt

Optional feature

- ☐ Twin Monitoring
- ☐ FAS (Fetal Acoustic Simulator)
- ☐ CMS
- ☐ Trolley
- ☐ Wired or Wireless Network

According TO

☒ TOCO	
☒ Measurement Range	0-100 units
☒ Display	
☒ LCD shows the FHR trace, TOCO tracd, FM, Doctor Event Mark, Time, Volume etc monitor state, and also it can store and playback.	
☒ Dimension	350Lx320Wx85H (mm)
☒ Net Weight	3.5 kg
☒ Environment:	
☒ Working Environment	Temperature: +5°C ~ +40
☒ Atmospheric Pressure	86kPa ~106kPa
☒ Transport and Storage Temperature	Humidity: < 93%
☒ Atmospheric Pressure	86kPa ~ 106kPa
☒ Transducer Acoustic Output:	
☒ Under the requirements laid down in IEC 1157, 1992, the peak negative acoustic pressure does not exceed 1Mpa.The output beam intensity does not exceed 20mW/cm ² and the spatial-peak temporal average intensity does not exceed 100 mW/cm ² . The sound intensity of this monitor will not exceed 5mW/cm ² .	
☒ GEL	
☒ Viscous aqueous non-sensitizing,hypo-allergenic and non-irritating to skin Bacteriostat (not sterile)	
☒ Standard	FHRTCOFM
☒ Optional	Twin Monitoring,FAS (fetal acoustic simulator)


Design

Lightweight,space saving,easy operations,can be laid on or mounted.



Screen

Multi-crystals ,wide beam form, high sensitivity ultrasound transducer ,low ultrasound power, Safer to the fetal.



Printer

The internal line 152mm thermal printer can records FHR ,TOCO ,The life exceed over 20 years.



Count | Storage

Auto Fetal movement are available. More than 12 hours data storage, then can be played and reprinted





Electric Current

AC or LI-battery operated.




Accessories

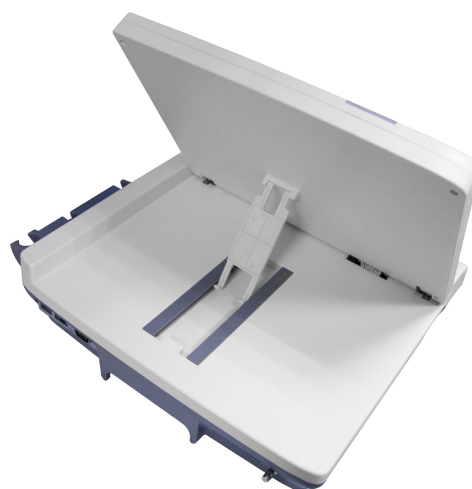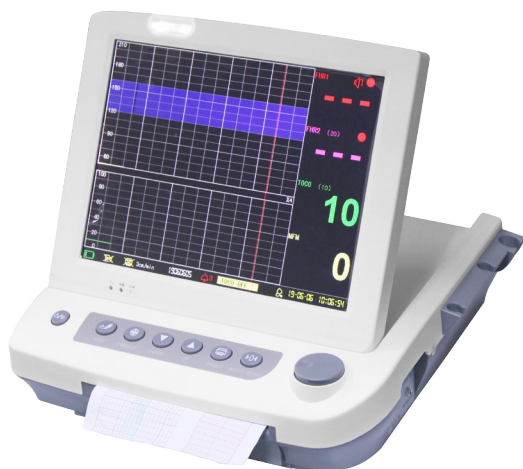



CONSTANT INNOVATION




Design



Research



Manufacturing



Maintenance



Service

WORLDWIDE BRANCHES

Portugal Showroom

Av. da Liberdade, nº 101
8150-101
São Brás de Alportel
Portugal
TEL: +351 289 090 212

Brazil Showroom

Rua Lauro Muller 116, Sala
1503 - Botafogo, Rio de
Janeiro - RJ, 22290-160
E-mail: mehecobrasil@
gmail.com

Indian Showroom

1460 M.I.E, Bahadurgarh,
Haryana-124507, INDIA
TEL: +91 96677 70747
E-mail: ind@saikangmedical.
com

China Headquarter

No.35 Lehong Road,
Zhangjiagang City,
Jiangsu Province, China.
TEL: +86 18021231901
E-mail: export@
saikangmedical.com

South East Asia Branch

**SAIKANG Medical
(Thailand) Co., Ltd.**
Ample Tower 909 Room 11/3
Debaratana Road,
Bangna Nuea, Bangkok
10260 Thailand
TEL: +66-936-569469

US Branch

**Healthward Technology,
INC**
17800 castleton st ste 180,
Los Angeles
TEL: +1 (380) 254 4913

SAIKANG Medical

Jiangsu Saikang Medical Equipment Co., Ltd.
STOCK CODE: 870098

 No. 35, Lehong Road · Zhangjiagang (Jiangsu) · China
 +86 18021231901 ·  24/7
 export@saikangmedical.com
 www.saikangmedical.com



Company video



General catalogue