



# SK-EX121

## SUCTION DEVICE



# SK-EX121

## FEATURES AND HIGHLIGHTS

### Technical parameters

|                                       |                                                                                                                         |
|---------------------------------------|-------------------------------------------------------------------------------------------------------------------------|
| ▪ Material:                           | cold rolled steel plate                                                                                                 |
| ▪ Pumping rate:                       | ≥45L/Min                                                                                                                |
| ▪ Limit negative pressure value:      | ≥0.09MPa (680mmHg)                                                                                                      |
| ▪ Negative pressure adjustment range: | 0.02MPa - ultimate negative pressure value                                                                              |
| ▪ Noise:                              | ≤55dB                                                                                                                   |
| ▪ Power Voltage:                      | AC110-220V±22V                                                                                                          |
| ▪ Power frequency:                    | 50-60Hz                                                                                                                 |
| ▪ Running method:                     | Continuous Operation with Intermittent Loading, Short-time operation, the longest running time 30min, duration rate 50% |
| ▪ Control Method:                     | Foot switch and manual switch control                                                                                   |
| ▪ Suction pump:                       | Oil-free plunger pump                                                                                                   |
| ▪ Glass Liquid Storage Bottle:        | 3000mL × 2 pieces                                                                                                       |
| ▪ Castors:                            | 50mm × 4 (two castors with brakes)                                                                                      |

### Technical configuration

|                                                                                 |       |
|---------------------------------------------------------------------------------|-------|
| <input checked="" type="checkbox"/> Suction flexible catheter(length 2M, Φ7×13) | 1 pc  |
| <input checked="" type="checkbox"/> Foot switch                                 | 1 pc  |
| <input checked="" type="checkbox"/> Air filter                                  | 2 pcs |
| <input checked="" type="checkbox"/> Fuses                                       | 2 pcs |
| <input checked="" type="checkbox"/> Chest suction tube                          | 1 pc  |



### Feature

Low noise, maintenance-free, high pumping rate, fast negative pressure rise, no oil mist pollution.

### Design

Novel shape, floor type mobile medical suction device.

### Structure feature







The product structure primarily consists of piston pump, vacuum gauge, negative pressure regulating valve, air filter, storage bottle, and foot pedal switch.

### Working principle

Utilizing a high-efficiency piston pump, it operates without the need for oil lubrication, ensuring long-term operation and has a long service life. The structure is rational and will not generate positive pressure, absolutely guaranteeing safety.


### Piston pump

Utilizing a high-efficiency piston pump, it operates without the need for oil lubrication, enabling long-term operation and has a long service life.

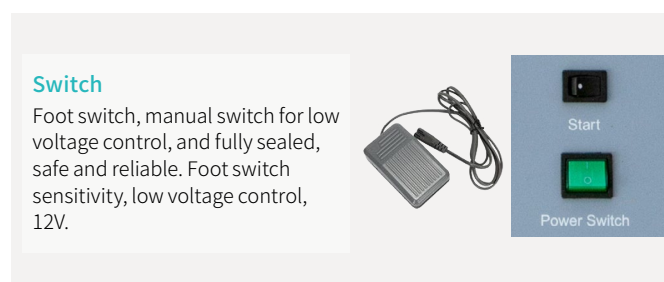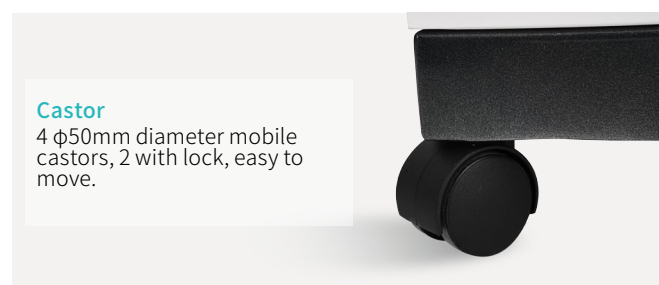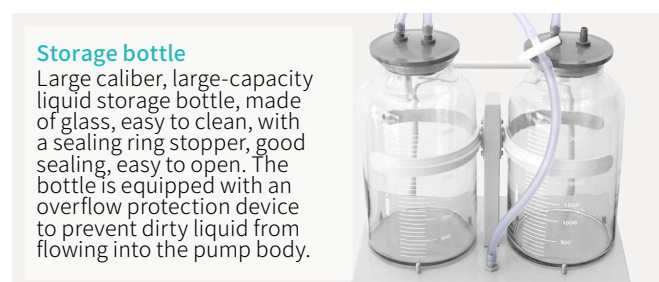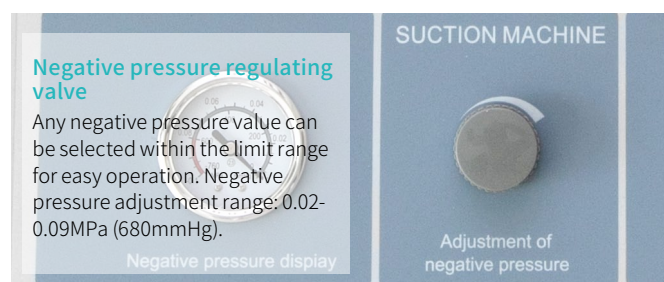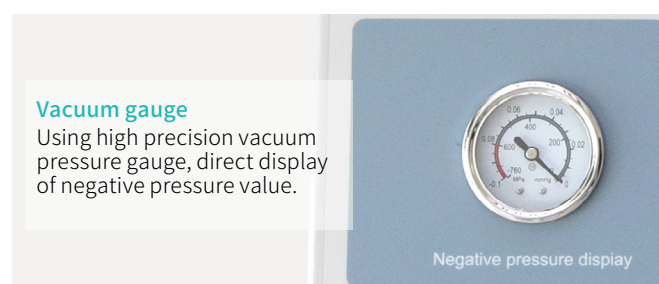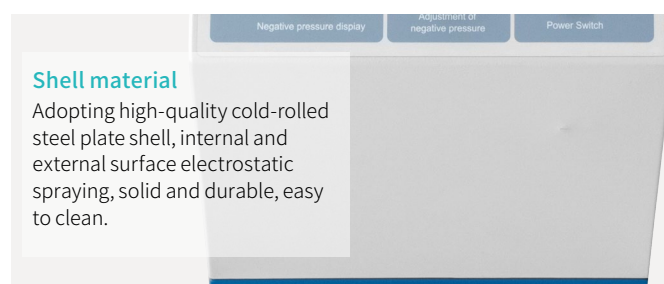



## **CONSTANT INNOVATION**




Design



Research



Manufacturing



Maintenance



Service

## **WORLDWIDE BRANCHES**

### European Branch

**Saikang Medical Portugal  
Office**  
Av. da Liberdade, nº 101  
8150-101  
São Brás de Alportel  
Portugal  
TEL: +351 289 090 212

### Russian Branch

**LLC 'SAIKANG'**  
454004, Russian Federation,  
Chelyabinsk,  
Universitetskaya  
Naberezhnaya, Russia  
TEL: +7 (919)300-00-06

### South America Branch

**Saikang Medical  
Technology, INC**  
Rua Lauro Muller 116, Sala  
1503 - Botafogo,  
Rio de Janeiro -  
RJ, 22290-160  
E-mail: mehecobrasil@  
gmail.com

### East Africa Branch

**Saikang Medical  
Technology Ltd**  
Mezzanine Floor, Taj Tower,  
upper hill, nairobi, Kenya  
TEL: +254714084806

### South East Asia Branch

**SAIKANG Medical  
(Thailand) Co., Ltd.**  
Ample Tower 909 Room 11/3  
Debaratana Road,  
Bangna Nuea, Bangkok  
10260 Thailand  
TEL: +66-936-569469

### US Branch

**Healthward Technology,  
INC**  
17800 castleton st ste 180,  
Los Angeles  
TEL: +1 (603) 416-3063

**SAIKANG**/Medical

Jiangsu Saikang Medical Equipment Co., Ltd.  
STOCK CODE: 870098

 No. 35, Lehong Road · Zhangjiagang (Jiangsu) · China  
 +86 18021231901 ·  24/7  
 export@saikangmedical.com  
 www.saikangmedical.com



Company video



General catalogue