



Care you precisely



SK-LLD7050Z

SHADOWLESS LAMP



SK-LLD7050Z

FEATURES AND HIGHLIGHTS

Suitable for clinical operation lighting



Technical parameters

▪ Lamp head diameter(mm):	700/530±10
▪ Illuminance at 1 meter(Lux):	40,000-160,000
▪ Brightness adjustment:	10 levels
▪ Color temperature(Kelvin):	4000-5000
▪ Color rendering index(CRI):	≥95
▪ Spot diameter at 1 meter(mm):	180-280
▪ Illumination depth(cm):	≥120
▪ Surge in surgeon's head temperature(°C):	≤1
▪ Surge in surgical field temperature(°C):	≤0.5
▪ Light source type:	LED
▪ LED brand:	OSRAM
▪ Number of LEDs:	81 + 51
▪ LED power(W):	Rated 3W, actual use 1W
▪ LED lifespan(hours):	50,000
▪ Brightness adjustment:	4.3-inch controller 10 levels adjustment
▪ Operating voltage:	AC 100V-240V, 50HZ/60HZ
▪ Installation :	2800-3200mm (optional 2.5m floor height customized edition)

Standard configuration

- ☒ 4.3-inch full-screen touch controller
- ☒ Manual focusing module
- ☒ Red light compensation
- ☒ Green light compensation
- ☒ Standard, endoscopic, low-light illumination modes

Options

- ☐ Motorized focusing module
- ☐ Shadow compensation
- ☐ Mutually control system
- ☐ Gesture detection
- ☐ Backup battery
- ☐ Remote controller
- ☐ Wall control system
- ☐ Camera system


Material technology

The lampshade shell is made of aluminum + integrated ABS engineering plastic with an embedded aerospace aluminum top cover, which facilitates heat dissipation. The surface adopts the high-voltage electrostatic spraying process, and the imported environmentally friendly antibacterial plastic powder that used to ensures that the product meets the requirements of surgical hygiene.



Lamp head design

Using LED cold light source technology, the ultra-thin streamlined design meets laminar flow purification requirements. The 360° surround handle design makes operation more convenient. The thickness of the 700mm-diameter lamp head is 95mm, and the thickness of the 500mm-diameter lamp head is 85mm.

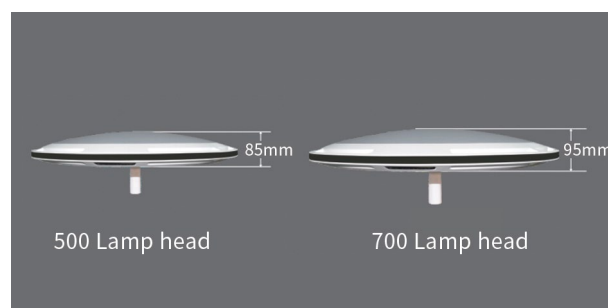

Bulb


Using the original imported LED lamp beads from Osram, Germany, the average service life is as high as 50,000 hours, which is 40 times longer life than halogen lamps.

Under the same brightness, the energy consumption of LED is only 1/10 of that of ordinary incandescent lamps and 1/2 of that of halogen lamps.




Color temperature&Illumination

Using a new type of LED cold light source, the illuminance can reach 160,000 Lux, which can realize 9-level adjustment; the color temperature is in the range of 4000K-5000K with 4-level adjustment.

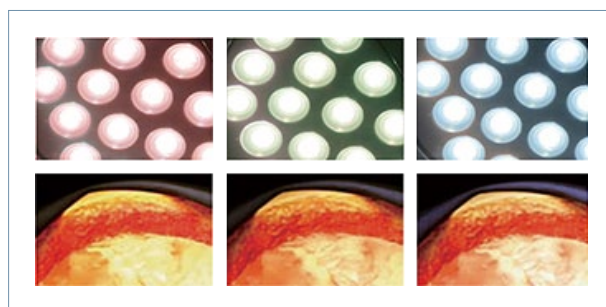


Color rendering index

The color rendering index reaches 95, which truly reflects the color of human tissues. It is suitable for various surgical scenes and greatly reduces the visual fatigue of medical staff due to long-term operations.

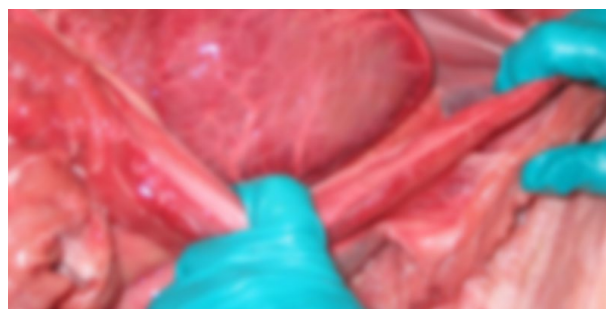


Temperature rise (surgical field)

Temperature rise (surgical field): $\leq 0.5^{\circ}\text{C}$, this can avoid tissue drying due to high temperature and rapid blood clots at the wound, which will affect the operation.

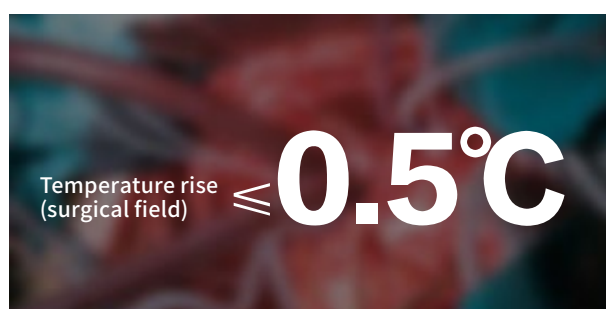

Light source components

The internal light source components are composed of ABS engineering plastic frame+aluminum substrate structure, offering excellent heat dissipation, lightweight to reduce failure rate.

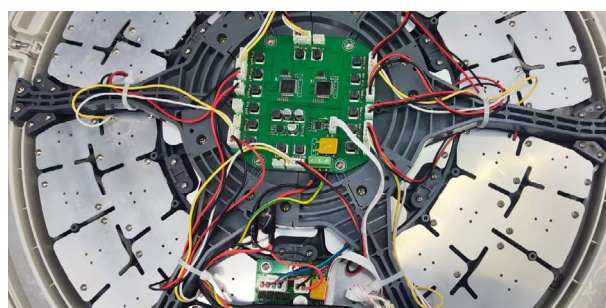

Operating handle

- Central detachable disinfection handle.
- Made of PPSU material.
- Temperature resistance up to 134°C .
- Pressure resistance up to 205.8 kPa.
- Suitable for high-temperature, high-pressure steam sterilization.




Control panel

- 4.3-inch large LCD screen.
- Bar graph display for brightness and color temperature.
- Brightness and color temperature memory function.




Operating

Equipped with red and green light compensation functions to enhance the CRI (Ra), these can be turned on or off independently and combined as needed. Additionally, it offers three illumination modes: standard, low-light, and endoscopic, all switchable with a single button.

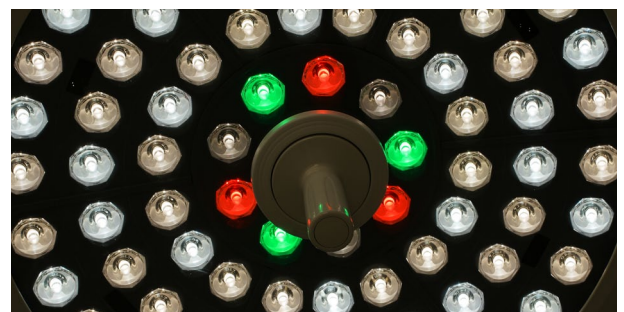

Lamp head adjustment

The lamp head can be vertically pulled down and rotated. The lamp panel has a rotation angle of ≥ 360 degrees.

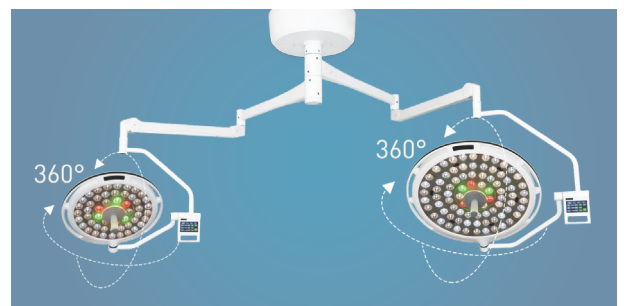



CONSTANT INNOVATION



Design



Research



Manufacturing



Maintenance



Service

WORLDWIDE BRANCHES

South America Branch

Saikang Medical Technology, Inc
W3400 Corrientes, Argentina
TEL: +55 (11) 2758-0438
Rua Universal, Hollywood,
São Bernardo do Campo,
Brazil
TEL: +55 (11) 2758-0438

East Africa Branch

Saikang Medical Technology Ltd
Mezzanine Floor, Taj Tower,
upper hill, nairobi, Kenya
TEL: +254714084806

South East Asia Branch

Saikang Medical (Philippines) Company Limited
Manila, The Philippines
TEL: +63 953 044 7864

US Branch

Healthward Technology, INC
17800 CASTLETON ST STE 180,
CITY OF INDUSTRY CA 91748
TEL: +1 (603)416-3063

Russia Branch

LLC 'SAIKANG'
454004, Russian Federation,
Chelyabinsk,
Universitetskaya
Naberezhnaya, Russia
TEL: +7 (919)300-00-06

Mid East Branch

Saikang Medical Supplies (Mid East) LLC
Musaffah
P.O Box 53200, Abu Dhabi,
UAE
Tel: +971 585710652

SAIKANG Medical

Jiangsu Saikang Medical Equipment Co., Ltd.
STOCK CODE: 870098

 No. 35, Lehong Road · Zhangjiagang (Jiangsu) · China
 +86 18021231901 ·  24/7
 export@saikangmedical.com
 www.saikangmedical.com



Company video



General catalogue