



SKE011-6

TREAT-WAITING CHAIR



SAIKANG/Medical

Healthier
your life

SKE011-6

FEATURES AND HIGHLIGHTS

Technical parameters

▪ Overall dimensions (3-seater)	1655×640×820mm±10
▪ Center distance	540±10mm
▪ Seat width	520±10mm
▪ Seat depth	470±10mm
▪ Seat height from the ground	440±10mm
▪ Seat top depth	660±10mm
▪ Seat top height from ground	805±10mm
▪ Armrest top height from the ground	625±10mm
▪ Weight	G.W.:39.6KG/set



Design

The overall design is simple, designed according to human body dimensions, and does not deform after long sitting.




Armrest leg

Material: Made of high-quality steel pipes through die-casting, with the surface treated with wear-resistant electrostatic epoxy powder coating. The armrest surface is made of high-quality polypropylene (PP) through injection molding, which is comfortable and more humanized without a cold feeling.



Backrest

The wavy water-patterned backrest fits the human body curve, relieving pressure on the whole body. It has good elasticity, with materials closely bonded, ensuring no deformation, wrinkling, cracking, or breaking even with frequent use.

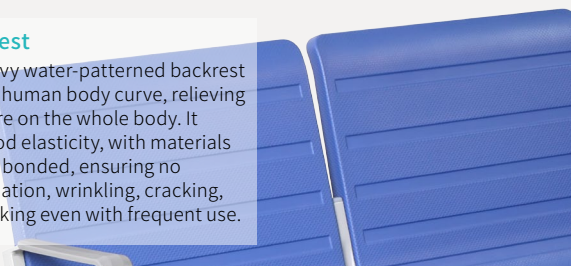


Seat and backrest

The seat and backrest adopt an integrated design, with reasonably designed gaps between seat panels. The armrests and seat panels are seamlessly processed to avoid children's hands and feet being stuck in the gaps between seats. The entire seat has no exposed screws, which is overall beautiful and easy to clean.




Seat and backrest


Material: The appearance thickness is 28-38mm, made of high-density polyurethane (PU) (with an internal steel frame, steel frame standard: steel pipe Q235) through molding. The seat and backrest adopt an integrated design, which is easy to clean and maintain, achieving both stability and beauty.
Surface hardness: It leaves no obvious marks on the surface against non-intentional behaviors such as scratching, scraping, rubbing, grinding, and impact. While ensuring sufficient bearing capacity and firmness of the seat and backrest panel, it has appropriate elasticity and maximum comfort. The density of the polyurethane (PU) for the seat is $\geq 400\text{kg/m}^3$.

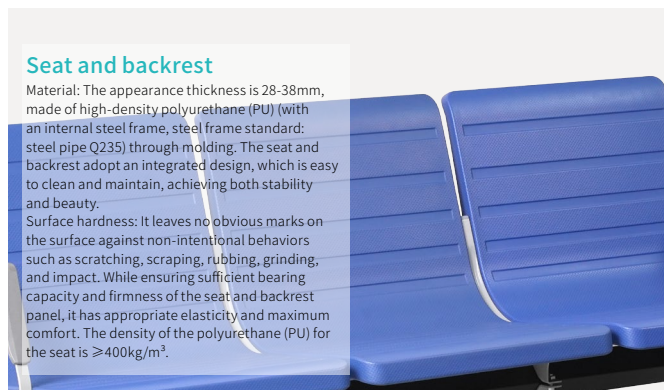

Crossbar

The material uses high-strength 60mm60mm1.5mm cold-rolled steel pipes, which have super strong load-bearing capacity and stability. The surface is treated with wear-resistant electrostatic epoxy powder coating, with good bearing capacity, elegant appearance, smooth surface, and not easy to accumulate debris.

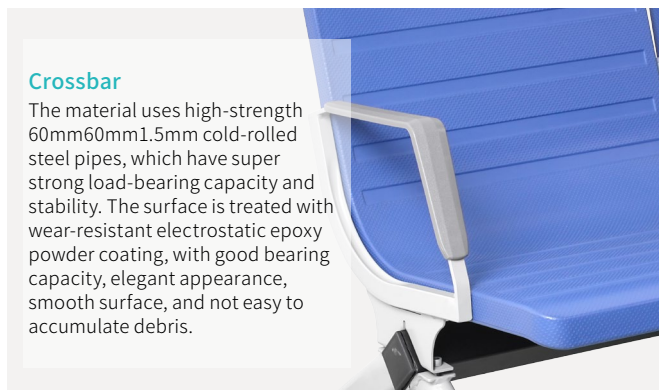

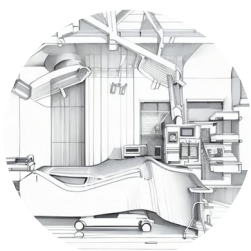


Design



Research



Manufacturing



Maintenance



Service



South America Branch

Saikang Medical Technology, Inc

W3400 Corrientes, Argentina
TEL: +55 (11) 2758-0438
Rua Universal, Hollywood,
São Bernardo do Campo,
Brazil
TEL: +55 (11) 2758-0438

East Africa Branch

Saikang Medical Technology Ltd

Mezzanine Floor, Taj Tower,
upper hill, nairobi, Kenya
TEL: +254714084806

South East Asia Branch

Saikang Medical (Philippines) Company Limited

Manila, The Philippines
TEL: +63 953 044 7864

US Branch

Healthward Technology, INC

17800 CASTLETON ST STE 180,
CITY OF INDUSTRY CA 91748
TEL: +1 (603)416-3063

Russia Branch

LLC 'SAIKANG'

454004, Russian Federation,
Chelyabinsk,
Universitetskaya
Naberezhnaya, Russia
TEL: +7 (919)300-00-06

Mid East Branch

Saikang Medical Supplies (Mid East) LLC

Musaffah
P.O Box 53200, Abu Dhabi,
UAE
Tel: +971 585710652

SAIKANG Medical

Jiangsu Saikang Medical Equipment Co., Ltd.
STOCK CODE: 870098

📍 No. 35, Lehong Road · Zhangjiagang (Jiangsu) · China

📞 +86 18021231901 · 🕒 24/7

✉️ export@saikangmedical.com

🌐 www.saikangmedical.com



Company video



General catalogue