

Choosing the product that best fulfils your needs

ApeosPort-VII

C7773/C6673/C5573/C4473/C3373/C3372/C2273

DocuCentre-VII

C5573/C4473/C3373/C3372/C2273



Customer Expectation Document

July 2019 – Version 1.2

CSO-FN-CED-323

Contents

| | |
|--|-----------|
| Contents | 2 |
| What Does This Document mean to Me? | 5 |
| Product Overview | 5 |
| Safety Data Sheets..... | 5 |
| Compliance & Approvals..... | 5 |
| Monthly Print Volume Range..... | 6 |
| Responsibility Matrix..... | 7 |
| Product Specifications | 8 |
| Product Configuration Options | 8 |
| Copier Specifications | 9 |
| Printer Specifications | 10 |
| Scan Function | 11 |
| Fax Specifications (Optional) | 12 |
| Direct Fax Specifications (optional) | 13 |
| Internet Fax Specifications | 13 |
| IP Fax (SIP) Specifications | 13 |
| Duplex Output Unit | 14 |
| Duplex Automatic Document Feeder B1-PC (Single Pass) | 14 |
| Duplex Automatic Document Feeder C2-PC (Single Pass)..... | 14 |
| Finishing Options | 15 |
| Finisher-A2..... | 15 |
| Finisher-B3..... | 15 |
| C3 Finisher with Booklet Maker..... | 17 |
| Folder Unit CD1 | 18 |
| Side Tray..... | 18 |
| Output Tray Capacity..... | 18 |
| Feeding and Options | 18 |
| Paper Tray Capacity*1..... | 18 |
| HCF-B1 (Option)..... | 19 |
| Envelope Tray (Option)..... | 19 |
| Memory Configuration..... | 20 |
| Cost Recovery | 21 |
| Billing Meters | 21 |

| | |
|--|-----------|
| Banner Printing | 22 |
| Supported Paper Types | 22 |
| Coated Stock..... | 23 |
| Label Stock..... | 23 |
| Pre-Printed Stock..... | 23 |
| Envelopes | 23 |
| Storage..... | 23 |
| Supplies..... | 23 |
| Consumables & Ordering | 23 |
| Toner Cartridge | 24 |
| Waste Toner Bottle | 24 |
| Drum Cartridge | 24 |
| Staple Cartridge..... | 24 |
| Stamp Replacement | 25 |
| Accessories/Options..... | 25 |
| Product Performance..... | 27 |
| Product Limitations | 27 |
| First Copy Output Timing and Print Speeds..... | 28 |
| Image Alignment Limitations | 29 |
| Duplex Speed Limitations | 29 |
| Fax Limitations | 29 |
| Internet Fax, Server Fax and IP Fax (SIP) Limitations | 30 |
| Printing from USB and camera media Limitations..... | 30 |
| Store to USB Limitations..... | 30 |
| Scan to Network Limitations..... | 31 |
| Printing from Mobile Devices (Print Utility) Limitations | 31 |
| Google Cloud Printing Limitations | 31 |
| Mopria Limitations..... | 31 |
| AirPrint Limitations..... | 32 |
| Wireless Network Kit (Dongle) Limitations..... | 32 |
| Secondary Ethernet Limitations | 34 |
| Scan to Word/Excel® / Searchable PDF Limitations..... | 34 |
| Centre Tray Notification Light..... | 35 |
| Gesture UI Limitations | 35 |
| Registration-less Scanning Limitations..... | 35 |
| Banner Size Printing (1200mm x 320mm) Limitations | 36 |
| C3 Finisher with Booklet Maker Limitations | 36 |
| Mobile Touch Print and Scan Kit (NFC) Limitations | 37 |
| Management Console | 38 |
| Portable UI for Business..... | 38 |

| | |
|--|-----------|
| Cloud Service Hub Functions & Specifications..... | 40 |
| Scan Delivery Kit | 41 |
| Web browser operating environment..... | 41 |
| Windows® OS environment | 41 |
| Mac OS environment | 42 |
| iOS environment..... | 42 |
| Android environment..... | 42 |
| Main Features of Cloud On-Demand Print | 42 |
| Main Features..... | 42 |
| Web browser operating environment..... | 43 |
| Windows® OS environment | 43 |
| Mac OS environment | 44 |
| Windows® Printer Tool Operating Environment | 44 |
| Dedicated Mobile Applications..... | 45 |
| iOS Environment | 45 |
| Android environment..... | 45 |
| Installation Requirements..... | 45 |
| General Installation Requirements | 46 |
| Delivery Restrictions | 46 |
| Temperature & Humidity | 46 |
| Electrical Requirements..... | 46 |
| Power Consumption | 46 |
| TEC (Typical Electricity Consumption) | 47 |
| Heat Emission (Kcal/Hr)..... | 47 |
| Noise Emission (Sound Pressure Level) | 47 |
| Machine Weight and Dimensions..... | 47 |
| Machine Weight..... | 47 |
| Machine Dimensions | 48 |
| Machine Dimensions | 48 |
| Space Requirements (Minimum Service Clearance)..... | 49 |
| Service Clearance Configuration Table | 49 |
| Support..... | 50 |
| Customer Support..... | 50 |
| Customer Support Centre | 51 |
| Customer Training | 51 |

What Does This Document mean to Me?

The purpose of this document is to help you understand the performance, capabilities and recommended operating guidelines for the ApeosPort-VII (AP-VII) / DocuCentre-VII (DC-VII) models C7773/C6673/C5573/C4473/C3373/C3372/C2273 and to help you ensure that it is the right product for your business.

The specifications and data in this document are current at the time of publication and proprietary to Fuji Xerox Australia. The customer should only circulate the document within their organization on a need-to-know basis & use all reasonable efforts to safeguard the document and to not disclose its contents to competitors of Fuji Xerox or to other third parties.

This document may be periodically updated to incorporate changes in specifications and to correct any technical inaccuracies or typographic errors.

Product Overview

The ApeosPort-VII / DocuCentre-VII

The launch configuration of the ApeosPort-VII / DocuCentre-VII consists of a print engine with print resolution up to 1,200 x 2,400 dpi and a copier/scanner with scanning resolutions up to 600 x 600 dpi.

The ApeosPort-VII / DocuCentre-VII also support faxing of documents up to A3 in size, single-pass automatic duplex document feeding. This device supports mobile printing (AirPrint, Google Cloud Print™, Mopria), cloud collaboration, Tap to Print or scan functionality via NFC and Wireless connectivity. The newly designed 10.1" inch electrostatic touch panel is another user-friendly feature of this product.

If you have any further questions after reading this document, please contact your Fuji Xerox sales representative who will be happy to assist you.

Safety Data Sheets

These documents can be obtained upon request by emailing: websupport@aus.fujixerox.com or by contacting the Fuji Xerox Customer Support Centre on 1800 028 962, or via link on our external website: http://www.fujixerox.com.au/company/safety_data_sheets.jsp

Compliance & Approvals

The approvals obtained in relation with environmental and safety considerations are as follows:

- International Energy Star Program
- Electromagnetic Compatibility Framework – Supplier's Declaration of Conformity for RCM mark (Australia)
- IEC60950-1 CB Test Certificate

Monthly Print Volume Range

This product is designed for operation based on the following recommended monthly print volumes.

| Description | ApeosPort-VII, DocuCentre-VII | | | | | | |
|---|-------------------------------|-------|-------|-------|-------|-------|-------|
| | C7773 | C6673 | C5573 | C4473 | C3373 | C3372 | C2273 |
| Minimum AMPV | 25K | 20K | 20K | 11K | 8.5K | 7K | 6K |
| Maximum AMPV | 50K | 45K | 40K | 35K | 30K | 25K | 20K |
| Duty Cycle | 381K | 342K | 271K | 207K | 153K | 129K | 107K |
| Machine Life | 3M | 2.7M | 2.4M | 2.1M | 1.8M | 1.5 | 1.2M |
| Rated Print Speed /ppm (BW / Colour) | 70/70 | 65/65 | 55/55 | 45/45 | 35/35 | 30/30 | 25/25 |

AMPV (Average Monthly Print Volume) Range: Working outside this range may affect machine performance. If the device consistently operates at a higher AMPV than the maximum stated, the customer should consider the purchase of multiple devices or a device with a higher print volume capacity.

Duty Cycle: If the device is occasionally used outside of the AMPV range, printing should not exceed the duty cycle limit. Duty cycle represents the rated print volume capacity of the device for a given month (printed on recommended stock and assuming 8hrs per day, 20 days per month usage).

Machine Life: The manufacturer's print volume limit for reliable performance of the device for the machine's life.

Rated Print Speed: Pages printed per minute on A4 LEF stock, 80GSM.

Responsibility Matrix

The Following table summarises customer and Fuji Xerox responsibilities relating to the product.

| Action | | Responsibility | |
|----------------------|---|----------------|------------|
| | | Customer | Fuji Xerox |
| Installation Actions | Ensure adequate space and power to install device | ✓ | |
| | Provide a working network (wired or wireless); confirm and maintain network integrity | ✓ | |
| | Provide network credentials to allow the MFD to connect to the wireless network (if a Fuji Xerox Wireless Adapter option was purchased). | ✓ | |
| | Unpack device components | | ✓ |
| | Connect all system components and install device hardware | | ✓ |
| | Install client software / device drivers on PC/workstations*1 | ✓ | ✓ |
| | Configure device to connect to the network (wired or Fuji Xerox Wireless Adapter) | | ✓ |
| | Initial operator training*1 | ✓ | ✓ |
| | Order and install specified Customer Replaceable Units (CRUs) according to machine instructions | ✓ | |
| Ongoing Actions | Order and install staple and dry ink cartridges (depending on the device configuration) according to machine instructions | ✓ | |
| | Remove, repair and re-install any failed components | | ✓ |
| | Provide Helpline support (Customer Support Centre) | | ✓ |
| | Provide spare parts | | ✓ |
| | Provide service | | ✓ |
| | Perform system software upgrades | | ✓ |
| | Download any additional fonts to server | ✓ | |
| | Install client software/ device drivers on PC/workstations | ✓ | |
| | Back-up Customer unique settings (Address book, logs, user settings, mailbox data, etc.). This data is required should the machine HDD fail. Please refer to the Admin Guide for more information | ✓ | |
| | Ensure adequate space and power to install device | ✓ | |
| | Provide a working network (wired or wireless); confirm and maintain network integrity | ✓ | |
| | Provide network credentials to allow the MFD to connect to the wireless network (if a Fuji Xerox Wireless Adapter option was purchased). | ✓ | |

*1 Fuji Xerox Representative will assist and show the I.T. person or customer contact how to install printer drivers, setup Scan to Network (via SMB or FTP), setup Scan to Email on a maximum of 2 client computers. If a Wireless Adapter is purchased, the Fuji Xerox Representative will assist and show the I.T. person or customer contact how to connect and print to an MFD via Wi-Fi direct on a maximum of 1 client mobile device which supports the feature. Scan Delivery Kit installation and configuration is available at an additional cost.

Product Specifications

Product Configuration Options

| Model | DocuCentre-VII | ApeosPort-VII |
|------------------------------|---|------------------------|
| | C7773/C6673/C5573/C4473/C3373/C3372/C2273 | |
| | Copier Printer Scanner | Copier Printer Scanner |
| Single Pass DADF | ✓ | ✓ |
| 10.1" Inch Touch panel | ✓ | ✓ |
| 4 Paper Trays | ✓ | ✓ |
| Bypass Tray | ✓ | ✓ |
| Duplex | ✓ | ✓ |
| Side Tray | ✓ | ✓ |
| Wing Table | Option | Option |
| System Memory* ¹ | 4GB | 4GB |
| HDD (320GB) | ✓ | ✓ |
| Data Security | ✓ | ✓ |
| Mopria Print Service | ✓ | ✓ |
| Google Cloud Print | ✓ | ✓ |
| AirPrint | ✓ | ✓ |
| Gigabit Ethernet | ✓ | ✓ |
| Network Scanning | NA | ✓ |
| External Access Kit | NA | ✓ |
| Adobe PostScript Kit | Option | ✓ |
| Extensible Customization Kit | ✓ | ✓ |
| USB Hub | Option | ✓ |
| Fax Kit | Option | Option |
| Smart WelcomEyes | ✓ | ✓ |
| Secondary Ethernet Kit | Option | Option |
| Wireless Network Kit | Option | Option |
| Scan Delivery* | Option | Option |

For additional options and further details refer to Accessories/Options section.

*¹: 4GB of shared memory

*²: The Scan Delivery Kit will be configured remotely, and as such, remote access to the customer's computer is required. If remote access is not available, then Scan Delivery Kit will need to be configured with an on-site analyst at standard service rates. Additional charges apply for installation of the Scan Delivery kit.

Copier Specifications

| Item | | Description | | | | | | |
|--|------------------|---|---------|---------|---|---------|---------|---------|
| | | C7773 | C6673 | C5573 | C4473 | C3373 | C3372 | C2273 |
| Memory | | 4GB (Shared) | | | | | | |
| HDD*1 | | 320GB (Usable space 128GB Shared) | | | | | | |
| Scanning Resolution | | 600 x 600 dpi (256 levels of colour; 16.7 million colours) | | | | | | |
| Printing Resolution | | 1,200 x 2,400 dpi (Photo), 600 x 600 dpi (Text/Text-Photo/Map) | | | | | | |
| Halftone | | 256 levels of colour (16.7 million colours) | | | | | | |
| Warm-up Time*2 | | 30 seconds or less when Embedded Plug-ins / Custom Services are enabled (Default) 24 seconds or less when Embedded Plug-ins / Custom Services are disabled | | | | | | |
| First Copy Output Time*3 | BW | 3.3 sec | 3.3 sec | 3.7 sec | 4.4 sec | 4.9 sec | 4.9 sec | 6.3 sec |
| | Colour | 4.1 sec | 4.1 sec | 5.2 sec | 5.7 sec | 6.7 sec | 6.7 sec | 8.7 sec |
| Continuous Copy Speed (Mono/Colour) *4 | Simplex | | | | | | | |
| | A4LEF/B5 | 70/70 | 65/65 | 55/55 | 45/45 | 35/35 | 30/30 | 25/25 |
| | A4SEF/B5 | 50/50 | 47/47 | 40/40 | 32/32 | 27/27 | 23/23 | 19/19 |
| | B4 | 41/41 | 38/38 | 32/32 | 26/26 | 23/23 | 20/20 | 16/16 |
| | A3 | 35/35 | 32/32 | 27/27 | 22/22 | 19/19 | 17/17 | 14/14 |
| | Duplex*5 | | | | | | | |
| | A4LEF/B5 | 70/70 | 65/65 | 55/55 | 45/45 | 35/35 | 30/30 | 25/25 |
| | A4SEF/B5 | 50/50 | 47/47 | 40/40 | 32/32 | 27/27 | 23/23 | 19/19 |
| | B4 | 27/27 | 25/25 | 21/21 | 17/17 | 14/14 | 12/12 | 10/10 |
| | A3 SEF | 24/24 | 23/23 | 19/19 | 15/15 | 13/13 | 11/11 | 9/9 |
| Original Paper Size | | Max: 297x432mm (A3, 11x17") for both sheet original and book original | | | | | | |
| Paper Size | Max | SRA3 (320 x 450 mm), 12 x 18" (305 x 457 mm), A3 Bypass Tray: 12 x 19" (305 x 483 mm) | | | | | | |
| | Min | A5, Bypass Tray: 89 x 98 mm | | | | | | |
| | Image loss width | Lead edge 4.0 mm, Trail edge 2.0 mm, Right & Left edges 2.0 mm | | | | | | |
| Paper Weight*6 | Paper Tray | 52 to 300 gsm | | | | | | |
| Continuous Copy*7 | | Max. 999 sheets | | | | | | |
| Copy Magnification Reduce/Enlarge) | | Size-to-Size: 100% (1:1 ±0.7%) Pre-set: 50%, 70%, 81%, 86%, 115%, 122%, 141%, 200% Variable: 25% to 400% (1% increments) | | | | | | |
| Power Supply | | AC220-240 V +/- 10 %, 10 A, 50/60 Hz common | | | | | | |
| Dimensions | | W 663 x D 793 x H 1169 mm | | | W 669 x D 723 x H 1141 mm | | | |
| Weight (Excluding Toners) | | 156 Kg | | | With 4 Tray Model: 132 kg With Tandem Tray Model: 139 kg | | | |

*1 The Storage Hard disk capacity is shared and not totally available.

*2: When the main power is ON. At room temperature 23°C.

*3: First Copy Output Time (FCOT) measured as time required from pressing [Start] button until first paper output. Measured once fuser is at operating temperature. Refer to the Product Limitations section for further information.

*4: This unit is sheets / minute. The speed may be reduced due to the image quality adjustment. Timing starts after first set has been outputted.

*5: The speed may be reduced due to image quality adjustment. The performance may be reduced depending on the paper type and/or the paper tray. With Finisher-B3/C3 installed, the Duplex speed is reduced when printing to the centre output tray.

*6: It is recommended to use Fuji Xerox recommended paper. Correct print output may not be possible depending on the requirement.

*7: Copy process may stop temporarily for stabilization of image quality.

Printer Specifications

| Item | | Description |
|--------------------------------------|---------------------------|--|
| Print Resolution | | 600 x600dpi (Standard) 1,200 x1,200dpi (High Resolution) 1,200 x2,400dpi (High Quality) |
| Print Size | Max | SRA3 (320 x 450 mm), 12 x 18" (305 x 457 mm), A3 [12 x 19" (305 x 483 mm), 320 x 1200 mm*1 when using Bypass Tray] |
| | Min | A5, Postcard (100 x 148) [89 x 98 mm when using Bypass Tray] |
| Continuous Print Speed *2 | | Same as the Basic Specifications / Copy Function |
| PDL | | PCL5 / PCL6 (Standard) Adobe PostScript® 3™ (Option on DocuCentre) |
| Protocol | Ethernet (Standard) | TCP/IP (lpd, IPP, Port9100, WSD*3, ThinPrint®) |
| Emulation | | ESC/P-K (LQ1900K II), TIFF, JPEG, PDF, HP-GL (HP7586B), HP-GL2 / RTL (HP Design Jet 750C Plus), DocuWorks, PCL5 / 6 (HP Colour Laser-Jet 5500), KSSM, KS5843, KS5895, XPS |
| Connectivity | Standard | Ethernet 1000BASE-T/100BASE-TX/10BASE-T, USB 3.0*4 |
| Operating System Supported *5 | PCL | 32 bit: Windows Server® 2008, Windows Vista®, Windows® 7, Windows® 8, Windows® 8.1, Windows® 10 64 bit: Windows Server® 2008, Windows Server® 2008 R2, Windows Server® 2012, Windows Server® 2012 R2, Windows Vista®, Windows® 7, Windows® 8, Windows® 8.1, Windows® 10 Mac OS X Driver: 10.13/10.12/ 10.11 / 10.10 / 10.9 |
| | Adobe PostScript®3 | 32 bit: Windows Server® 2008, Windows Vista®, Windows® 7, Windows® 8, Windows® 8.1, Windows® 10 64 bit: Windows Server® 2008, Windows Server® 2008 R2, Windows Server® 2012, Windows Server® 2012 R2, Windows Vista®, Windows® 7, Windows® 8, Windows® 8.1, Windows® 10 Mac OS X Driver: 10.13/10.12/ 10.11 / 10.10 / 10.9 |
| Fonts | PCL | 83 European fonts, 43 symbol sets Optional Multi-Language Fonts |
| | Adobe PostScript®3 | 136 European fonts |

*1: Long paper of 106 to 220 gsm is available. The printed papers can be delivered to the Side Tray when an A2 or C3-finisher is attached. The center tray can only be used when a B3-Finisher is attached.

*2: The speed may be reduced due to the image quality adjustment. The printing speed may be reduced depending on the document.

*3: WSD, Web Service on Devices.

*4: USB 3.0 speeds are supported by Windows® 8, Windows® 8.1, Windows® 10, Windows Server® 2012, Mac OS X 10.9/10.10/10.11/10.12/10.13. All other operating systems support USB 2.0 speeds only. Only FAT12, FAT16, FAT32, and VFAT file systems are supported.

*5: Please refer to the Fuji Xerox website for the latest supported operating systems

Scan Function

| Item | | Description | |
|------------------------------|--------------------------------|--|---|
| Type | | Colour Scanner | |
| Original Paper Size | | Same as the Copy function | |
| Scanning Resolution | | 600 x 600dpi, 400 x 400dpi, 300 x 300dpi, 200 x 200dpi | |
| Scanning Speed* ¹ | DADF (B1-PC) single pass | C5573/C4473/C3373/C3372/C2273 BW: 80 sheets/minute, Colour: 80 sheets/minute (Simplex) BW: 154ipm, Colour: 154ipm (Duplex)* ² (Fuji Xerox Standard Document, A4LEF, 200dpi, store to folder) | |
| | DADF (C2-PC) single pass | C7773/C6673 BW: 135 sheets/minute, Colour: 135 sheets/minute (Simplex) BW: 270 ppm, Colour: 270 ppm (Duplex)* ² (Fuji Xerox Standard Document, A4LEF, 200dpi, store to folder) | |
| Connectivity | Standard | Ethernet 1000BASE-T/100BASE-TX/10BASE-T | |
| Scan to Folder | Protocol | TCP/IP (WebDAV, HTTP) | |
| | File Format | Monochrome binary | TIFF, DocuWorks* ³ , PDF* ³ , XPS* ³ |
| | | Grayscale | TIFF, JPEG* ⁴ , DocuWorks* ³ , PDF* ³ , XPS* ³ |
| | | Full Colour | TIFF, JPEG, DocuWorks* ³ , PDF* ³ , XPS* ³ , High Compression DocuWorks* ³ , High Compression PDF* ³ , High Compression XPS* ³ |
| | Driver | TWAIN Interface support | |
| | Operating System* ⁵ | 32 bit: Windows Server® 2008, Windows Vista®, Windows® 7, Windows® 8, Windows® 8.1, Windows® 10 64 bit: Windows Server® 2008, Windows Server® 2008 R2, Windows Server® 2012, Windows Server® 2012 R2, Windows Vista®, Windows® 7, Windows® 8, Windows® 8.1, Windows® 10 | |
| Scan to PC | Protocol | TCP/IP (SMB,FTP) | |
| | Operating System* ⁵ | 32 bit: Windows Server® 2008, Windows Vista®, Windows® 7, Windows® 8, Windows® 8.1, Windows® 10 64 bit: Windows Server® 2008, Windows Server® 2008 R2, Windows Server® 2012, Windows Server® 2012 R2, Windows Vista®, Windows® 7, Windows® 8, Windows® 8.1, Windows® 10 Mac OS X 10.6/10.7/10.8/10.9/10.10/10.11 | |
| | File Format | Monochrome binary | TIFF, DocuWorks, PDF, XPS |
| | | Grayscale | TIFF, JPEG, DocuWorks* ³ , PDF* ³ , XPS* ³ , High Compression DocuWorks* ³ , High Compression PDF* ³ , High Compression XPS* ² , Microsoft® Word* ⁶ , Microsoft® Excel* ⁶ |
| | | Full Colour | |
| Scan to e-mail | Protocol | TCP/IP(SMTP) | |
| | File Format | Monochrome binary | TIFF, DocuWorks, PDF, XPS |
| | | Grayscale | TIFF, JPEG, DocuWorks* ³ , PDF* ³ , XPS* ³ , High Compression DocuWorks* ³ , High Compression PDF* ³ , High Compression XPS* ³ , Microsoft® Word* ⁷ , Microsoft® Excel* ⁷ |
| | | Full Colour | |

*¹: Scanning speed varies according to the document

*²: 160/270 ppm for both B/W and colour when Quiet Mode is disabled. For AP-VII /DC-VII

C7773/C6673/C5573/C4473/C3373/C3372/C2273, Quiet Mode is enabled by factory default. This setting

- can be changed to suit the customer's usage. Simplex scanning speed of Duplex Automatic Document Feeder B1-PC and C2-PC is reduced when Paper Security Function is enabled
- *3: When scanned image is retrieved using CentreWare Internet Services (CWIS)
- *4: When scanned image is retrieved using Network Scanner Utility 3
- *5: Please refer to the Fuji Xerox web site for the latest information of the compliant Operating System
- *6: To use this feature, the optional Advanced Scan Kit is required. Mistakes in OCR recognition, layout discrepancies, and colour differences may occur in the generated Word/Excel® or searchable PDF format document when compared to the original scanned document due to the format of the text font, graphics and layout.

Fax Specifications (Optional)

| Item | | Description |
|-----------------------------|----------------------------|--|
| Original Size | | Max: A3, 11 x 17", Long document (Max. 600mm) |
| Recording Paper Size | | Max: A3, 11 x 17"; Min: A5 |
| Transmission Time | | 2 seconds and more but fewer than 4 seconds* ¹ |
| Transmission Mode | | ITU-T G3 |
| Scanning Resolution | Standard | 8 x 3.85 line/mm, 200 x 100 dpi |
| | Fine | 8 x 7.7 line/mm, 200 x 200 dpi |
| | Super Fine (400dpi) | 16 x 15.4 line/mm, 400 x 400 dpi |
| | Super Fine (600dpi) | 600 x 600 dpi |
| Coding Method | | MH, MR, MMR, JBIG |
| Transmission Speed | | G3: 33.6 / 31.2 / 28.8 / 26.4 / 24.0 / 21.6 / 19.2 / 16.8 / 14.4 / 12.0 / 9.6 / 7.2 / 4.8 / 2.4 kbps |
| Applicable Lines | | Telephone subscriber line, PBX, Fax communication (PSTN), Maximum 1 port * ² (G3-1 port) |

*1: When A4 size document with approximately 700 characters is transmitted in standard image-quality (8 x 3.85 lines/mm) and in high-speed mode (33.6 kbps, JBIG). Only indicates the time for transmitting the image information and does not include the communication control time. The total communication time will vary depending on the contents of the document, the type of machine receiving the fax, and line condition.

*2: Number of FAX lines is up to 3 ports. Port refers to number of channels for FAX.

*3: Only UNI-V ports are supported for fax transmissions on our devices when connected to the NBN. For more information please contact your Internet Service Provider.

*4: Refer to Product Performance section for further information

Direct Fax Specifications (optional)

| Item | Description |
|------------------------------------|---|
| Original Size | A3, B4, A4 |
| Resolution | As same image quality indicated in Scanning Resolution for Fax Function |
| Transmission Speed | Same as the Fax Function |
| Applicable Lines | Same as the Fax Function |
| Supported Operating System* | <div> <div> Windows® 10 (32 bit) Windows® 8.1 (32 bit) Windows® 7 (32 bit) Windows Server® 2016 (64 bit) Windows Server® 2012 (64 bit) Windows Server® 2008 (32 bit) macOS 10.13 / 10.12, OS X 10.11 / 10.10 / 10.9 / 10.8 </div> <div> Windows® 10 (64 bit) Windows® 8.1 (64 bit) Windows® 7 (64 bit) Windows Server® 2012 R2 (64 bit) Windows Server® 2008 R2 (64 bit) Windows Server® 2008 (64 bit) </div> </div> |

*1: Please refer to the Fuji Xerox web site for the latest information of the compliant Operating System

Internet Fax Specifications

| Item | Description |
|----------------------------|--|
| Document Size | A3, B4, A4 |
| Scanning Resolution | Same as the fax function |
| Output Format | Format: TIFF-FX, Compression Method: MH, MMR, JBIG |
| Profile | TIFF-S, TIFF-F, TIFF-J |
| Protocol | Send: SMTP, Receive: SMTP, POP3 |
| Connectivity | Ethernet 1000BASE-T/100BASE-TX/10BASE-T |

IP Fax (SIP) Specifications

| Item | Description |
|----------------------------|---|
| Document Size | Same as the fax function |
| Scanning Resolution | Same as the fax function |
| Protocol | SIP, JT-T.38 |
| Coding Method | Same as the fax function |
| Connectivity | Ethernet 1000BASE-T/100BASE-TX/10BASE-T |

Duplex Output Unit

| Item | Description |
|---------------------|--|
| Paper Size | Max: SRA3 (320 x 450 mm), 12 x 18" (305 x 457 mm); Min: A5 |
| Paper Weight | 52 to 300*1 gsm |

*1 221-300gsm uncoated

Duplex Automatic Document Feeder B1-PC (Single Pass)

Note: The Duplex Automatic Document Feeder B1-PC is standard on C5573/C4473/C3373/C3372/C2273 models only.

| Item | Description | | | | |
|--|--------------------------------|-------|-------|-------|-------|
| | C5573 | C4473 | C3373 | C3372 | C2273 |
| Original Paper Size | Max: A3, 11 x 17", Min: A5*1 | | | | |
| Original Paper Weight | 38 -128gsm (Duplex: 50-128gsm) | | | | |
| Capacity | 130 sheets*2 | | | | |
| Copy Scanning Speed (BW/Colour)*3 | 55/55 | 45/45 | 35/35 | 30/30 | 25/25 |

*1: 125 x 85 mm for non-standard paper size.

*2: 64gsm

*3: Sheets per minute, A4 LEF Simplex. The speed varies depending on the documents.

Duplex Automatic Document Feeder C2-PC (Single Pass)

Note: The Duplex Automatic Document Feeder C2-PC is standard on C7773/C6673 models only.

| Item | Description | |
|--|--------------------------------|-------|
| | C7773 | C6673 |
| Original Paper Size | Max: A3, 11 x 17", Min: A5*1 | |
| Original Paper Weight | 38 -200gsm (Duplex: 50-200gsm) | |
| Capacity | 250 sheets*2 | |
| Copy Scanning Speed (BW/Colour)*3 | 70/70 | 65/65 |

*1: 84 x 139.7mm for non-standard paper size.

*2: 64gsm

*3: Sheets per minute, A4 LEF Simplex. The speed varies depending on the documents.

Finishing Options

Finisher-A2

Note: The optional A2-Finisher cannot be installed on AP/DC-VII C7773/C6673 models.

| Item | | Description |
|--------------------------------|---------------|--|
| Type | | Sorting (Offset available* ¹) / Stacking (Offset available* ¹) |
| Paper Size | | Max: A3, 11 x 17", Min: A5, Postcards (100x148mm) |
| Paper Weight* ² | | 52-256gsm |
| Stacker Capacity* ³ | Finisher Tray | [Without Staples] A4LEF: 500 Sheets, B4: 250 Sheets, A3 or larger: 200 Sheets, Mixed Size Stacking* ⁵ : 250 Sheets, [With Staples] 30 Sets, or A4 LEF: 500 sheets, B4: 250 sheets, A3 or larger: 200 sheets, Mixed Size Stacking* ⁴ : 250 sheets |
| Staple | Capacity | A4: 50 Sheets (Max 90gsm), B4 or larger: 30 Sheets (Max 90gsm) |
| | Paper Size | Max: A3, 11x17", Min: B5 LEF |
| | Position | Single (Front/Angled Staple), Dual Stapling |
| Dimensions / Weight | | W 478 x D 461 x H 238mm, 11kg |

*¹: [No Offset] is selected by factory default. The settings can be changed according to the customer's use situation.

*²: Documents may not be printed correctly depending on usage conditions. (52 to 55gsm)

*³: 64 gsm

*⁴: When large-sized sheets are stacked on small-sized sheets

Finisher-B3

Note: Available on all models

| Item | | Description |
|---|-----------------|--|
| Type | Finisher Tray | Sorting (Offset available)/ Stacking (Offset available) |
| Paper Size* ¹ / Paper Weight* ² | | Max: A3, 11 x 17", Min: A5. / 52 - 300gsm |
| Stacker Capacity* ³ | | [Without Staple] A4: 2,000 Sheets, B4: 1,000 Sheets, Mixed Size Stacking* ⁴ : 300 Sheets [With Staples] A4: 100 Sets or 1,000 Sheets* ⁵ , B4 or larger: 75 Sets or 750 Sheets [Booklet] * ⁶ 50 Sets or 600 Sheets [Half -Fold/Scoring] * ⁶ 500 Sheets |
| Staple | Capacity | 50 Sheets (Max 90gsm) |
| | Paper Size | Max: A3, 11 x 17", Min: A5 LEF |
| | Position | Single (Front/Angled, Back/Straight), Dual |
| | Paper Weight | 52-256 gsm |
| Punch* ⁷ (Option) | Paper Size | A3, 11x 17", B4* ¹² , A4* ⁸ , A4LEF, Letter* ⁸ (8.5 x 11"), Letter (8.5 x 11")LEF, B5LEF, A5,A5* ¹¹ LEF* ¹¹ |
| | Number of Holes | 2/4 Holes (Option) or US 2/3 Holes (Option) |

| Item | | Description |
|---|---------------------|---|
| | Paper Weight | 52 - 200gsm ^{*10} |
| Booklet Finishing^{*1} | Capacity | Booklet: 15 Sheets, Single Fold: 5 Sheets |
| | Paper Size | Max: A3, 11 x 17", Min: A4, Letter (8.5 x 11") |
| | Paper Weight | Saddle-Stapling: 64 - 80gsm, Single Fold: 64 - 105gsm |
| Dimensions^{*9} / Weight | | W 592 x D 653 x H 1041mm, 25 kg (w/o Booklet Maker) W 592 x D 673 x H 1079mm, 35kg (with Booklet Maker unit) |

^{*1}: Paper in the sizes larger than A3 or 11 x 17" or smaller than A5 are delivered to the Centre Tray.

^{*2}: Documents may not be printed correctly depending on usage conditions. (52 to 55 gsm, 257gsm or greater).

^{*3}: 64gsm paper

^{*4}: When larger size sheets are stacked on top of smaller size sheets.

^{*5}: 75 sets or 750 sheets with dual stapling.

^{*6}: The Booklet Finishing function requires the optional Booklet Maker unit for Finisher-B3. After a job with the Booklet Finishing function specified has been output, the next job may not be delivered until the sheets are removed from the output tray. Also, if larger size sheets are stacked on top of smaller size sheets after a job with the Booklet Finishing function specified has been run, the next job may not be delivered until the sheets are removed from the output tray.

The Booklet/paper folding features require the optional Finisher B3 Booklet Maker unit.

^{*7}: The Punch feature requires the optional Finisher B3 Hole Punch kit (EC103677 or EC103678). Refer to the Product Performance section for the specification of each hole punch kit.

^{*8}: 3-hole punch is not applicable.

^{*9}: Inner connector within the body is excluded.

^{*10}: Cover sheets can be up to 220 gsm (Extra Heavyweight).

^{*11} 3-hole, 4-hole punch is not applicable

^{*12} 4-hole punch is not applicable

C3 Finisher with Booklet Maker

Note: The C3 Finisher with Booklet Maker requires Transport Unit H3 (QC100171)

| Item | | Description |
|------------------------------|-----------------|---|
| | | C3 Finisher with Booklet |
| Type | Exit Tray | Sorting/ Stacking |
| | Finisher Tray | Sorting (Offset available)/ Stacking (Offset available) |
| | Booklet Tray | Sort/Stack |
| Paper Size / Paper Weight | Exit Tray | Max: 12 x19" (305 x 483 mm), Min: Postcard (100 x 148 mm) / 52-300gsm* ¹ |
| | Finisher Tray | Max: 12 x19" (305 x 483 mm), Min: B5, / 52-300gsm* ¹ |
| | Booklet Tray | Max: 12 x 18" (305 x 457 mm), Min: B5 / 64- 220 gsm |
| Paper Capacity* ² | Exit Tray | 500 Sheets (A4) |
| | Finisher Tray | [Without Staple] A4: 1,500 Sheets, B4 or larger: 1,500 Sheets, Mixed Size Stacking* ³ : 300 Sheets [With Staple] A4: 200 Sets or 1,500 Sheets, B4 or larger: 100 Sets or 1,500 Sheets, Mixed Size Stacking* ³ : 70 sets or 200 sheets |
| | Booklet Tray | 20 sets* ⁴ |
| Staple | Capacity | 50 Sheets (90gsm or less) / 65 Sheets (Option)* ⁵ |
| | Paper Size | Max: A3, 11 x 17", Min: B5 LEF |
| | Positions | Single Stapling, Dual Stapling |
| Punch (Option) | Paper Size | A3, 11x 17", B4, A4* ⁷ , A4LEF, Letter (8.5 x 11")* ⁶ , Letter (8.5 x 11")LEF, B5LEF, 7.25 x 10.5", 8 x 10"(203 x 254 mm), 16K (194 x 267 mm), Cover A4 (223 x 297 mm), 9 x 11" (229 x 279 mm), 215 x 315 mm, 8.5 x 13" (216 x 330 mm), Legal (8.5 x 14"), 11 x 15" (279 x 381 mm), 8K (267 x 388 mm) |
| | Number of Holes | 2/4 Holes (Option), or US2/3 Holes (Option) * ⁷ |
| | Paper Weight | 52-220gsm |
| Booklet Finishing | Capacity | Saddle-Stapling: 16 Sheets* ⁸ Half-Folding: 5 Sheets Single-Fold: 1 Sheet |
| | Paper Size | Max: SRA3 (320 x 450 mm), 12 x 18" (304.8 x 457.2 mm); Min: B5 |
| | Paper Weight | Saddle-Stapling: 60-300gsm Half-Folding: 60-300gsm Single-Fold: 60-300gsm |
| Dimensions / Weight | | W 790 x D 589 x H 1056mm, 66kg W 1025 x D 726 x H 1056 mm (With Folder Unit CD1), 118 kg |

Note: Transport Unit H3 is required.

*¹: 52 - 55 gsm output paper may not be aligned properly depending on the paper type.

*²: 64 gsm

*³: When larger size sheets are stacked on top of smaller size sheets

*⁴: When the output paper is the same size.

*⁵: Optional C3 Finisher Staple Unit 65 Sheets is required. However, depending on the paper type, incorrect stapling such as uneven edge alignment of sets may occur.

*⁶: 3-Hole Punch is not applicable for this paper size

*⁷: Refer to the Product Performance section for the specification of each hole punch kit.

*⁸: The number of folded sheets may vary depending on the paper weight you use. Booklet may not be tightly closed depending on the size or type of the paper.

Folder Unit CD1

A C3 Finisher with Booklet Maker is required

| Item | | Description |
|---------------------|-------------------|---|
| Paper Size | Z-Fold Half Sheet | A3, 11 x 17", B4 |
| | Tri-Fold | A4, Letter |
| Paper Weight | Z-Fold Half Sheet | 64-90gsm |
| | Tri-Fold | 64-90gsm |
| Paper Capacity | | 40 sheets (64gsm) |
| Power Consumption*1 | | Max: AC220-240V +/- 10%, 0.6A, 50/60Hz common, 144W or less |
| Dimensions / Weight | | W 232 x D 726 x H 991 mm, 53kg |

*1: A separate power source is required when using the optional Folder CD1

Side Tray

| Item | Description |
|------------------|--|
| Paper Size | Same as the Basic Specifications / Copy Function |
| Paper Weight | 52 to 300 gsm |
| Paper Capacity*1 | 100 sheets |
| Dimensions | W 324 x D 567+ x H 228 mm |

Output Tray Capacity

| Output Tray | Paper Capacity (80gsm) | Paper Weight | Paper Size |
|---------------------------------|------------------------|--------------|------------|
| Upper Centre Tray (Exit 2 Tray) | 250 sheets | 52-300gsm | Up to SRA3 |
| Lower Centre Tray | 250 sheets | 52-300 gsm | Up to SRA3 |
| Side Tray | 100 sheets | 52-300 gsm | Up to SRA3 |

Feeding and Options

Paper Tray Capacity*1

| Input Tray | | Paper Capacity (80gsm) | Paper Weight | Paper Size |
|----------------------------|--------|------------------------|--------------|---------------------------|
| Standard | Tray 1 | 500 sheets | 52-300gsm | A5 to A3S, 11" x 17S" |
| | Tray 2 | 500 sheets | | A5 to SRA3S, 12" x 18"SEF |
| Tray 3, 4 2 Tray Module | | 500 sheets x 2 | 52-300gsm | A5 to SRA3, 12" x 18"SEF |

| Input Tray | Paper Capacity (80gsm) | Paper Weight | Paper Size |
|--|--|--------------|---|
| Tray 3, 4 Tandem Tray Module | Tray 3: 810 sheets Tray 4: 1,175 sheets | 52-300gsm | A5 to A4L, 8.5 x 11L |
| Tray 5 Bypass Tray | 90 sheets | 52-300gsm | A5 (89 x 98 mm) to SRA3 Banner size* ² , 12 x 19S |
| Tray 6 HCF | 2,030 sheets | 55-216gsm | B5LEF 7.25 x 10.5 to A4LEF, 8.5" x 11" LEF |

*1: Please see 'Paper Types' in Administrator Guide for full list of supported paper types

*2: Please see 'Banner Printing' section in Product Performance for more detail on this feature

HCF-B1 (Option)

| Item | Description |
|----------------------------|-------------------------------|
| Original Paper Size | A4LEF, Letter LEF, B5LEF |
| Paper Weight | 55 – 216gsm |
| Paper Capacity | 2,030 sheets (80gsm) |
| Dimensions/Weight | W 389 x D 610 x H 380mm, 29kg |

Envelope Tray (Option)

| Item | Description |
|---|---|
| Paper Size | DL LEF, ISO-C4, ISO-C5 LEF, ISO-C6 LEF, Commercial #10 LEF, Monarch 7.3/4 LEF Custom size : 241 x 372 mm to 90 x 98 mm |
| Paper Weight | Envelope: 75 to 90gsm, Postcard: 106 to 220gsm |
| Feeding Capacity / Number of Tray* 1 | 50 sheets x 1-tray |
| Dimensions | W 620 x D 566 x H 87 mm |
| Weight | 3 kg |

*1 : Commercial #10 paper.

*2 : Conforms to the main unit specifications as this tray is replaced with the standard tray 1 when used.

| Tray 1 | Capacity | Regular Size | Custom size | Paper Type | Output Paper Weight |
|----------------------|-----------|--|--|--|------------------------|
| Envelope tray | 50 sheets | DL LEF ISO-C4 SEF ISO-C5 LEF ISO-C6-LEF Commercial#10 LEF Monarch7.3/4LEF | Minimum Size W90mm x L98mm Maximum Size W241mm x L372mm | Envelope Post Card Heavyweight 1/2/3 | 75-90gsm* ¹ |

*1: Brand of guarantee is as follows.

- Columbian CO131 24 pond Commercial#10

Features and Memory Configurations

Memory Configuration

| Item | Description | |
|-------------------|----------------------------|----------------|
| Model | ApeosPort-VII | DocuCentre-VII |
| Standard Memory | 4GB (Shared) | |
| HDD Extension Kit | 320GB (Usable space 128GB) | |

| Features | | System Memory 4GB | HDD | Required Options |
|----------|---|----------------------|-----|-----------------------------------|
| Copy | EPC | ● | ● | Provided as standard |
| | 2 Sided Book Copy/ Booklet Creation | ● | ● | Provided as standard |
| | Cover Insertion/Copies for Distribution/Build Job | ● | ● | Provided as standard |
| | Annotation | ● | ● | Provided as standard |
| | Multi-value Copy | ● | ● | Provided as standard |
| Print | Adobe PostScript | ● | ● | Adobe Post Script 3 Kit |
| | Media Print – Photo/ Text | ● | ● | USB Memory Kit + USB Kit Board |
| | Private Print | ● | ● | Provided as standard |
| | Secure Print/Sample Print/ Delayed Print | ● | ● | Provided as standard |
| | Mailbox Print | ● | ● | Provided as standard |
| | File Direct Print | ● | ● | Provided as standard |
| | High-resolution Print | ● | ● | Provided as standard |
| Scan | Scanner (Scan to PC Save/Scan to Mailbox) | ● | ● | Provided as standard |
| | Scanner (Scan to E-mail/ Send to URL) | ● | ● | Provided as standard |
| | Scanner (Scan to USB) | ● | ● | USB Memory Kit + USB Kit Board |
| | SW Image Compression (High compression/ specific colour) | ● | ● | Provided as standard |
| | HW Image Compression (High compression/ specific colour) | ● | ● | Advanced Scan Kit |

| Features | | System Memory 4GB | HDD | Required Options |
|----------|------------------------------------|-------------------|-----|---|
| | Searchable PDF | ● | ● | Advanced Scan Kit |
| | Scan to Word/Excel | ● | ● | Advanced Scan Kit |
| | External Access | ● | ● | External Access Kit |
| Fax | Fax | ● | ● | Fax Kit 3 |
| | Direct Fax | ● | ● | Fax Kit 3 |
| | Internet Fax | ● | ● | Fax Kit 3 |
| | Internet Fax Direct | ● | ● | Fax Kit 3 |
| | Received Paperless Fax | ● | ● | Fax Kit 3 |
| | IP FAX [SIP] | ● | ● | IP FAX [SIP] Kit |
| | Server Fax | ● | ● | Server Fax Kit |
| Security | Copy Management Expansion | ● | ● | Copy Management Expansion Kit |
| | Data Security (Encryption) | ● | ● | Provided as standard |
| | Data Security (Overwriting) | ● | ● | Provided as standard |
| | Secure Watermark (Copy Prevention) | ● | ● | Secure Watermark Kit |
| | Image Log | ● | ● | Image Log Kit |
| Other | Thumbnail View | ● | ● | Provided as standard |
| | Finisher | ● | ● | Select a finisher from among Finisher-A2, Finisher-B3 or C3 Finisher with Booklet Maker |
| | Custom Authentication | ● | ● | USB Hub |
| | Cloud Connection | ● | ● | Print and Scan for Google Docs. |
| | Card Reader | ● | ● | ICCR-B Card Reader |

●: Standard

Cost Recovery

An EPSV (Electronic Partnership SuperVisor) Kit is required to interface between the machine and external cost recovery devices. The EPSV translates machine activity into readable pulses for the external device to debit the relevant account.

Limitations: Either the internal Auditron or External third party device (via EPSV) may be used for authentication, but not concurrently. Please consult your Fuji Xerox sales representative on the pre-requisites for cost-recovery solutions.

Billing Meters

An automated meter capture service is available for customers with a Fuji Xerox Australia Support Services Agreement (SSA). This service assists customers with convenient, accurate billing by eliminating the need for manual meter read submission for each device. It is included as a standard

part of support for customers with devices and networks compatible with Fuji Xerox meter capture technology.

If your device or network is not compatible with our meter capture technology, you will be required to manually submit your meter readings for billing purposes. The billing counters can be viewed on the control panel display screen.

| Item | Description |
|----------------|--|
| Meter 1 | Colour Impressions: Provides the total output for all colour copies/prints, regardless of paper size (includes Meter 3). Up to 7-digit meter. |
| Meter 2 | Black Impressions: Provides the total output for all black & white copies/prints/faxes (received), regardless of paper size. Up to 7-digit meter. |
| Meter 3 | Colour Large Impressions: Provides the total output for all large-size (279mm x 400mm or larger) colour copies/prints. Up to 7-digit meter. |
| Meter 4 | Total Impressions: Combined total copy/print/fax output for Meters 1 and 2. Up to 7-digit meter. |

Banner Printing

| Item | Description |
|--------------------------|---|
| Supported Drivers | PCL, Postscript (Windows and Mac OSX)* ¹ |
| Input/Feeding | Bypass Tray |
| Output | Side Tray, Centre tray when B3-Finisher attached* ³ |
| Paper Weight | 150-250 gsm |
| Media Size | 320 x 1200 mm for printable area of 305 x 1,194 mm* ² 297 x 1200 mm 297 x 900 mm 210 x 900 mm |
| Billing meter | 320 x 1200 mm = 4 impressions 297 x 1200mm = 3 impressions 297 x 900 mm = 3 impressions 210 x 900 mm = 2 impressions |
| Duplex printing | Not supported. Simplex only. Pages per sheet, poster and offset not supported. |

*¹ Printing may not be able to be performed due to a lack of memory, depending on the document and image quality specified.

*² Select 'Custom Paper Size' on driver

*³ Notes:

- To prevent jams, please be sure to take a sheet from the tray every time it is printed.
- Creasing and jams may occur depending on the paper type.
- If banner sheets are used often, it is recommended to use the side tray as the output destination.
- When Finisher A2 or C3 Finisher Booklet Maker is installed, it is not possible to deliver sheets to the center tray.

Supported Paper Types

Please refer to the Device User Guide for media that is supported to ensure you receive the best image quality from your Product: The User Guide also lists optimum media selections and / or caveats for the supported media.

Important

- Refer to the Product Administrator Guide, Chapter 3 "Paper and Other Media" for further information regarding supported paper types.
- Printing with a different type and size of paper from the paper specified for the printer driver, or printing from a tray not supporting the loaded paper, can result in paper jams.

Coated Stock

- Non-Fuji Xerox Coated papers are predominantly designed for use in offset equipment and when used in Xerographic equipment may cause miss feeds, skewing, and streaks. Coated stock can be automatically duplexed or finished and can be fed from the bypass tray however depending on the quality and construction of the paper we cannot guarantee the devices performance when using coated media.

Label Stock

- Labels stock should be used only once and cannot be reused as it will lead to labels stuck inside the device.

Pre-Printed Stock

- Stock produced by an offset printer may cause jamming due to the drying agent used to improve drying time
- Stock which has been produced by digital devices may cause bleeding due to the low melting point of modern toner materials used to create the pre-printed stock.

Envelopes

- Successful envelope printing is highly dependent on the quality and construction of the envelopes. However, performance cannot be guaranteed. The pressure and heat of the fuser may cause some degree of creasing or wrinkling on envelopes. Although there is no recommended envelope media, it is advised to use envelopes made specifically for laser printers. Do not use envelopes with windows or clasps.

Storage

- The recommended storage conditions for all paper supplies are 20°C to 23°C at 45%-55% relative humidity. Papers stored or used outside the recommended environment are likely to affect the image quality output. Paper should always be stored in sealed packs, on shelves located in a work place that is consistently controlled at the recommended environment stated above.

Supplies

This section details the supplies that can be ordered from Fuji Xerox for the ApeosPort-VII/ DocuCentre-VII C7773/C6673/C5573/C4473/C3373/C3372/C2273 products.

Consumables & Ordering

Toner and consumables can be ordered by contacting the Fuji Xerox Customer Support Centre on 1 800 028 962, or by ordering on the Internet: <http://www.fxs.com.au>.

Toner Cartridge

The yield of the toner cartridge shall differ according to print paper size, image type, as well as density. The following information is based on A4 LEF size paper @ 5% area coverage per colour.

| Item | Part Number | Yield | Replaced By |
|-----------------------------|-------------|---------------|-------------|
| Toner Cartridge BLACK (K) | CT202634 | 36,000 prints | Customer |
| Toner Cartridge CYAN (C) | CT202635 | 21,000 prints | Customer |
| Toner Cartridge MAGENTA (M) | CT202636 | 21,000 prints | Customer |
| Toner Cartridge YELLOW (Y) | CT202637 | 21,000 prints | Customer |

Waste Toner Bottle

The life of the waste toner bottle differs according to engine speed, print paper size, image type, as well as density. The following information is based on A4 LEF size paper @ 5% area coverage.

| Item | Part Number | Life (prints) | | | | | | | Replaced By |
|--------------------|-------------|---------------|-------|-------|-------|-------|-------|-------|-------------|
| | | C7773 | C6673 | C5573 | C4473 | C3373 | C3372 | C2273 | |
| Waste Toner Bottle | CWAA0901 | N/A | N/A | 83K | 83K | 83K | 83K | 83K | Customer |
| | CWAA0902 | 83K | 83K | N/A | N/A | N/A | N/A | N/A | |

Drum Cartridge

The life of the drum cartridge shall differ according to copy mode (BW/Colour), engine speed, print paper size, average job run length, and frequency of device usage. The following information is based on A4 LEF size paper, and average job run length of 3 pages.

| Item | Part Number | Mode | Life (prints) | | | | | | | Replaced By |
|------------------------------------|-------------|----------------------|---------------|-------|-------|-------|-------|-------|-------|-------------|
| | | | C7773 | C6673 | C5573 | C4473 | C3373 | C3372 | C2273 | |
| Number of pages copied at one time | | | 11 | 11 | 6 | 4 | 3 | 3 | 3 | |
| Drum Cartridge | CT351105 | Mono* ₁ | 270K | 255K | 239K | 220K | 198K | 187K | 190K | Fuji Xerox |
| | | Colour* ₂ | 250K | 238K | 206K | 193K | 165K | 157K | 157K | |

*1: Number of capable copy pages per drum cartridge under BW Mode. When BW copy made under Automatic Colour Selection (ACS) mode, CMY drums are also consumed. The level of CMY consumption under ACS mode is dependent on the mix of Colour and BW on the output.

*2: Number of capable copy pages per 4 drum cartridges under ACS mode

Staple Cartridge

| Item | Part Number | Life | Replaced By |
|--|-------------|---------------------------|-------------|
| 50 Sheet Staple Cartridge for Finisher-A2/B3/C3* ¹ | CWAA0856 | 5,000 staples (2 per box) | Customer |
| 50 Sheet Staple Cartridge for Finisher-B3 Booklet* ² | CWAA0728 | 2,000 staples (4 per box) | Customer |
| 65 Sheet Staple Cartridge for C3 Finisher with Booklet* ³ | CWAA0855 | 5,000 staples (3 per box) | Customer |

*1: For Single and Dual Stapling on Finisher-A2, Finisher-B1 and C3 Finisher with Booklet. For Saddle Stapling with C3 Finisher with Booklet

*2: For Saddle Stapling on Finsher-B1 only

*3: For Single and Dual Stapling on C3 Finisher with Booklet Maker only

Stamp Replacement

The Stamp Replacement Kit includes the replacement ink for Stamp kit.

| Item | Part Number | Life | Replaced By |
|-----------------------|-------------|-----------------------|-------------|
| Stamp Replacement Kit | F451 | 2000 times x 3 pieces | Customer |

Accessories/Options

| Part Number | Description | Notes |
|------------------------------|---|--|
| Finishers and Feeders | | |
| QC100181 | Finisher A2 ^{*1} | Inner finisher. Stack, Sort, Staple (50 sheets Front corner, Rear straight, 2 position) C2273/C3372/C3373/C4473/C5573 only. Exit 2 Tray and Finisher-A2 cannot be installed together. |
| QC100185 | Finisher B3 ^{*1} | Stores up to 2,000 sheets. Up to 50 sheets stapling. Available on all Models Exit 2 Tray and Finisher-B1 cannot be used together. Hole Punch optional. |
| EC103676 | Finisher-B3 Booklet Maker Unit | Enables booklet finishing, saddle stapling and bi-folding Finisher-B3 is required. Hole Punch optional. |
| EC103677 | 2/4 Hole Punch Kit for Finisher-B3 | 2 or 4 Hole punch feature. Finisher-B3 is required. Only one Hole Punch kit can be installed. |
| EC103678 | US 2/3 Hole Punch for Finisher-B3 | 2 or 3 Hole punch feature (US size). Finisher-B3 is required. Only one Hole Punch kit can be installed. |
| QD200085 | C3 Finisher with Booklet Maker ^{*1} | Stores up to 1,500 sheets. Up to 50 sheets stapling. Enables booklet finishing, saddle stapling and bi-folding. Exit 2 Tray and C3 Finisher with Booklet Maker cannot be used together. Transport Unit required. Hole Punch optional. |
| QC100171 | Transport Unit H3 | Required for C3 Finisher with Booklet Maker |
| EC102445 | 2H/4H Hole Punch for C3 Finisher with Booklet Maker | 2 or 4 Hole punch feature. C3 Finisher with Booklet Maker is required. Only one Hole Punch kit can be installed. |
| EC102446 | 2H/3H Hole Punch for C3 Finisher with Booklet Maker | 2 or 3 Hole punch feature (US size). C3 Finisher with Booklet Maker is required. Only one Hole Punch kit can be installed. |
| EC102447 | C3 Finisher Staple Unit 65 Sheets | Enables up to 65 sheet stapling. Cannot equip with standard 'C3 Finisher Staple Unit 50 sheets' |
| QC100122 | Folder Unit CD1 | Enables Z folding and C folding C3 Finisher with Booklet Maker is required Additional Power Cord is required |
| QC100180 | HCF B1 | 2,030 sheets A4 LEF (1 tray). |
| EC103457 | Long Paper Inserter | Recommend to load 1 banner sheet at a time on the Bypass Tray. |
| EC103650 | Envelope Tray | Dedicated Tray for Envelopes or Postcards Replaces Tray 1 |

| Fax | | |
|-------------------|----------------------------------|---|
| EC103747 | Fax Kit 3 | Enables 1 x G3 line. Includes Internet Fax feature. Cannot equip together with Server Fax Kit. 040L07023 Fax Cable is required. |
| EC103140 | Fax Extension Board | Enables additional G3 ports to be added to extend the number of fax lines. Fax Kit and Additional G3 Port must be fitted. |
| EC103129 | Additional G3 Port | Adds additional fax lines. Maximum 2 x additional G3 ports can be ordered. Fax Kit and Fax Extension Board must be fitted. |
| EC103642 | IP Fax (SIP) Kit | Enables Fax Transmission via VoIP server and IP-Fax Transmission to another IP-Fax (SIP) enabled device. Cannot be installed with Server Fax |
| EC103643 | Server Fax Kit | Enables integration with 3rd Party Fax Servers. Cannot be installed with Fax Kit or IP Fax Kit |
| EC103263 | Stamp Kit SP-H | Stamp red marks on the stored fax original. Available only for AP VII C7773/C6673. |
| EC102142 | Stamp Kit SP | Stamp red marks on the stored fax original. Available for AP/DC VII C2273/C3372/C3373/C4473/C5573. |
| Other Accessories | | |
| EC103656 | Secondary Ethernet Kit | Allows two Ethernet networks to be connected to a single device |
| EC103651 | Wireless Network Kit | Enables wireless connecting to existing access point and/or Wi-Fi Direct printing. |
| EC103657 | Advanced Scan Kit | Enables HW High Compression PDF/DocuWorks, HW Specific Colour PDF/DocuWorks, Searchable (OCR) PDF/DocuWorks and Scan to Word/Excel features for scan services. |
| EC103637 | USB Memory Kit*2 | Allows direct printing of documents from / and scanning of data to USB memory stick. Comes standard with USB Memory Board (EC103638) |
| EC103262 | USB Expansion Kit | Adds a USB Hub under the front panel Optional on non-fax DC models Standard feature on all Fax models and ApeosPort Models Required for Embedded Card reader |
| EC103635 | Adobe PostScript 3 Kit | Enables Postscript printing, and printing of PDF files using the EWS (Embedded Web Server). Standard feature on all ApeosPort models. Comes with mandatory label (ED201136) |
| EC103644 | Copy Management Expansion Kit | Watermark printing feature. |
| EC103645 | Network Accounting Kit | Required for integration with EQUITRAC JBA Systems. Note: The customer must have the Equitrac Server Job Accounting System installed in order for the device to integrate & "communicate" with the server-based accounting system. |
| EC103646 | Secure Watermark Kit | Illegal copy prevention feature. |
| EC103648 | Image Log Kit (Adobe PostScript) | Store/ Manage images of jobs executed by an MFD. ApeosPort model only. |
| EC103247 | Wing Table | Side table attached to the left side of the machine. |
| EC101037 | Assist Handle | Aiding tool for closing the platen cover or DADF |
| EC103250 | Full Stack Sensor | Full stack detection for exit 1 output tray |
| EC100639 | Attention Light II | This light notifies the state of a MFD. |
| EC101145 | Multi-Language Font Kit | Enables Unicode (TUF8) outputting from the mission-critical system. Printing in four languages: English, Korean, Chinese and Japanese, is available. |
| 800L08465 | Scan Delivery*3 | Automatically scans paper documents and sends them to various transfer destinations. |

| | | |
|---|-------------------------------------|--|
| | | This kit is Customer Installable. However, due to complexity of this kit's configuration, it is highly recommended that the customer purchases at least one hour of Remote Support for configuration of up to three scan destinations ^{*4} . Additional Installation charges apply. |
| DCS6061-14 | EPSV Kit^{*5} | Required to enable direct interface with external cost recovery devices. |
| 040L60614 | EPSV Kit+ Table^{*5} | Required to enable direct interface with external cost recovery devices. |
| 040L42550 | HCF Tray Lock Kit | Keyed locking device to secure optional HCF paper tray. All keys are keyed alike. |
| MM230117-3 | Paper Tray Lock | Keyed locking device to secure paper trays 1-4 (suits both 4-Tray and Tandem Tray modules). |
| Embedded IC Card Reader B^{*6} | EC103319 | Supports multiple card type such as Felica, MiFare HID Prox, HID iClass, EM Prox, Indala Prox. Can equip either thr Embedded Card Reader or the FAX one touch buttons on a MFD. Requires USB Hub on DC models. |
| Embedded IC Card Reader B for Wing Table | EC103423 | Supports multiple card type such as Felica, MiFare HID Prox, HID iClass, EM Prox, Indala Prox. Can use the FAX one touch buttons. Required Wing table (EC103247). |
| External IC Card Reader B | EC103320 | Supports multiple card type such as Felica, MiFare HID Prox, HID iClass, EM Prox, Indala Prox. Can use the FAX one touch buttons when installing External Card Reader. When not attaching C3 Finisher, a Wing table is required |

^{*1}: Finisher A2 is unique to AP/DC-VII C5573/C4473/C3373/C3372/C2273 devices. Same Finishers from the previous models cannot be installed.

^{*2}: When installing USB Memory Kit, a cover for USB memory connector on the on the left side of operation panel will be opened. Media Print-Text/Photo and Store to USB features cannot be executed at the same time.

^{*3}: Scan Delivery Kit purchased as optional accessory requires configuration at additional cost. To order Remote or Onsite support for Scan Delivery configuration please consult your Fuji Xerox Sales representative.

^{*4}: To configure more scan destinations additional Specialist charges will apply. If remote access is not available, then Scan Delivery Kit will need to be configured with an on-site Specialist at standard service rates. That is, additional charges apply.

^{*5}: Please consult your Fuji Xerox Sales representative for compatible card reader and authentication terminal options. The Fuji Xerox Software Solution will determine the correct type of reader and terminal combination for your environment.

^{*6}: When installing Embedded Card Reader on an MFD with FAX Kit, the Fax one touch buttons (Hard buttons) must be removed from the MFD. Use the speed dial on the control panel.

Product Performance

This section provides details of the performance of the AP-VII/DC-VII C7773/6673/C5573/C4473/C3373/C3372/C2273. This includes any known system limitations, image quality information and the way media and other factors can affect image quality and product performance.

Product Limitations

This product is designed to provide "benchmark" image quality and performance for its class. The following factors are known to affect machine performance and output print quality:

- High toner density and area coverage*.
- Monthly output volume consisting of >10% of heavy weight, coated or special throughput stock, which is out of or close to specification limits.

- Paper condition (The way that it is handled and stored).

Environment: Heat, humidity, a lack of ventilation, and emissions from other equipment will downgrade system performance. Air-conditioned sites are strongly recommended (refer to the Installation requirements section of this document).

Operator skill and understanding of applications file management, and colour theory will affect the quality of the final output. Colour quality perception is subjective and will be affected by surrounding lighting conditions. Like other colour reproduction processes, there will be some variation in output quality and colour registration over time e.g. long runs with an area coverage >70% (per colour).

*Print quality issues may arise when continuously printing/copying high coverage and high density documents. If colour print quality is a key requirement and there is a large amount of high density documents being printed/copied, an alternative product may need to be considered.

Notes:

- 1) If the storage media (such as hard disk drives) for the base unit fail, loss of received data, accumulated data, Registered setting data, etc. may occur. In no event shall Fuji Xerox be liable for any damages whatsoever arising from loss of data.
- 2) Functional spare parts will be available for at least 7 years after the product is no longer manufactured.

First Copy Output Timing and Print Speeds

This product has been designed with the First Copy Output Timing (FCOT) and Print Speeds measured under the following specifications:

FCOT

The device must not have any options installed and requires initial version of firmware. FCOT is measured once <Start> is pressed until the paper trail edge is output to the predetermined output destination. The following settings are used when measuring FCOT:

| Document/Paper Size and Orientation | A4 LEF document and A4 LEF paper document sizes must be detected before the <Start> button is pressed. |
|-------------------------------------|---|
| IIT/DADF Status | If the Platen is used, the document size is detected when the Platen Cover is closed. When DADF is used, the Elevator Tray rises before <Start> is pressed. |
| Tray Used | Tray 1 |
| Copy Side Settings | 1 -> 1 Sided Copy |
| Paper Quality Settings | Uncoated/Paper Weight: 64 to 79 gsm |
| Quantity Settings | 1 set |
| Reduce / Enlarge | 100% (excluding the case of 100% Fine Adjustment) |
| Output Tray | SCT, OCT, Finisher Top Tray |
| Output Orientation | Auto (Face Up) |
| Fusing Status | The Fusing Unit must be in the Ready state |
| LED Status | The LED has to ready before <Start> is pressed (Press <Start> at approx. 3 seconds after the Platen is opened or after the document is placed on the DADF) |
| UI | Touch Panel |
| Others | Other application functions or optional functions must not be set. |
| Background Suppression | When it is turned OFF or ON (when High Speed is specified) |

Print Speed

As the device receives print information via a print job or copy job it first set of that job will require a self-learning process to understand the steps required to support the commands in the print instructions. Therefore, the specification set is based on the 2nd set after the first set of a job.

Image Alignment Limitations

- Image to paper alignment can vary up to 1.6 mm in the lead edge to trail edge direction, and up to 2.1 mm from side to side, depending on paper stock, machine set up and other factors.
- Copy skew will be within 1.6 mm per 200 mm.

Duplex Speed Limitations

- With Finisher-B3/C3 installed, duplex speed is reduced when printing to the Centre output tray. To allow the device to print at rated speed, set the output destination to the Finisher output tray.

Fax Limitations

- It is recommended to load originals in landscape (SEF) orientation when faxing
- Digital & Analogue Fax service cannot be used concurrently. Users can choose between digital or analogue Fax services in tools mode. Please consult the Fuji Xerox support Centre for more detail.
- Telstra “FaxStream Duet” (distinctive ring) is not supported.
- Call Waiting feature must be disabled on the fax line.
- G4 fax (ISDN) fax is not available. Digital lines are not supported.
- Faxing from Macintosh print driver is not supported.
- The fax device is designed to meet the T.30 protocol as set by ITU-T Recommendations, which specifies that a facsimile must be connected to a public switched telephone network (PSTN).
- For optimum performance, a dedicated analogue line must be installed for each fax port.
- A dedicated analogue line must not be shared by any other device or system, such as ADSL, EFTPOS or alarm systems, etc.
- The facsimile device is designed to conform to the Australian Telecommunication Signalling Requirements under the AS/ACIF S002:2005 Appendix E paragraph 5.5.1.1.1 Note 3. This states that the standard ring cadence is nominally 0.4s ON, 0.2s OFF, 0.4s ON and 2.0s OFF.
- Faxing on the NBN network is supported according the network specifications outlined in the NBN Co NFAS UNI-V Electrical Specification – Fifth Release.
- Faxing over “VoIP” (Voice over IP) and “FoIP” (Fax over IP) networks cannot be guaranteed. In these cases, networks will need to be configured by the supplier to establish optimum fax protocol. Where poor fax performance is still an issue, a dedicated analogue line will need to be installed.
- Only UNI-V ports are supported for fax transmissions on our devices when connected to the NBN. For more information please contact your Internet Service Provider.

Internet Fax, Server Fax and IP Fax (SIP) Limitations

- Digital & Analogue Fax service cannot be used concurrently. Users can choose between digital or analogue Fax services in tools mode. Please consult the Fuji Xerox support Centre for more detail.
- Direct Fax feature is not supported for devices operating with the Fax Server.
- Fax workflow cannot be specified as a Job Flow Sheet destination for devices operating with the Fax Server.
- The Server Fax service uses a fax feature provided by a 3rd party fax server. Feature with the device alone cannot be used.
- The machine needs to be connected to a network and support TCP/IP communication.
- Server Fax products that may be compatible are: Accuroute Law Office (ARLO), FreeFlowOfficeFaxPro certificate, GeniFax Version 3.3.1, RightFax9.0 EDC Fax & Scan with Templates, StreamCentre Version 6.35. Use of these solutions with the device are not supported by FXA.
- It is recommended that for reliable IP faxing the network should be configured for T.38 with redundancy.

Printing from USB and camera media Limitations

- The optional USB Memory Kit enables printing PDF, TIFF and XPS files from USB memory (media Text mode).
- Only FAT12, FAT16, FAT32, and VFAT file systems are supported. NTFS and exFAT are not supported.
- Copying the DCIM folder with content from Digital Still Camera media to USB root directory will also allow printing of JPEG files (media Photo mode).
- The internal Auditron can restrict access to the optional USB Media Print (Text/Photo) feature; however, access control can only be set for the MFD, not for individual users.
- Text mode printing will result in low image quality
- USB memory devices that are encrypted with software cannot be used with the machine.

Store to USB Limitations

- Only USB devices compatible with USB 2.0 and capacity of up to 128GB are supported.
- Only FAT12, FAT16, FAT32, and VFAT file systems are supported. NTFS and exFAT are not supported.
- USB devices that are encrypted with software cannot be used with the machine.
- Jobs are stored in the root directory of the USB device
- The internal Auditron can restrict access to the optional Store to USB feature, however access control can only be set for the MFD. Individual users can be controlled using LDAP groups.
- Refer to the product User/Administrator Guide "Configuration of Store to USB", for further information regarding this feature.
- USB memory devices that are encrypted with software cannot be used with the machine.

Scan to Network Limitations

- Scan to Network functionality (Job Template Scanning) is limited to ApeosPort models only. This function is not available for DocuCentre models and cannot be added as an option.
- SFTP can only be used when creating a job flow via CentreWare Internet Services (CWIS). It is not possible to select SFTP as the transfer protocol for job flow sheets that are created on the device or with job flow creation tools. It is also not possible change the destination of a job flow sheet that uses the SFTP protocol on the device. This feature supports the password authentication method among SFTP authentication methods and does not support the public key authentication method.

Printing from Mobile Devices (Print Utility) Limitations

- A wireless router (to be setup by the customer) or Wireless Network Kit (Dongle) is required.
- Mobile device and MFD need to be on the same network.
- Where a Wireless Network Kit is used, printing from mobile devices can be performed by Wi-Fi Direct®.
- The activation of the Bonjour protocol is required for automatic recognition of MFDs and printers.
- The Adobe® PostScript® 3 kit is required for some MFDs and printers in order to use the Bonjour protocol.
- Please refer to the official Fuji Xerox Asia Pacific Homepage.
- NFC reader is provided as standard, Touch to Print via Print Utility 2.2 or later is required.

Google Cloud Printing Limitations

- A Google account is required to use Google Cloud Print™
- The device (MFD) requires internet access
- Supported client devices include Android™ 2.1 or later and iOS 4.3 or later (iPad/iPad2, iPhone 3GS/4, iPod touch). Please refer to Google Cloud Print home page for compatible applications: <http://www.google.com.au/cloudprint/learn/apps.html>
- When using an HTTP/HTTPS proxy server, proxy authentication is not supported
- Authentication printing and private charge print are not supported. Machine cannot hold print job

Mopria Limitations

- Mopria allows for printing from a Mopria-certified mobile device without the need to install a manufacturer or model specific printing application.
- Printing can only be performed through apps that support Mopria Print Service. For a sample list of supported apps, please refer to <http://mopria.org/>.
- Mopria Print Service is required to be downloaded from the Google Play Store and is only supported on Android 4.4 or later
- Mopria Print Service is not supported through Bluetooth, cellular 3G or 4G connections.
- Please refer to <http://mopria.org/> for further information and limitations on Mopria Print Service feature

AirPrint Limitations

- Enables printing from printers on a network without downloading software or drivers
- Supports printing from Safari, E-mail, Maps, Adobe Reader and Photos
- Supported on iOS 6 or later, MacOS X 10.8 or later
- AirPrint does not support authenticated printing or Private Charge Print.
- If SSL is disabled after printing with both basic authentication and SSL specified in the AirPrint settings of the machine, the printer may not be able to be detected. In this case, enable the SSL settings of the machine again.
- A user name and password may be requested in the following cases. It needs to delete and re-register the printer in OS X
 - “Basic authentication” is ON in the AirPrint settings of the machine
 - Registering a device from “Printers & Scanners” in OS X
 - “Basic authentication” is changed to OFF in the AirPrint settings of the machine
- The hole punch position is fixed when using AirPrint. To specify the position to perform hole punching, use the Fuji Xerox printer driver.
- Hole punching and some paper types cannot be specified with OS X 10.8. To enable these features, please update to OS X 10.9.
- Printing cannot be performed from “Print” due to a problem with Photoshop CS6
- USB connection is supported on Mac OS X 10.11.3 or later.
- Faxing not available if MFD is set to prohibit Direct Fax.
- Fax number must be entered in half-width numbers. Full-width or other character strings will result in an incorrect transmission.
- Some applications may not be compatible with sending faxes via AirPrint.
- Mixed Size Originals cannot be scan as [Next Original] function is not available due to Mac OS Scanner Driver limitations.
- Device cannot communicate with multiple Macs simultaneously for AirPrint scanning.
- Scanning via AirPrint may not be available if Mac is using a Proxy Server.
- OS X Print driver may print documents in colour despite being set as Black and White. It is recommended to use the Fuji Xerox Print driver.
- iOS 7.0.3 or later is recommended when printing from a mobile device or tablet.

Wireless Network Kit (Dongle) Limitations

- Enables MFD to connect wirelessly to an access point and/or enables Wi-Fi Direct® printing capability

Customer Pre-Requisites

- Customers are required to have a working wireless network and allow for the MFD to connect wirelessly
- Customers are responsible for choosing the location of the device for best connectivity/signal. The Optional Wireless Network Kit (Dongle) is attached to the MFD.
- It is the customer responsibility to maintain and resolve wired and wireless network issues. The customer needs to provide Fuji Xerox information on the wireless network

SSID, encryption type and passphrase of the network they wish to connect the MFD to before installation

- Wireless Network Kit (Dongle) does not require additional power source.

Technical Pre-Requisites

- The Wireless Network Kit cannot connect to access points that communicates under IEEE802.11b
- The range of the Wireless Network Kit is dependent on where the device and router is located. The Fuji Xerox Wireless Network Kit has a rated assumed interference distance is 40 metres or less
- For further information about notes, safety instruction and specification you may refer notes of the Fuji Xerox Wireless Network Kit setup guide or contact our help desk on 1800 028 962

Installation

- Fuji Xerox Australia will configure the MFD to an existing wired or wireless network initially. The connectivity will need to be maintained by customers IT if there are changes to the network environment.
- Fuji Xerox can will provide operator training to connect one mobile device to the MFD via Wi-Fi direct. If customers require additional devices to be set up, basic and advanced training packages can be purchased. Please contact your Fuji Xerox Account Manager for more information
- For Wireless Network Kit (Dongle) 3 ports will be available.

Printing using Wi-Fi Direct Limitations

- Printing and scanning via Wi-Fi Direct is only supported via the Fuji Xerox Print Utility on Android or iOS.
- The Fuji Xerox Print Utility does not automatically search for a printer when connecting via Wi-Fi Direct. A manual IP address must be entered, please refer to the Fuji Xerox Support website for more information
- iOS does not officially support connection to an MFD via Wi-Fi Direct. Please follow manual registration steps found online at <http://www.fujixerox.com.au/support>
- Mopria, Google Cloud Print and AirPrint is not available through Wi-Fi Direct
- If Wi-Fi Direct is running concurrently to an infrastructure connection to an access point, if the infrastructure side is disconnected, Wi-Fi Direct becomes unavailable
- A maximum of 3 devices can be concurrently connected to the MFD via Wi-Fi Direct with Wireless Network Kit (Dongle)
- If the Wireless Network Kit (Dongle) is connected to the MFD via the Secondary Ethernet, it will share the same limitations as outlined in the Secondary Ethernet Limitations section

| Description | Thin Print | Google Cloud Print2.0 | Job flow sheets to send files stored in Folders via SMB | NFC Touch-to-Print |
|--------------|------------|-----------------------|---|--------------------|
| LAN1 | YES | YES | YES | YES |
| LAN2 | YES | YES | YES | YES |
| Wi-Fi | YES | YES | YES | YES |
| Wi-Fi Direct | NO | YES | NO | NO |

| | | | | |
|---------|--|--|--|--|
| Remarks | | Connection method can be selected from LAN1, LAN2, and Wi-Fi when registering devices with CentreWare Internet Service | Documents received via paperless fax and documents scanned and imported into a Folder can be transferred to a user on a LAN2 | |
|---------|--|--|--|--|

Support

- Please refer to Fuji Xerox's online support system at <http://www.fujixerox.com.au/support> for further information regarding the Wireless LAN Converter feature

Secondary Ethernet Limitations

- Enables two networks to be connected to a single device (i.e. private and public)
- Printing with LPD, port 9100, SNMP, and HTTP protocols only
- Internet fax and IP fax is not supported on Secondary Ethernet
- Mopria (v1.2.26), Cloud on Demand Print (v1.3) and Google Cloud Print (v1.2/2.0) cannot be used with Secondary Ethernet
- When using Mac OS X printer driver and Print Utility for iOS/Android, IP settings must be specified manually
- Printing using the IPP protocol of ContentsBridge (for Windows) cannot be performed.
- Scan to PC, E-mail, Store & Send Link, Store to WSD, ScanAuto, Job Flow, Job Flow Sheets cannot be used on Secondary Ethernet, use Scan to Folder or CentreWare Internet Services
- Network Scanner Utility 3, Scan function on Print Utility for IOS/Android or setting Restore Tool cannot be used on Secondary Ethernet
- Common settings are used for Standard Ethernet and Secondary Ethernet. Opening ports, reception memory/reception port number, number of items that can be received at the same time, IPSec cannot be separated
- IPv6 DNS cannot be set automatically

Scan to Word/Excel® / Searchable PDF Limitations

- Advanced Scan Kit is required
- OCR recognition technology is not 100% accurate
- Mistakes in OCR recognition, layout discrepancies, and colour differences may occur in the generated Word/Excel® or searchable PDF format document when compared to the original scanned document. The customer should check the original against the document and correct discrepancies manually.
- Use with the Mac OS version of Microsoft® Office (Word/Excel®) and Microsoft Word/Excel® 2000 is not guaranteed

Centre Tray Notification Light

- The color of the light cannot be changed.
- This function can be turned off in the system administrator settings.
- All models are equipped with the center tray attention light as standard. The light also works when the Exit 2 Tray is installed on an MFD.
- This light is not used for notifying errors.
- During the Low Power mode or Sleep mode, the light does not turn on nor blink.
- The light does not turn on if the MFD recovers from the Sleep mode with “operations not related to paper output” such as scan and fax, even if paper remains in Lower Center Tray.

| Optional output module | Output destination | | | | | |
|--------------------------------|---------------------|---------------------|-----------|----------------------|---------------|-----------------------|
| | Center Tray (Lower) | Center Tray (Upper) | Side Tray | Finisher Output Tray | Finisher Tray | Finisher Booklet Tray |
| No Exit 2 Tray | • | — | x | — | — | — |
| Exit 2 Tray | • | • | x | — | — | — |
| Finisher A2 | — | — | x | — | x | — |
| Finisher B3 | — | x | x | — | x | — |
| C3 Finisher | — | x | x | x | x | — |
| C3 Finisher with Booklet Maker | — | x | x | x | x | x |

•: On x: Off —: Unavailable combination

Gesture UI Limitations

- Only the flick, drag, tap and double tap gestures are available.
- The following menus support the flick/drag gesture feature:
 - All Services
 - Folders
 - Selecting Jobs/Documents
 - Address Book
 - Job Status
 - Network browsing list
 - 1st screen of Tools
 - Preview screen
 - Copy, Fax, Scan – Settings screen.
 - The double tap (zoom) gesture is only available for the preview screen
 - Pinch to zoom in/out is not a supported gesture

Registration-less Scanning Limitations

- Originals which have a skew greater than 1.3 °(±0.2°) or 7.2mm may result in error and may not be corrected
- Originals with curved, torn corners or not are square may not be detected for skew correction

Banner Size Printing (1200mm x 320mm) Limitations

- Recommended paper weight: 150-250gsm
- Supported Drivers: PCL, Postscript (Windows and Mac OSX)
- Banner printing can only be loaded from the bypass tray
- Cannot be used with the copy function
- Simplex Only. The 2-sided print, pages per sheet, poster, and offset modes, etc. cannot be used
- Printing may not be able to be performed due to a lack of memory, depending on the document and image quality specified
- Max paper size of 320 x 1200 mm is supported for printable area of 305 x 1,194mm
- When printing 320 x 1200mm, select 'Custom Paper Size'
- Excess Toner charges apply as per the Support Services Agreement (SSA)

C3 Finisher with Booklet Maker Limitations

Stapling

It is expected behaviour that when the stapling feature has been selected for the top or bottom corner of a set will cause the outputted stack to become misaligned due to the difference in thickness between the stapled corner to the unstapled corner.

Booklet Making

Booklet folding precision is specific to the number of sheets and the size of the sheets in the booklet.

The following outlines the specifications for folding precision.

- Stapled sets A4 skew of greater than or equal to 2.0mm
- Stapled sets larger than A4 skew of greater than or equal to 2.5mm
- Unstapled sets A4 skew of greater than or equal to 2.5mm
- Unstapled sets larger than A4 skew of greater than or equal to 4.0mm

The booklet maker can create booklets (folded and/or stapled) with the following configurations:

- Maximum booklet configuration: 1 x 220gsm cover + 14 x 90gsm
- Maximum bi-fold configuration: 1 x 300gsm
- The below table displays the conversion rates for each paper weight/type:

| Paper Weight | Number of Sheets that can be Stapled | | Conversion no. of sheets for 1 sheet | |
|----------------|--------------------------------------|--------|--------------------------------------|--------|
| | Uncoated | Coated | Uncoated | Coated |
| 52 to 59 gsm | 16 | n/a | 1 | n/a |
| 60 to 80 gsm | 16 | n/a | 1 | n/a |
| 81 to 90 gsm | 16 | n/a | 1 | n/a |
| 91 to 105 gsm | 7 | n/a | 2.3 | n/a |
| 106 to 128 gsm | 7 | 7 | 2.3 | 2.3 |
| 129 to 150 gsm | 7 | 7 | 2.3 | 2.3 |


| | | | | |
|----------------|-----|-----|-----|-----|
| 151 to 176 gsm | 7 | 7 | 2.3 | 2.3 |
| 177 to 220 gsm | 5 | 5 | 3.2 | 3.2 |
| 221 to 280 gsm | 3 | 3 | 5.3 | 5.3 |
| 281 to 300 gsm | 3 | 3 | 5.3 | 5.3 |
| 301 to 350 gsm | n/a | n/a | n/a | n/a |

- For example, if a booklet consisting of 1x220gsm cover (3.2) + 3x220gsm (3x3.2) = 12.8 this is within the specified limitation of (16) and therefore could be made into a booklet with fold and staple.


Hole Punching

The below depicts the hole punch position specifications for the two option hole punch kits. The positions cannot be adjusted and the kits cannot be installed concurrently. Only the 3-hole punch position is supported when the US 2/3-hole punch is installed

2/4 Hole Punch

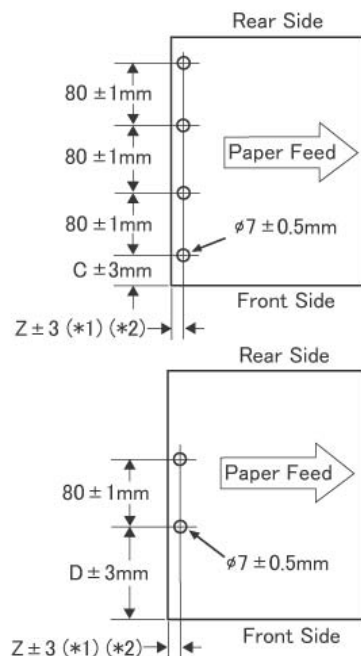

US 2/3 Hole Punch

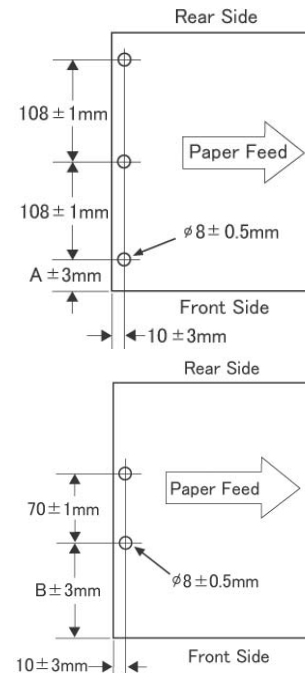

Mobile Touch Print and Scan Kit (NFC) Limitations

- DHCP is not supported. Please specify an IP address on LAN1 Ethernet port manually.
- Mobile Touch Print & Scan Kit does not support the Secondary Ethernet Port.

| | | Print Utility for Android ^{*1} Print Utility for iOS ^{*1} | | Print Utility for Android ^{*1} | |
|---|-----------------|--|------|---|------------------|
| | | Operation on the Utility | | NFC touch | |
| | | Print | Scan | Print | Scan |
| Use LAN1 as primary network ^{*3} | LAN1 | OK | OK | OK ^{*2} | OK ^{*2} |
| | Wifi connection | OK | NG | NG | NG |
| | Wifi Direct | OK | NG | OK | NG |
| Use Wifi as primary network | LAN1 | OK | NG | OK ^{*2} | NG |
| | Wifi connection | OK | OK | NG | NG |
| | Wifi Direct | OK | NG | OK | NG |

*1: Requires V2.3 or above.

*2: Need to set IP address of the MFD to use NFC touch feature.

*3: Changing Primary port settings can only be done in CWIS

Management Console

Management Console is a downloadable tool (www.fujixerox.com.au) that can only be installed on a Windows-based PC). Management Console enables a customer to centrally manage services on the Fuji Xerox (Document Messaging Platform) Multi-Function Device.

Portable UI for Business

- Portable UI for Business must be downloaded from App Store or Google Play and installed on an Android device that supports the NFC function or a device with iOS 11 or any subsequent iOS version (regardless of whether this iOS device supports the NFC function).
- A wireless LAN access point is necessary.
- The mobile device must be on the same network as the device
- The authentication method of an MFD must be either non-authentication or device authentication method

| Item | Content | | |
|---------------------|---|---|---|
| Supported OSs | Android 4.4 or later, iOS 11 or later | | |
| Compatible devices | Xperia™ Z3 (Android™ 5.1) Galaxy S5 (Android™ 6.0) Galaxy S7 (Android™ 6.0) Android One X3(Android™ 8.1) | Nexus 5X (Android™ 7.1) Nexus 6P (Android™ 7.0) Nexus 6P (Android™ 8.0) | Nexus 9 (Android™ 5.0) Nexus 10 (Android™ 4.4) Pixel2 XL (Android™ 8.1) |
| | iPhone X (11.2) iPhone 7 (11.0) iPhone 7 Plus (11.0) | iPhone 5s (11.0 / 11.2) iPad mini 3 (11.0) iPad Air (11.2) | iPad Pro 12.9" (1st Generation) (11.0) |
| Supported languages | Japanese, English | | |
| Features | Copy, Fax, Scan (Store to Folder), Scan (E-mail), feature to save settings as favorites, authentication support | | |

| | |
|---|---|
| Copy features | Quantity, Output Color, Reduce/Enlarge, Paper Size Selection, Original Orientation, Lighten/Darken, Original Type, Erasing the Background Color of Documents, 2 Sided Copying, Pages per Side, Staple, Invert Image (Negative Image), Auto Upright Orientation (when Auto Select for Paper Supply, Off for Pages per Side, and Off for Staple are configured) |
| Fax features | Enter Recipient, Re-enter Recipient, Address Book on a mobile device, 2 Sided Scanning, Resolution, Original Type, Lighten/Darken, Skip Blank Pages (always ON) |
| Scan features | Store to Folder, E-mail, File Format (E-mail only, PDF/XDW/XPS/JPEG/TIFF), Color Scanning, Original Orientation, 2 Sided Scanning, Original Type, Resolution, Quality/File Size, Erasing the Background Color of Documents, Skip Blank Pages |
| Status notification | Job start, Job start failed, Processing, Pending, Cancel, Successful completion, Abnormal termination Note that Pause of a fax is not supported. |
| Operability | Voice guidance, color inversion, enlarged screen display, gestural operation, support for external keyboards |
| Supported authentication methods | Non-authentication (including Deemed authentication), device authentication (including server-less authentication) |
| Supported models | ApeosPort-VII / DocuCentre-VII C7773 / C6673 / C5573 / C4473 / C3373 / C3372/ C2273 (A card reader is not necessary.) |

- Wi-Fi Direct connection is unavailable.
- Only the non-authentication and device authentication methods are supported. This application cannot be used when the external or custom authentication method is used.
- When authentication is required: Performing NFC touch does not authenticate a user but only enables a mobile device and an MFD to communicate. In order to authenticate a user, authentication through other means (e.g., using a smart card) is necessary.
- Scan (E-mail): Only one recipient can be configured. The address book in an MFD cannot be used. A recipient address must be entered manually or be taken from the address book in a mobile device OS. When a file size is too large, the file must be sent using Store & Send Link or Split Encrypted E-mail according to the MFD settings. Store & Send Link is set by default.
- Scan (Store to Folder): It is not possible to store a scanned document in a Folder without a password. A password must always be set.
- Fax: Only one recipient can be configured.
- In an environment where you have to dial zero to get an outside line, call a fax number from the phone book of your mobile device, add a "0" at the beginning of the number, and then touch your mobile device to the NFC on the MFD. Otherwise, add a "0" at the beginning of fax numbers in the phone book in advance.
- Favorites: Items cannot be searched. Only the names can be edited. The content of the settings cannot be edited. Favorite settings cannot be exported nor imported.
- Statuses of paper trays and consumables cannot be retrieved or displayed.
- In order to use the read-aloud feature and gesture operations, Talkback (Android™) or VoiceOver (iOS) must be enabled.
- Depending on the OS or the characteristics of voice engines, texts may partly be read aloud incorrectly.
- Please be careful not to touch the MFD screen when holding a large size tablet over it. Otherwise, it may touch the start button on the MFD screen and copy, fax or scan may start if any of the functions is ready on the screen.
- The following settings need to be configured in advance.
System Settings > Job Flow Service Settings... > Auto Start Job Flow Sheet > All Users
- Jobs cannot be accepted if the system administrator remains logged in.

Cloud Service Hub Functions & Specifications

Main Features

| Item | | Description | |
|-----------------------------------|---|---|---|
| Supported Cloud Services* | | Box®, Dropbox®, Evernote®, Google Drive™, OneDrive®, SharePoint® Online, Working Folder | |
| Number of registered users | | Up to 500 users (including administrators) | |
| Scan Function | Resolution | 600 dpi, 400 dpi, 300 dpi, 200 dpi | |
| | Image Format | Monochrome binary: DocuWorks documents, PDF Grayscale / Full Colour: DocuWorks documents / Highly compressed DocuWorks documents, PDF / highly compressed PDF | |
| File Search | | Cross-Search | |
| Print Function | Print format | DocuWorks (.xdw, .xbd) Microsoft® Word 2003, 2007, 2010, 2013 (.doc, .docx) Microsoft® Excel® 2003, 2007, 2010, 2013 (.xls, .xlsx) Microsoft® PowerPoint® 2003, 2007, 2010, 2013 (.ppt, .pptx) PDF documents (.pdf) Google Docs from Google Drive™ | OpenDocument word documents (.odt) OpenDocument spreadsheets (.ods) OpenDocument presentations (.odp) OpenDocument graphics (.odg) Images (.tiff, .jpg, .png) |
| Security Features | Communication path encryption method | Encrypted communication using TLS | |
| | SSL certificate | RSA 2048-bit Key Length | |
| | SSL encryption | 256-bit encryption to protect data at transit | |
| | Data Centre Security Compliance | Servers are hosted within facilities that are compliant with ISO27001 and SOC2 security standards | |
| Authentication Function | | Single Sign On | |
| Supported Languages | | English, Traditional Chinese, Simplified Chinese, Korean, Thai, Vietnamese, Japanese | |

* Regarding Connection with Cloud services, Fuji Xerox has confirmed connection with personal free service category for Box®, Dropbox®, Evernote®, Google Drive™, and OneDrive®.

Refer to our official web site for the latest information concerning the Cloud Service Hub operating environment and supported devices.

The Cloud Service Hub and Cloud on Demand Print is a subscription based service which requires registration to FX Direct to activate the Service using the customer's authorised purchaser email address (primary email address). Annual subscription renewal is automatic unless Fuji Xerox Australia receives notification otherwise prior to renewal date.

The terms and conditions of Cloud Service Hub and Cloud on Demand Print is accessible from <http://www.fujixerox.com.au/products/softwareterms/>,

Scan Delivery Kit

Scan Delivery is an easy solution that provides the following features:

- Pre-set a button on the Control Panel to allow user to scan, store documents with a file format and send to destinations easily.
- File names can be customized on a PC combined with the document type and date, which provide easier search for documents.

To configure this kit remote access to the customer's computer is required. As such, Admin access must be provided during installation. Alternatively, availability of an IT Admin to support install is also possible.

As part of the configuration process for SMB/FTP server destinations, the following are required:

- Pre-configured destination folders with correct write permission by IT/Network Administrator^{*1}.
- SMB or FTP OS services must be enabled by IT/Network Administrator for scanning to locally hosted folders
- User ID and Password of accounts which are used in Scan Delivery should not expire, if the customer's policy is set to expire, it is the customer's responsibility to manage/maintain user credentials used for Scan Delivery.

^{*1} Please note that troubleshooting or creating new shared folders on customer's server is out of scope of this process.

If Fuji Xerox is not permitted to remotely access the customers' computer, the optional on-site support option is available to purchase.

Web browser operating environment

Windows® OS environment

| Item | Description |
|---------------------|---|
| Web Bowser | Internet Explorer® 11 Microsoft® Edge Mozilla® Firefox® Google Chrome™ Safari |
| Supported Languages | English, Traditional Chinese, Simplified Chinese, Korean, Thai, Vietnamese, Japanese |

Mac OS environment

| Item | Description |
|---------------------|---|
| Web Browser | Mozilla® Firefox® Google Chrome™ Safari |
| Supported Languages | English, Traditional Chinese, Simplified Chinese, Korean, Thai, Vietnamese, Japanese |

iOS environment

| Item | Description |
|----------------------------|---|
| Supported Operating System | iOS 10.0 iOS 9.3 / 9.2 / 9.1 / 9.0 iOS 8.4 / 8.3 / 8.2 / 8.1 |
| Web Browser | Google Chrome™ Safari |
| Supported Languages | English, Traditional Chinese, Simplified Chinese, Korean, Thai, Vietnamese, Japanese |

Android environment

| Item | Description |
|----------------------------|---|
| Supported Operating System | Android™ 6.0 Android™ 5.1 / 5.0 Android™ 4.4 |
| Web Browser | Google Chrome™ |
| Supported Languages | English, Traditional Chinese, Simplified Chinese, Korean, Thai, Vietnamese, Japanese |

Main Features of Cloud On-Demand Print

Main Features

| Item | Description |
|---|--|
| Number of registered users | 10 to 1000 Users (Varies depending on your contract) |
| Number of Guests that can be registered | 10 Guests |
| Number of files that can be registered | 200 to 20000 (Varies depending on your contract) |
| Authentication | User registration by administrator |
| Authentication method | User authentication using user ID and password |

| | | |
|---|---|--|
| Uploaded document retention period | 24 hours after being uploaded (by default) The retention period can be set in the following range: 0.5 day, 1 day, 2 days, 3 days, 4 days, 5 days, 6 days and 7 days. The retention period can be changed for each Tenant. | |
| Supported file format | Word files (doc, docx) Rich Text file (rtf) Excel® files (xls,xlsx) PowerPoint® files (ppt, pptx) DocuWorks files (xdw, xbd)*1 PDF file (pdf)*2 | XPS file (xps)*3 OpenXPS file (oxps)*3 JPEG files (jpg, jpeg, jpe) TIFF files (tif, tiff) PNG file (png) Web page*4 |
| Document file size | 100 MB | |
| Document paper size | A1 to B7 | |
| Number of registered multifunction devices | Up to 1000 | |
| Communication path encryption method | SSL (SSL 3.0 is not supported.) | |
| Supported languages*5 | Japanese, English, Traditional Chinese, Korean, Thai | |
| File availability setting | Private / Shared | |

*1: If the file contains special characters (non-standard characters and special characters), its appearance on the PC or iOS/

Android™ device and the printed result may be different.

*2: If the font is not embedded in the file, its appearance on the PC or iOS/Android™ device and the printed result may be different.

*3: XPS stands for "XML Paper Specification".

*4: Can be uploaded from an iOS/Android™ device.

*5: On a multifunction device, Cloud On-Demand Print screens are displayed in Japanese, English, Korean, Traditional Chinese or Thai with the language switching function.

*: Appearance on the PC or iOS/Android™ device and the printed result may be different.

Web browser operating environment

Windows® OS environment

| Item | Description |
|-----------------------------------|--|
| Web Browser | Windows® Internet Explorer® 9 Internet Explorer® 11 Microsoft® Edge Mozilla® Firefox® ESR 45 Mozilla® Firefox® 48 Google Chrome™ 49 |
| Supported Operating System | Windows® 10 (32bit) Windows® 10 (64bit) Windows® 8.1 Update (32bit) Windows® 8.1 Update (64bit) Windows® 7 (32bit) [Service Pack 1] Windows® 7 (64bit) [Service Pack 1] Windows Vista® (32bit) [Service Pack 2] Windows Vista® (64bit) [Service Pack 2] |
| Supported Languages * | English, Traditional Chinese, Korean, Thai, Japanese |

* If you select either of Japanese, English, Korean, Traditional Chinese or Thai from [Language] menu at the bottom of login screen, Cloud On-Demand Print pages are displayed in the selected language. If you select Simplified Chinese or Vietnamese, the pages are displayed in English.

Mac OS environment

| Item | Description |
|-----------------------------------|--|
| Web Browser | Safari 9.0 Safari 8.0 Safari 7.0/7.1 Safari 6.1/6.2 |
| Supported Operating System | OS X 10.11 El Capitan OS X 10.10 Yosemite OS X 10.9 Mavericks OS X 10.8 Mountain Lion |
| Supported Languages | English, Traditional Chinese, Korean, Thai, Japanese |

* If you select either of Japanese, English, Korean, Traditional Chinese or Thai from [Language] menu at the bottom of login screen, Cloud On-Demand Print pages are displayed in the selected language. If you select Simplified Chinese or Vietnamese, the pages are displayed in English.

Windows® Printer Tool Operating Environment

| Item | Description |
|-----------------------------------|--|
| Supported Operating System | Windows® 10 (32bit) Windows® 10 (64bit) Windows® 8.1 Update (32bit) Windows® 8.1 Update (64bit) Windows® 7 (32bit) [Service Pack 1] Windows® 7 (64bit) [Service Pack 1] Windows Vista® (32bit) [Service Pack 2] Windows Vista® (64bit) [Service Pack 2] |
| CPU | Conforms to recommended value for each OS |
| Hard Disk Capacity | 300 MB or more free space *1 Memory capacity Conforms to recommended value |
| Memory capacity | Conforms to recommended value for each OS |
| Display | Conforms to recommended value for each OS*2 |
| Required software | Microsoft® .NET Framework 3.5 [Service Pack 1] Microsoft® .NET Framework 3.5.1 Microsoft® .NET Framework 4.5.2 Microsoft® .NET Framework 4.6 |
| | Microsoft® Outlook® 2007 / 2010 / 2013*3 Windows® Live mail 2012*3 Windows® Store Application "Mail"*3 Gmail™*3 Mozilla Thunderbird*3 |
| Supported Languages | English, Traditional Chinese, Korean, Japanese |

*1: If .NET Framework is not installed, additional free storage of 280 MB to 2 GB is necessary. *2: Minimum resolution is XGA (1024 x 768 pixels). *3: Required if sending file upload completion message by mail. *4: If the operating system language is either of Japanese, English, Traditional Chinese, Korean, or Thai, Windows® printer tool screens are displayed in the same language as the operating system. If the operating system language is other than the above, the printer tool screens are displayed in English.

Dedicated Mobile Applications

iOS Environment

| Item | Description | |
|-----------------------------------|---|--|
| Supported Operating System | iOS10.0 iOS 9.3 iOS 9.2 iOS 9.1 iOS 9.0 | iOS 8.4 iOS 8.3 iOS 8.2 iOS 8.1 |
| Hardware | iPad 2 iPad (3rd generation, 4th generation) iPad mini iPad mini 2 iPad mini 3 iPad mini 4 iPad Pro | iPad Air iPad Air 2 iPhone 4S iPhone 5 iPhone 5s / 5c iPhone 6 / 6 Plus iPhone 6s / 6s Plus iPhone SE |
| Supported Languages * | English, Traditional Chinese, Korean, Thai, Japanese | |

*: If the operating system language is either of Japanese, English, Traditional Chinese, Korean, or Thai, mobile applications (iOS) screens are displayed in the same language as the operating system. If the operating system language is other than the above, the mobile applications screens are displayed in English.

Android environment

| Item | Description | |
|-----------------------------------|--|--|
| Supported Operating System | Android™ 4.2 Android™ 4.3 Android™ 4.4 Android™ 5.0 Android™ 5.1 Android™ 6.0 | |
| Supported Languages* | English, Traditional Chinese, Korean, Thai, Japanese | |

*: If the operating system language is either of Japanese, English, Traditional Chinese, Korean, or Thai, mobile applications (Android) screens are displayed in the same language as the operating system. If the operating system language is other than the above, the mobile applications screens are displayed in English.

*: Applications are not tested on all models that satisfy the operating environment.

Refer to our official web site for the latest information concerning the Cloud On-Demand Print operating environment and supported devices.

Installation Requirements

This section contains information on preparing for the delivery and installation for the ApeosPort-VII and DocuCentre-VII C7773/C6673/C5573/C4473/C3373/C3372/C2273 products.

General Installation Requirements

- The product should not be exposed to direct sunlight, external heat sources, excessive dust or vibration.
- Do not operate the machine in a poorly ventilated room.
- The machine must be located on a stable and level floor.

Delivery Restrictions

Any deliveries not occurring at street level locations must have elevators large enough to accommodate the product modules. Passageways (doorways and hallways) must also be large enough to allow the machine to pass through.

Temperature & Humidity

Maximum: 32°C and 85%RH
Minimum: 10°C and 10%RH

Drastic climatic changes are detrimental to image quality, performance and consistency. It is strongly recommended that the product be operated in an air-conditioned environment to achieve best performance.

Electrical Requirements

220-240 Volt, 50/60 Hz and a dedicated 10 Amp supply is required for each machine installation*.

*Where a dedicated supply is not available, it is the customer's responsibility to provide the equivalent, and where the equivalent is not available, Fuji Xerox will not be held responsible for any damage that may occur. Fuji Xerox will not be held responsible for any damage that may occur as a result of lightning strikes, power surges, etc.

Power Consumption

| Model | Sleep Mode | Stand-By | Max |
|--------------|------------|----------|--------|
| C2273 | 0.5 W | 75 W | 2.4 kW |
| C3372 | 0.5w | 75 W | 2.4 kW |
| C3373 | 0.5 W | 75 W | 2.4 kW |
| C4473 | 0.5 W | 111 W | 2.4 kW |
| C5573 | 0.5 W | 111 W | 2.4 kW |
| C6673 | 0.5 W | 111 W | 2.4 kW |
| C7773 | 0.5 W | 111W | 2.4 kW |

TEC (Typical Electricity Consumption)

| Model | kWh per week |
|--------------|--------------|
| C2273 | 0.8 |
| C3372 | 1.0 |
| C3373 | 1.2 |
| C4473 | 1.7 |
| C5573 | 2.1 |
| C6673 | 3.0 |
| C7773 | 3.2 |

Heat Emission (Kcal/Hr)

| Model | Power Save | Ready | Running |
|--------------------------|------------|-------|---------------|
| C6673/C7773 | 0.516 | 89.44 | 696.6/ 713.8 |
| C4473/C5573 | 0.516 | 85.14 | 593.4/ 645 |
| C2273/C3372/C3373 | 0.516 | 55.04 | 399.9 / 498.8 |

Noise Emission (Sound Pressure Level)

| Item | Mode | C2273/C3372/C3373 | C4473/C5573 | C6673/C7773 |
|---|---------|-------------------|-------------|-------------|
| | | Full System | Full System | Full System |
| Operating LpAm (dB)^{*2} | Run | 54.5 | 57 | 60 |
| | Standby | 15.2 | 15.3 | 15.3 |

*1 : Full system configurations: main body + option:

*2: LpAm : A-weighted radiated sound pressure level

Machine Weight and Dimensions

Machine Weight

| Components | Unpackaged Weight | | | | | | |
|--|-------------------|--------|----------------------|----------------------|--------|--------|--------|
| | C7773 | C6673 | C5573 | C4473 | C3373 | C3372 | C2273 |
| MFD^{*1} + Single Pass DADF | 156 kg | 156 kg | 139 kg ^{*2} | 139 kg ^{*2} | 132 kg | 132 kg | 132 kg |
| HCF | 29 kg | | | | | | |
| Finisher-A2 | 11 kg | | | | | | |
| Finisher-B3 | 28 kg | | | | | | |
| Finisher-B3 with Booklet | 38 kg | | | | | | |
| C3 Finisher with Booklet | 66 kg | | | | | | |

| Components | Unpackaged Weight | | | | | | |
|---|-------------------|-------|-------|-------|-------|-------|-------|
| | C7773 | C6673 | C5573 | C4473 | C3373 | C3372 | C2273 |
| C3 Finisher with Booklet + Folder Unit CD1 | 118 kg | | | | | | |

*1: Excluding toner.

*2: Applies to Tandem Tray Configuration.

Machine Dimensions

For ApeosPort-VII and DocuCentre-VII C2273/C3372/C3373/C4473/C5573 products

| Description | Dimensions (mm) | | |
|--|-------------------|-------|--------------------|
| | Width | Depth | Height |
| MFD | 663* ¹ | 723 | 1141* ² |
| + HCF*³ | 1,022 | 723 | 1141 |
| + Finisher-A2*⁴ | 865 | 723 | 1141 |
| + HCF + Finisher-A2*³ | 1,220 | 723 | 1141 |
| + Finisher-B3*³ | 1,283 | 723 | 1141 |
| + HCF + Finisher-B3*³ | 1,643 | 723 | 1141 |
| + C3 Finisher with Booklet*³ | 1,453 | 723 | 1141 |
| + C3 Finisher with Booklet + Folder CD1*³ | 1,688 | 723 | 1141 |
| + HCF + C3 Finisher with Booklet+ Folder CD1*³ | 2,050 | 723 | 1141 |

*1: With adjusting foot the Width will be 669mm.

*2: With standard DADF (B1-PC).

*3: This dimension does not include the Bypass Tray when fully extended. The width of fully extended Bypass tray is 436mm.

*4: With A2 Finisher Paper Support tray fully extended.

Machine Dimensions

For ApeosPort-VII C6673/C7773 products

| Description | Dimensions (mm) | | |
|--|-----------------|-------|--------------------|
| | Width | Depth | Height |
| MFD | 663 | 793 | 1169* ¹ |
| + HCF*² | 1,022 | 793 | 1169 |
| + C3 Finisher with Booklet*² | 1,453 | 793 | 1169 |
| + C3 Finisher with Booklet + Folder CD1*² | 1,688 | 793 | 1169 |
| + HCF + C3 Finisher with Booklet+ Folder CD1*² | 2,050 | 793 | 1169 |

*1: With standard DADF (C2-PC).

*2: This dimension does not include the Bypass Tray when fully extended. The width of fully extended Bypass tray is 440mm.

Space Requirements (Minimum Service Clearance)

These specifications are based upon accepted Workplace Health and Safety standards and allow for the safe and effective operation and servicing of the device, including space for:

- Moveable components, such as draws and doors
- A technician to safely access the device

These space requirements (site width & site depth) are the minimum requirements* and compliance with these standards is mandatory for the safety of staff members for the Australian market**. Site width and site depth changes with each configuration. Refer to the tables below for actual site requirements for each configuration.

* Note: Where a device is installed adjacent to an access way, additional space over and above that specified in this document may be required. Space required for access ways is dependent on circumstance, and it is recommended that the local statutory body be contacted for advice.

** Note: 'Machine installation' figures presented in the User Guide represents the machine dimensions and the dimensions when the trays have been fully extended. These do not represent space requirements or service clearances for Australia.

Service Clearance Configuration Table

The following table refers to the device configuration For ApeosPort-VII and DocuCentre-VII C2273/C3372/C3373/C4473/C5573 products working from left (feeder) to right (finisher):

| Configuration* ¹ | Dimensions (mm) | | | | | |
|---|-----------------|-------|--|------|------|-------|
| | Site Clearance | | From machine to the nearest object* ³ | | | |
| | Width | Depth | Front | Rear | Left | Right |
| MFD*¹ | 1,265 | 1,650 | 825 | 100 | 500 | 100 |
| + HCF*¹ | 1,520 | 1,650 | 825 | 100 | 500 | 100 |
| + Finisher-A2*² | 1,415 | 1,650 | 825 | 100 | 500 | 100 |
| + HCF + Finisher-A2*¹ | 1,655 | 1,650 | 825 | 100 | 500 | 100 |
| + Finisher-B3*¹ | 1,885 | 1,650 | 825 | 100 | 500 | 100 |
| + HCF + Finisher-B3*¹ | 2,135 | 1,650 | 825 | 100 | 500 | 100 |
| + C3 Finisher with Booklet*¹ | 2,055 | 1,650 | 825 | 100 | 500 | 100 |
| + HCF + C3 Finisher with Booklet*¹ | 2,250 | 1,650 | 825 | 100 | 500 | 100 |
| + C3 Finisher with Booklet + Folder Unit CD1*¹ | 2,290 | 1,650 | 825 | 100 | 500 | 100 |
| + HCF + C3 Finisher with Booklet+ Folder Unit CD1*¹ | 2,490 | 1,650 | 825 | 100 | 500 | 100 |

*¹: With the Bypass Tray Fully Extended

*²: With Bypass Tray and A2 Finisher Paper Support tray fully extended

^{*3}: Minimum overhead workspace clearance (within site area) for all installations = 2,000 mm (H).

The following table refers to the device configuration For ApeosPort-VII C6673/C7773 working from left (feeder) to right (finisher):

| Configuration ^{*1} | Dimensions (mm) | | | | | |
|---|-----------------|-------|--|------|------|-------|
| | Site Clearance | | From machine to the nearest object ^{*2} | | | |
| | Width | Depth | Front | Rear | Left | Right |
| MFD^{*1} | 1,265 | 1,720 | 825 | 100 | 500 | 100 |
| + HCF^{*1} | 1,520 | 1,720 | 825 | 100 | 500 | 100 |
| + C3 Finisher with Booklet^{*1} | 2,055 | 1,720 | 825 | 100 | 500 | 100 |
| + C3 Finisher with Booklet + Folder Unit CD1^{*1} | 2,250 | 1,720 | 825 | 100 | 500 | 100 |
| + HCF + C3 Finisher with Booklet+ Folder Unit CD1^{*1} | 2,490 | 1,720 | 825 | 100 | 500 | 100 |

^{*1}: With the Bypass Tray Fully Extended

^{*2}: Minimum overhead workspace clearance (within site area) for all installations = 2,000 mm (H).

All configurations are supplied with 2 x plastic plinths. An additional plinth is also required for the optional C3 Finisher with booklet or HCF.

Support

Customer Support

eSupport

Our internet-based support system can be accessed at:

<http://www.fujixerox.com.au/support> and includes a number of services:

Online Support Assistant

The Online Support Assistant allows users to obtain instant self-help, step-by-step instructions and information on Fuji Xerox products 24 hours a day, 7 days a week.

Interactive User Guide

The Interactive User Guide provides users with interactive demonstrations on the key features of the machine. It also provides step-by-step instructions on commonly asked question featuring screen captures of the UI.

My Account

My Account provides access to information about your account. You can view your invoice details, submit your meter readings, order toner or request machine relocations.

Online Supply Ordering

For a full range of products, you can access the site directly at www.fxs.com.au.

Customer Support Centre

The Fuji Xerox Customer Support Centre is available 24/7 for all service calls and for customer application requests. You can contact them directly on 1 800 028 962.

Customer Training

Fuji Xerox may provide on-site training (Basic or Advanced) with the delivery of our equipment. Additional or repeat training is available (charges and conditions apply).