

A Scalable Dynamic Capacitive Wireless Power Transfer System Architecture

Ben Liao, Dheeraj Etta, Khurram K. Afridi
Department of Electrical and Computer Engineering
Cornell University
Email: {bhl47, dke27, kka34}@cornell.edu

Abstract—This paper presents a novel power-scalable architecture for dynamic capacitive wireless power transfer (WPT) systems utilizing an active variable reactance (AVR) rectifier. The AVR rectifier enables continuous compensation, allowing the WPT system to maintain high-efficiency power transfer at a fixed frequency by appropriately distributing power between its two branches. A transformer-based power-splitting method is used to realize a scalable AVR rectifier while maintaining high system efficiency and wide dynamic compensation range. Furthermore, a state-space model of this architecture is developed and used to design a full state feedback controller. To validate the proposed approach, a 6.78 MHz 12-kW dynamic capacitive WPT system is built. Three 4-kW full-bridge inverters and three half-bridge rectifiers per AVR branch are paralleled to achieve this power level. The system's operation is demonstrated through both simulations and experiments on the hardware prototype.

I. INTRODUCTION

Wireless power transfer (WPT) is becoming increasingly important and has the potential to accelerate the widespread adoption of electric vehicles (EVs), especially amongst vehicles that routinely travel along fixed routes such as buses and warehouse forklifts [1], [2]. Capacitive WPT systems can be lighter, cheaper, and smaller than comparable inductive WPT systems due to the absence of ferrite cores [3]. The ability of capacitive WPT systems to transfer high power at high efficiency has been demonstrated, thus proving the viability of this technology [4].

One main challenge of WPT systems is the extreme sensitivity to the value of the coupling capacitance or mutual inductance between the receiver and the transmitter [5]. To increase the practicality of WPT systems in dynamic applications, it is desirable to design and control them to tolerate coupling variations while maintaining full power transfer at high efficiency [6]–[9]. The recently proposed active variable reactance (AVR) rectifier addresses these challenges and efficiently provides variable compensation in high-frequency WPT systems [10]. Additionally, a novel time-domain solution for the control of the AVR rectifier has been proposed in [11] and demonstrated on hardware at low power. This approach allows an AVR-equipped capacitive

WPT system to dynamically compensate for changes in the coupling capacitance automatically.

Capacitive WPT systems typically operate at multi-MHz frequencies, which pose another significant challenge for high-power operation due to limitations in commercially available GaN devices. Various power-combining approaches have been proposed in [4], [12], with the transformer-based power-combining and power-splitting approach in [4] being particularly effective due to its scalability, low component count, and simple implementation. This digest combines the AVR rectifier architecture [10] with the transformer-based power-splitting method [4] to obtain a scalable dynamic capacitive WPT system.

In this work, an AVR-equipped scalable dynamic capacitive WPT system architecture is proposed. A state-space model is developed for this architecture, and a full-state-feedback controller is designed using the proposed model to automatically compensate for variations in coupling capacitance. Finally, the proposed architecture and controller are validated first in simulation, then on a prototype 6.78 MHz, 12-kW dynamic capacitive WPT hardware system.

II. DYNAMIC CAPACITIVE WIRELESS POWER TRANSFER SYSTEM WITH AN AVR RECTIFIER

Figure 1 presents the practical circuit schematic of the dynamic capacitive WPT system with the AVR rectifier. A DC input bus is connected to a full-bridge inverter. C_s is the coupling capacitance between the roadway-side and vehicle-side coupling plates. The L-section matching network (L_{pri} , C_{pri} , L_{sec} , C_{sec}) surrounding C_s is designed to provide a voltage gain to minimize displacement current through the air gap while compensating the reactance of C_s such that the loading on the inverter is near-resistive, allowing the inverter to achieve soft-switching.

The AVR rectifier has two branches: a top branch containing a boost converter attached to an inductive reactance $+jX$ through one half-bridge rectifier, and a bottom branch containing a buck converter attached to a capacitive reactance $-jX$ through another half-bridge rectifier. By independently varying the amount of power processed in each branch, the AVR rectifier can maintain the desired constant output

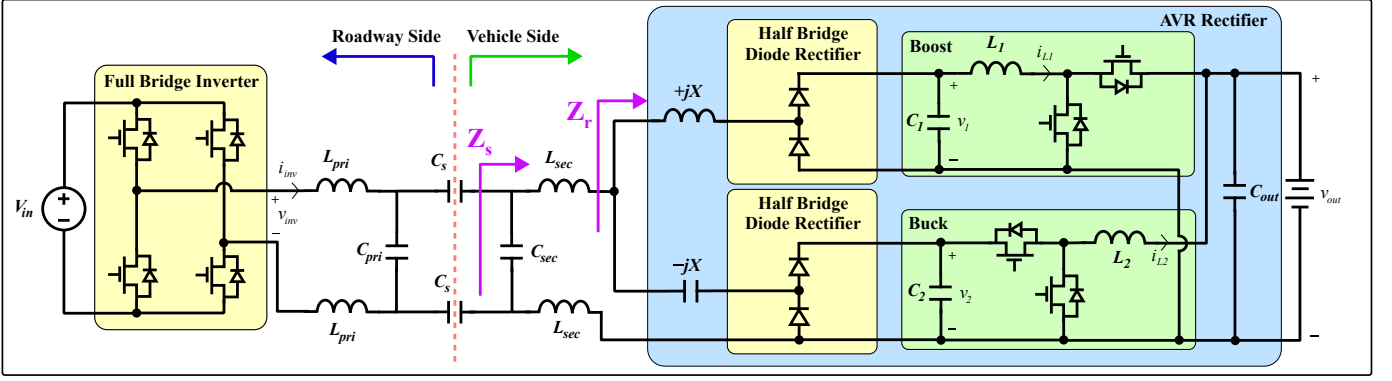


Fig. 1: Dynamic capacitive wireless power transfer system with active variable reactance rectifier schematic.

$$p_{out} = p_1 + p_2 = v_1 i_{L1} + v_{out} i_{L2} \quad (1a)$$

$$z_r = \text{Re}(z_r) + j \cdot \text{Im}(z_r) = r_r + jx_r = \frac{k_{rec}^2 v_1^2 v_2^2 + v_1 v_{out} i_{L1} i_{L2} X^2}{k_{rec} (v_1 v_2^2 i_{L1} + v_{out} v_1^2 i_{L2})} + jX \frac{v_1 i_{L1} v_2^2 - v_{out} i_{L2} v_1^2}{v_1 i_{L1} v_2^2 + v_{out} i_{L2} v_1^2} \quad (1b)$$

$$z_s = \text{Re}(z_s) + j \cdot \text{Im}(z_s) = r_s + jx_s = \frac{r_r}{(1 - \omega_s C_{sec} x_r)^2 + (\omega_s C_{sec} r_r)^2} + j \left[\omega_s L_{sec} + \frac{x_r - \omega_s C_{sec} (r_r^2 + x_r^2)}{(1 - \omega_s C_{sec} x_r)^2 + (\omega_s C_{sec} r_r)^2} \right] \quad (1c)$$

power (P_{out}) while compensating for coupling variations by modulating the impedance seen at the input of the AVR rectifier (z_r). Throughout this digest, the following notation is used: p_{out} is the time-varying measured variable, P_{out} is the constant nominal DC value, and $\hat{p}_{out}$ is the small-signal variable. They are related as $p_{out}(t) \equiv P_{out} + \hat{p}_{out}(t)$.

Equations 1a-1c give p_{out} , z_r , and z_s as a function of the large-signal circuit states as labeled in Fig. 1.

k_{rec} is a gain associated with the half-bridge rectifiers under sinusoidal approximation, X is the differential reactance $\pm jX$ attached to the two branches, and ω_s is the inverter switching frequency. When the coupling capacitance C_s changes by an amount ΔC_s , Eqns. 1a-1c are utilized to adjust the operation of the AVR rectifier such that the real part of the impedance looking into the secondary $\text{Re}(Z_s)$ is held constant at its nominal value $r_s = R_s$. This also guarantees $p_{out} = P_{out}$, as well as resistive loading on the inverter. A derivation of Eqn. 1b can be found in [10]; a derivation of Eqn. 1c is provided in Appendix A.

III. SCALABLE ARCHITECTURE FOR DYNAMIC CAPACITIVE WPT

This section motivates and presents a novel topology for scaling the capacitive WPT system described in Section II to higher powers while maintaining dynamic compensation capability. In high-power capacitive WPT systems, the performance bottleneck is typically at the high-frequency inverters, as the GaN FETs used have much lower power-handling capabilities compared to the SiC Schottky diodes and switches in the rectifiers and DC-DC converters. To address inverter power scaling issues, multiple inverters can be paralleled using transformers as described in [4]. But, the performance bottleneck of the system is now shifted to the SiC diodes in the high frequency half-bridge rectifiers in

the AVR rectifier. Additionally, there is an inherent tradeoff between the efficiency of the matching network, the gain of the matching network, and the AVR rectifier's compensation range. Thus, having a large current gain while achieving a target matching network efficiency causes the maximum compensation range of the resulting AVR rectifier to be prohibitively narrow, decreasing the utility of the system. [10] To meet the growing power demands of EV chargers without compromising the dynamic compensation range of WPT systems, there is a need to develop power-scaling methods that enable effective parallel operation of the AVR rectifier.

Figure 2 shows the proposed novel scalable dynamic capacitive WPT topology. On the roadway side, an N -level stacked-inverter architecture introduced in [4] combines the power from N high-frequency inverters at the input. On the vehicle side, power is split between the $+jX$ and $-jX$ branches. On each branch, an M -level stacked-rectifier structure using a series-in parallel-out transformer splits the power into M high-frequency half-bridge diode rectifiers. The rectified power is then combined in parallel and fed through a single DC-DC converter on each branch. This topology meshes the wide dynamic compensation range of the AVR rectifier with the high-efficiency scalable system proposed in [4], all with a low component count. This novel architecture is the first significant contribution of this digest.

IV. MODELING, CONTROL, AND SIMULATION OF THE SCALABLE DYNAMIC CAPACITIVE WPT SYSTEM

In this section, a model for the scalable WPT architecture is developed in state space using methods presented in [11], [13]. A full state feedback controller is then designed utilizing this model to provide dynamic compensation for a changing coupling capacitance. Finally, the proposed

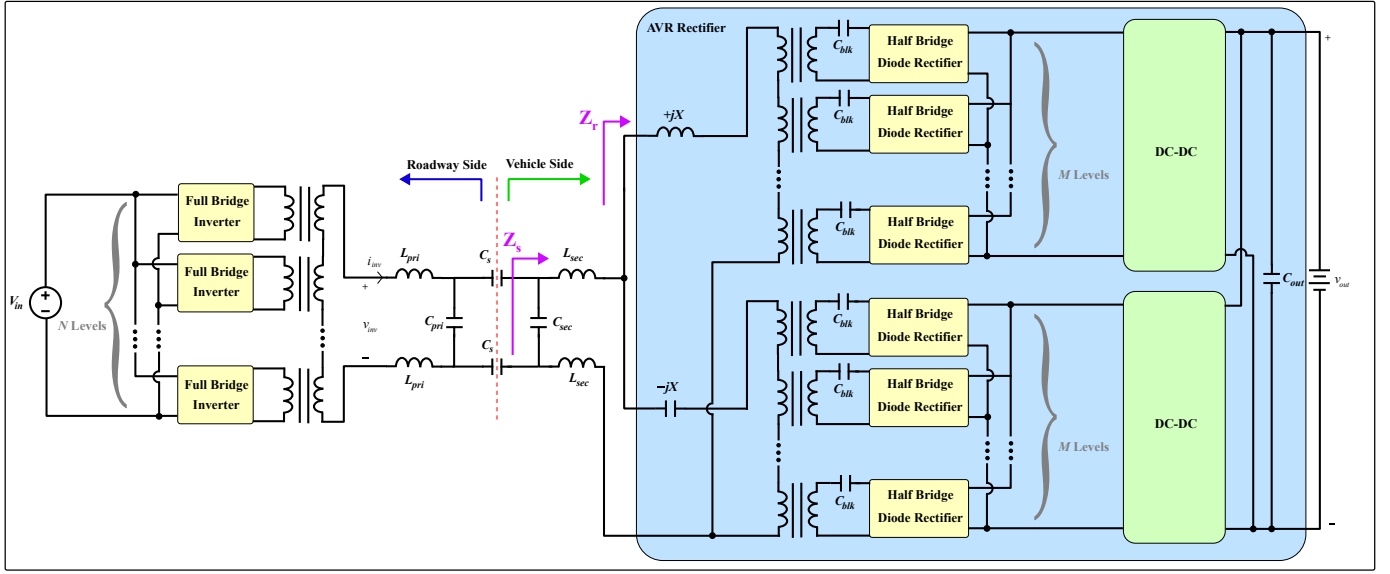


Fig. 2: Proposed scalable dynamic capacitive wireless power transfer system schematic. All transformers have a 1:1 turns ratio.

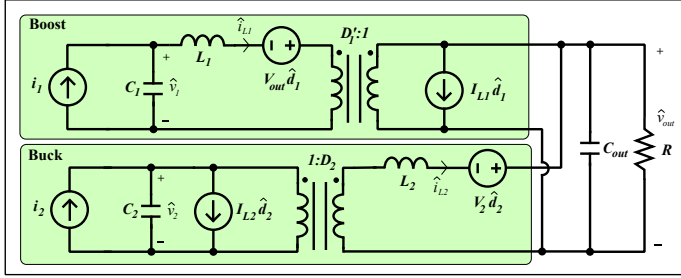


Fig. 3: Schematic of the linearized small-signal model of the AVR rectifier.

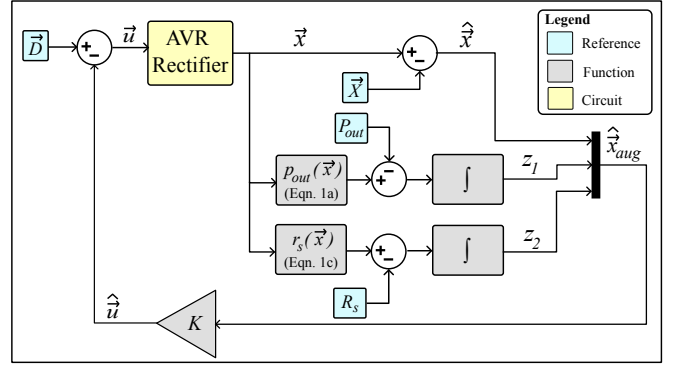


Fig. 4: Block diagram of the state-space control loop. $p_{out}(\vec{x})$ and $r_s(\vec{x})$ are given by Eqns. 1a and 1c. $\vec{D}$ contains nominal duties of the buck and boost converters.

topology and controller are validated in simulation. Since the proposed architecture of Fig. 2 does not modify the small-signal schematic of the AVR rectifier (Fig. 3), the derivation of the state-space model presented in [11] applies nearly exactly. Deviations occur only in the value of k_{rec} and the partial derivatives of z_r , which now become the partial derivatives of z_s , taken using Eqn. 1c. The resulting augmented state-space model is given by Eqn. 2; a full derivation of the updated state-space model will be presented in the full paper. A full state feedback controller is designed using methods employed in [11], [14]. Figure 4 shows the complete block diagram of the system under closed-loop control.

A model is built in Simulink and PLECS to validate the proposed topology and controller for a 6.78 MHz, 12-kW system with $V_{in} = V_{out} = 400$ V. Figure 5 shows steady-state inverter output waveforms and AVR branch currents. It also shows the control objectives p_{out} and r_s being controlled to $P_{out} = 12$ kW and $R_s = 43.2 \Omega$,

while the coupling reactance is disturbed by an amount $\Delta X_s \equiv \frac{1}{2\pi f_s} (\frac{1}{C_{s,nom}} - \frac{1}{C_s})$, where f_s is the switching frequency, and $C_{s,nom}$ is the nominal coupling capacitance. The state-space model, full state feedback controller, and simulation validation of the proposed architecture comprise the second significant contribution of this digest.

V. HARDWARE PROTOTYPE AND EXPERIMENTAL RESULTS

The proposed controller is implemented on a prototype 6.78 MHz, 12-kW AVR-equipped scalable capacitive WPT system. To achieve this power level, three 4-kW-rated full-bridge inverters and three half-bridge rectifiers in each AVR branch ($N = M = 3$) are paralleled. Figure 6 shows the hardware prototype and experimental setup with annotations labeling important components. The system has been tested at a lower power level of 100 W, and output voltage of 30 V. Figure 7 shows the transient behavior of the converter when the controller is activated, as well as the inverter switch node voltage v_{inv} and current i_{inv} in steady-state. In the inverter

waveforms, note that v_{inv} and i_{inv} are in phase and that the inverter achieves soft switching. In the transient, note that the three voltages settle to new values after the control action is taken, and that the settling time is around 1 millisecond. Full-power results at 12 kW with improved PCBs, along with an exhaustive list of important components used will be shown in the full paper. The hardware and experimental validation of the proposed topology and controller are the third significant contribution of this digest.

VI. CONCLUSION AND FUTURE WORK

This digest presents a novel architecture for scalable dynamic capacitive WPT systems. A state-space model is developed and a full state feedback controller is designed for the proposed topology. The operation of the system is validated in simulation. Finally, a 6.78-MHz, 12-kW AVR-equipped scalable capacitive WPT system with three 4-kW-rated full bridge inverters and three half-bridge rectifiers in each AVR branch is built. Its operation is then validated in a dynamic setting.

APPENDIX A

PROOF OF THE FIRST ZONKLAR EQUATION

Appendix one text goes here.

APPENDIX B

PROOF OF ANOTHER EQUATION

Appendix two text goes here.

REFERENCES

- [1] J. M. Miller, P. Jones, J.-M. Li, and O. C. Onar, "Ornl experience and challenges facing dynamic wireless power charging of ev's," *IEEE Circuits and Systems Magazine*, vol. 15, no. 2, pp. 40–53, 2015.
- [2] B. Regensburger, A. Kumar, S. Sinha, and K. Afridi, "High-performance 13.56-mhz large air-gap capacitive wireless power transfer system for electric vehicle charging," in *2018 IEEE 19th Workshop on Control and Modeling for Power Electronics (COMPEL)*, pp. 1–4, 2018.
- [3] G. A. Covic and J. T. Boys, "Modern trends in inductive power transfer for transportation applications," *IEEE Journal of Emerging and Selected Topics in Power Electronics*, vol. 1, no. 1, pp. 28–41, 2013.
- [4] D. Etta, M. A. Dominguez, S. Maji, S. S. Rashid, and K. K. Afridi, "A 10.4-kw high-power-transfer-density multi-mhz capacitive wireless power transfer system for ev charging utilizing stacked-inverter stacked-rectifier architecture," in *2025 IEEE Applied Power Electronics Conference and Exposition (APEC)*, pp. 1640–1645, 2025.
- [5] M. Budhia, G. A. Covic, and J. T. Boys, "Design and optimization of circular magnetic structures for lumped inductive power transfer systems," *IEEE Transactions on Power Electronics*, vol. 26, no. 11, pp. 3096–3108, 2011.
- [6] Y. Lim, H. Tang, S. Lim, and J. Park, "An adaptive impedance-matching network based on a novel capacitor matrix for wireless power transfer," *IEEE Transactions on Power Electronics*, vol. 29, no. 8, pp. 4403–4413, 2014.
- [7] T. C. Beh, M. Kato, T. Imura, S. Oh, and Y. Hori, "Automated impedance matching system for robust wireless power transfer via magnetic resonance coupling," *IEEE Transactions on Industrial Electronics*, vol. 60, no. 9, pp. 3689–3698, 2013.
- [8] J. Choi, J. Xu, R. Makhoul, and J. M. R. Davila, "Implementing an impedance compression network to compensate for misalignments in a wireless power transfer system," *IEEE Transactions on Power Electronics*, vol. 34, no. 5, pp. 4173–4184, 2019.
- [9] A. Kamineni, M. J. Neath, G. A. Covic, and J. T. Boys, "A mistuning-tolerant and controllable power supply for roadway wireless power systems," *IEEE Transactions on Power Electronics*, vol. 32, no. 9, pp. 6689–6699, 2017.
- [10] S. Sinha, A. Kumar, B. Regensburger, and K. K. Afridi, "Active variable reactance rectifier—a new approach to compensating for coupling variations in wireless power transfer systems," *IEEE Journal of Emerging and Selected Topics in Power Electronics*, vol. 8, no. 3, pp. 2022–2040, 2020.
- [11] B. Liao, S. Lin, D. Etta, and K. K. Afridi, "A full state feedback controller for dynamic capacitive wireless power transfer systems," in *2025 IEEE 26th Workshop on Control and Modeling for Power Electronics (COMPEL)*, pp. 1–6, 2025.
- [12] K. Surakitbovorn and J. M. Rivas-Davila, "A simple method to combine the output power from multiple class-e power amplifiers," *IEEE Journal of Emerging and Selected Topics in Power Electronics*, vol. 10, no. 2, pp. 2245–2253, 2022.
- [13] J. C. Mayo-Maldonado, J. C. Rosas-Caro, R. Salas-Cabrera, A. González-Rodríguez, O. F. Ruíz-Martínez, R. Castillo-Gutiérrez, J. R. Castillo-Ibarra, and H. Cisneros-Villegas, "State space modeling and control of the dc-dc multilevel boost converter," in *2010 20th International Conference on Electronics Communications and Computers (CONIELECOMP)*, pp. 232–236, 2010.
- [14] R. Williams and D. Lawrence, *Linear State-Space Control Systems*. Wiley, 2007.

$$\frac{d}{dt} \begin{bmatrix} \hat{v}_{out} \\ \hat{v}_1 \\ \hat{v}_2 \\ \hat{i}_{L1} \\ \hat{i}_{L2} \\ z_1 \\ z_2 \end{bmatrix} = \begin{bmatrix} -\frac{1}{RC_{out}} & 0 & 0 & \frac{D'_1}{C_{out}} & \frac{1}{C_{out}} & 0 & 0 \\ 0 & 0 & 0 & -\frac{1}{C_1} & 0 & 0 & 0 \\ 0 & 0 & 0 & 0 & -\frac{D_2}{C_2} & 0 & 0 \\ -\frac{D'_1}{L_1} & \frac{1}{L_1} & 0 & 0 & 0 & 0 & 0 \\ -\frac{1}{L_2} & 0 & \frac{D_2}{L_2} & 0 & 0 & 0 & 0 \\ -\frac{\partial p_{out}}{\partial v_1} & -\frac{\partial p_{out}}{\partial v_2} & -\frac{\partial p_{out}}{\partial v_1} & -\frac{\partial p_{out}}{\partial i_{L1}} & -\frac{\partial p_{out}}{\partial i_{L2}} & 0 & 0 \\ -\frac{\partial r_s}{\partial v_1} & -\frac{\partial r_s}{\partial v_2} & -\frac{\partial r_s}{\partial v_1} & -\frac{\partial r_s}{\partial i_{L1}} & -\frac{\partial r_s}{\partial i_{L2}} & 0 & 0 \end{bmatrix} \begin{bmatrix} \hat{v}_{out} \\ \hat{v}_1 \\ \hat{v}_2 \\ \hat{i}_{L1} \\ \hat{i}_{L2} \\ z_1 \\ z_2 \end{bmatrix} + \begin{bmatrix} -\frac{I_{L1}}{C_{out}} & 0 \\ 0 & 0 \\ 0 & -\frac{I_{L2}}{C_2} \\ \frac{V_{out}}{L_1} & 0 \\ 0 & \frac{V_2}{L_2} \\ 0 & 0 \\ 0 & 0 \end{bmatrix} \begin{bmatrix} \hat{d}_1 \\ \hat{d}_2 \end{bmatrix} \quad (2)$$

TABLE I: Table of partial derivatives for Eqns. 1a-1b. n and d are the numerator and denominator of the expression for r_s in Eqn. 1c, respectively. They are evaluated at the nominal DC value of the system.

$\frac{\partial p_{out}}{\partial v_{out}} = I_{L2}$	$\frac{\partial r_s}{\partial v_{out}} = d^{-2} \left(d(V_1 I_{L1} I_{L2} X^2) - nk_{rec}(V_1^2 I_{L2}) \right)$
$\frac{\partial p_{out}}{\partial v_1} = I_{L1}$	$\frac{\partial r_s}{\partial v_1} = d^{-2} \left(d(2k_{rec}^2 V_2^2 V_1 + V_{out} I_{L1} I_{L2} X^2) - nk_{rec}(V_2^2 I_{L1} + 2V_{out} V_1 I_{L2}) \right)$
$\frac{\partial p_{out}}{\partial v_2} = 0$	$\frac{\partial r_s}{\partial v_2} = d^{-2} \left(d(2k_{rec}^2 V_1^2 V_2) - nk_{rec}(2V_1 V_2 I_{L1}) \right)$
$\frac{\partial p_{out}}{\partial i_{L1}} = V_1$	$\frac{\partial r_s}{\partial i_{L1}} = d^{-2} \left(d(V_1 V_{out} I_{L2} X^2) - nk_{rec}(V_1 V_2^2) \right)$
$\frac{\partial p_{out}}{\partial i_{L2}} = V_{out}$	$\frac{\partial r_s}{\partial i_{L2}} = d^{-2} \left(d(V_1 V_{out} I_{L1} X^2) - nk_{rec}(V_{out} V_1^2) \right)$

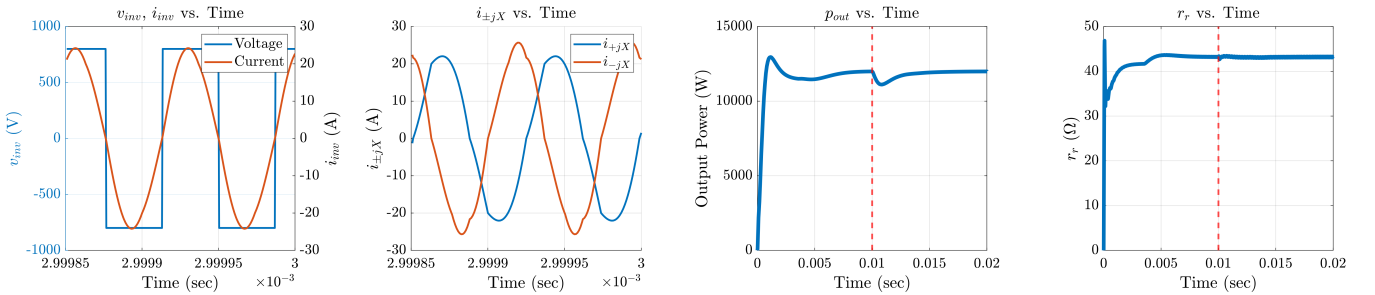


Fig. 5: From left to right: inverter output waveforms v_{inv} and i_{inv} in steady-state; AVR branch currents i_{+jX} and i_{-jX} in steady-state; p_{out} and r_r vs. time, showing the AVR rectifier's startup transient under the proposed controller for $t \in [0, 0.01)$, followed by a step change in coupling reactance ΔX_s at time $t = 0.01$, marked by the red vertical line.

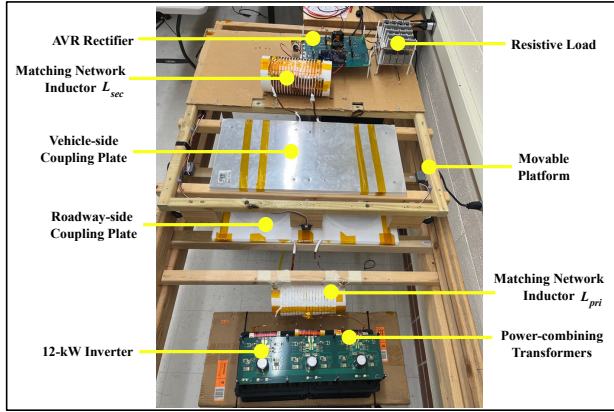


Fig. 6: Annotated photograph of the hardware prototype. A load resistor R is used in place of a battery.

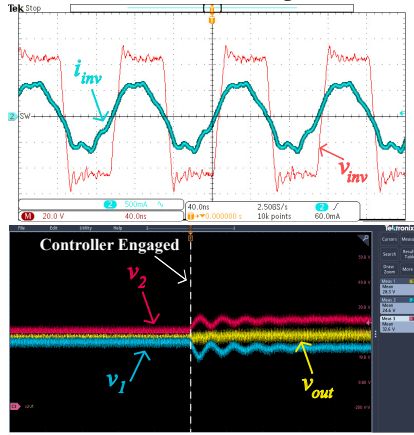


Fig. 7: Top: inverter switch node voltage v_{inv} and current i_{inv} . Bottom: controller activation transient showing v_1 , v_2 , and v_{out} trajectories.