

CSA0734-COMPUTER NETWORKS FOR SERVER MANAGEMENT

NAME: A.V.Prasad reddy

REG. NO.: 192110462

EXPERIMENT 1

Configuration of Network Devices using Packet Tracer

Aim:

To establish a Local Area Network (LAN) using Cisco Packet Tracer.

Tools Required:

- 1.End device - They are the devices through which we can pass message from one device to another and they are interconnected.
- 2.Switch/Hub - Interface Between two devices.
- 3.Cable - Used to connect two devices.

Procedure:

STEP 1: Click on end devices, select generic Pc's drag and drop it on the window. Click on SWITCH drag and drop it on the window.


STEP 2: Select the straight through cable and connect all end device to switch. Assign the IP address for all end devices. (Double click the end device Select → desktop → IP configuration static)

STEP 3: Now set the IP address to Host A (192.168.1.1) in static mode. Similarly set IP address for Host B (192.168.1.2) and Host C (192.168.1.3)


STEP 4: To view the IP address, give ipconfig command in command prompt. Using ping command, we can establish communication between two host devices.

STEP 5: Now display the packet transmission in simulation mode.


Using Hub:

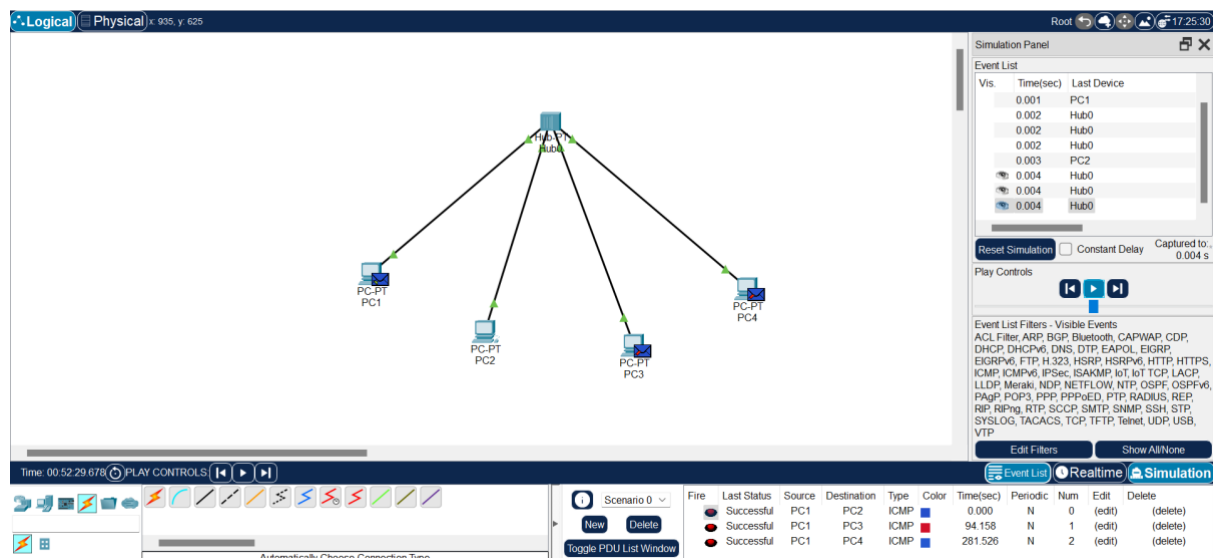


Using Switch:

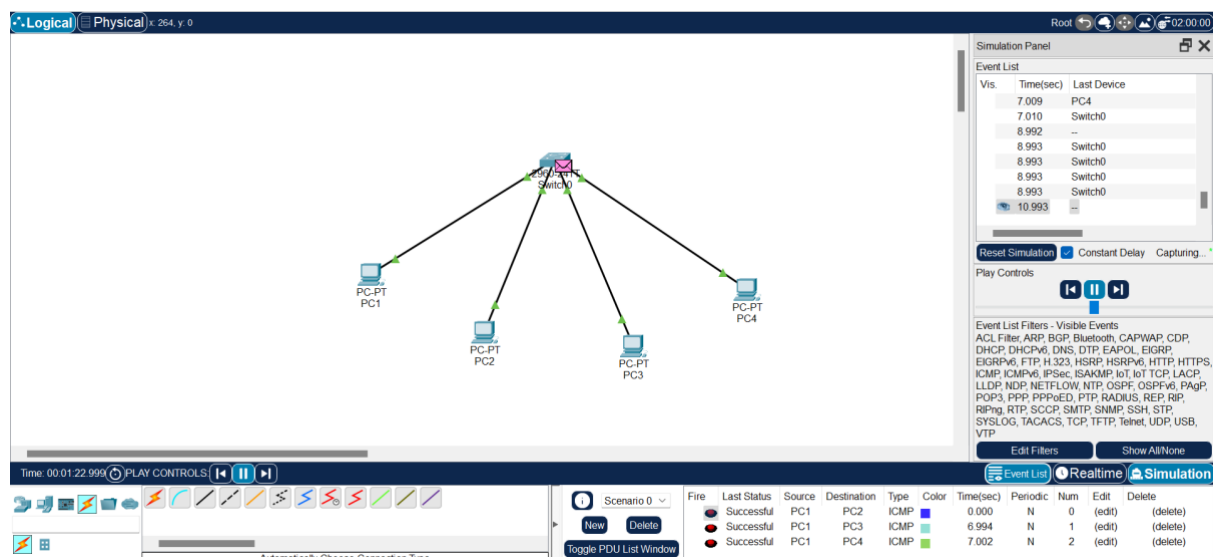

Using Ethernet:

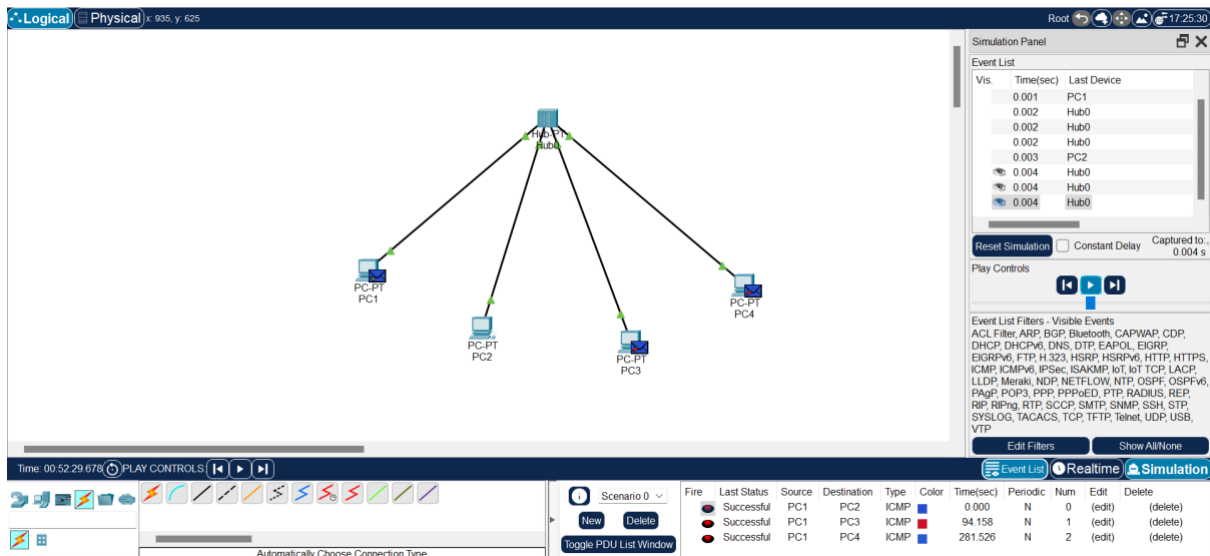

Using Broadcast:

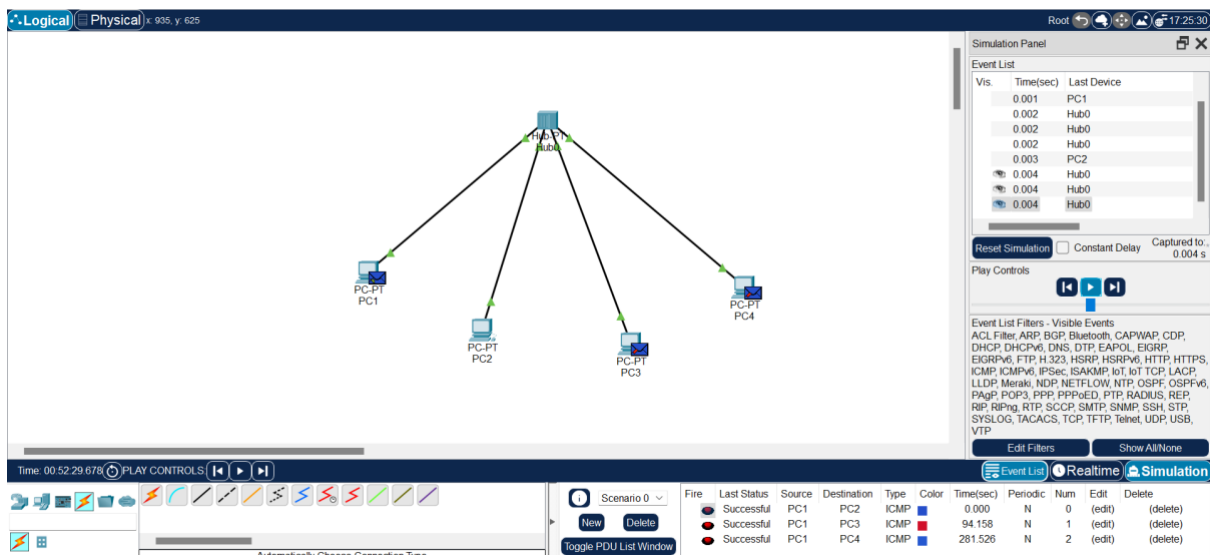

Result:

Configuration of Network Devices using Packet Tracer Hub, Switch, Ethernet, Broadcast is verified successfully.