

Welcome to use Wireless Terminal EVDO Modem

User Manual

# 1

## EVDO Modem Install

---

Installation procedures may vary based on the operating system installed on your PC. The following instructions are based on the Windows XP OS:

Turn on your PC and plug your modem into the USB interface slot to begin software installation. Windows should automatically detect the new device and will prompt you to begin installation. After following the prompts of installation setup, upon completion, a shortcut will be placed on your desktop for quick future access.

Note:

1. If installation "auto-run" does not begin, you will need to locate the "autoRun.exe)" file in the driver path, and Double-Click on AutoRun.exe to run the installation manually.
2. A Micro-SD card is an optional accessory
3. Please do not remove the Micro-SD card when your modem is in use.


Upon successful installation of the EVDO Modem program, the program will launch automatically. You may also double-click the short cut icon



on the desktop to launch the program.



Double-click the short cut icon on the desktop to launch the program.

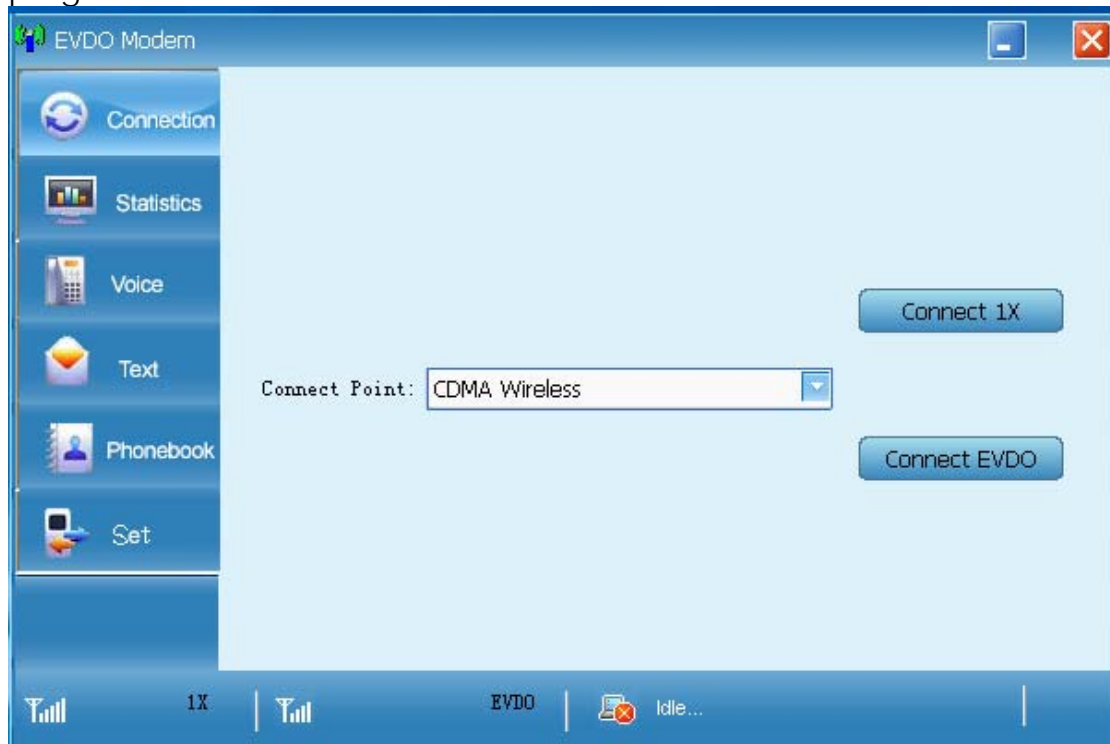

### 2.1 Connect to Internet Function Demo

Connecting with user-defined logon profile


Click on Set icon and select the <Options> menu to open the profile setting window. The first page as follows.

#### 1. Adding a new connection profile

If <New> is selected, the new connection profile windows will pop up.

- ⌚ Please enter the info of requested;
- ⌚ Connect Point (Connection Naming), Phone, User Name and password;
- ⌚ Click <OK>

Note: Users may obtain Number, User Name, Password and Auth type information from networks provider.

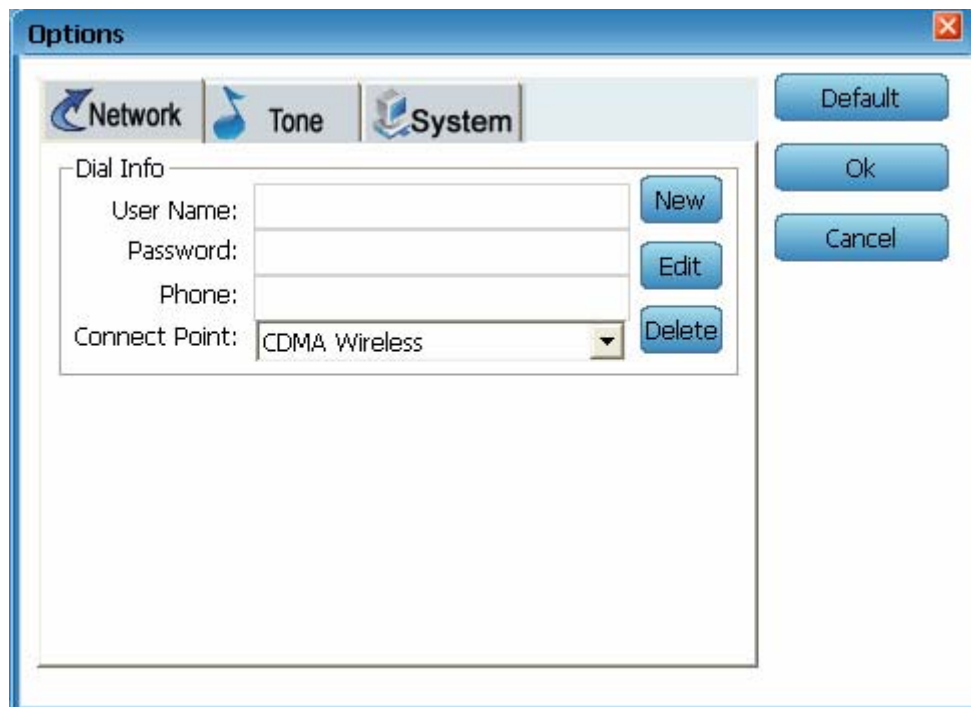

## 2. Connecting

At the home page, there are two buttons.


**Connect 1X**

For connecting to the 1X net

**Connect EVDO**

For connecting to the EVDO net


- ⌚ Click on <Connect> from the home page;
- ⌚ Wait several seconds until the connection is established;
- ⌚ Once you are connected, Icon of <Connect> will change into <Disconnect>.

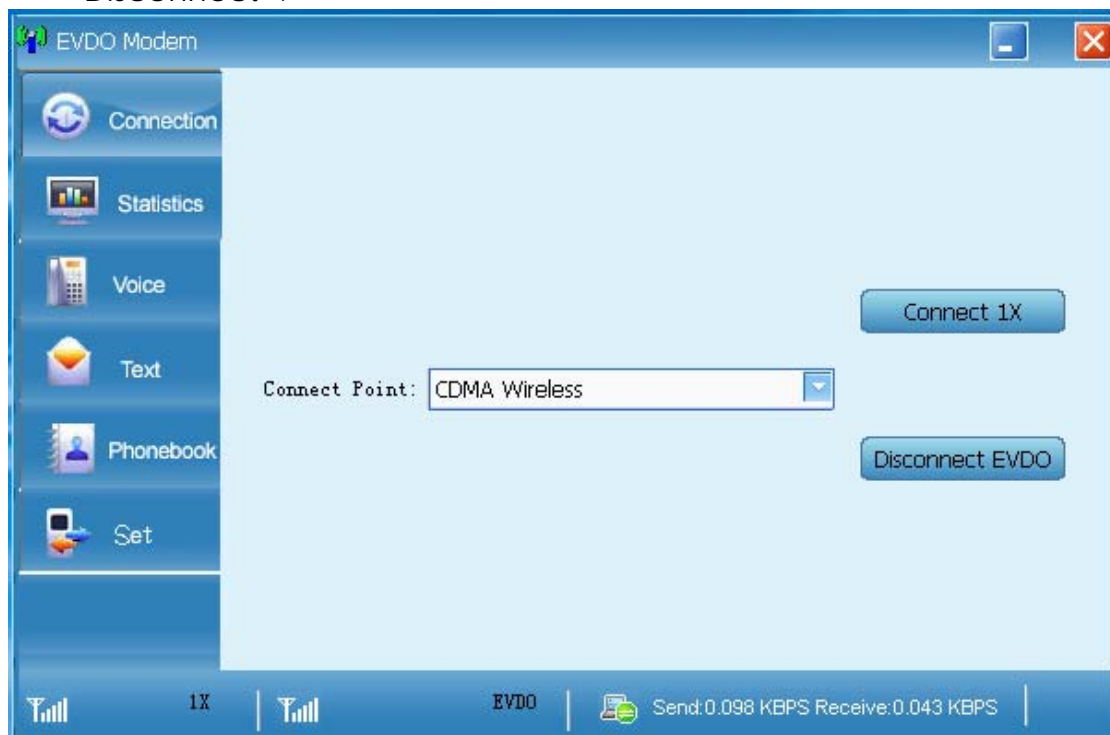

### 3. Statistics

While the connection established, the Statistics page will show the Statistics lines about upload and download.

Other, the status bar will show the send rate and receive rate.

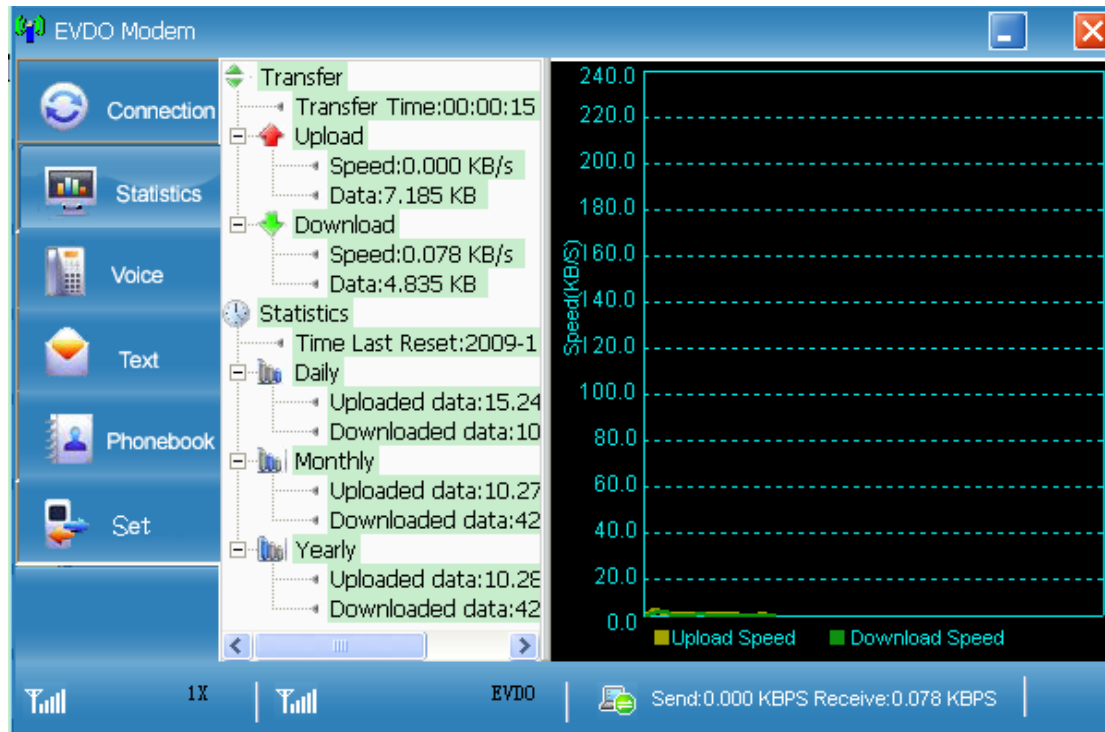


### 3. Disconnecting

Click on Icon of <Disconnect> from the home page to disconnect from the Internet.

## 2.2 Voice Services Function Demo

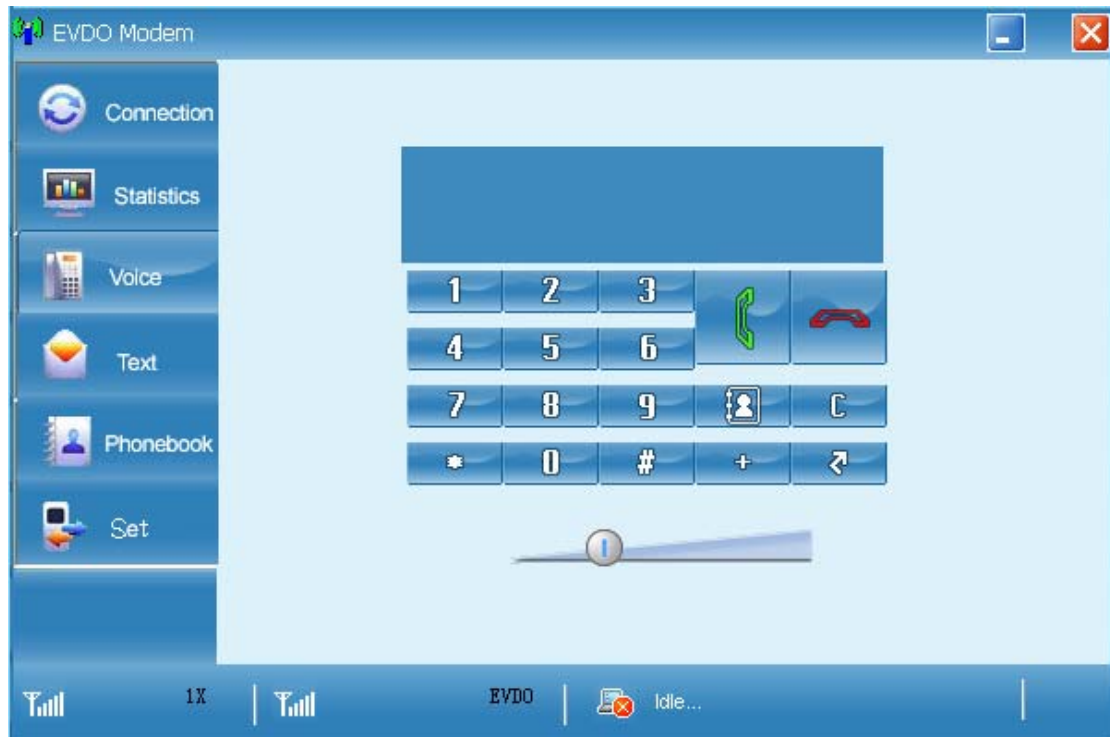

Click Voice icon from the main interface of the PC suite to access the SMS service.



1. Button

When a new calling is coming, click the to answer the calling

⌚ When a new calling is coming, click it to answer;

⌚ Select a contact from PB  or input a number (click  to save to PB), and click it to call someone



2. Button

Hang up the phone by click it.




3. Button

Adjust the volume.

### 2.3 SMS Services Function Demo

Click Text icon from the main interface of the PC suite to access the SMS service.

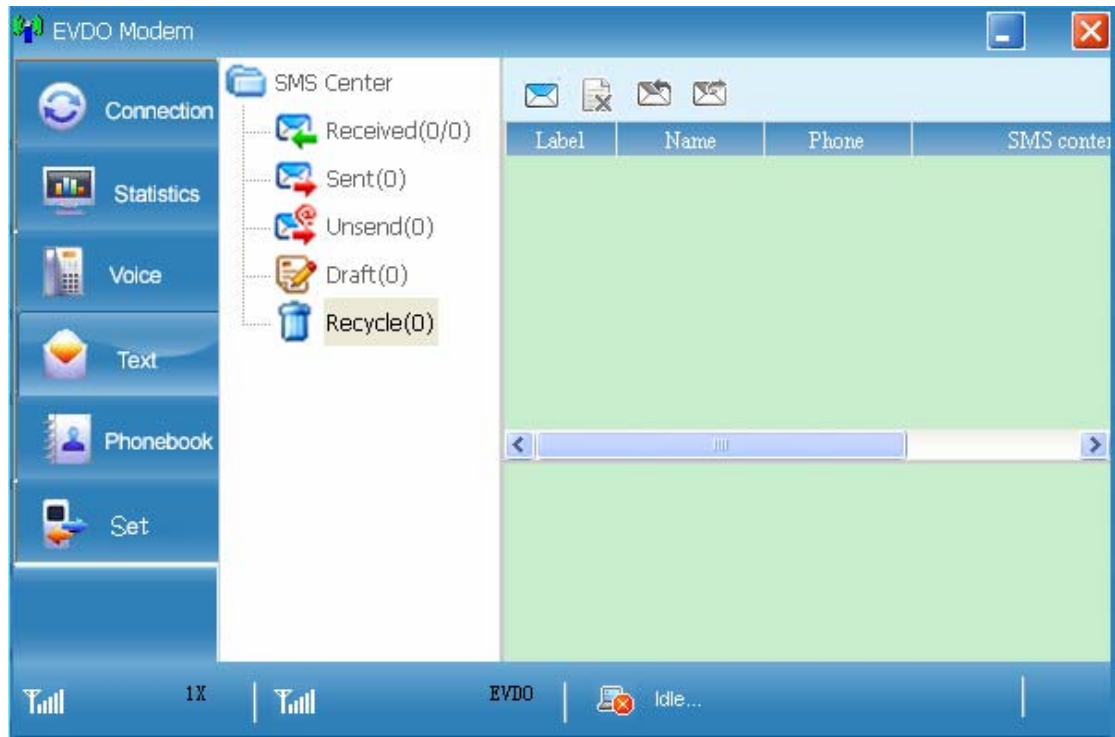


#### 1. Displaying the received SMS

When a new message is received, a message box appears in the status bar. .

- ⌚ Click the content of the chosen message. You may also display the content on the message window.

Note: Received SMS will be saved your PC at last.

#### 2. New SMS


- ⌚ Click on  in the shortcut menu bar. An SMS creation window will pop up;
- ⌚ Enter the text.

#### 3. Send

(1) You may enter a recipient's number in 3 ways:


- ⌚ Enter the number directly. If there are two or more recipients, use ";" to separate each;
- ⌚ Enter the name of a recipient saved in the phonebook;
- ⌚ Click Icon of SMS in the pop up the window to access the recipient's selection window. Select one party, or more, and the

click on <OK> to add the chosen party (ies) to the recipient list.

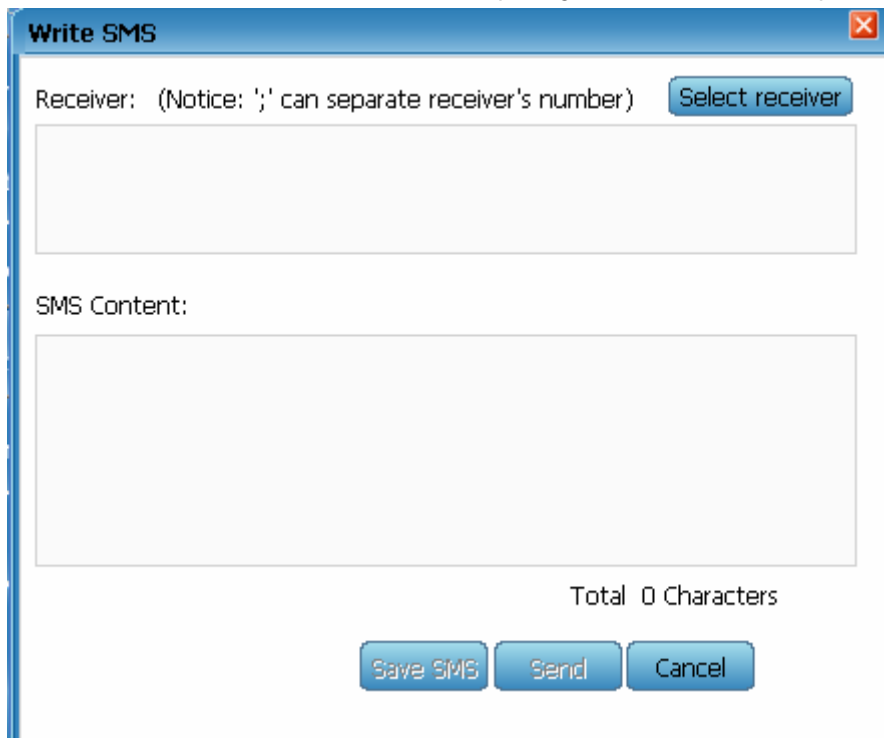



(2) Click on <Send> to send the message. If the message is not sent, it will be saved in the Unsend box.

#### 4. Reply

- ⌚ Select a message in the inbox and then click on  in the shortcut menu bar;
- ⌚ The recipient's / number will appear;
- ⌚ Enter the reply in input field, and then click on <Send>.

#### 5. Forward

- ⌚ Select a message and then click on  in the shortcut menu bar;
- ⌚ The content of the selected message will appear in the input field;
- ⌚ Enter the recipient's number and then click on <Send>.


Note: First click on  Sent(0) . It will read the SMS from UIM card to your PC, next it will be deleted all SMS in UIM card.




## 2.4 PB Services Function Demo

Click Phonebook from the main interface of PC suite to access the Phonebook management.

The contacts list column contains: UIM /Computer. You can use contacts stored either on the UIM or on Computer in the corresponding window.

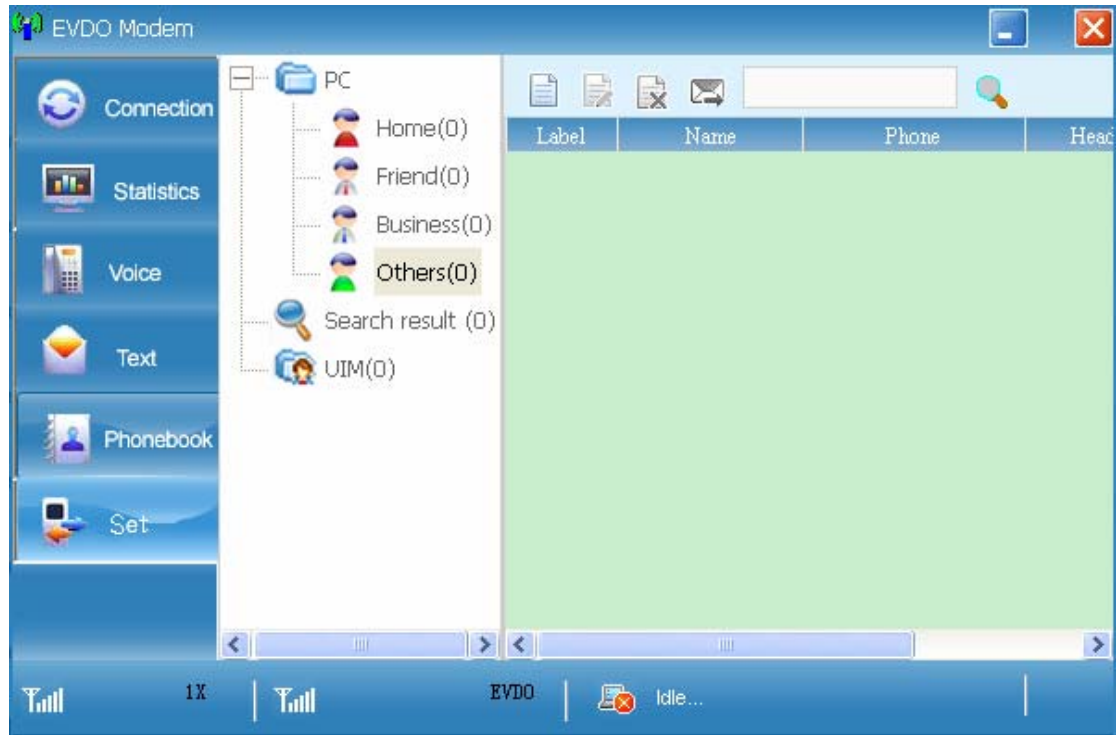

### 1. New

- ⌚ Select  from the tool bar to access the contacts editor;
- ⌚ Enter the relevant information, and press <OK>; the new contact will appear in the current contact list.

**Create new business card**

Communication Info

Select Class: Home Select

Name:  Email:

Home number:  Mobile number:

Fax number:  Office phone:

Address Info


Country:

Company:


HeadShip:

Ok Cancel


## 2. Edit


- ⌚ Select a contact and access the contact editor by selecting  from the tool bar or by double-clicking on the contact;
- ⌚ Modify the relevant contact information, and select <OK> to save the changes.

## 3. Delete

- ⌚ Select one contact, or more (using the ctrl/shift key);
- ⌚ Click on  from the tool bar. A dialog box will ask "Are you sure to delete the contacts?"
- ⌚ Click on <OK> and the contact(s) will be deleted; deleted contacts will not be restored.


## 4. Send SMS

- ⌚ Select one contact or more (using ctrl/shift key);
- ⌚ Click on  in the tool bar;
- ⌚ When the message is completed, you may send it by clicking on <Send>.

Note: First click on  UIM(0) . It will read all of PB from UIM card to your PC.

## 2.5 PIN Security Function Demo

Click on Set icon and select the <PIN Operations> menu to open the profile Security window.

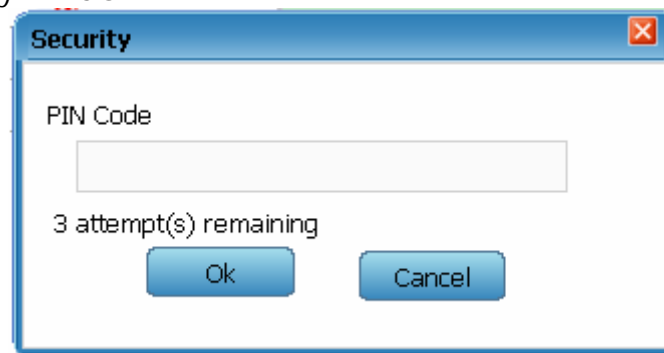

Note: It is only three attempts to validate the PIN code, and it is only ten attempts to validate the PUK code.


## 2.6 PB Import/Export Function Demo

Click on Set icon and select the <Import/Export PC card> menu to open the profile Security window.



It can store all contacts from PC box to the file which format is .csv

## 2.7 Setting Menu Function Demo

Options dialog as follow:

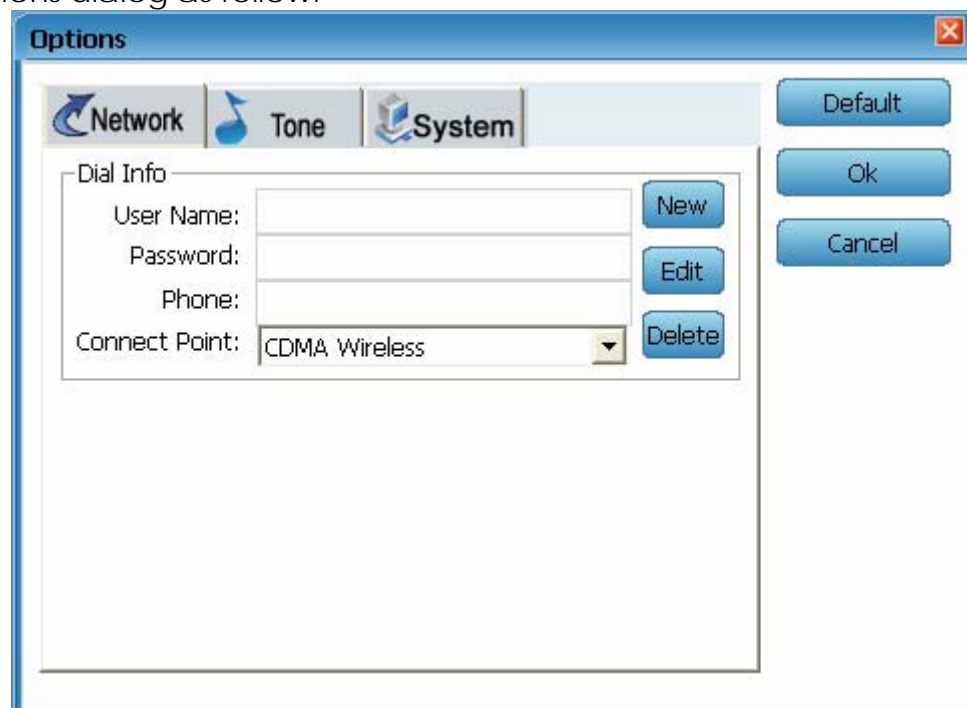

We can add, edit, delete the connect point. But the CDMA Wireless do not can be deleted.

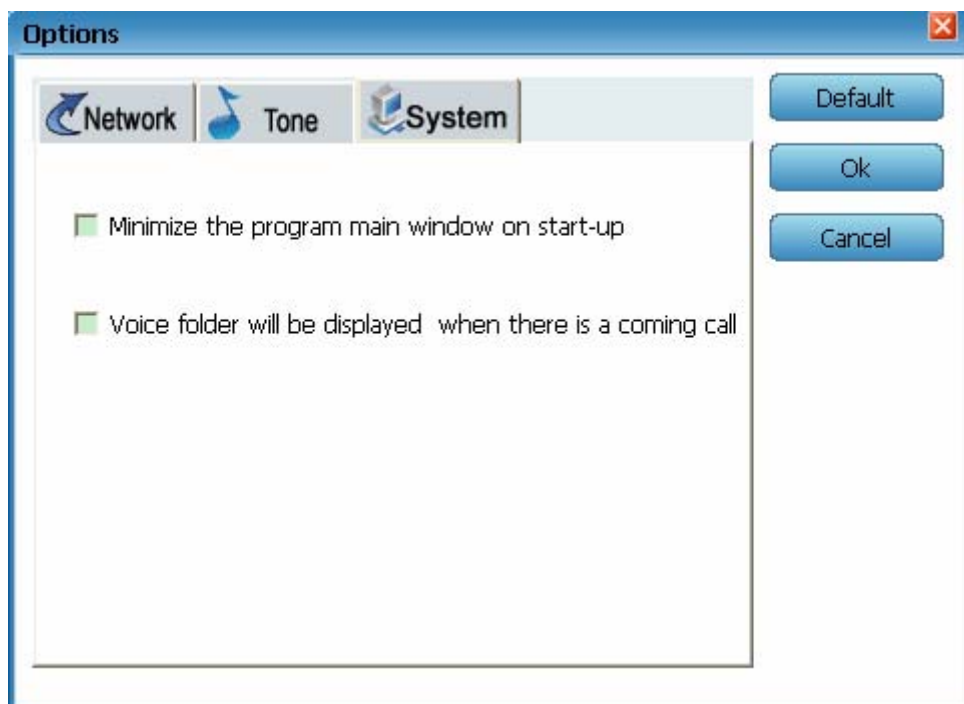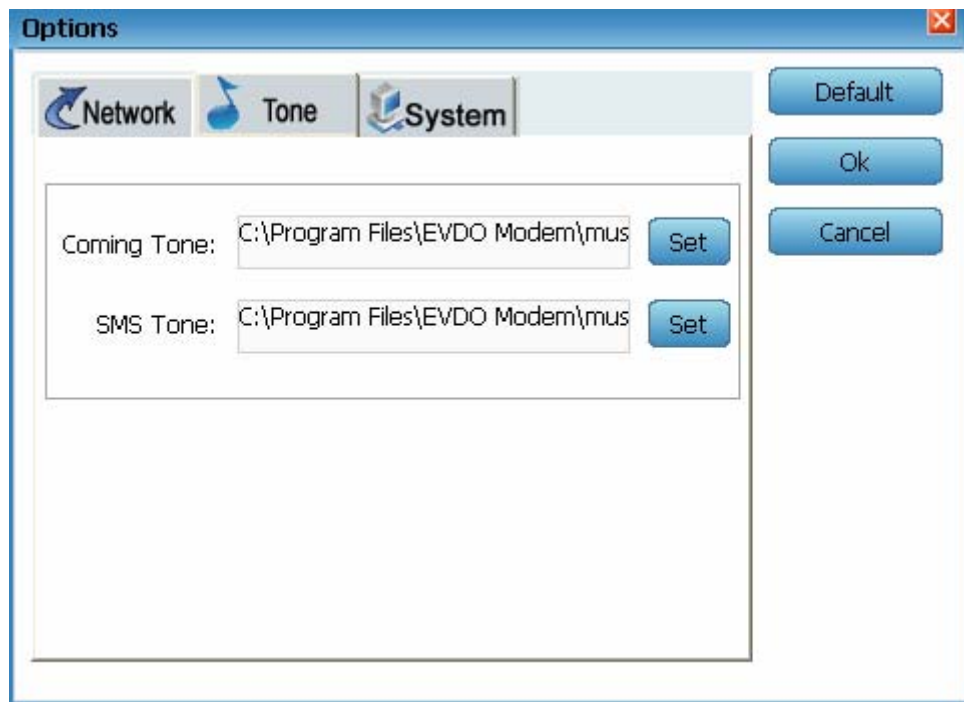

- 1、Exit the application program。
- 2、Safely Remove Device。
- 3、choose the Start Menu-> Programs。
- 4、choose EVDO Modem, click the Uninstall EVDO Modem 。

Note: Some personal information files will be remained in the installation directory.

## FAQS

1. Q: Which operation systems does the software support?  
A: It supports Windows XP, Windows Vista and Windows 7 OS.
2. Q: I cannot install the driver  
A: On some PCs, installation of the driver may take a long time because of the PC configuration. So please wait and do not cancel the process or you will have to uninstall and re-install again.
3. Q: The data card does not register any networks  
A: The reasons are shown below:
  1. Unstable local signal;
  2. The software is an old version;
  3. Hardware problem.You may:
  1. Try to logon from another location;
  2. Update the software;
  3. Check the hardware or use another data card and retry.
4. Q: It failed to connect to the internet  
A: Please make sure the connection profile and settings are correct.
5. Q: The connection speed and data transfer rates are too slow  
A: Please check the local network signal strength.
6. Q: Does it support roaming?  
A: This depends on the local operator. Please check with your local operator or service provider.
7. Q: What can I do when state bar show "Serial port not available!"?  
A: Maybe the Serial Port was be used by other program. Please restart the software or re-insert your modem into the USB interface slot.