


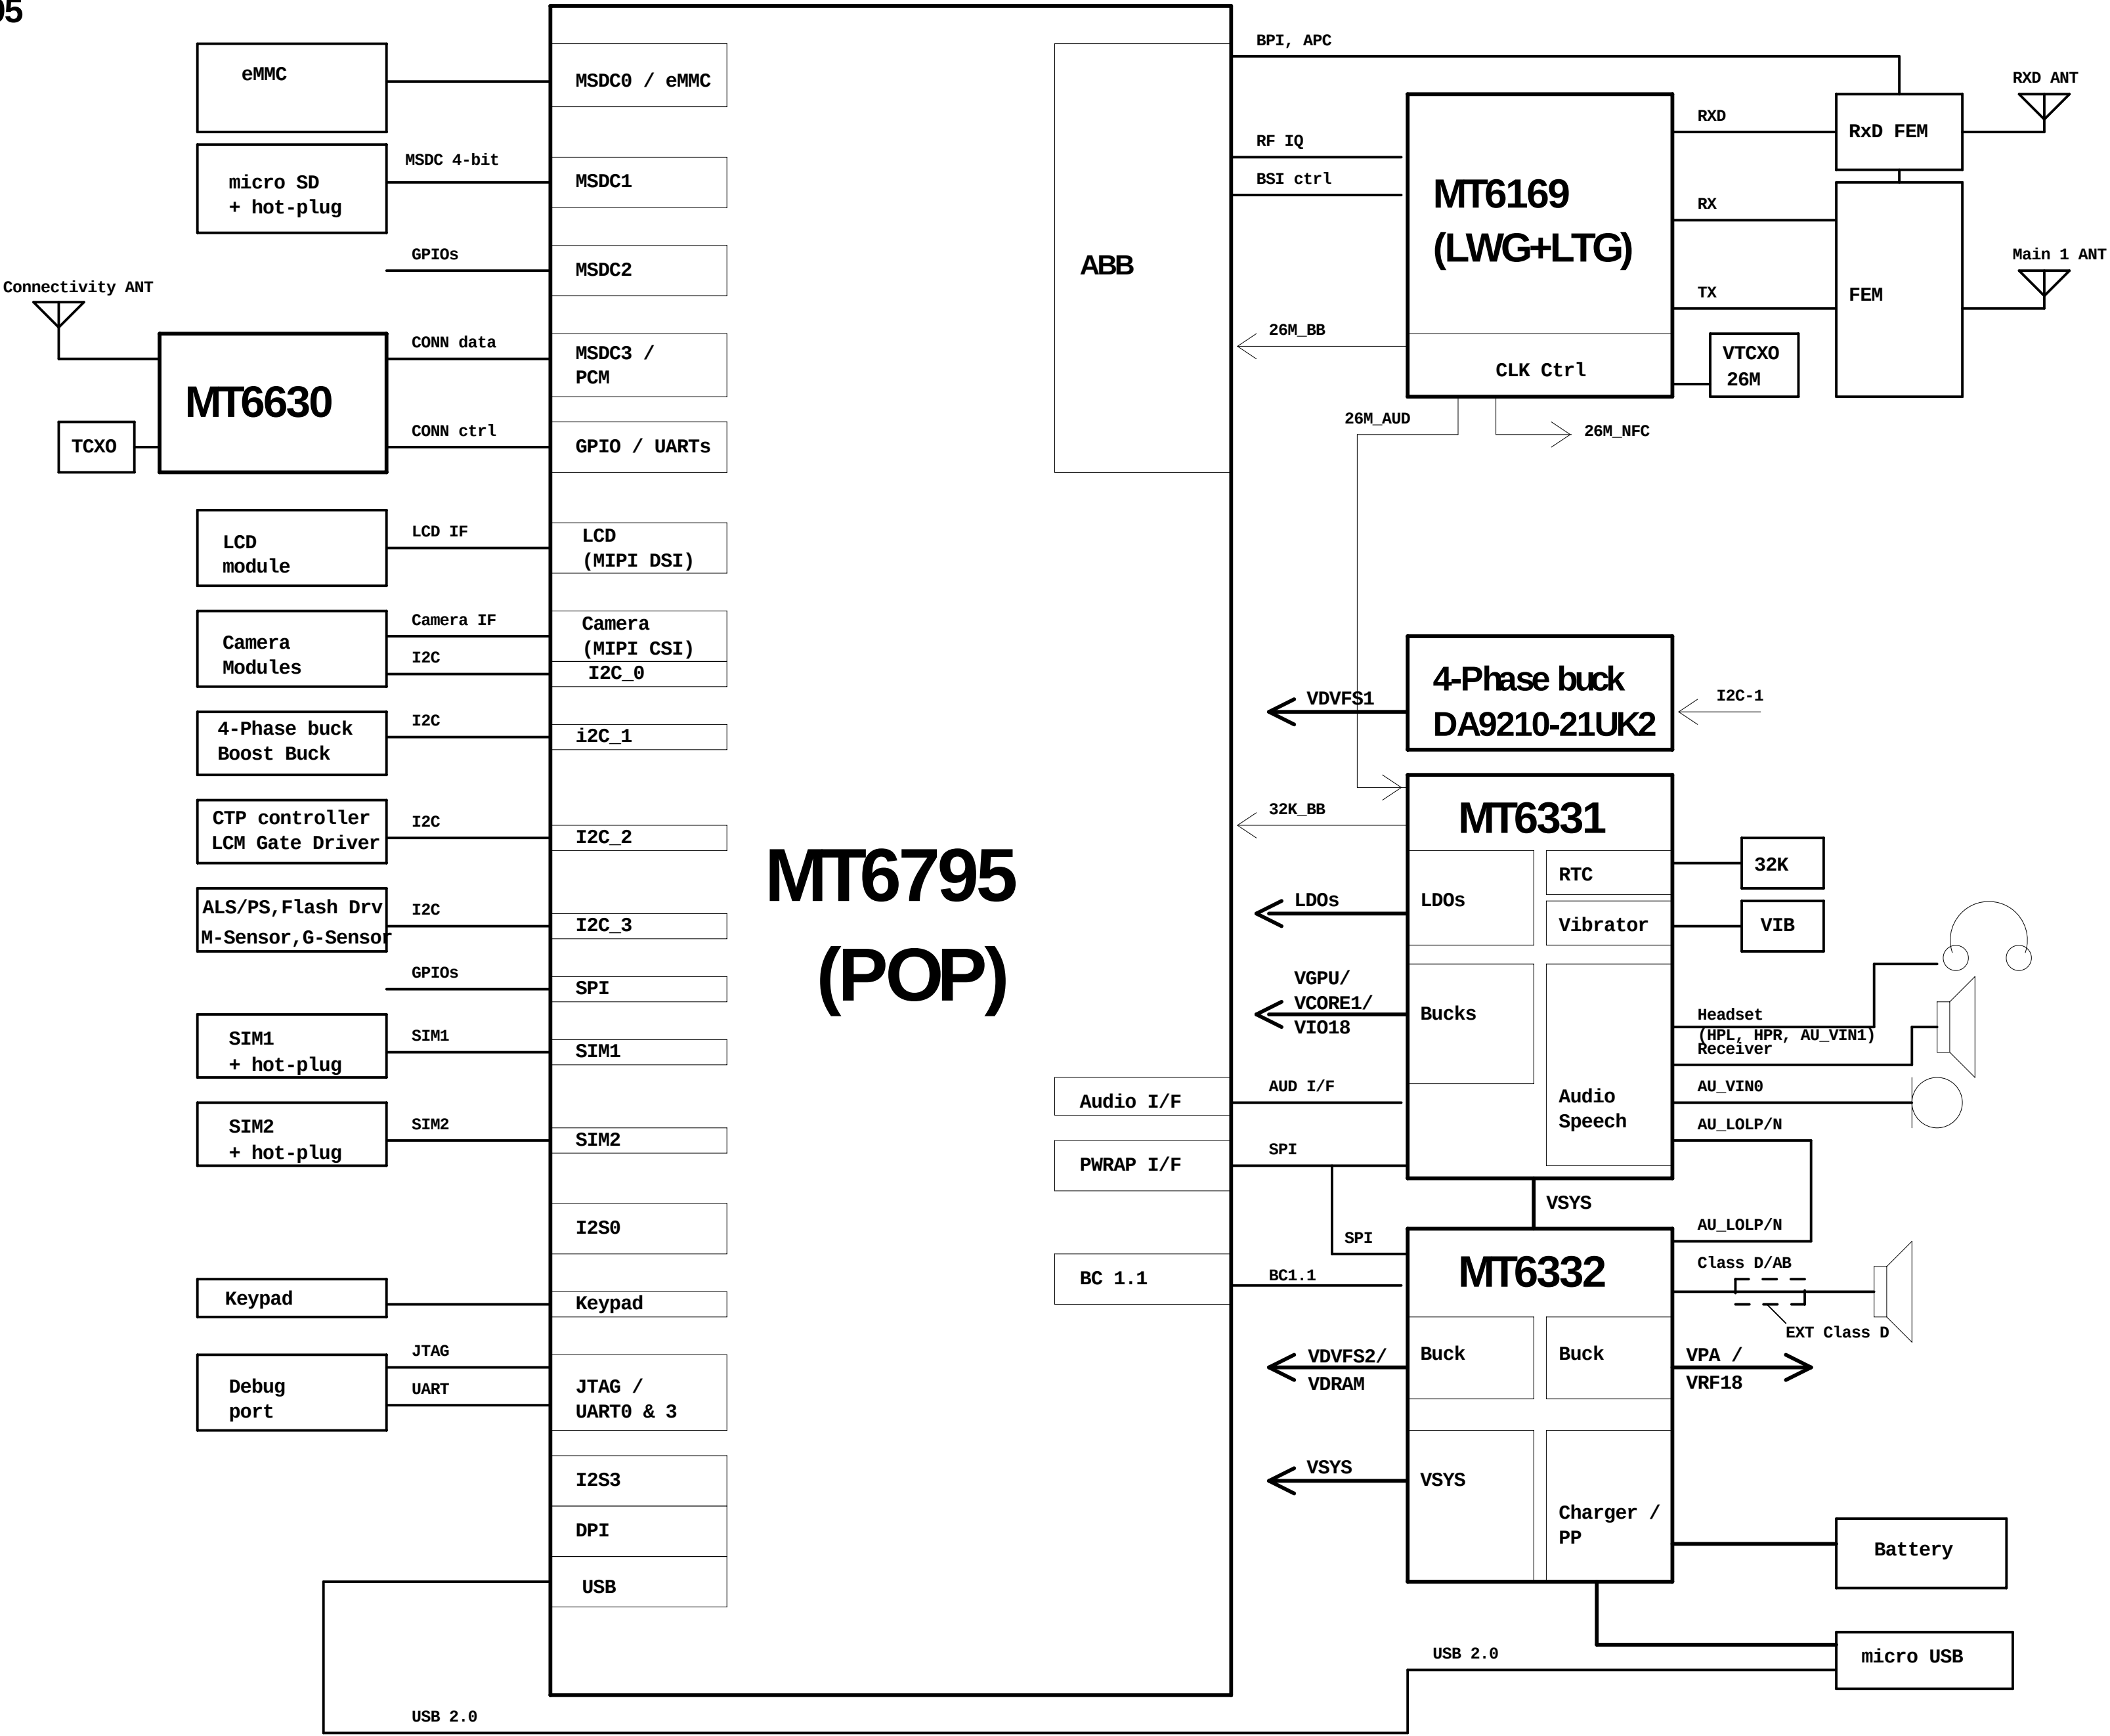


REVISION RECORD			
LTR	ECO NO.	APPROVED:	DATE:

MT6795 (POP)

COMPANY: Shanghai ReallyTek Information Technology Co.,Ltd				MODEL: H952		Modified Date: 2015-7-14	
DRAWN	ZY/TS	DATED	20140512	TITLE: 00_BLOCK_DIAGRAM		VERSION: V1.0	SHEET: 1 OF 22
CHECKED	< >	DATED	< >				

BB_POWER_I

REVISION RECORD			
LTR	ECO NO.	APPROVED:	DATE:

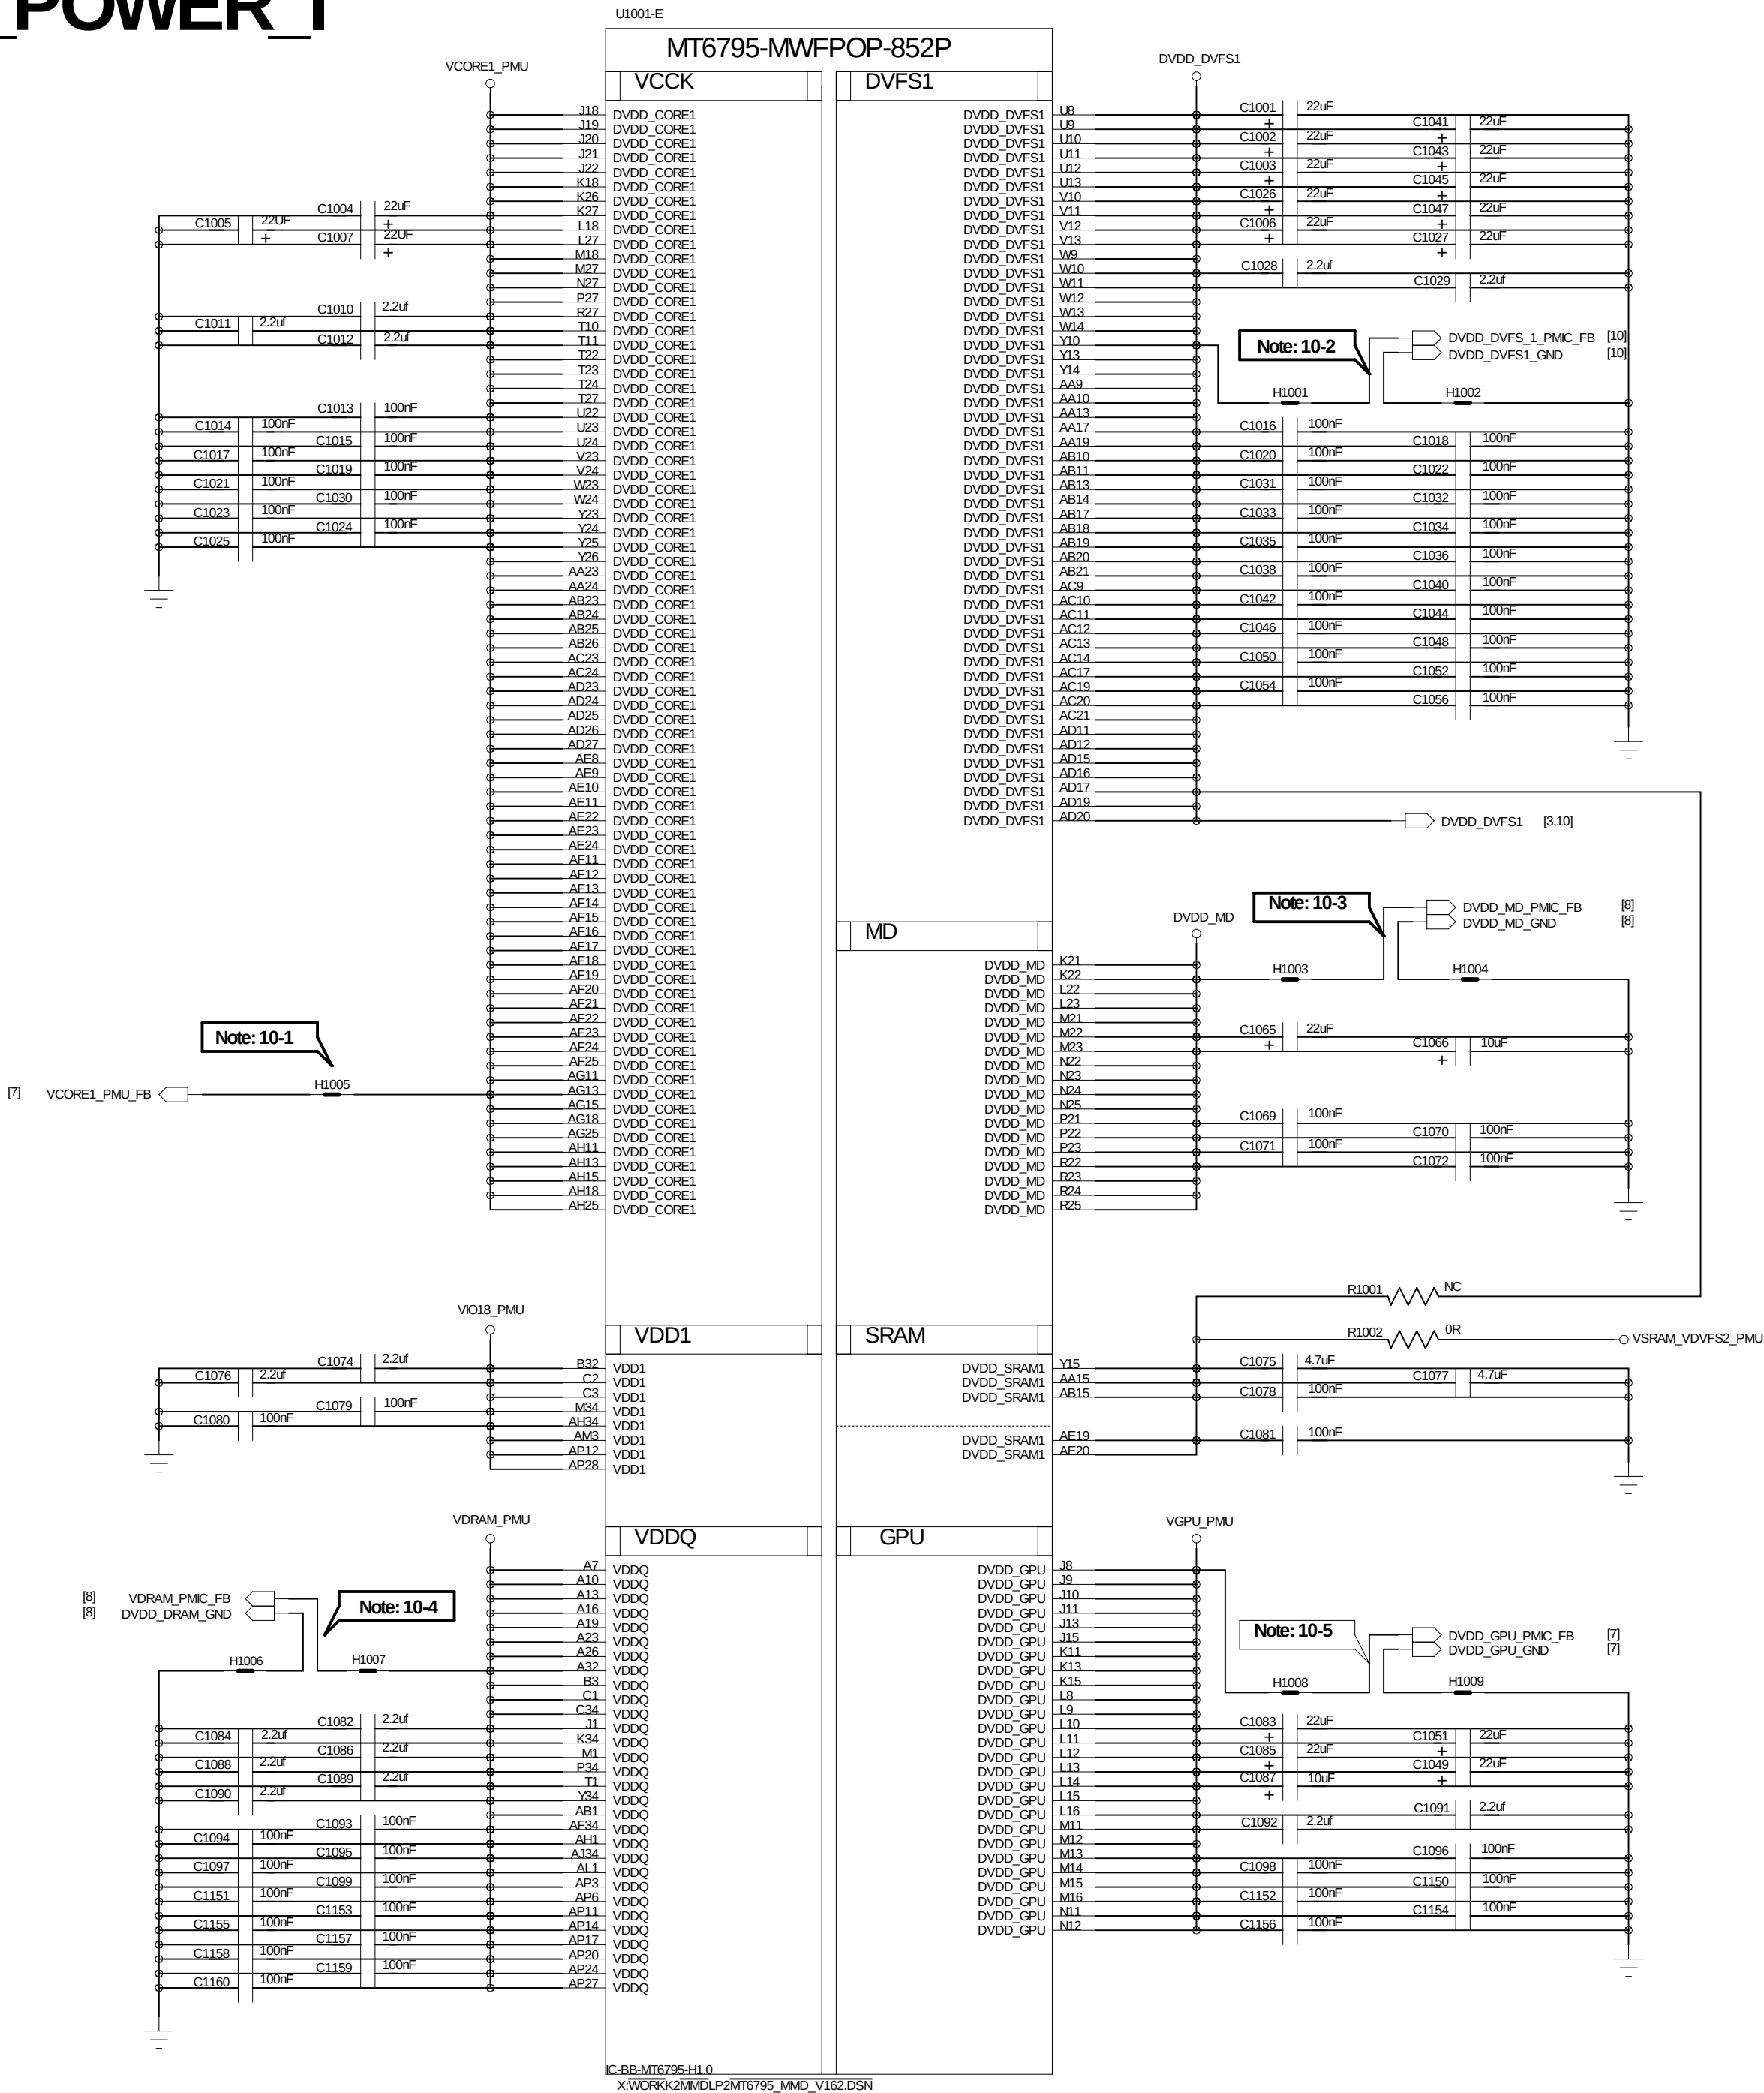

Schematic design notice of "10_BB_POWER_1" page.

- Note 10-1:

VCORE_1 remote sense must be close to MT6795i | s AG13 ball.
Remote sense trace with GNDshielding to PMIC (Differential)
- Note 10-2:

Differential pair of DVFS1 remote sense must be close to MT6795i | s Y10 ball.
- Note 10-3:

Differential pair of DVDD_MD remote sense must be close to MT6795i | s K22 ball.
- Note 10-4:

VDRAM remote sense must be close to MT6795i | s A32 ball or be placed to the farrest power ball of VDRAM from MT6332 point of view.
- Note 10-5:

Differential pair of GPU remote sense must be close to MT6795i | s J8 ball.



SHIELDING AND MARK

SH1001	SH1002	SHC1001	SHC1002	SHC1003	SHC1004	SHC1005	MARK1001	MARK1002
SH-4IN1-H952-H-EMMC-H951	SH1003	SH1004	LG1001	SN1001	WPL1001	H1	H2	H3
SH-BB-H951	SH-RF-H951	IN-FINX-6.4H	SNV-5ATER-PROO-1.0	CL-1.0	LA-1.0	VI-1.0	VI-1.0	VI-1.0

COMPANY: Shanghai ReallyTek Information Technology Co.,Ltd				MODEL: H952		Modified Date: 2015-7-14	
DRAWN	ZY/TS	DATED	20140512	TITLE: 10_BB_POWER_1		VERSION: V1.0	SHEET: 3 OF 22
CHECKED	< >	DATED	< >				

BB_POWER_2

REVISION RECORD			
LTR	ECO NO:	APPROVED:	DATE:

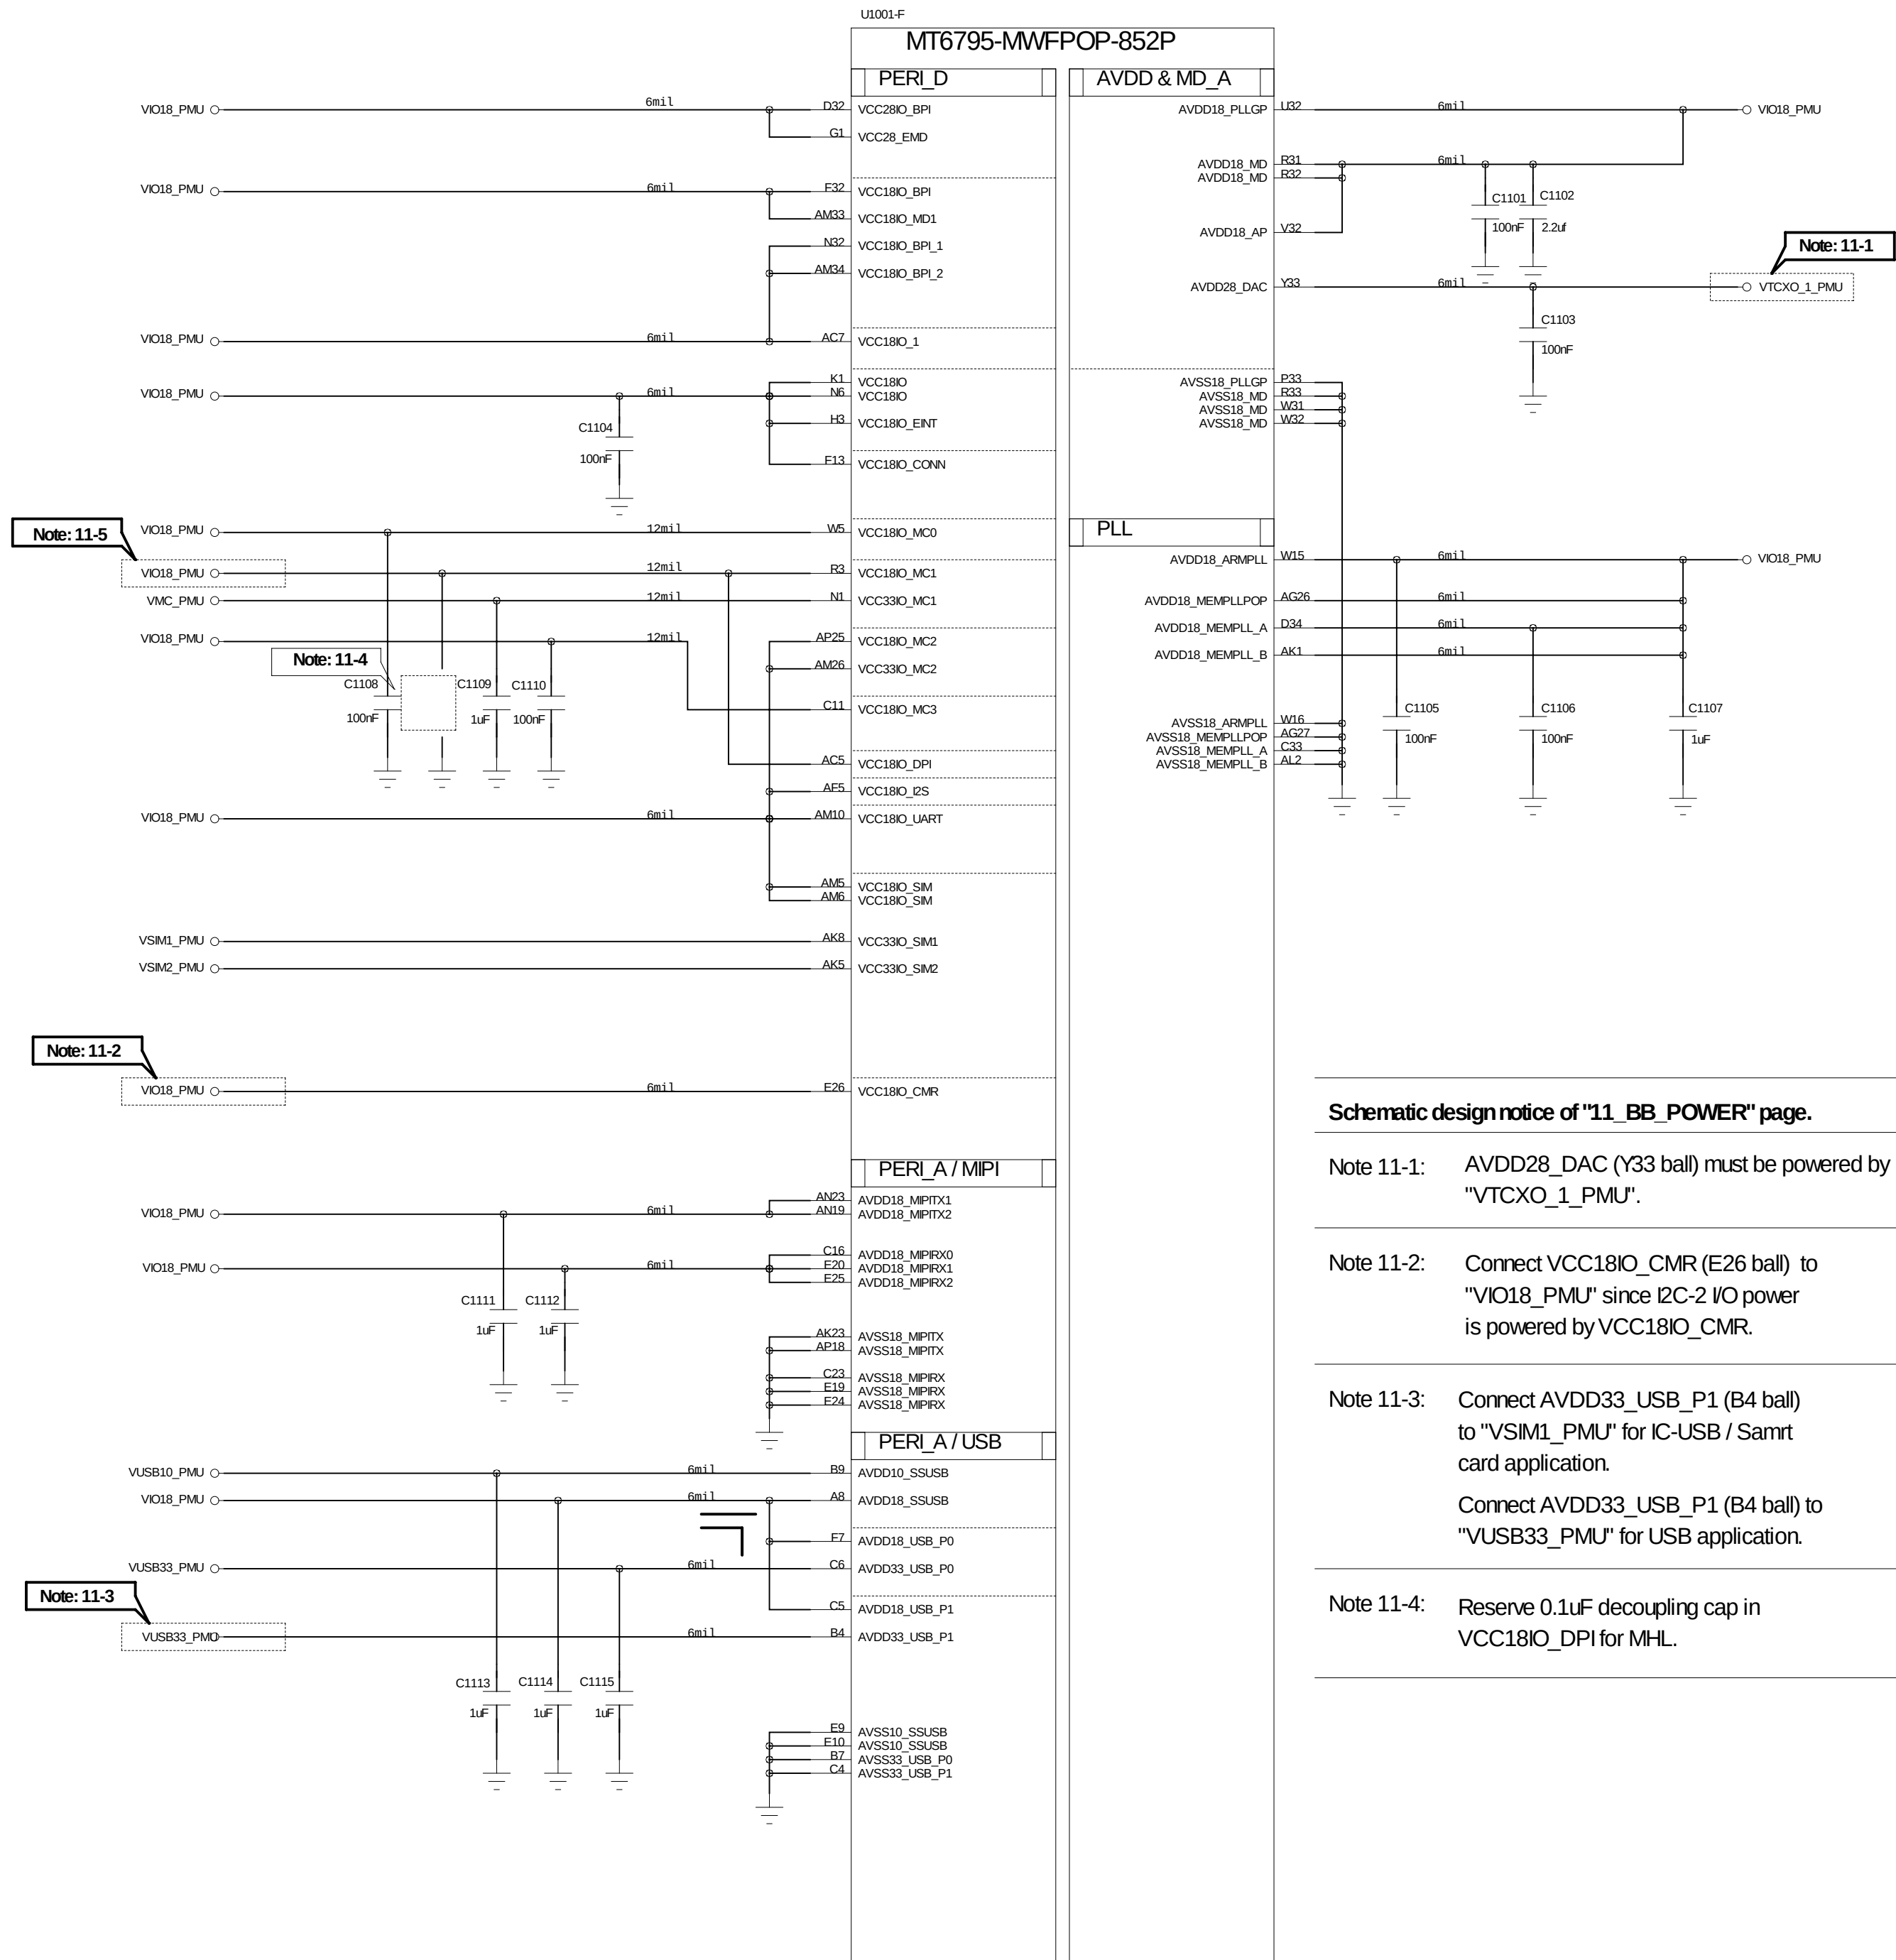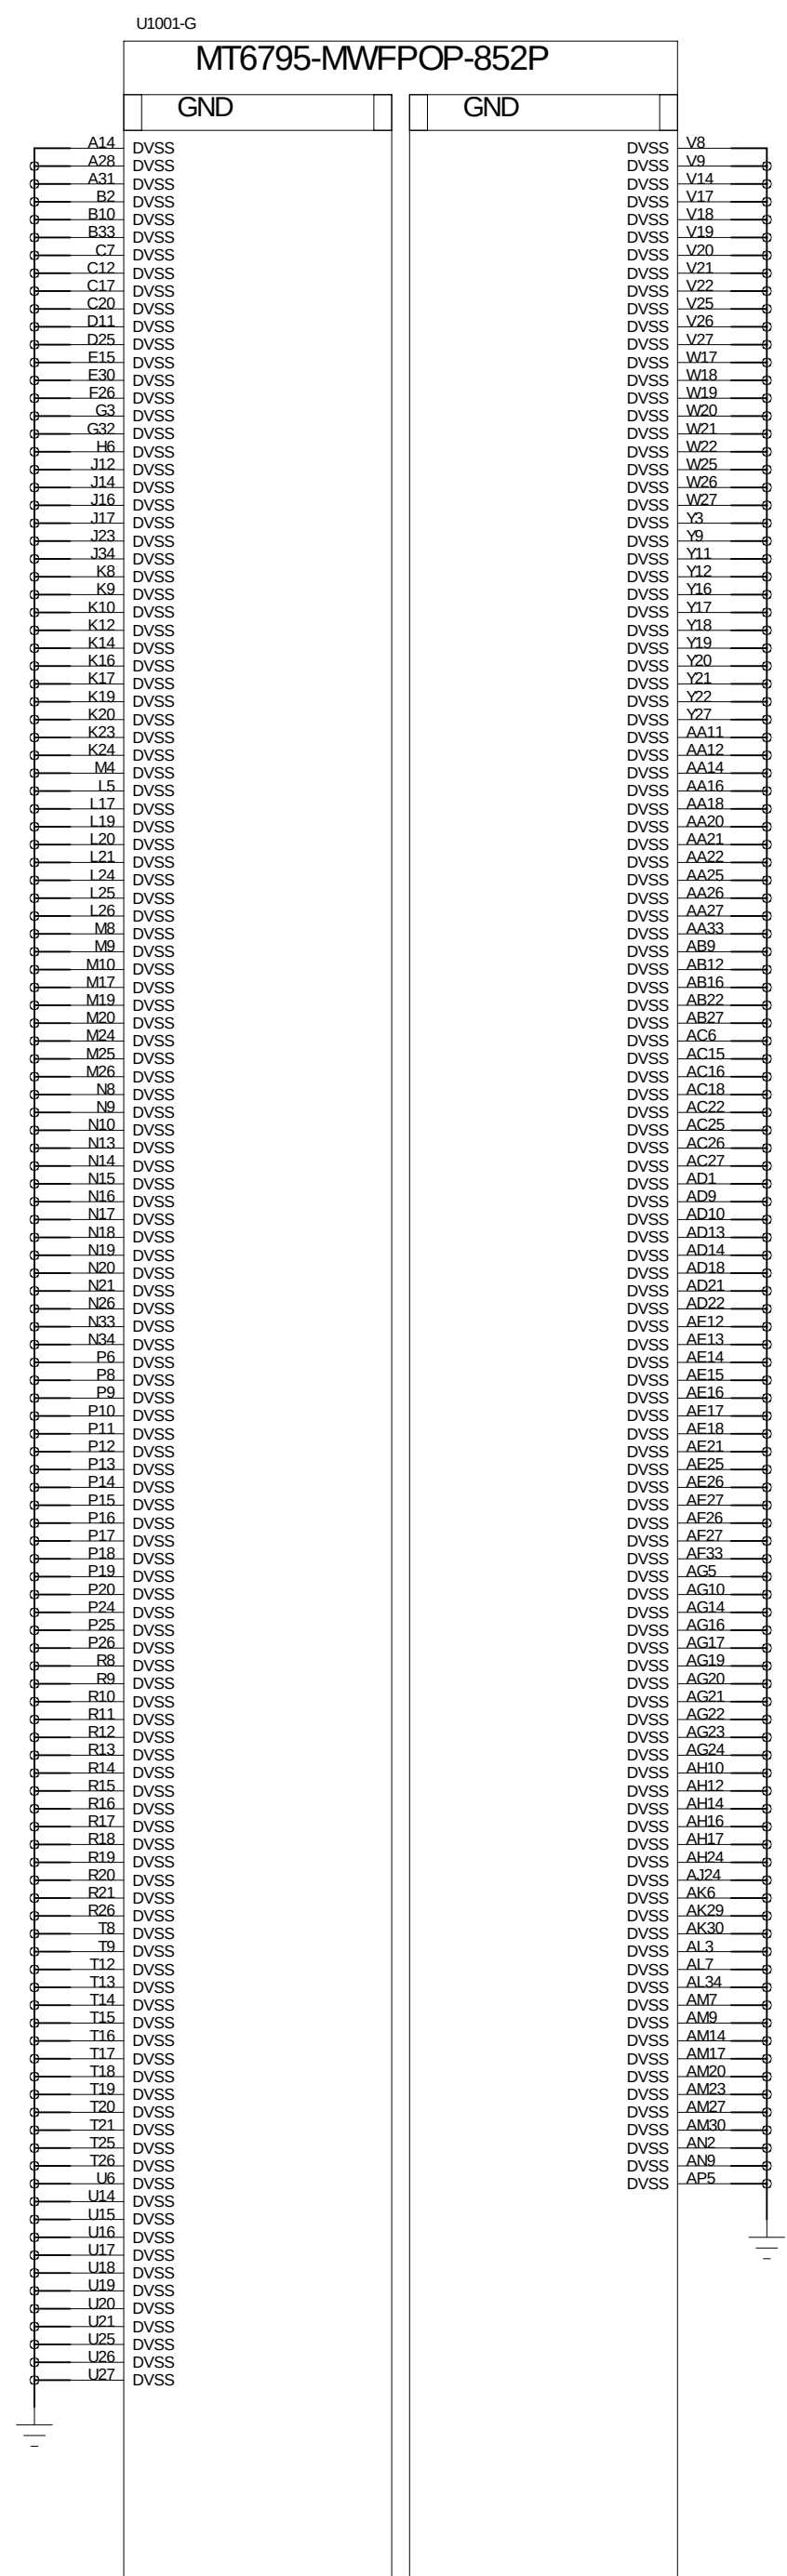

Schematic design notice of "11_BB_POWER" page.

Note 11-1: AVDD28_DAC (Y33 ball) must be powered by "VTCXO_1 PMU".

Note 11-2: Connect VCC18IO_CMR (E26 ball) to "VIO18_PMU" since I2C-2 I/O power is powered by VCC18IO_CMR.


Note 11-3: Connect AVDD33_USB_P1 (B4 ball) to "VSIM1_PMU" for IC-USB / Samrt card application.

Connect AVDD33_USB_P1 (B4 ball) to "VUSB33_PMU" for USB application.


Note 11-4: Reserve 0.1uF decoupling cap in VCC18IO_DPI for MHL.

COMPANY: Shanghai ReallyTek Information Technology Co.,Ltd U / M76795-E1-4MMFPQP-14X14mm				MODEL: H952		Modified Date: 2015-7-14	
DRAWN	ZY/TS	DATED	20140512	TITLE: 11_BB_POWER_2		VERSION: V1.0	SHEET: 4 OF 22
CHECKED	< >	DATED	< >				

REVISION RECORD			
LTR	ECO NO.	APPROVED:	DATE:

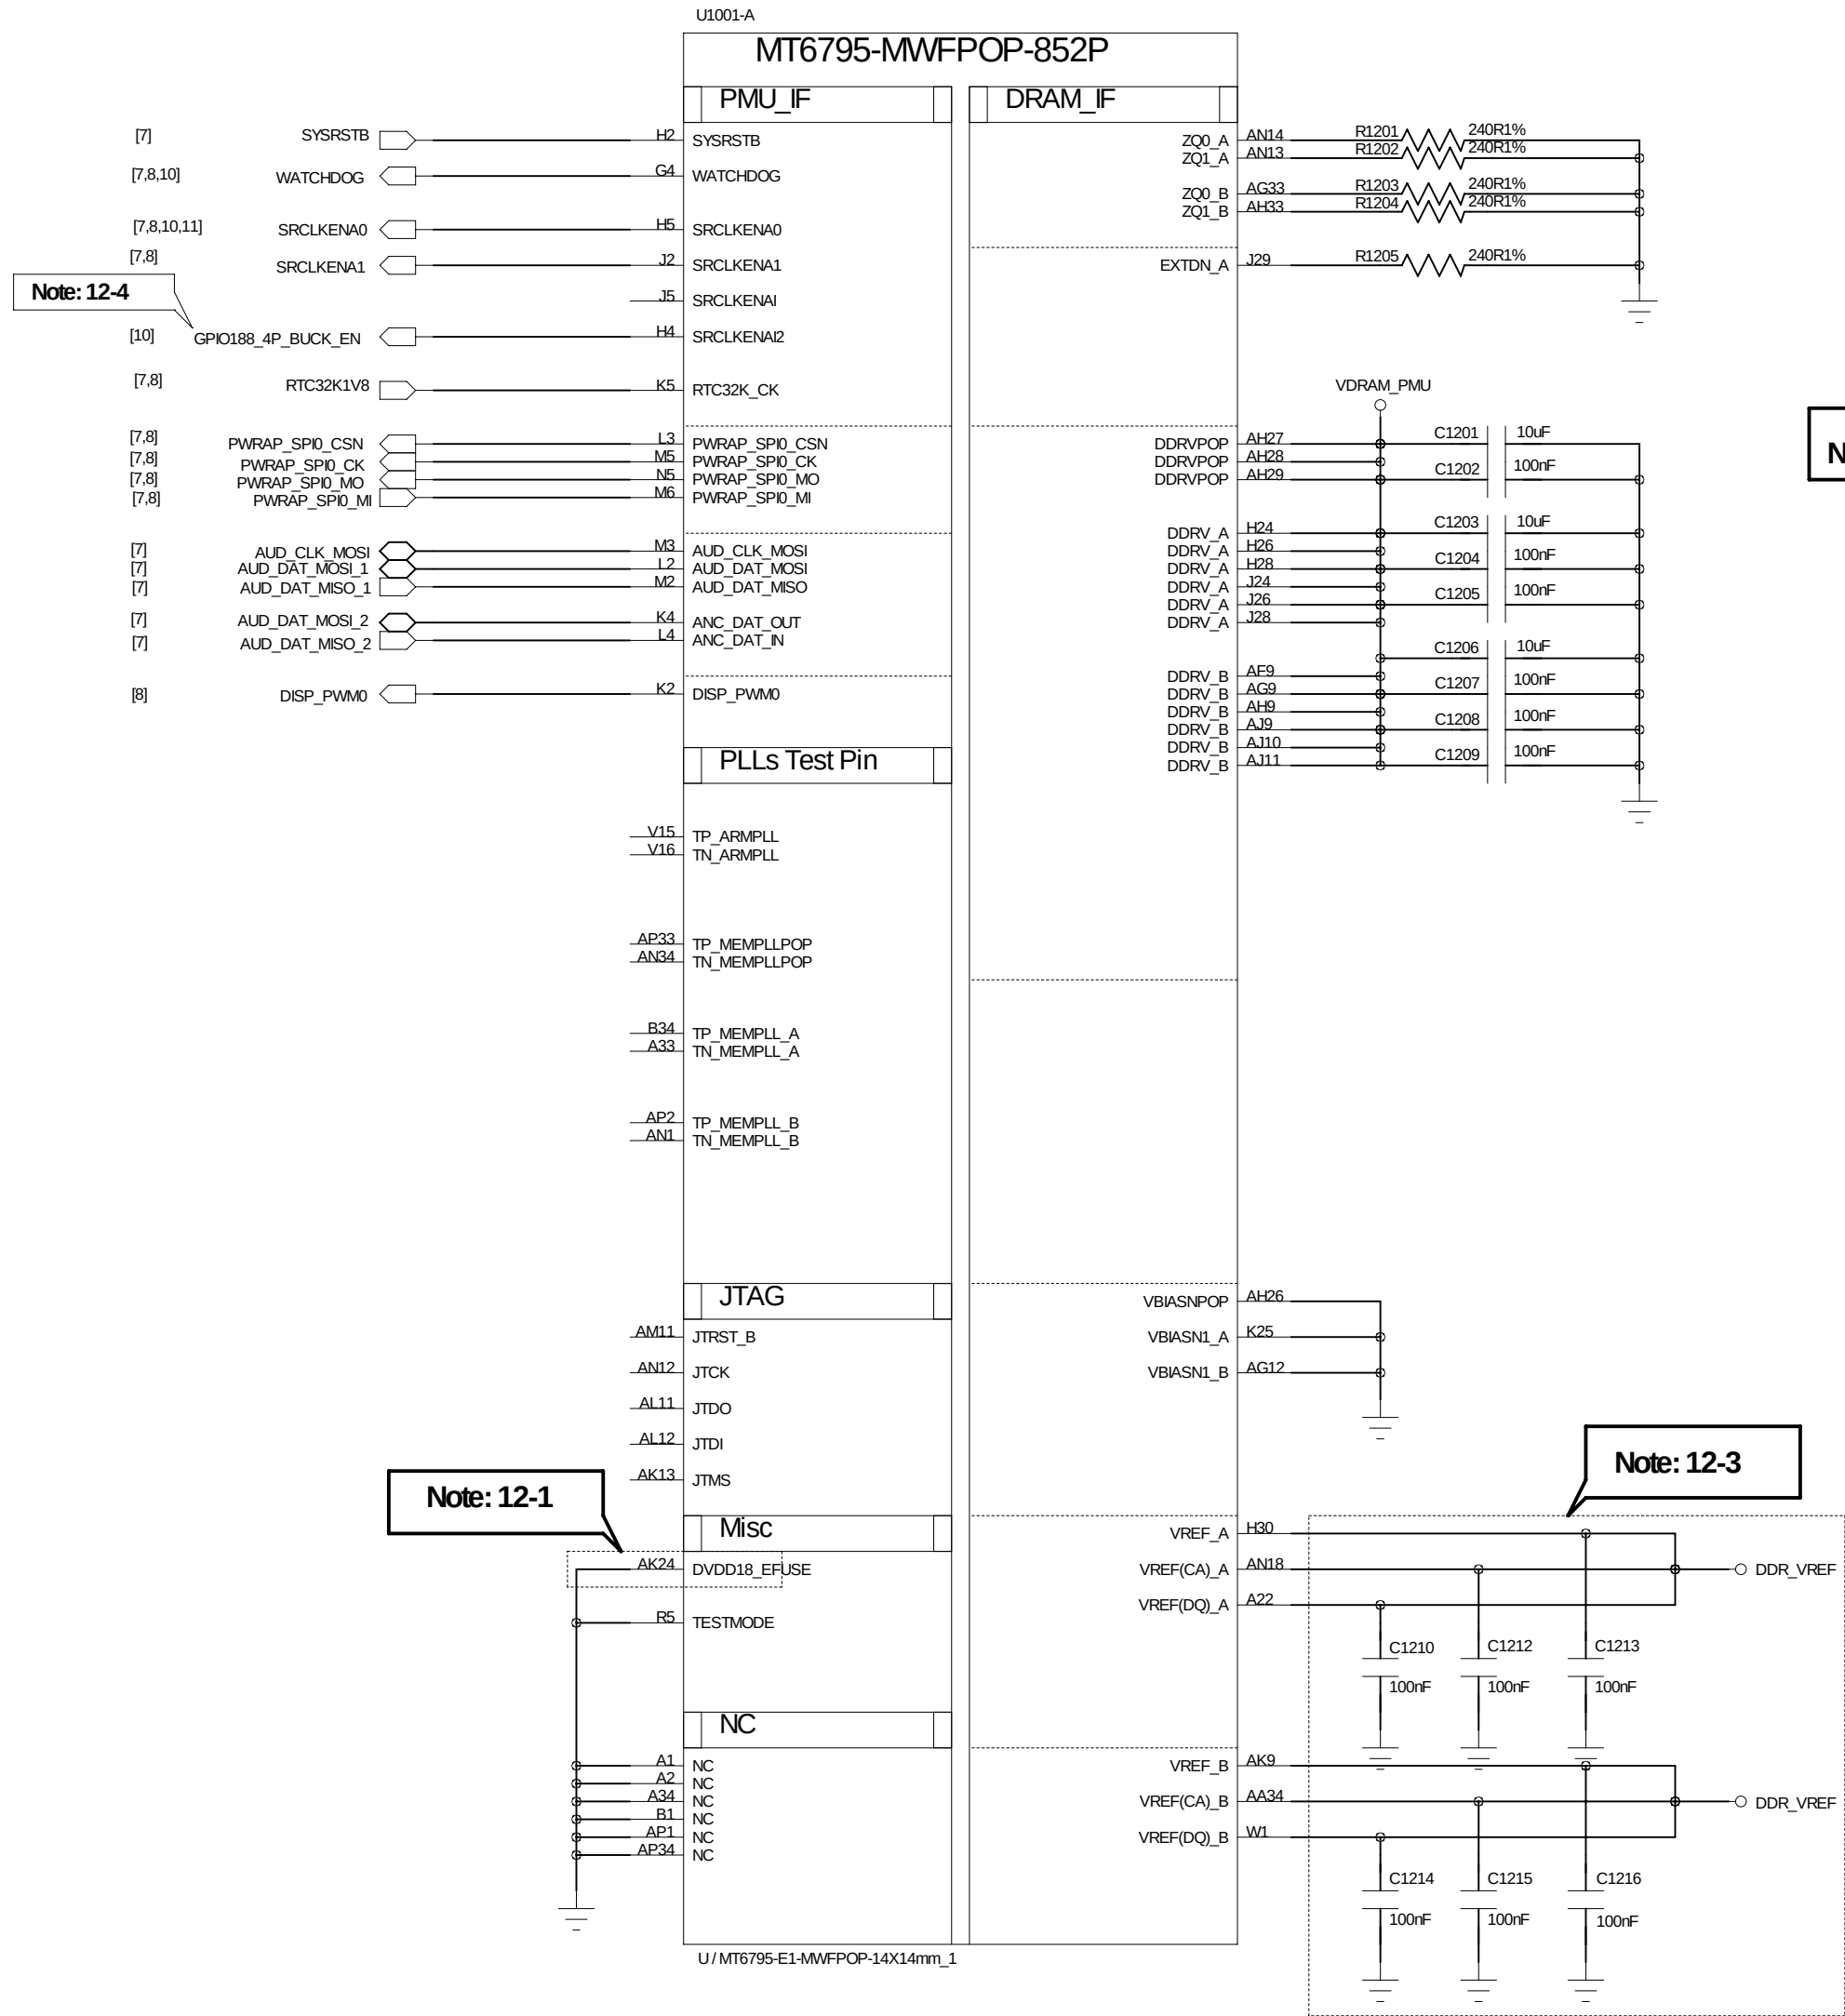

Note: 12-2

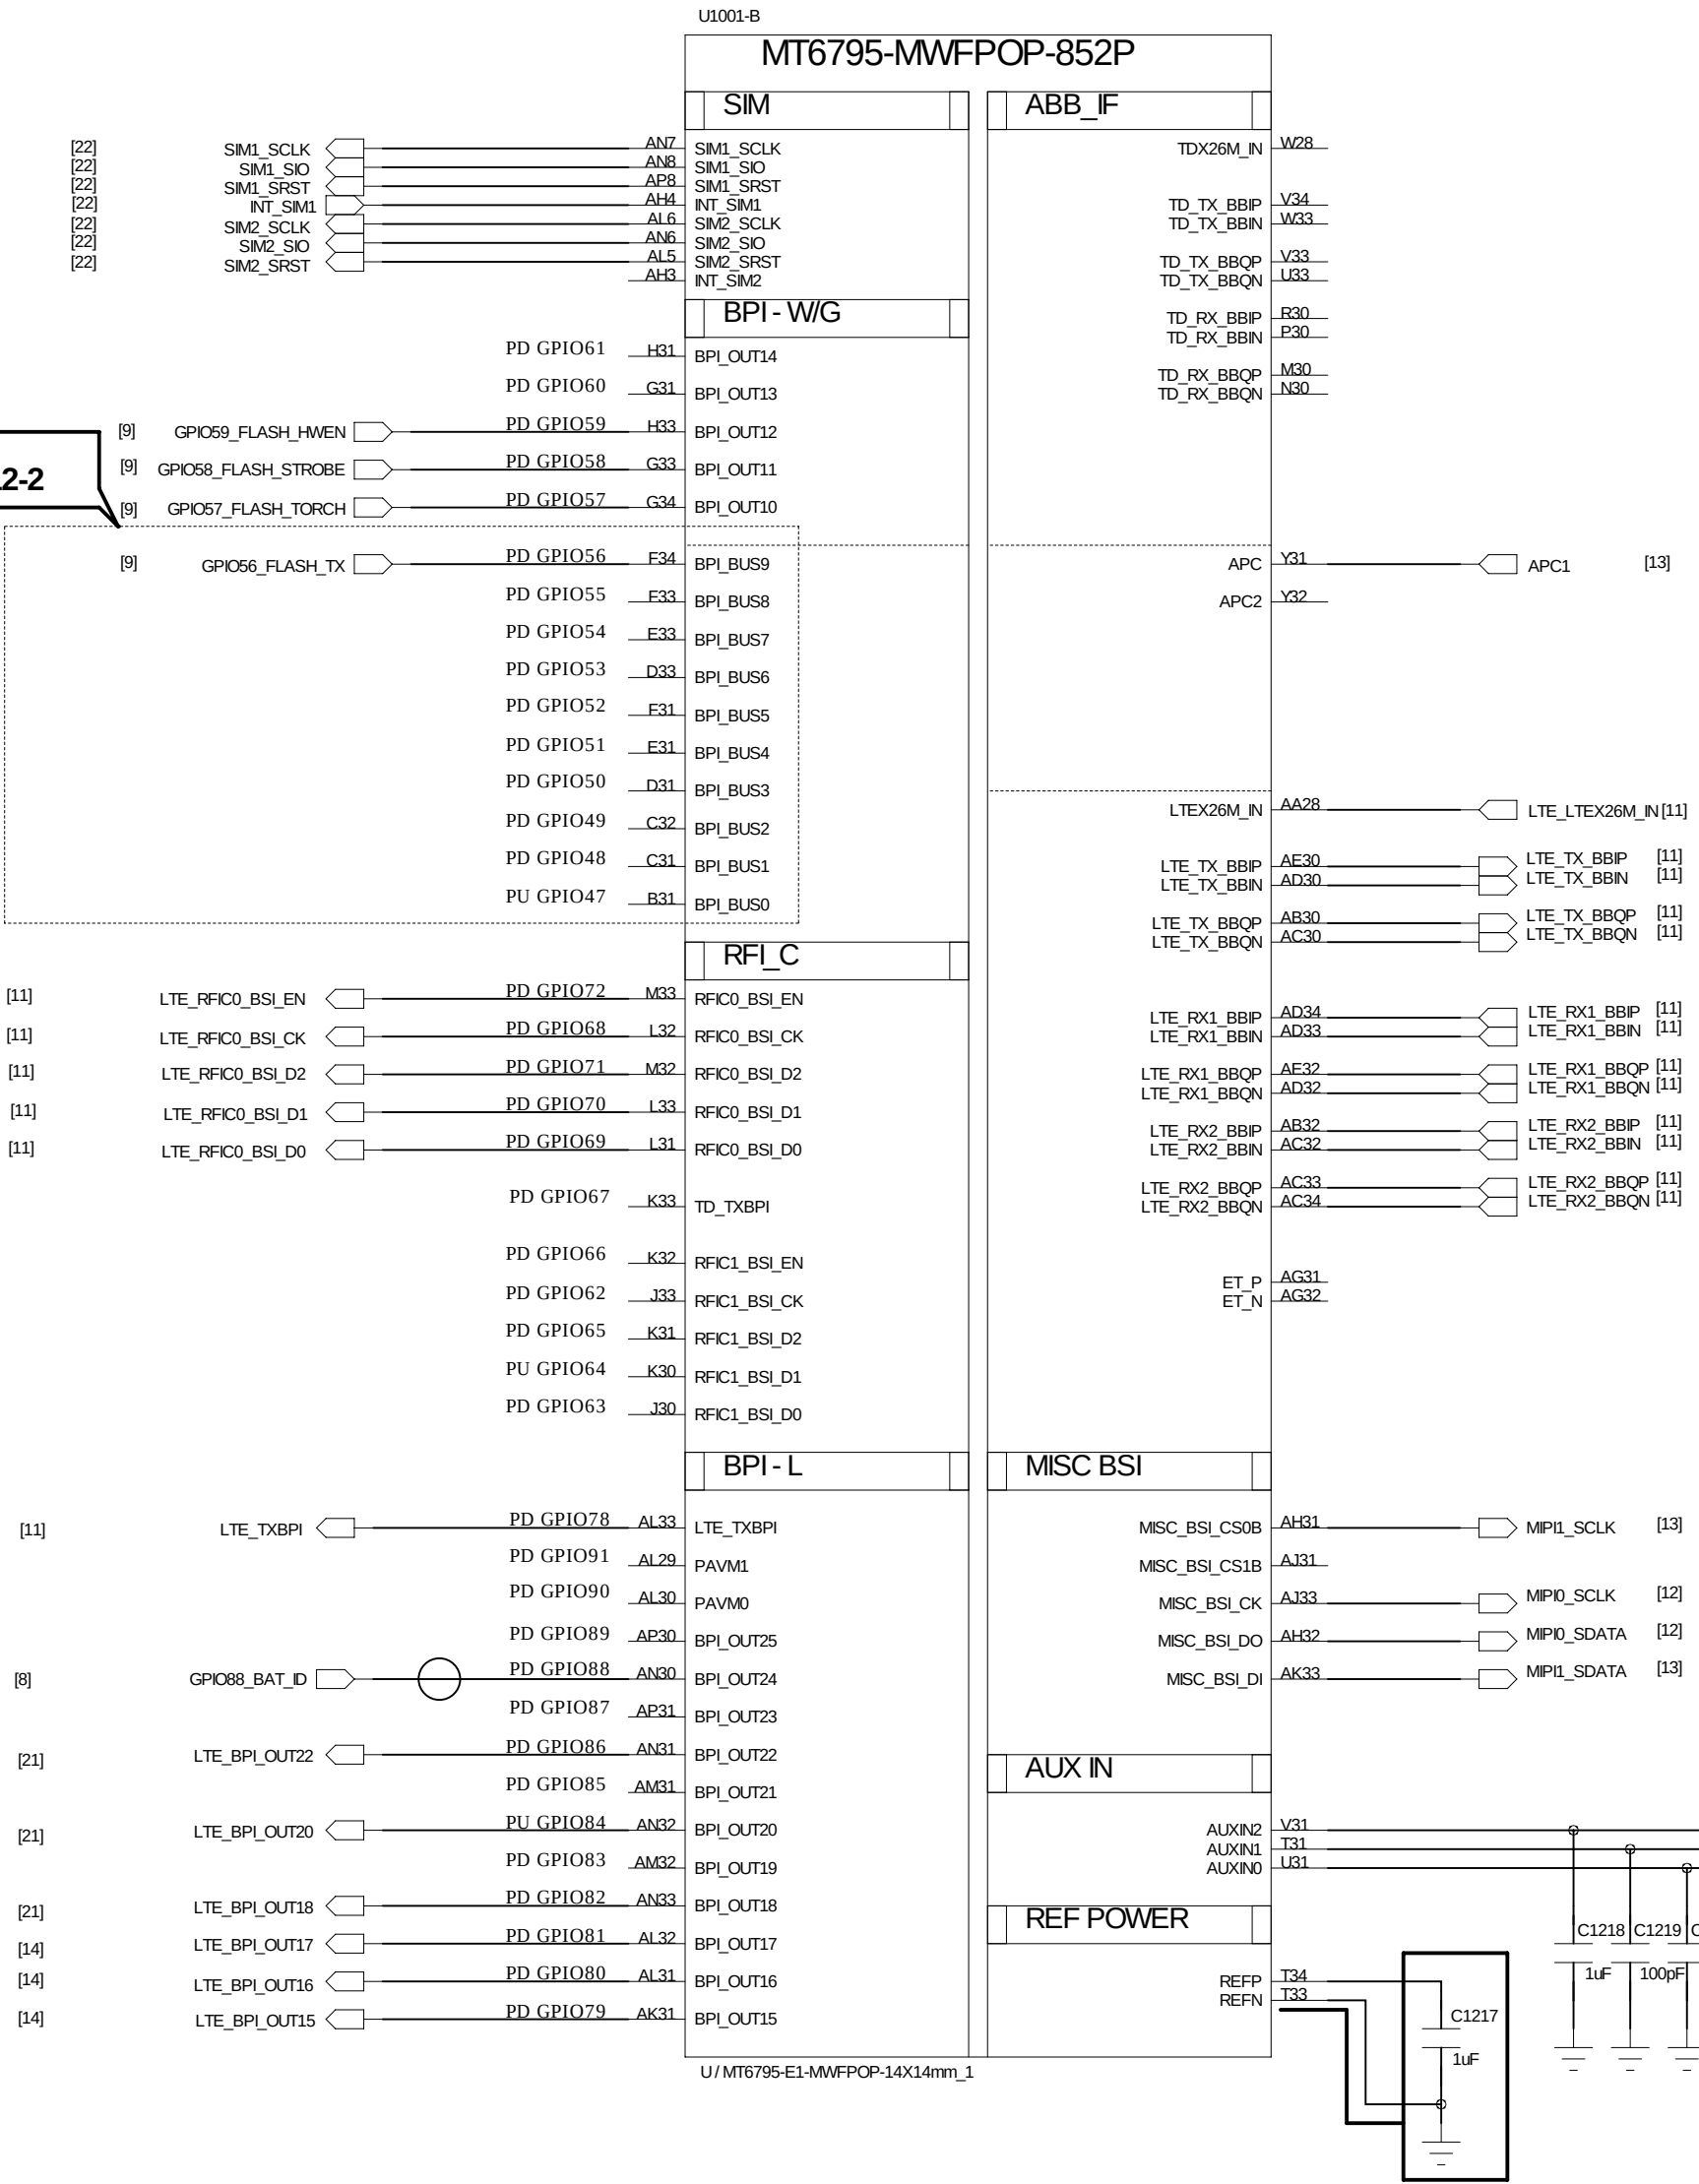

Close to BB IC.

Schematic design notice of "12_BB_11" page.


Note 12-1: Apply 1.8V to DVDD18_EFUSE (AK24) for eFuse programming.

Note 12-2: The BPI_BUS0~BPI_BUS9 are capable of 2.8V I/O operation.

Note 12-3: The de-coupling cap. of DRAM VREF have to be placed as close to BB as possible.

Note 12-4: SRCLKENA12 features watch dog reset output to reset 4-phase buck.

COMPANY: Shanghai ReallyTek Information Technology Co.,Ltd				MODEL: H952		Modified Date: 2015-7-14	
DRAWN	ZY/TS	DATED	20140512	TITLE: 12_BB_1		VERSION: V1.0	SHEET: 5 OF 22
CHECKED	< >	DATED	< >				

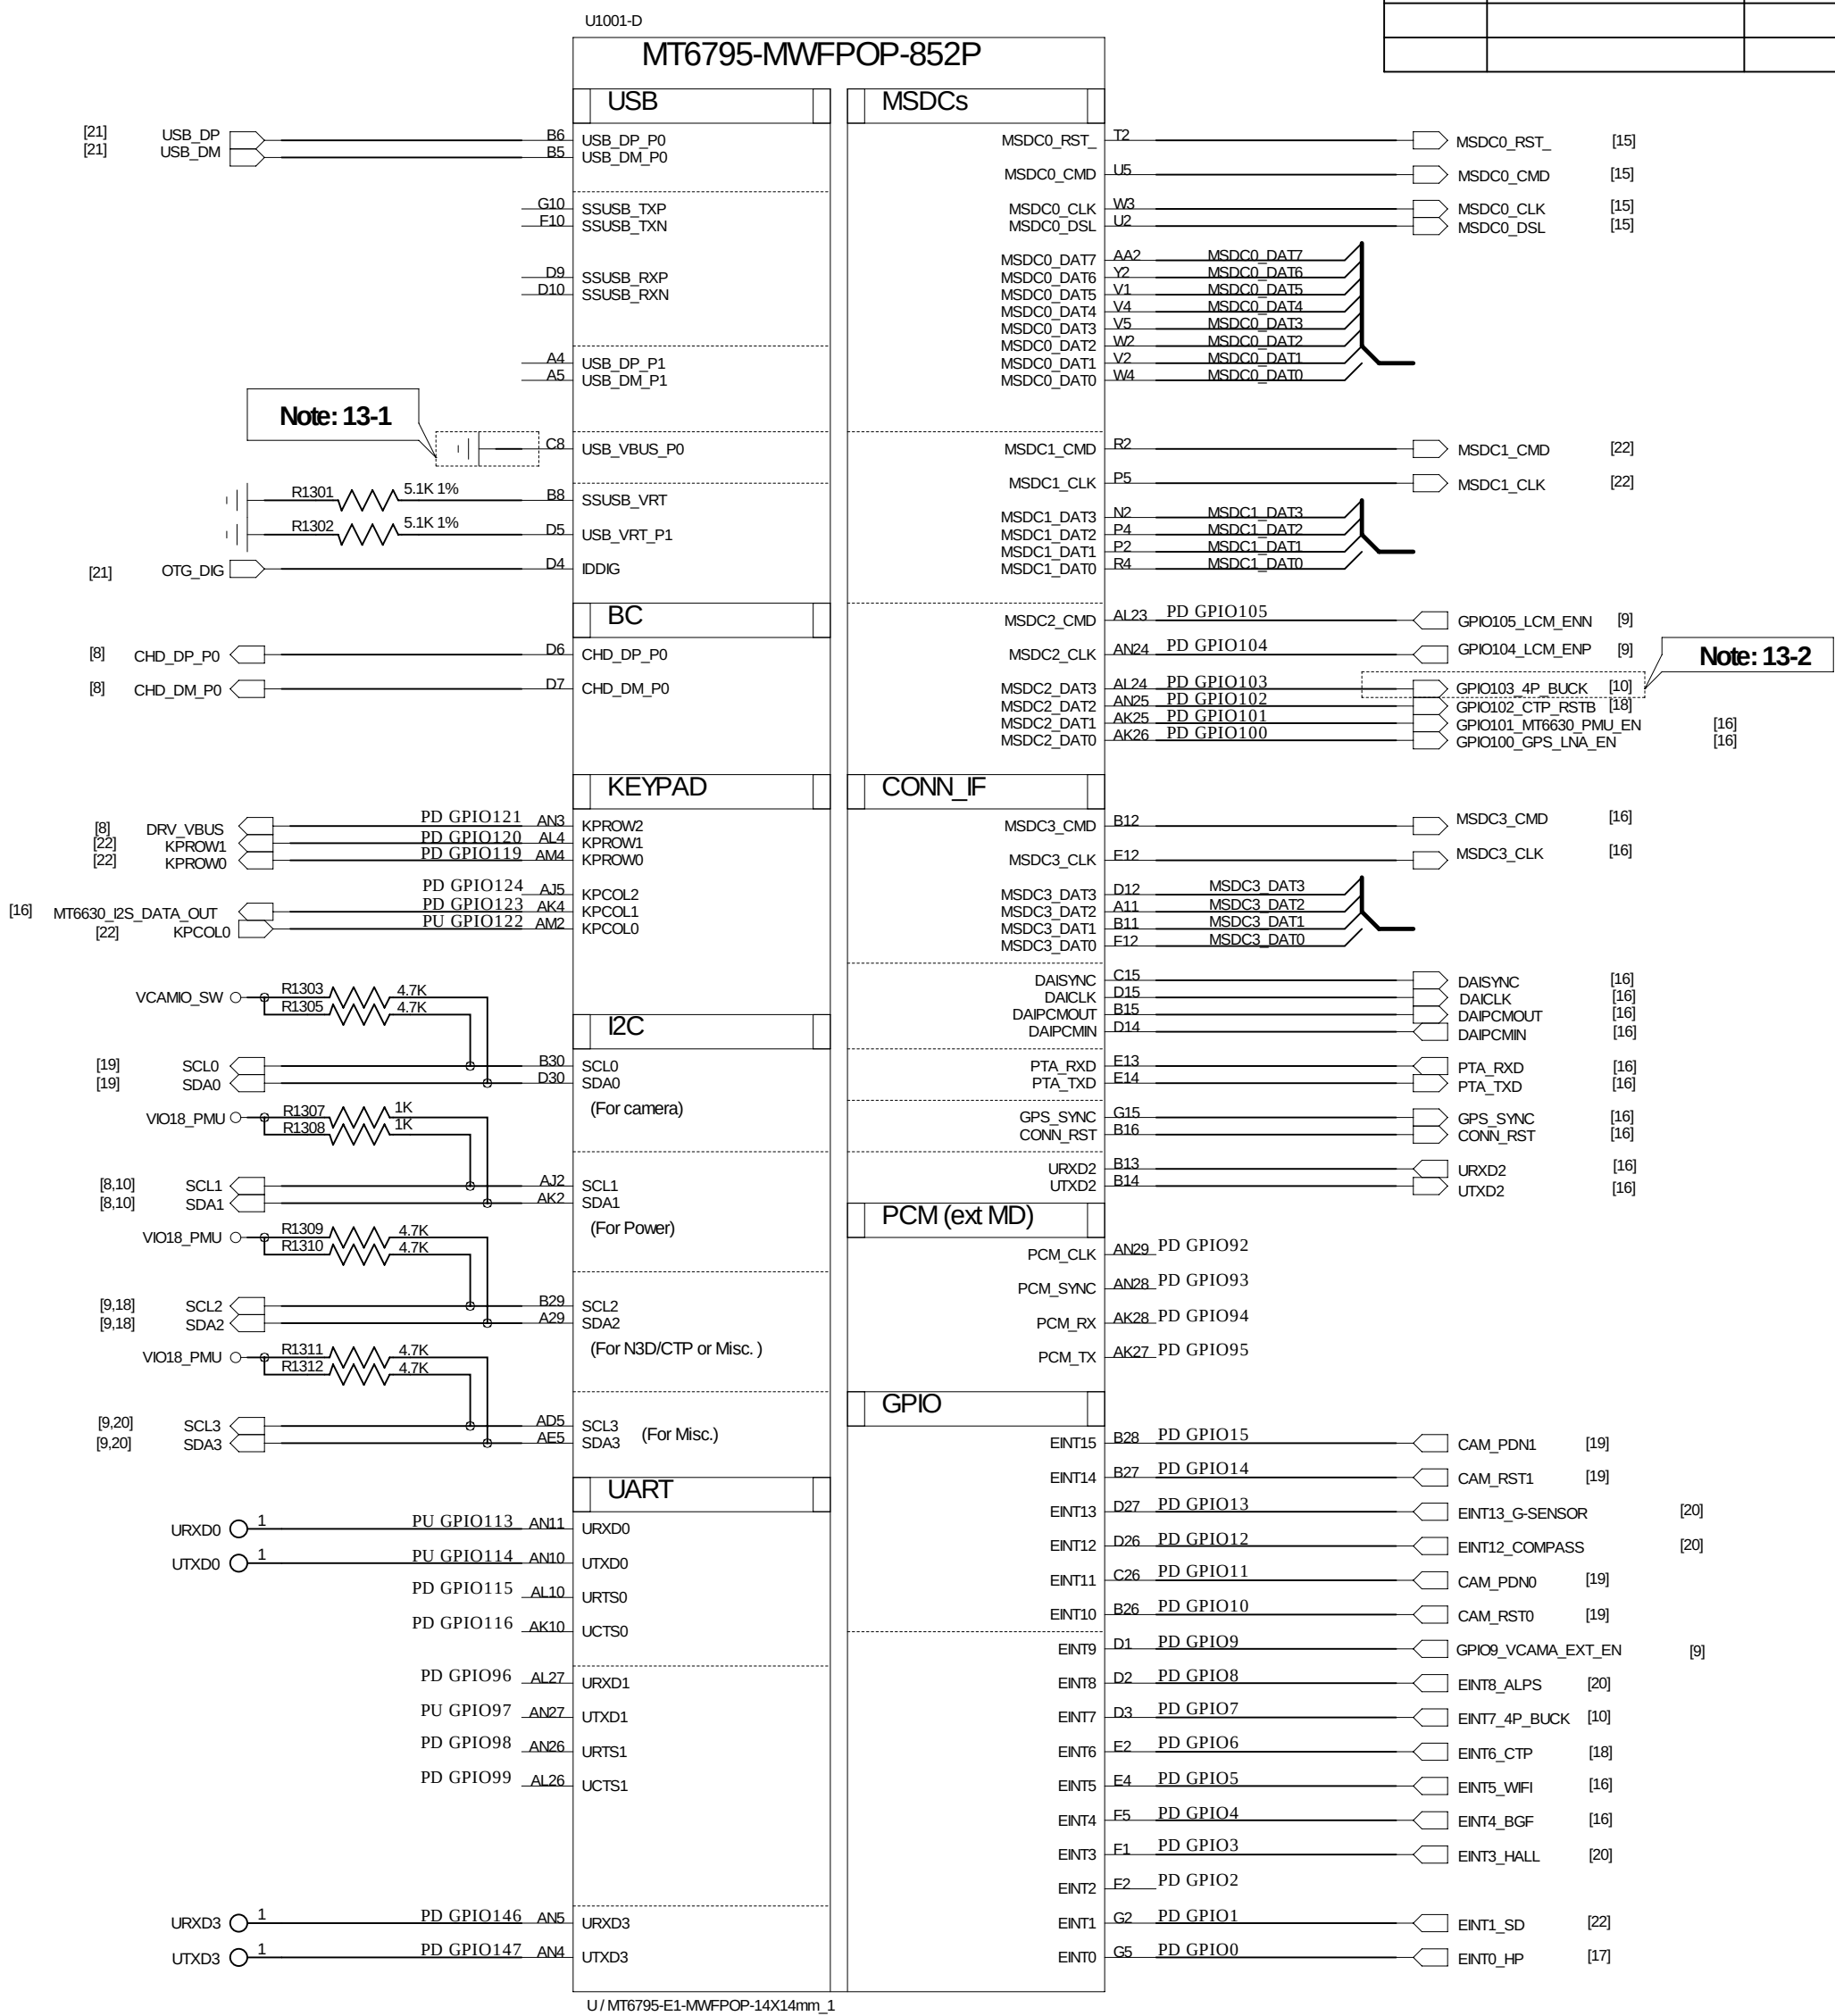

Note 13-2: GPIO103 is dedicated for DA9210 4-phase buck control.

VERSION: V1.0	SHEET: 6 OF 22
---------------	----------------

POWER_MT6331


























Schematic design notice of "20_POWER_MT6331" page.

Note 20-1: External pull resistor in PMU SPI interface is not allowed.

Note 20-2: This PIN should be connected to ground for normal operation.

Note 20-3: Connect MT6331's K9 pin to "VCORE1_PMU" when VCORE2 is not used.

Note 20-4: Layout trace from MT6331 ball D12 AU_REFN to Audio jack GND must surround shield with GND

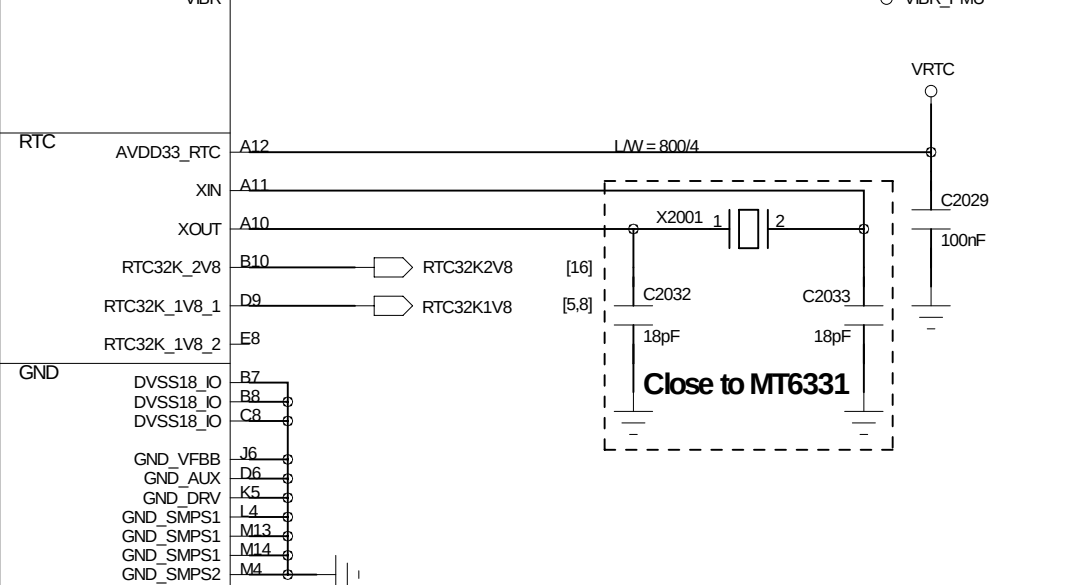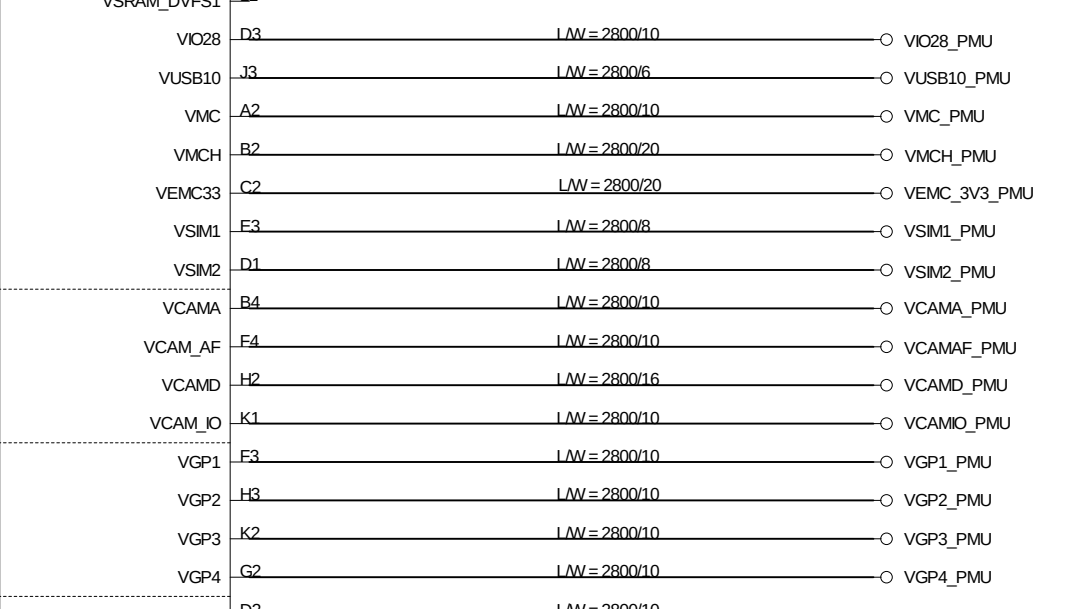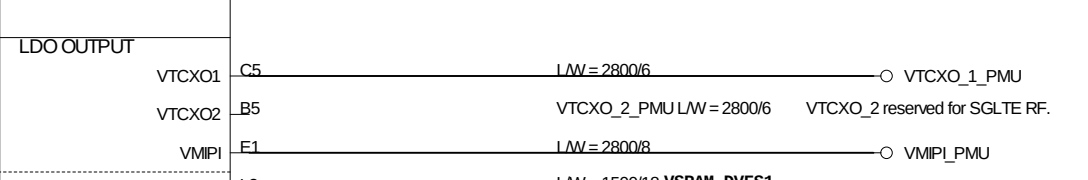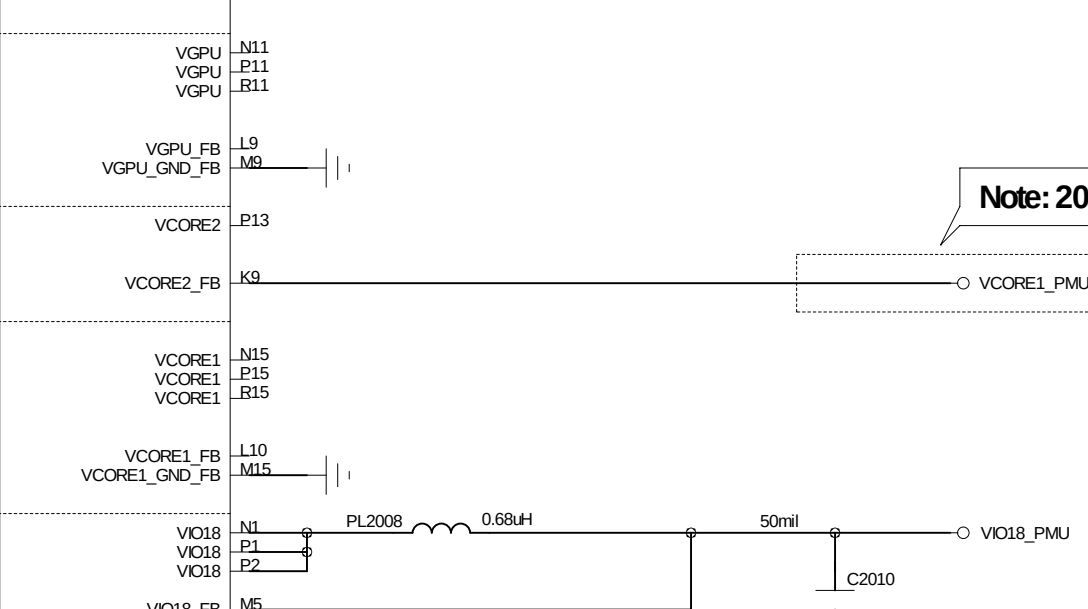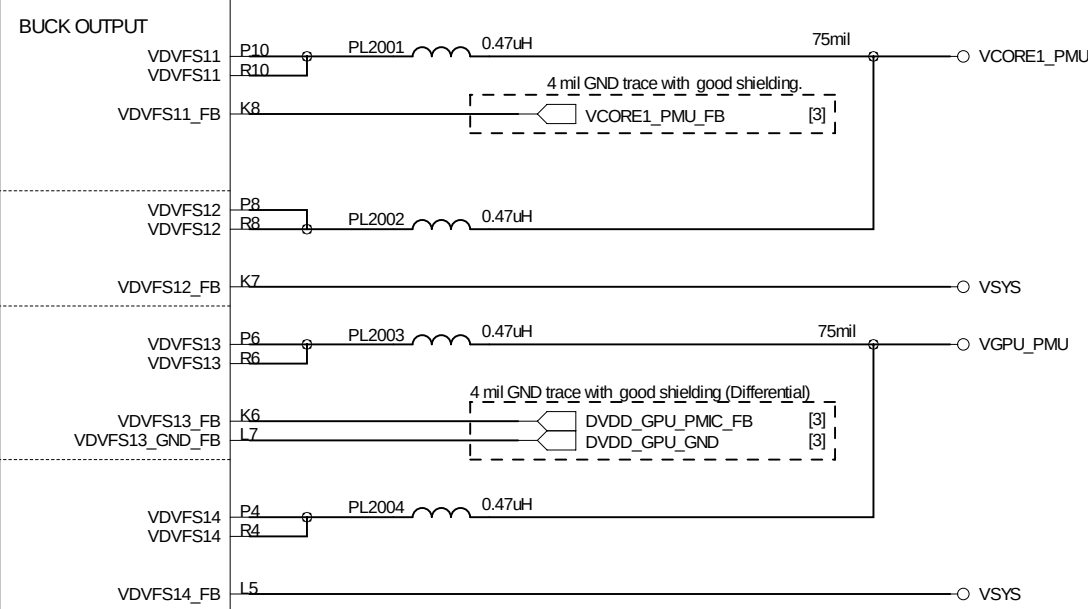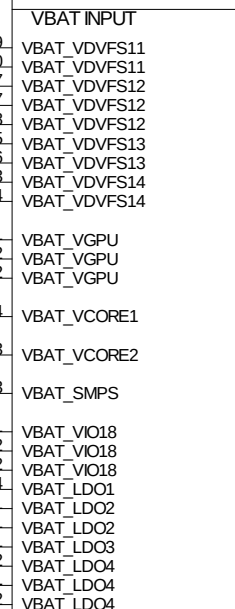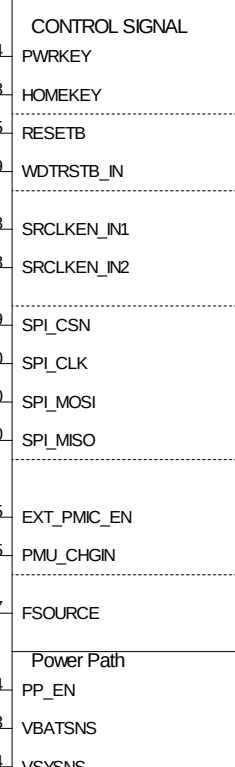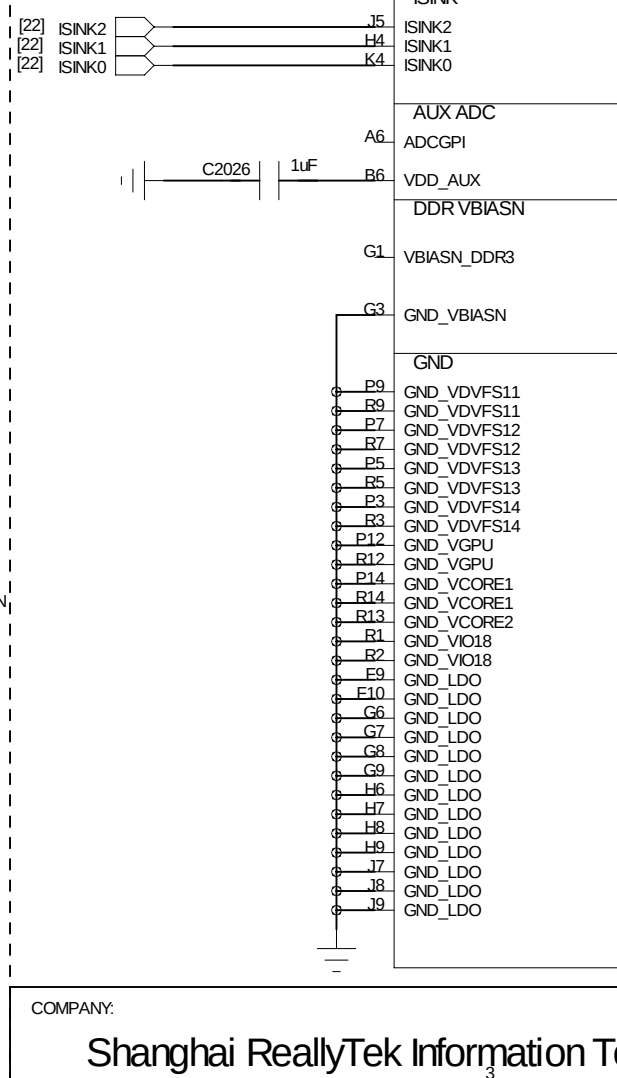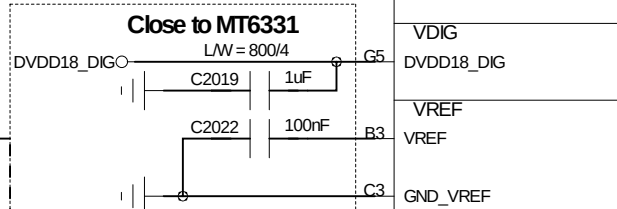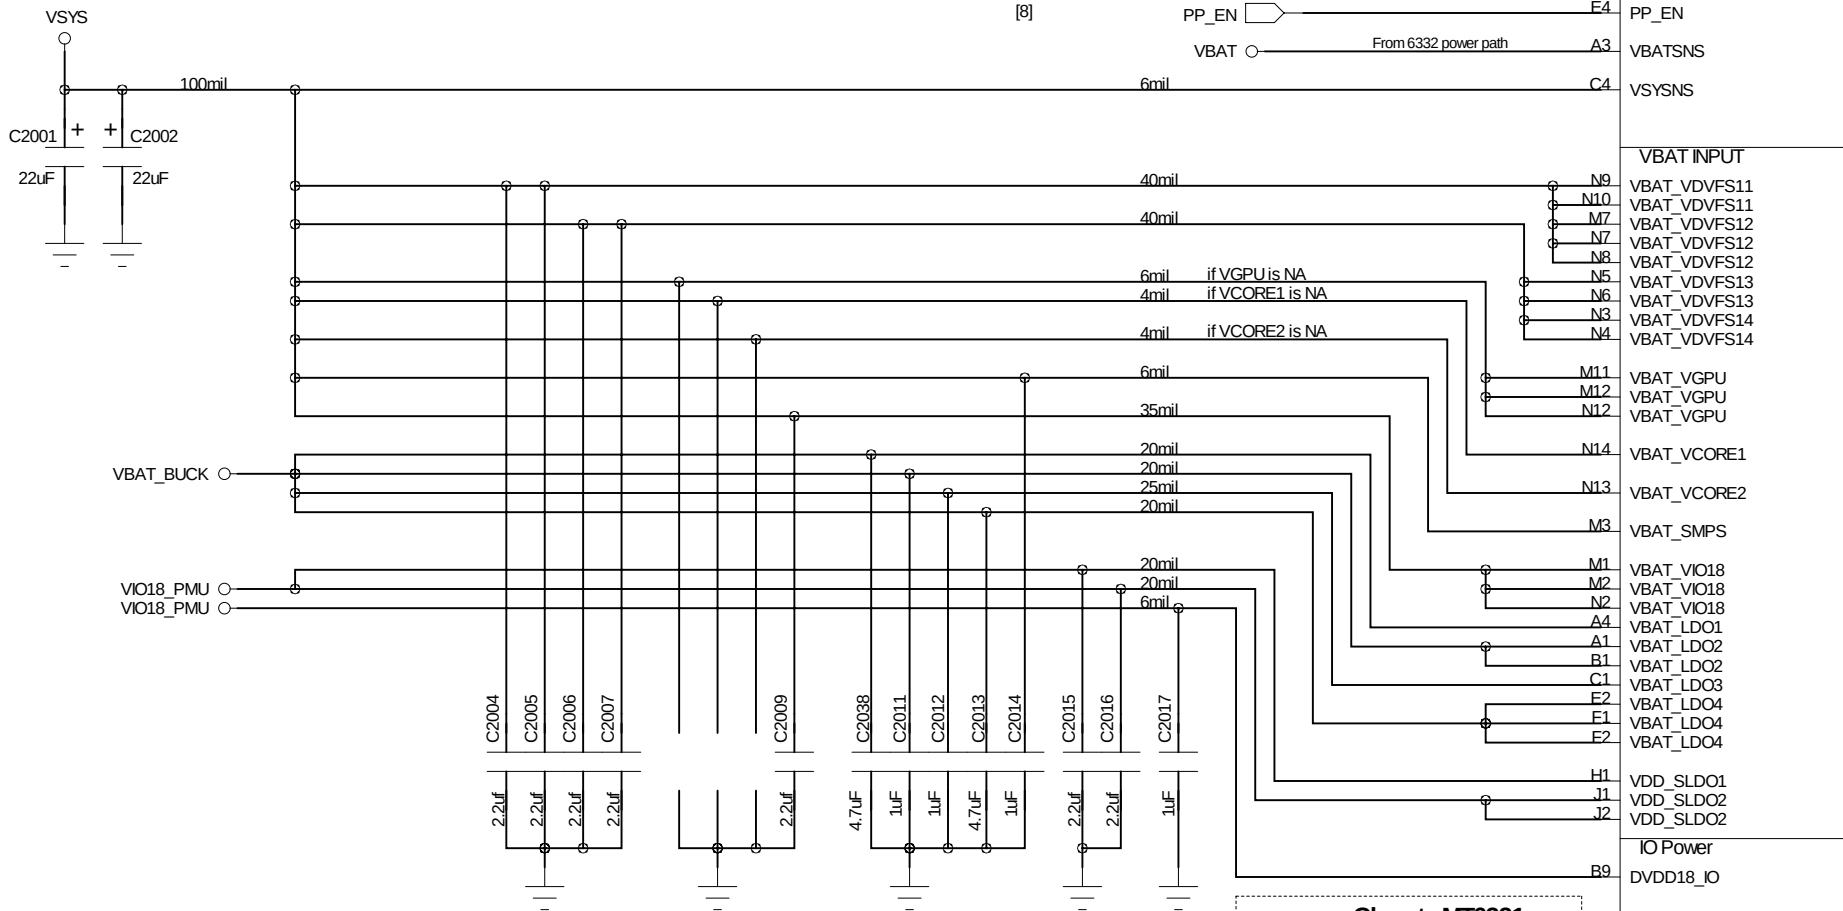

REVISION RECORD			
LTR	ECO NO.	APPROVED:	DATE:

PowerType	Power	Available Vout	Default V	Max current
BUCK Current Regulator	VDVFS11	0.7V-1.31V	1.05V	200mA
	VDVFS12			
	VDVFS13			
	VDVFS14			
	VCORE2	0.7V-1.31V	1.05V	600mA
Analog LDO	VIO18	1.8V	1.8V	2400mA
	VTCXO1	2.8V	2.8V	40mA
	VTCXO1	2.8V	2.8V	40mA
	AVDD32_AUD	3.2/3.0/2.8V	3.2V	80mA
	VAUXA32	3.2/3.0/2.8V	3.2V	20mA
Digital LDO	VCAMA	1.5/1.8/2.5/2.8V	2.8V	250mA
	VIO28	2.8V	2.8V	200mA
	VCAM_AF	1.2/1.3/1.5/1.8V 2.0/2.8/3.0/3.3V	2.8V	200mA
	VMC	1.8/3.3V	3.3V	200mA
	VMCH	3.0/3.3V	3.3V	800mA
	VEMC33	3.0/3.3V	3.3V	800mA
	VSIM1	1.7/1.8/1.86V 2.76/3.0/3.1V	1.8V	100mA
	VSIM2	1.7/1.8/1.86V 2.76/3.0/3.1V	1.8V	100mA
	VMIP1	1.2/1.3/1.5/1.8V 2.0/2.8/3.0/3.3V	1.8V	150mA
	VBR	1.2/1.3/1.5/1.8V 2.0/2.8/3.0/3.3V	2.8V	200mA
	VCAMD	0.9/1.0/1.1V 1.2/2.1/3.1/5V	1.3V	500mA
	VCAM_IO	1.2/1.3/1.5/1.8V	1.8V	200mA
	VUSB10	1.0/1.05/1.1V 1.15/1.2/1.25/1.3V	1.0V	60mA
	VSRAM_DVFS1	1.0125V	1.0125V	600mA
	VGP1	1.2/1.3/1.5/1.8V 2.0/2.8/3.0/3.3V	2.8V	200mA
	VGP2	1.1/1.2/1.35/1.5V	1.2V	10mA
	VGP3	1.2/1.3/1.5/1.8V	1.8V	200mA
	VGP4	1.6/1.7/1.8V 1.9/2.0/2.1/2.2V	2.0V	200mA
	VRTC	2.8V	2.8V	2mA

COMPANY:

Shanghai ReallyTek Information Technology Co.,Ltd

MODEL: H952

Modified Date: 2015-7-14

DRAWN | ZY/TS

DATED	20140512
-------	----------





CHECKED < >

DATED < >

TITLE: 20 POWER MT6331

VERSION: V1.0 | SHEET: 7 OF 22

POWER_MT6332

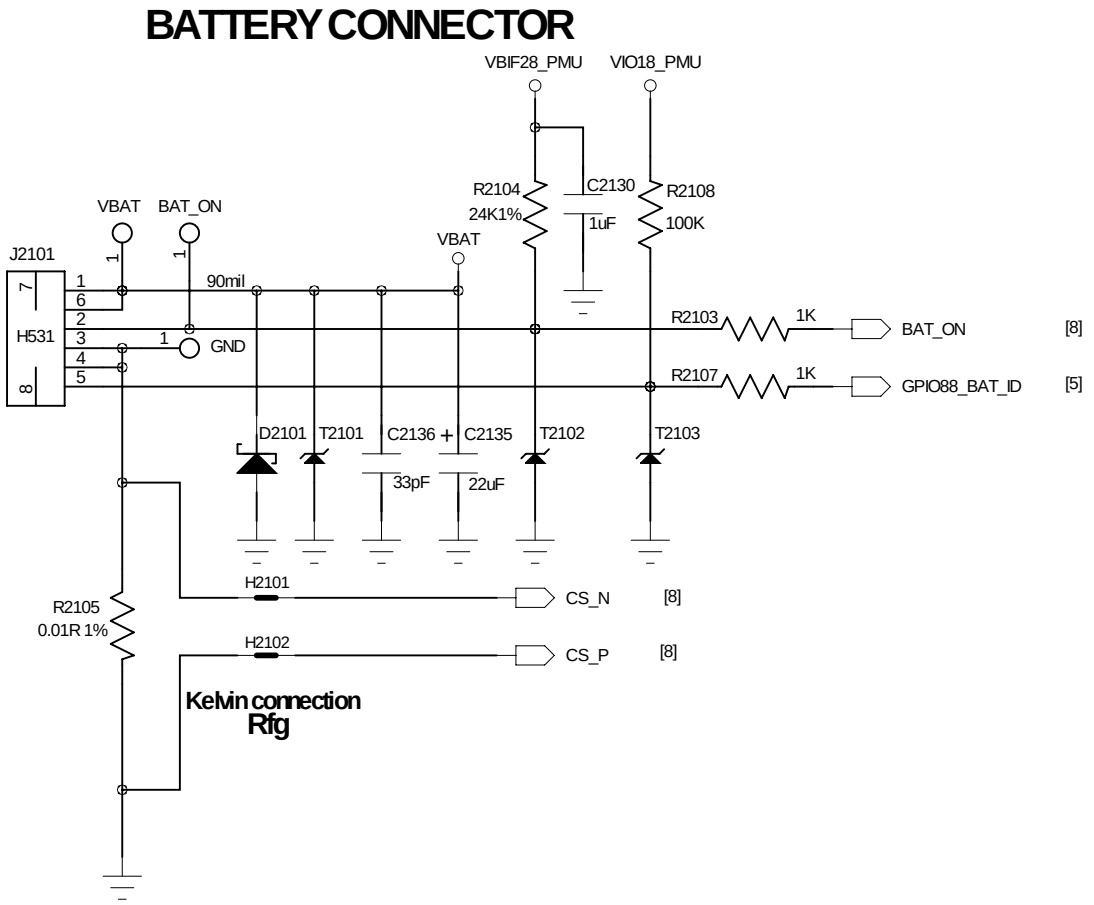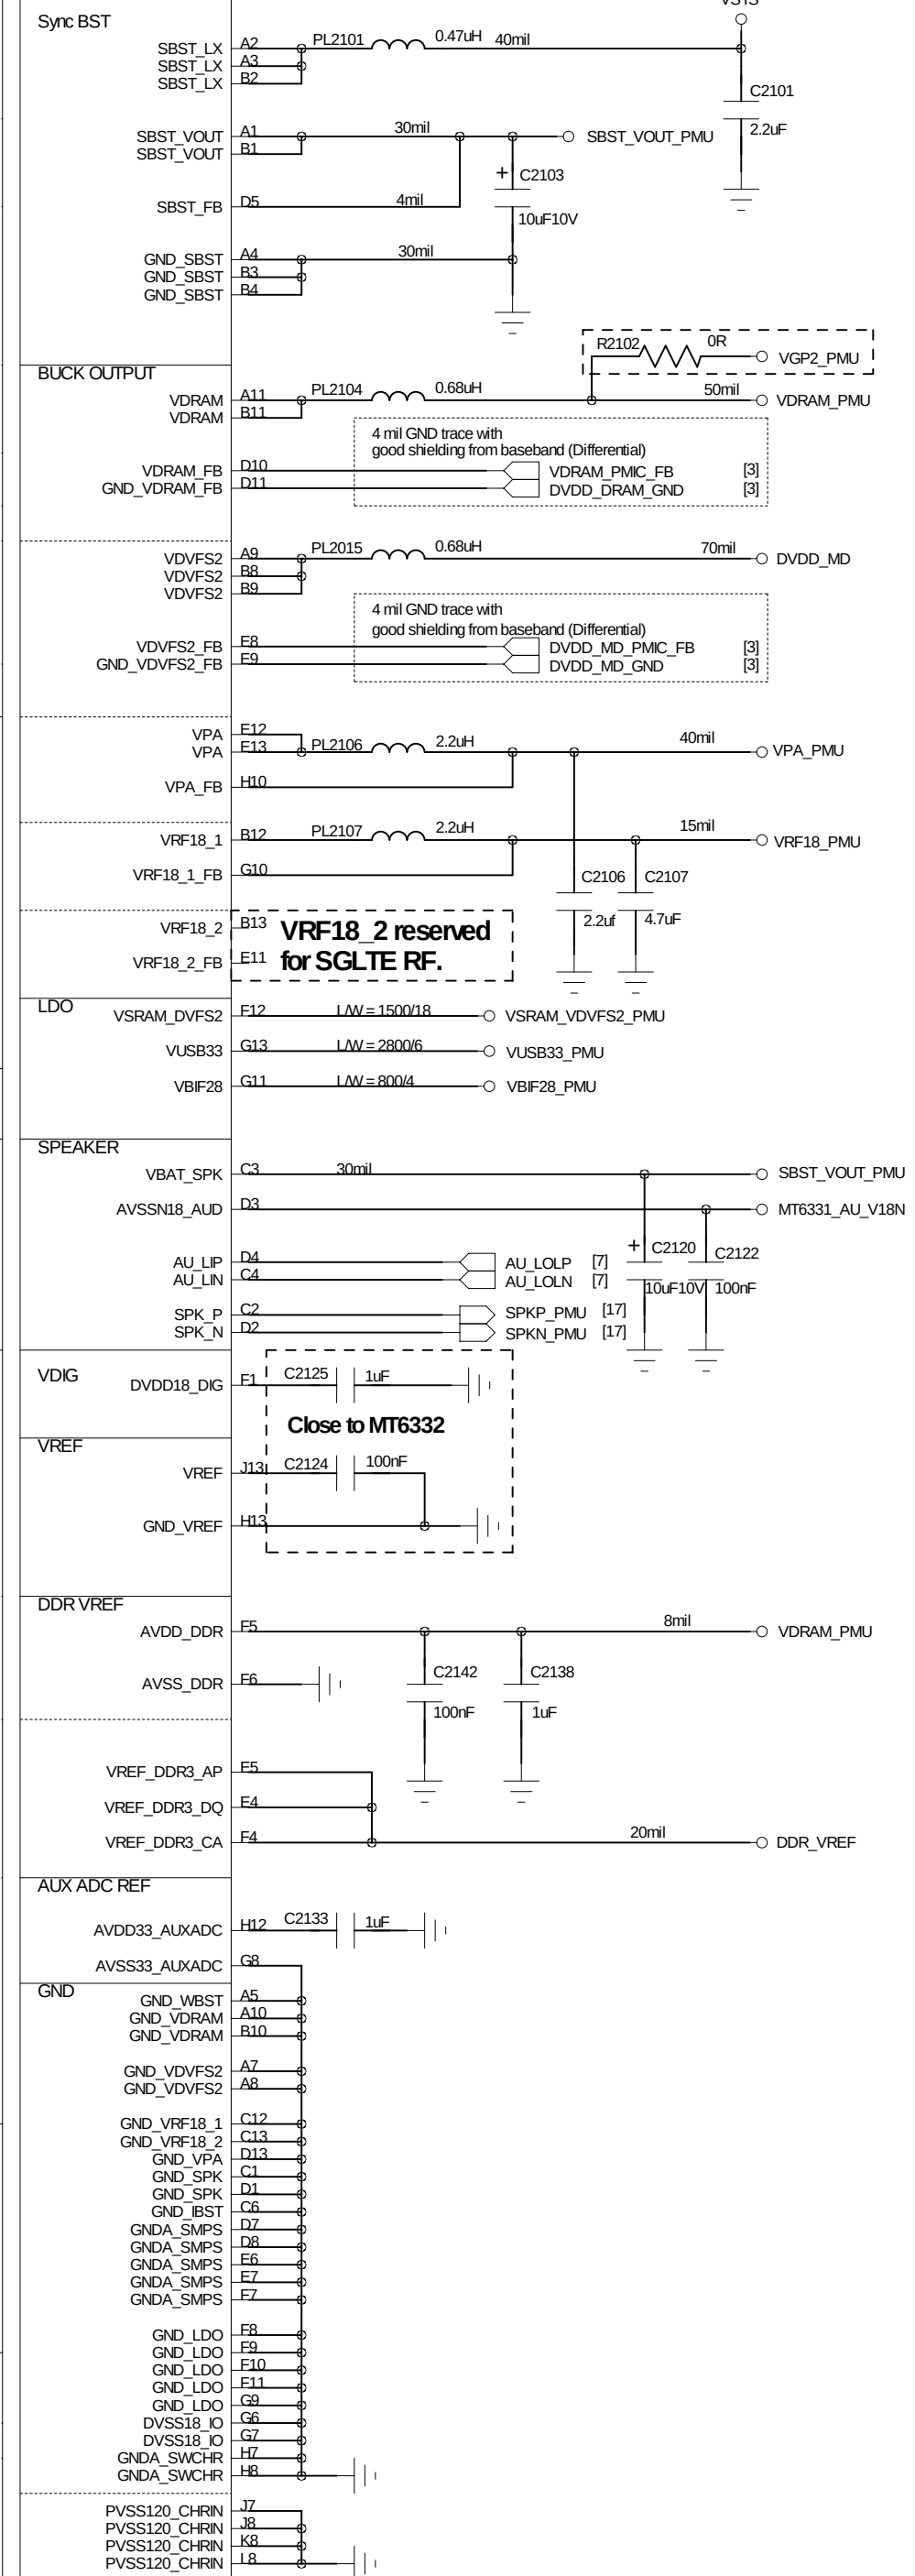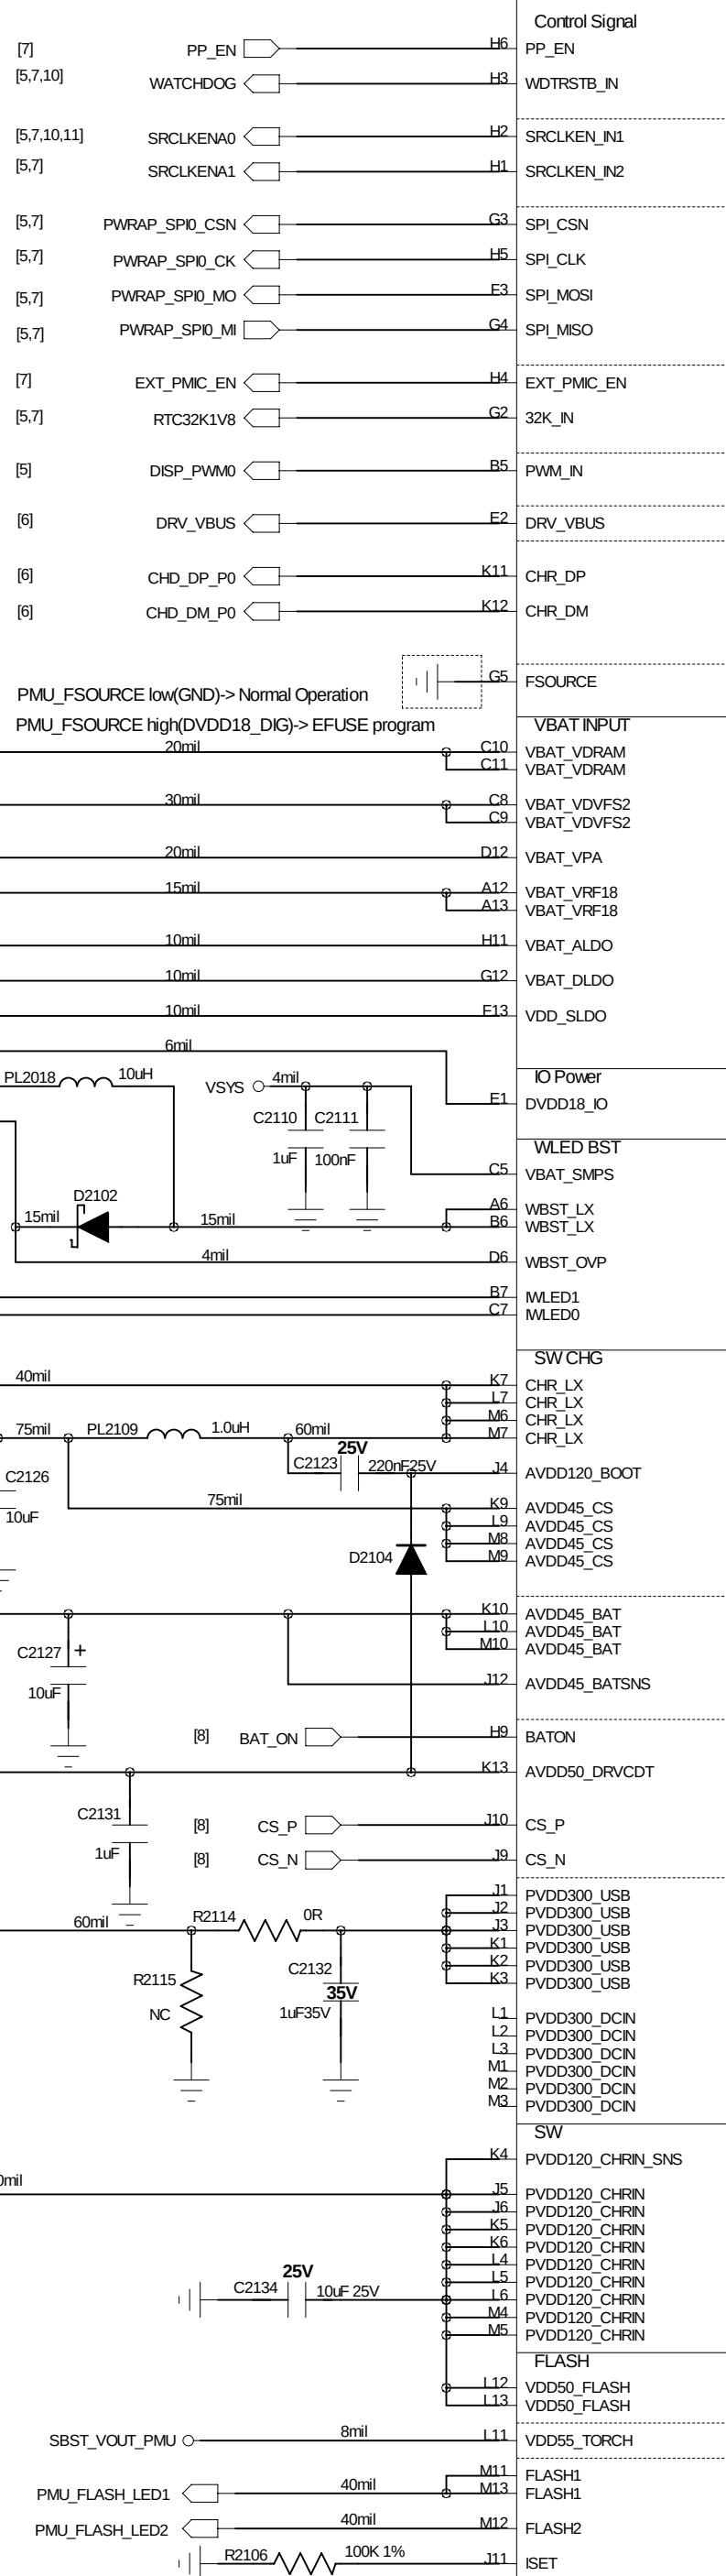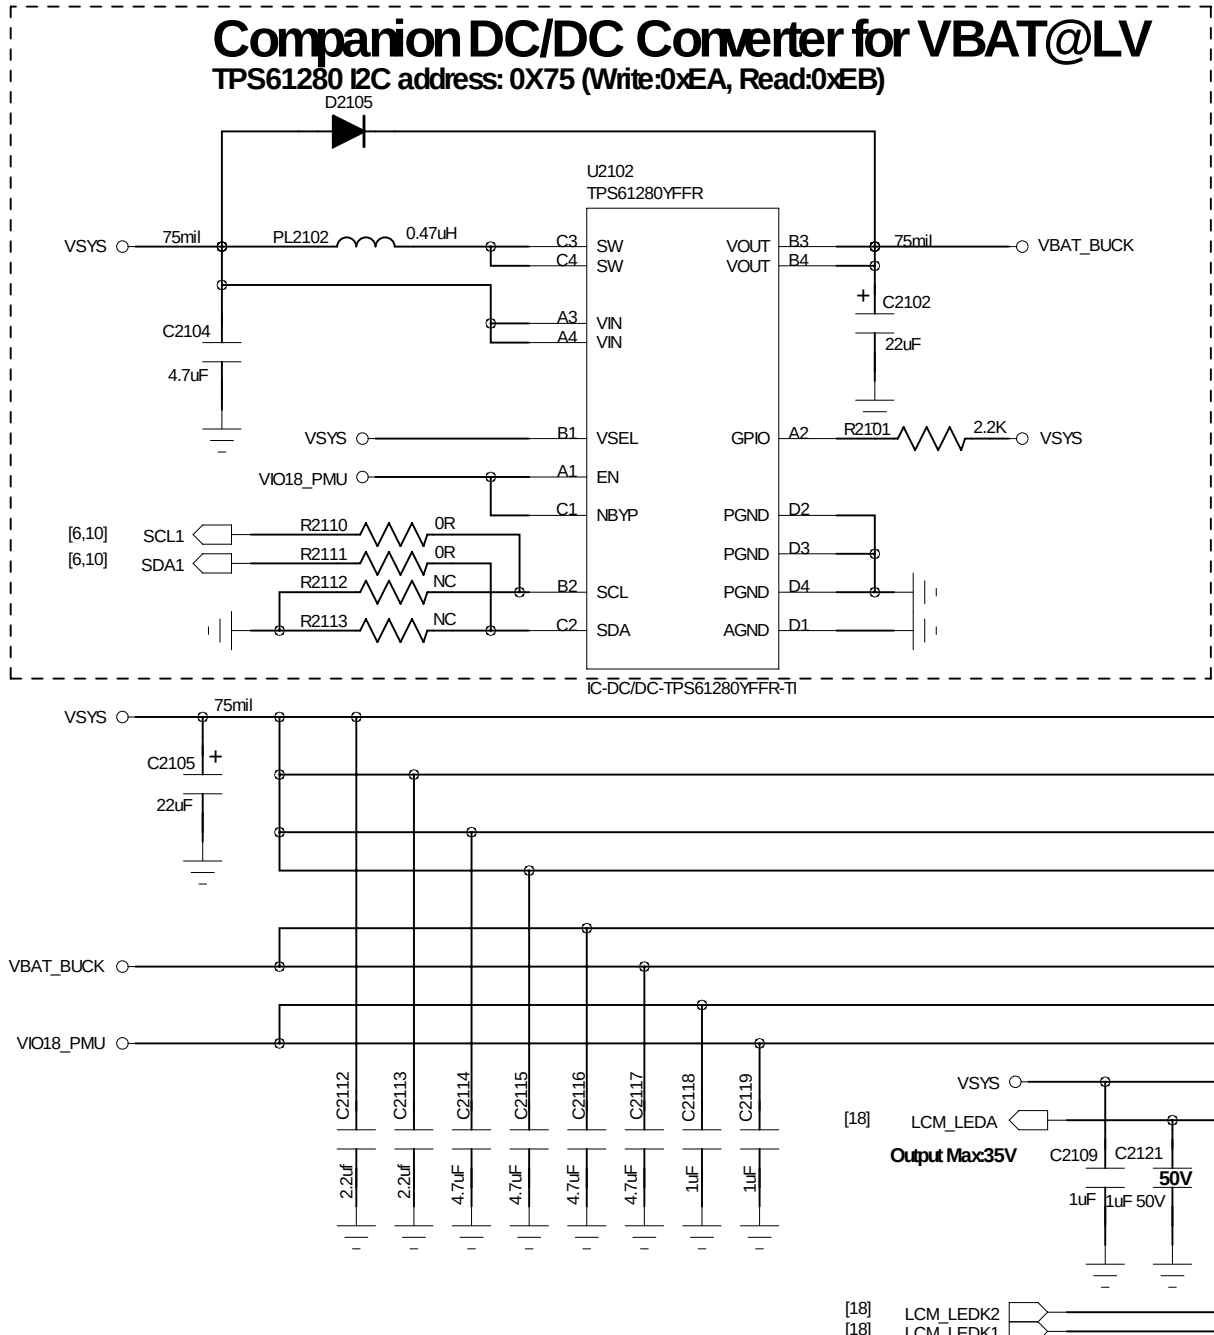

REVISION RECORD			
LTR	ECO NO:	APPROVED:	DATE:

PowerType	Power	Available Vout	Default V	Max current
BUCK Converter	VDVFS2	0.7V-1.31V	1.0V	1400mA
	VDRAM	1.1V/1.2V	By trapping	2000mA
	VRF18_1	1.825V	1.825V	450mA
	VRF18_2	1.825V	1.825V	450mA
	VPA	0.5V-3.4V	0.5V	800mA

COMPANY: Shanghai ReallyTek Information Technology Co.,Ltd				MODEL: H952	Modified Date: 2015-7-14		
DRAWN	ZY/TS	DATED	20140512	TITLE: 21_POWER_MT6332	VERSION: V1.0	SHEET: 8 OF	22
CHECKED	< >	DATED	< >				


POWER_THIRD-PART

REVISION RECORD			
LTR	ECO NO.	APPROVED:	DATE:


For 5.46" FHD

LCM BOOST

NT50358CG/J:I2C ADDRESS:0x7C(Write)/0x7D(Read)

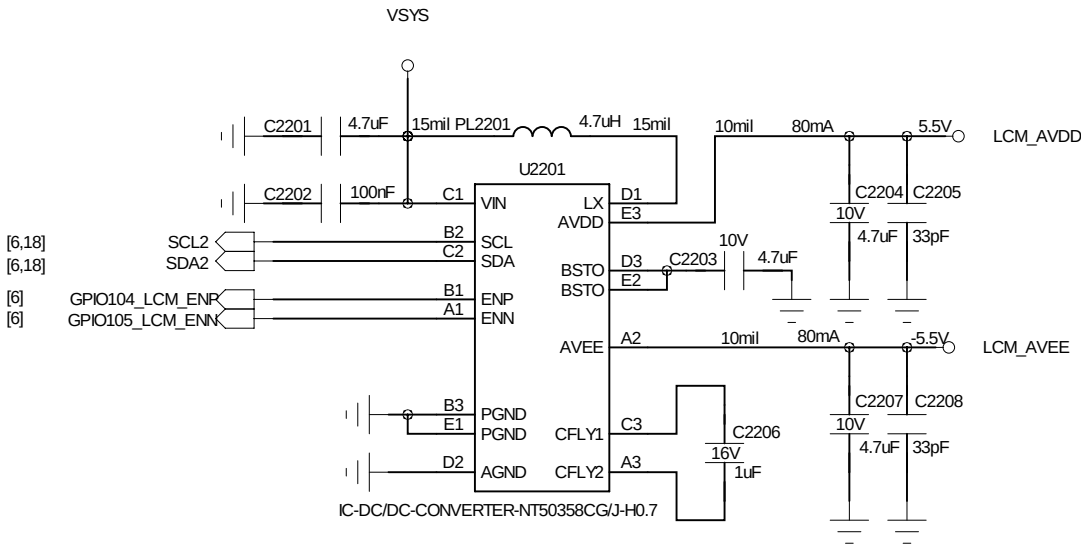


FRONT CAMERA LED

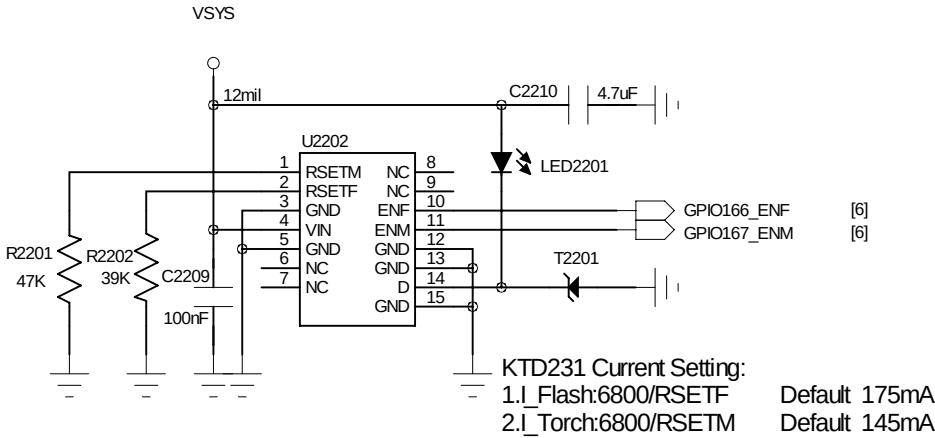


CAMERA FLASH LED

LM3643YFFR:I2C ADDRESS:0xC6(Write)/0xC7(Read)

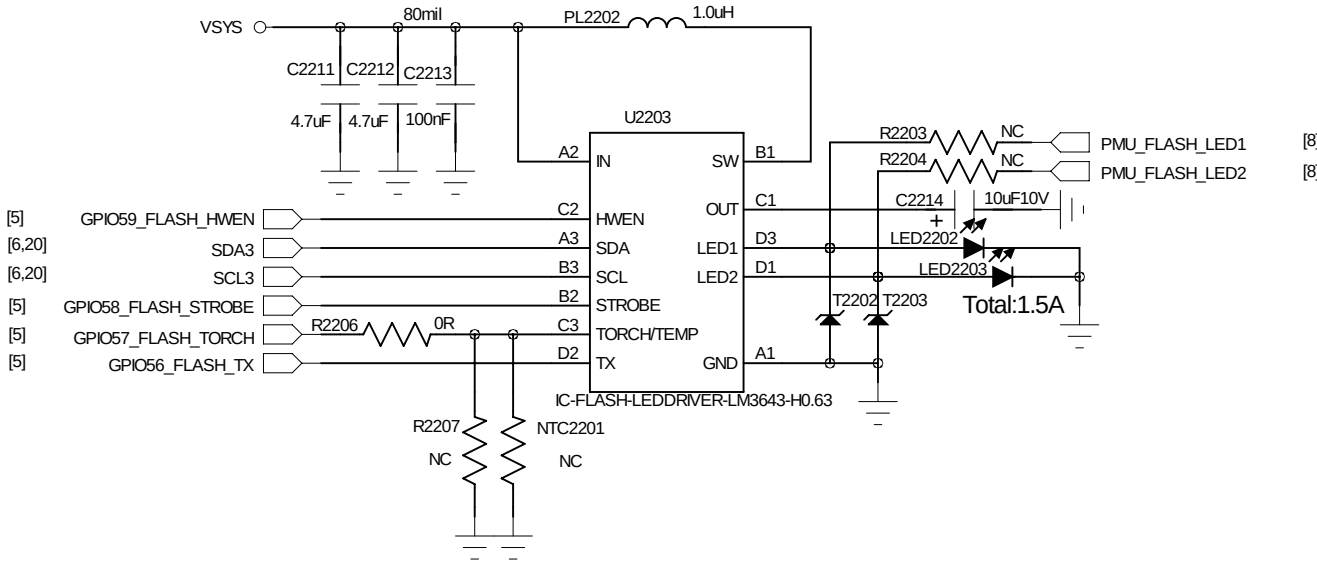

2.8V_VCAMA_EXT for SUB CAM

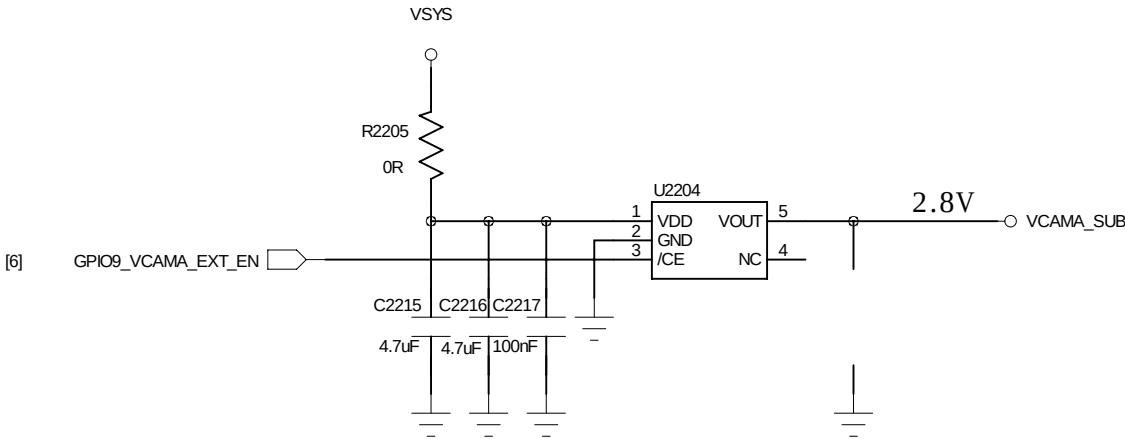


COMPANY: Shanghai ReallyTek Information Technology Co.,Ltd				MODEL: H952		Modified Date: 2015-7-14	
DRAWN	ZY/TS	DATED	20140512	TITLE: 22_POWER_THIRD-PARTY		VERSION: V1.0	SHEET: 9 OF 22
CHECKED	< >	DATED	< >				

POWER_EXT_4PHASE_BUCK

REVISION RECORD			
LTR	ECO NO.	APPROVED:	DATE:

4-Phase Buck

4-Phase Buck I2C address: 0X68 (Write:0xD0, Read:0xD1)

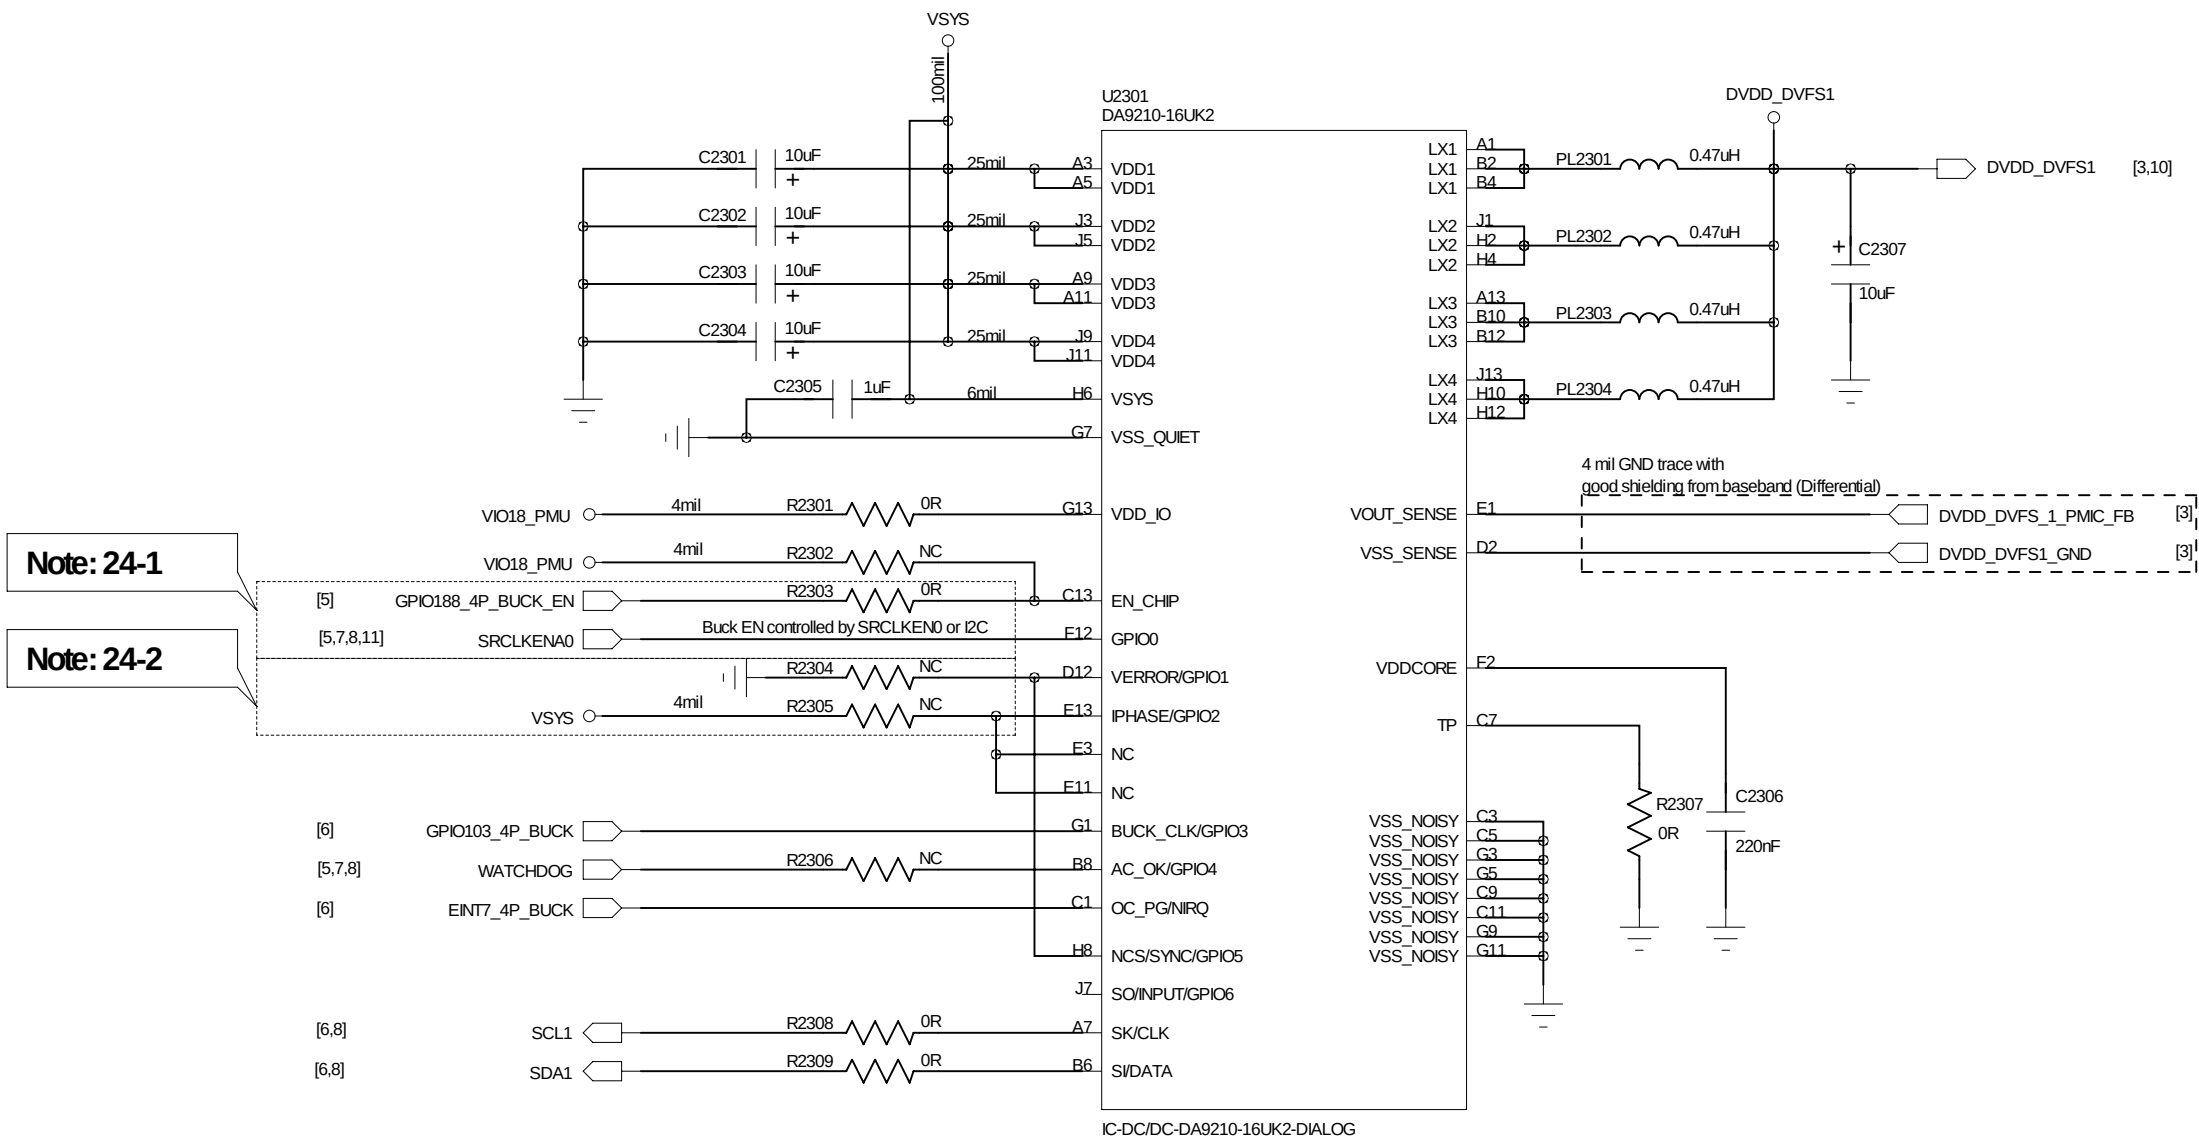

Schematic design notice of "23_POWER_EXT_4PHASE_BUCK" page.

Note 24-1: DA9210's GPIO0 = SRCLKENA0 => Buck EN controlled by SRCLKEN0 or I2C.

Note 24-2: BOM option to select which 4-pahse buck be applied? DA9210-21UK2 or second source.


	R2302	R2303	R2304	R2305	R2306
DA9210-21UK2	N/M	0R	N/M	N/M	N/M
2nd source	10K	N/M	0R	0R	0R

Note 24-3: The part number of DA9210 must be specified to "DA9210-21UK2" for MT6795.

COMPANY: Shanghai ReallyTek Information Technology Co.,Ltd				MODEL: H952	Modified Date: 2015-7-14	
DRAWN	ZY/TS	DATED	20140512	TITLE: 23_POWER_EXT_4PHASE_BUCK	VERSION: V1.0	SHEET: 10OF 22
CHECKED	< >	DATED	< >			

RF_MT6169_PIN_OUT


REVISION RECORD			
LTR	ECO NO.	APPROVED:	DATE:

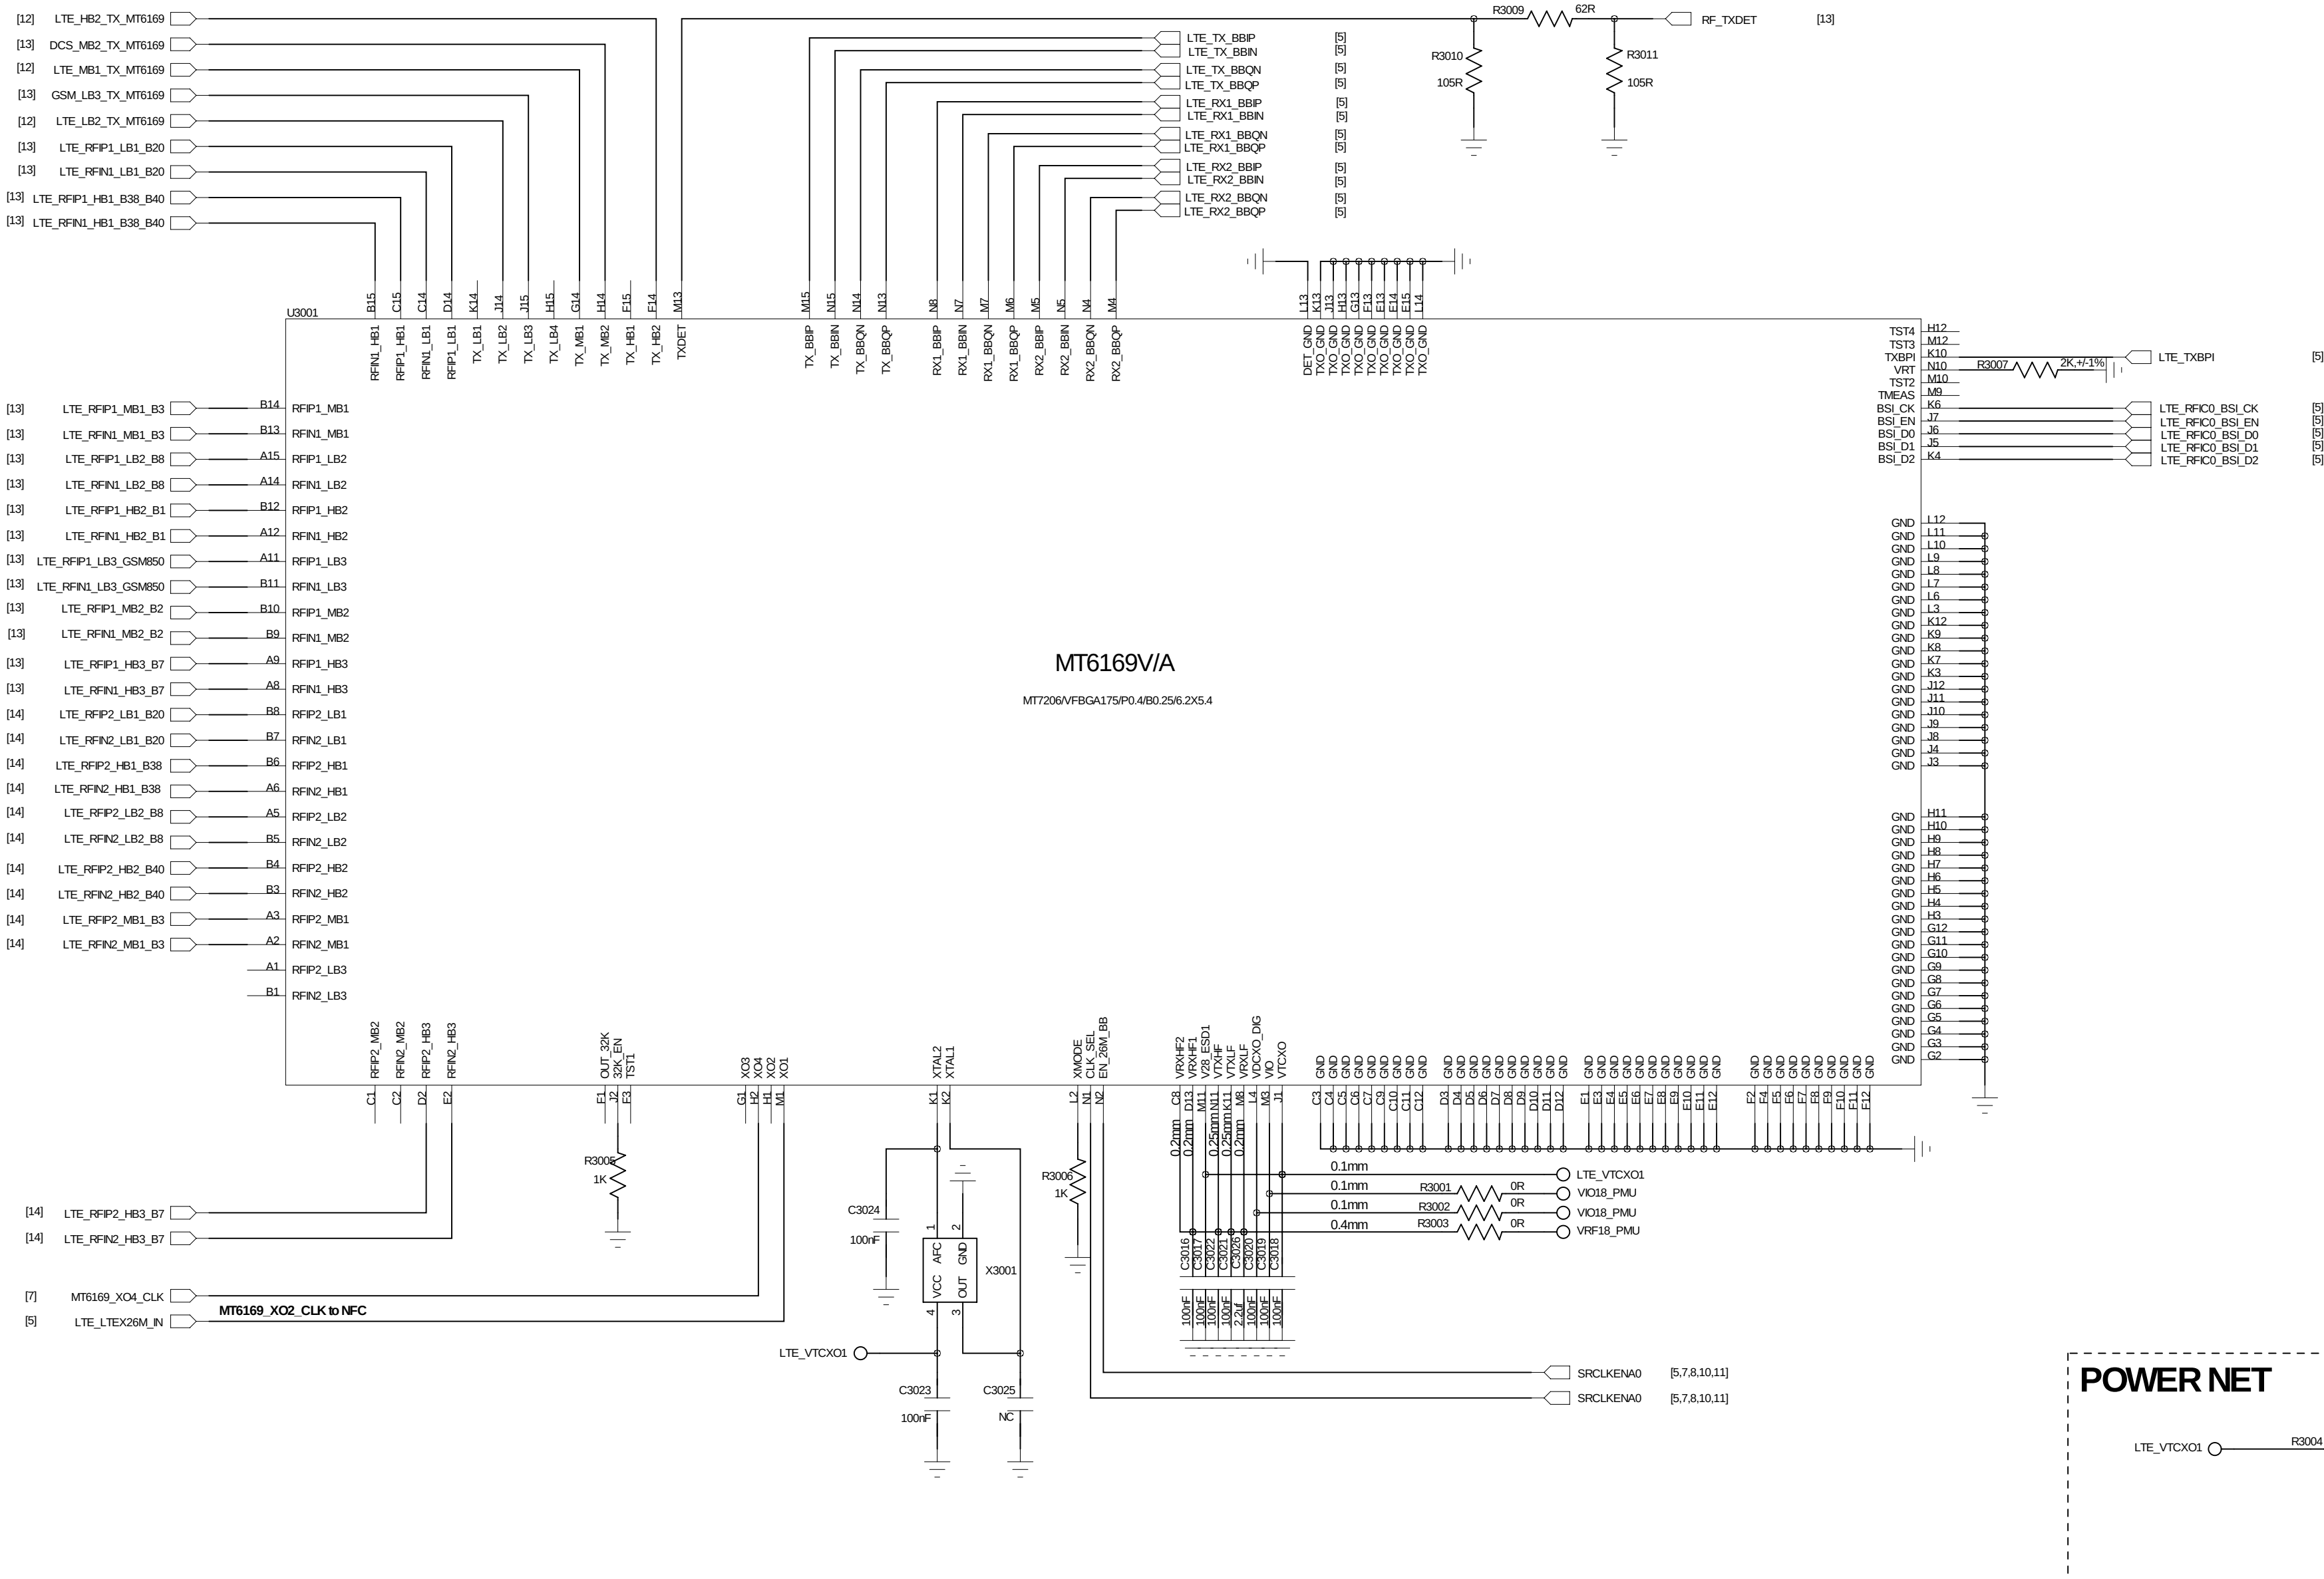

COMPANY: Shanghai ReallyTek Information Technology Co.,Ltd				MODEL: H952		Modified Date: 2015-7-14	
DRAWN	ZY/TS	DATED	20140512	TITLE: 30_RF_MT6169_PIN_OUT		VERSION: V1.0	SHEET: 11 OF 22
CHECKED	< >	DATED	< >				

RF_MT6169_RF_TX


REVISION RECORD			
LTR	ECO NO.	APPROVED:	DATE:

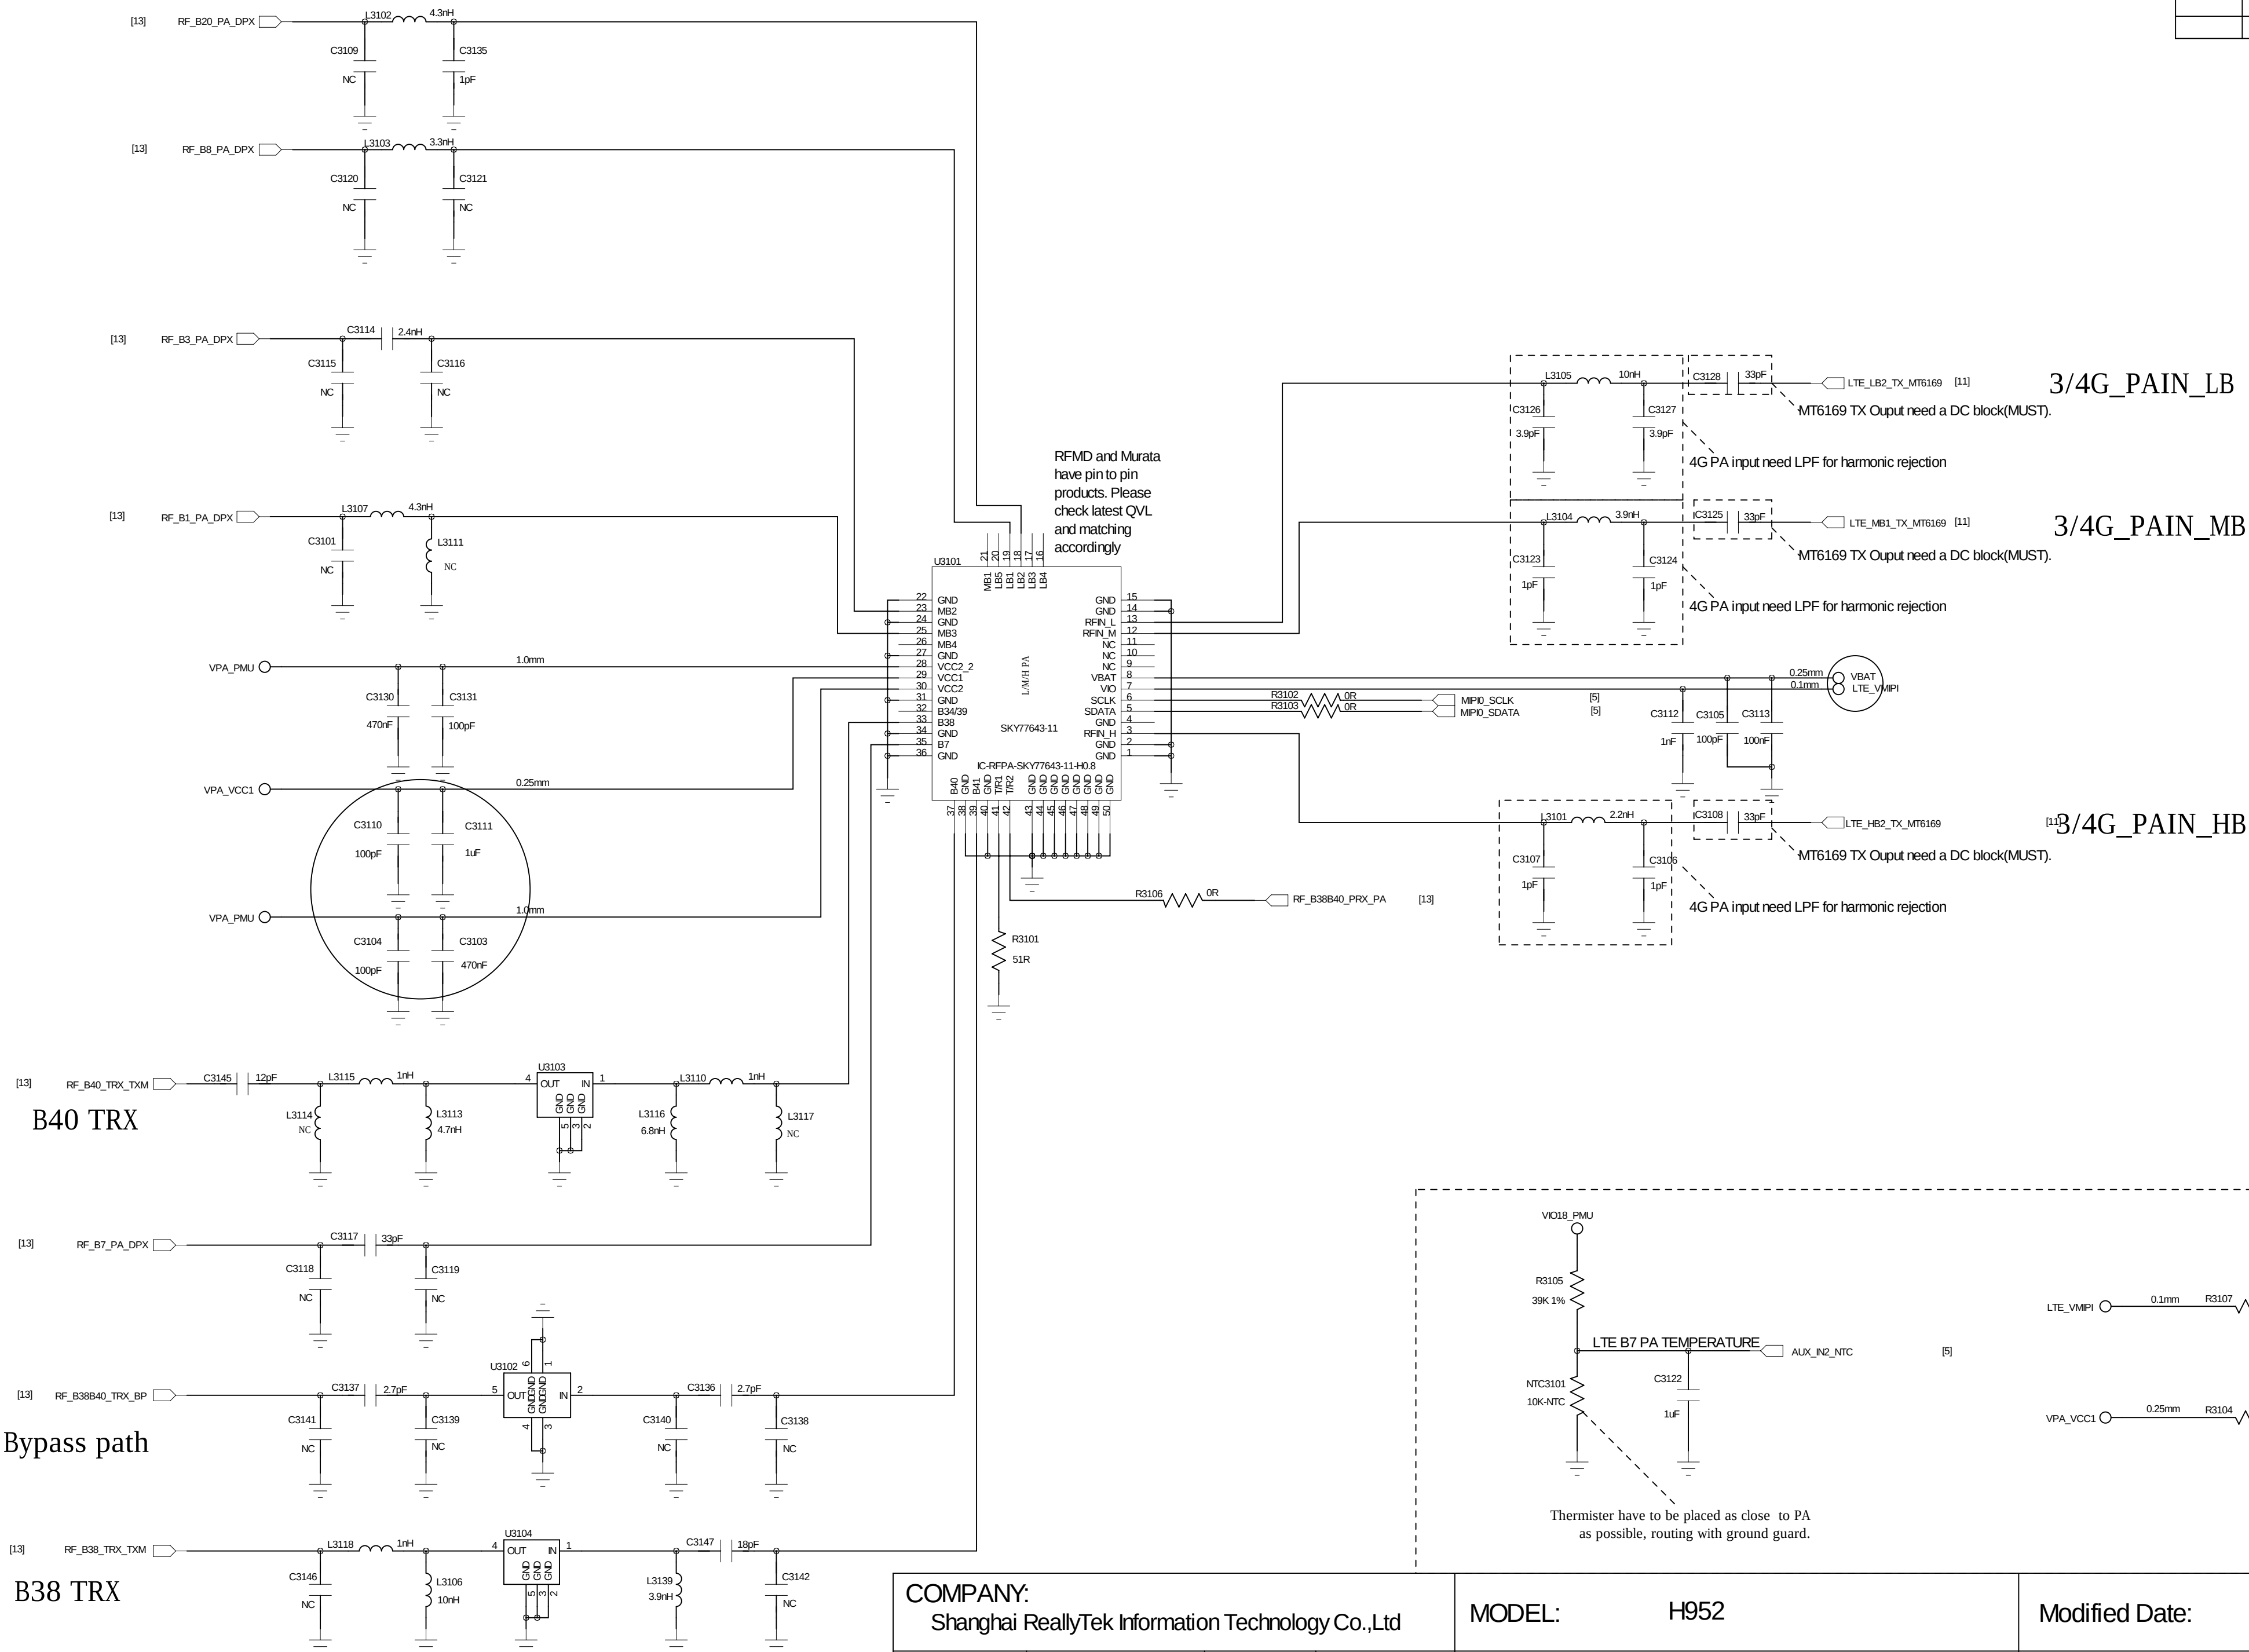

COMPANY: Shanghai ReallyTek Information Technology Co.,Ltd				MODEL: H952	Modified Date: 2015-7-14	
DRAWN	ZY/TS	DATED	20140512	TITLE: 31_RF_MT6169_RF_TX	VERSION: V1.0	SHEET: 12OF 22
CHECKED	< >	DATED	< >			

RF_MT6169_RF_PRX

ASM_Main_791~960MHz + 1710~2690MHz

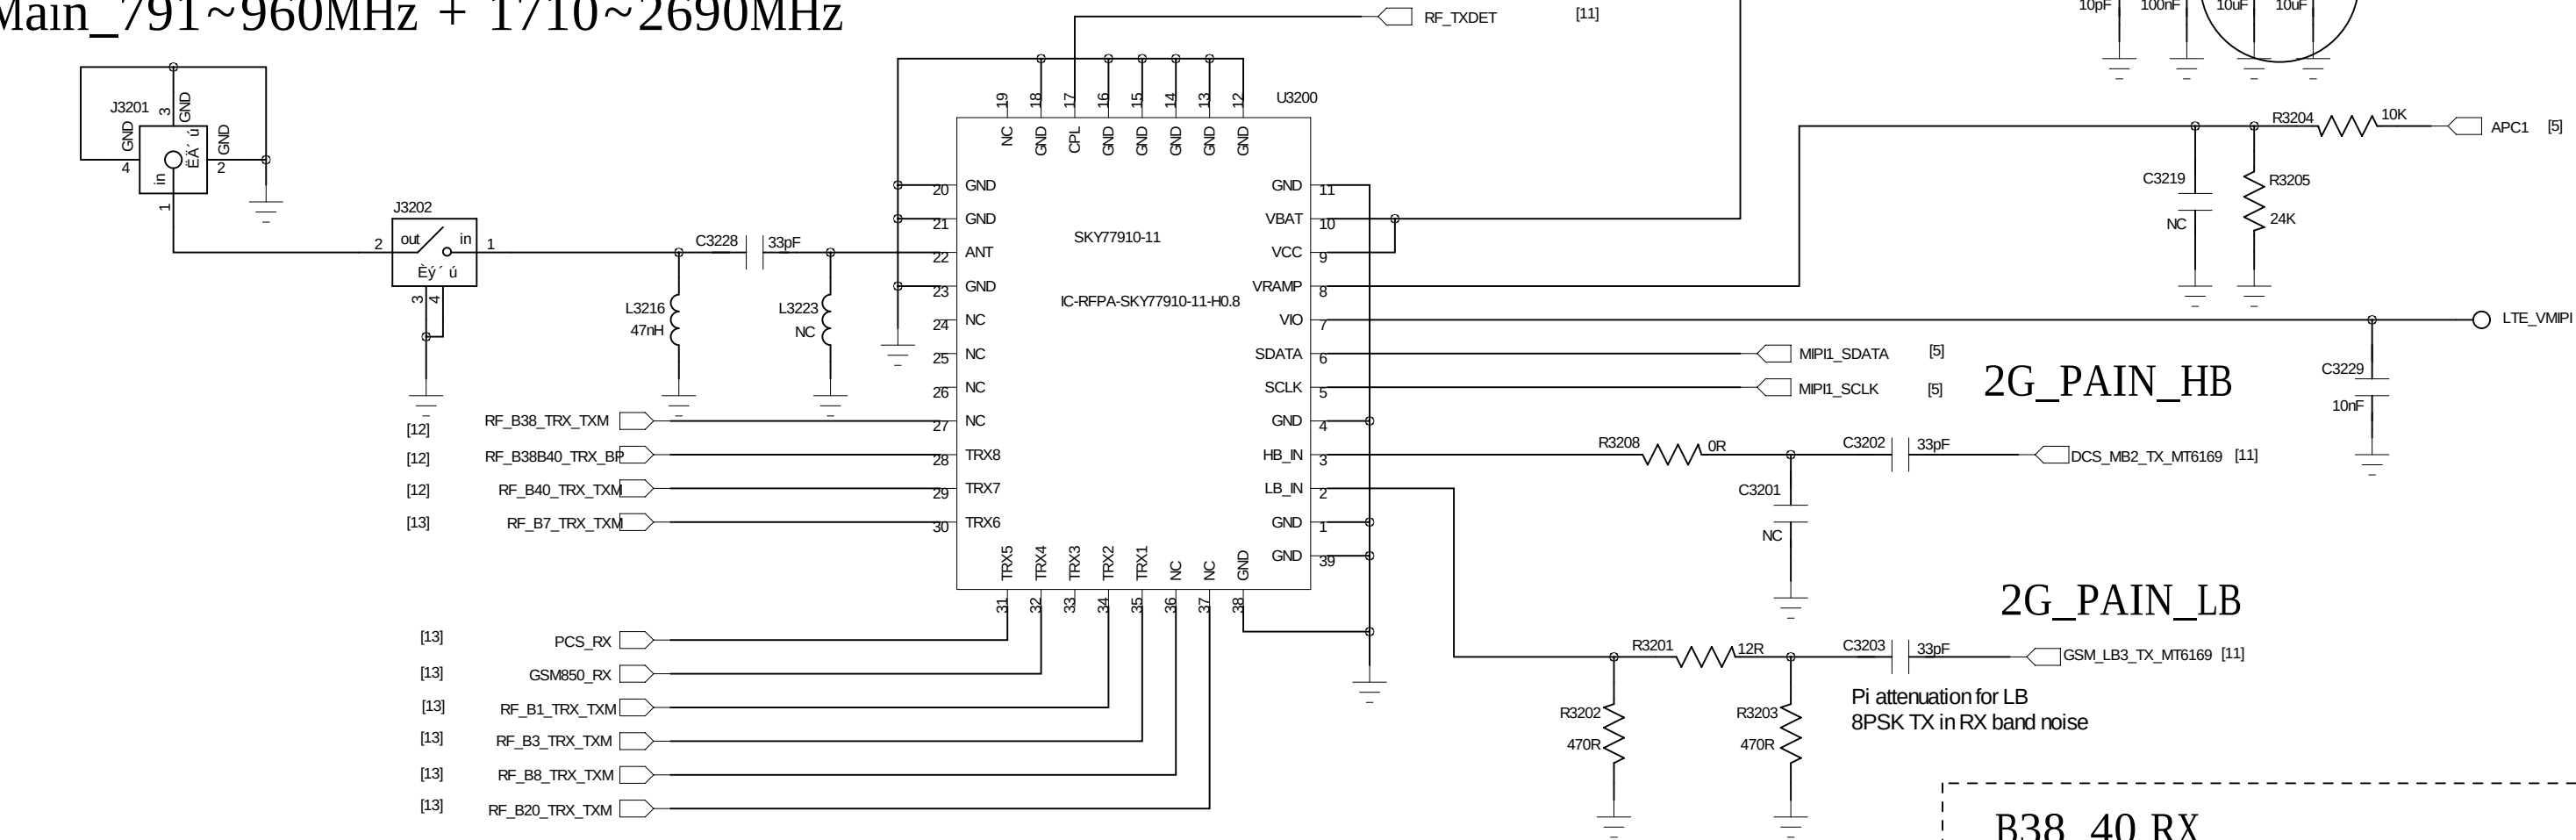


2G_PAIN_HB


2G_PAIN_LB

Pi attenuation for LB
8PSK TX in RX band noise


B38_40 RX

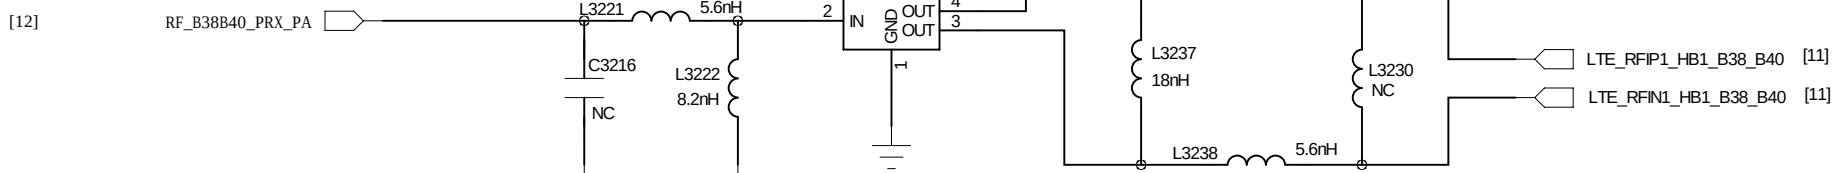


B20 TRX

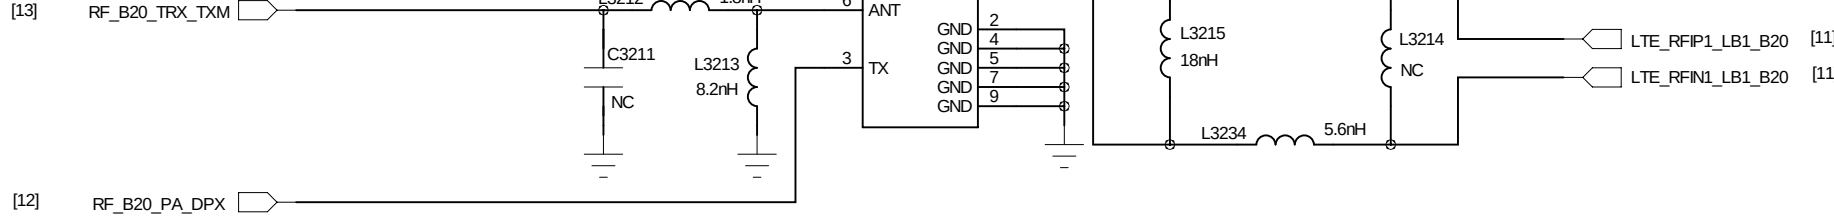


GSM850

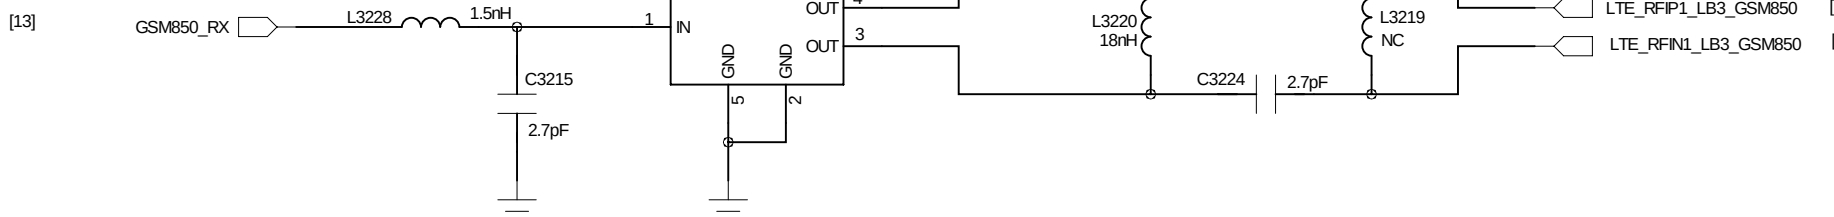


B2 RX

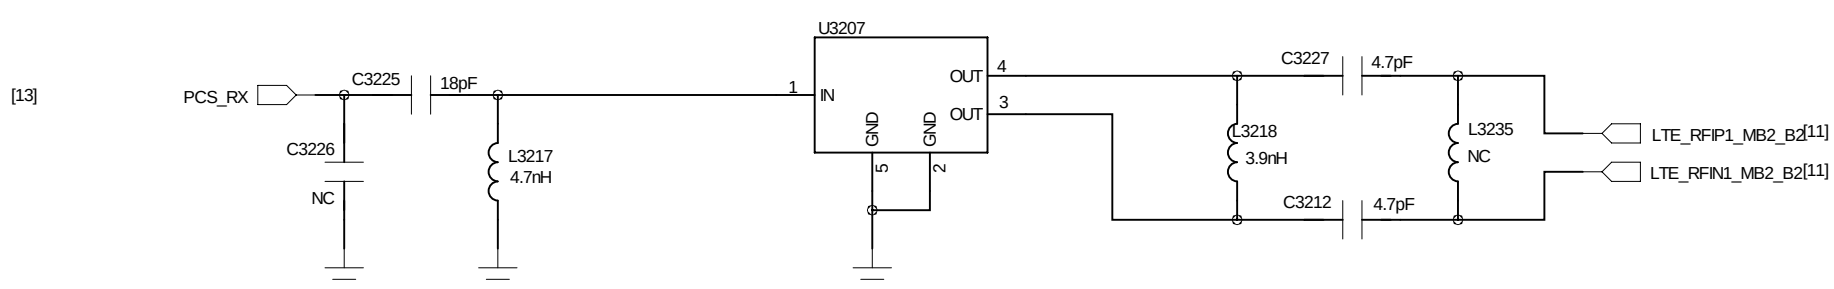


B1 TRX

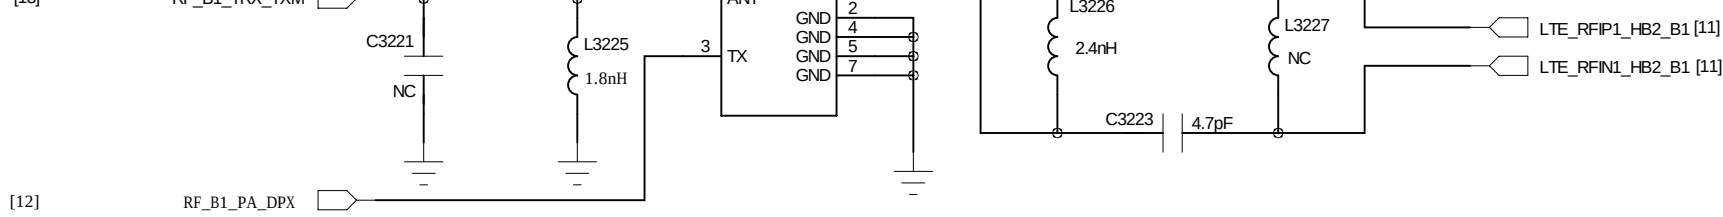


B3 TRX

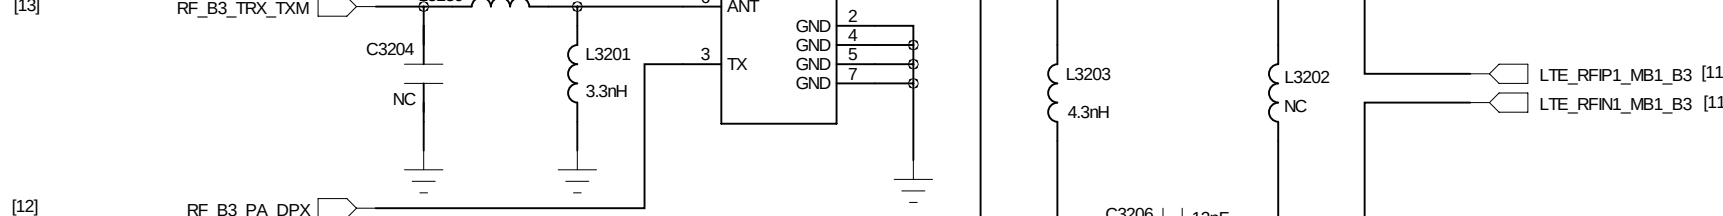

B7 TRX

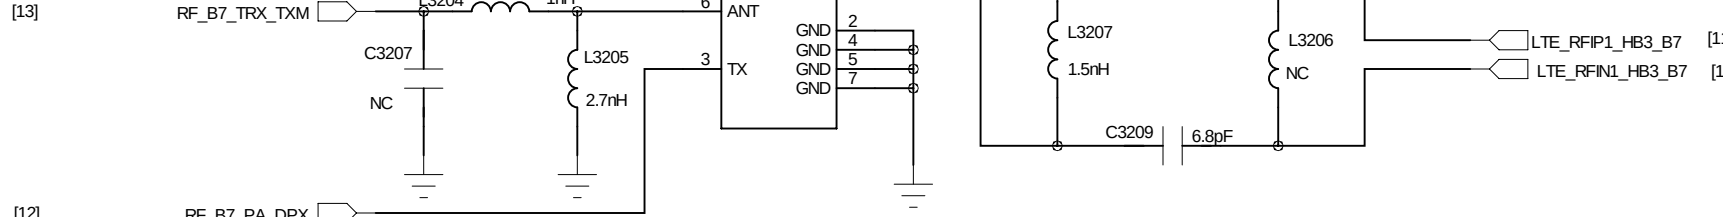

B8 TRX

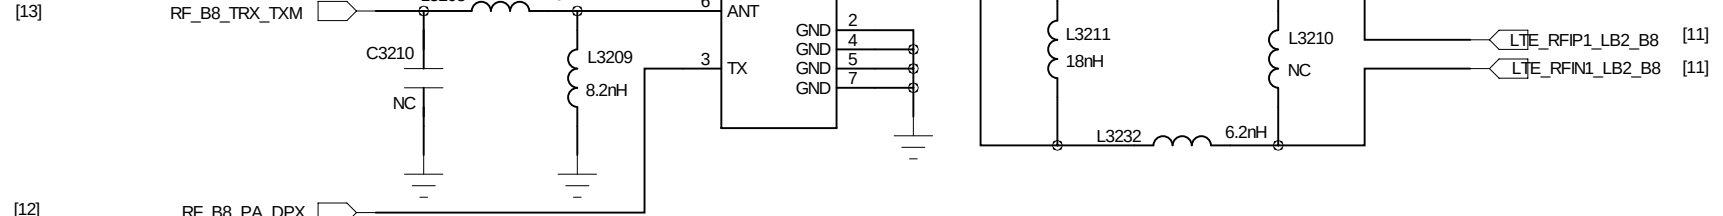

COMPANY:
Shanghai ReallyTek Information Technology Co.,Ltd

MODEL: H952

Modified Date: 2015-7-14

DRAWN ZY/TS

DATED 20140512

TITLE: 32_RF_MT6169_RF_PRX

VERSION: V1.0


SHEET: 13OF 22

CHECKED < >


DATED < >

RF_MT6169_RF_DRX


REVISION RECORD			
LTR	ECO NO.	APPROVED:	DATE:

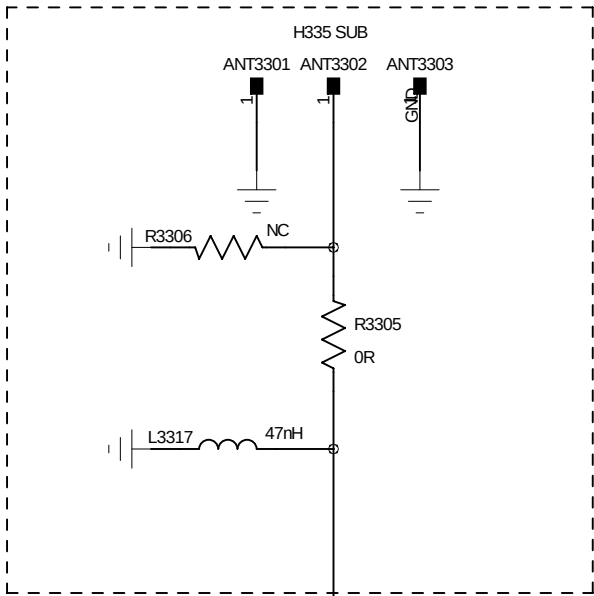


DRX ANT: 832~2690MHz

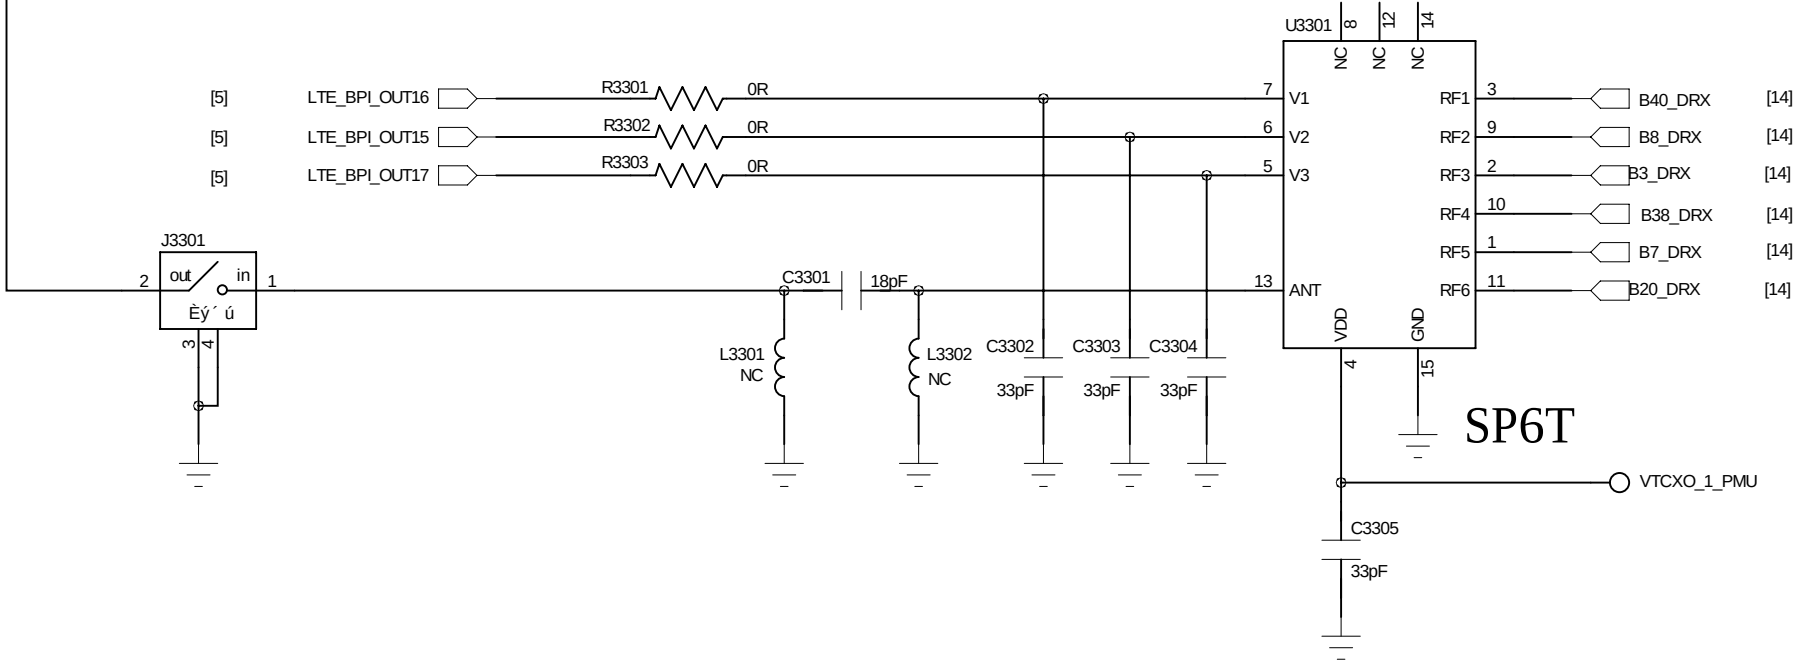


B3 DRX

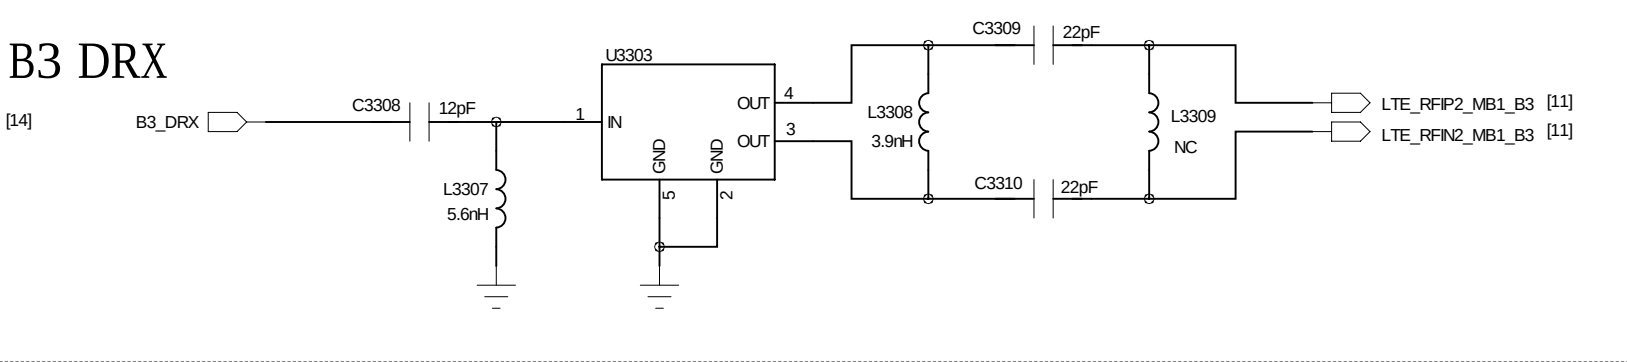


B7 DRX

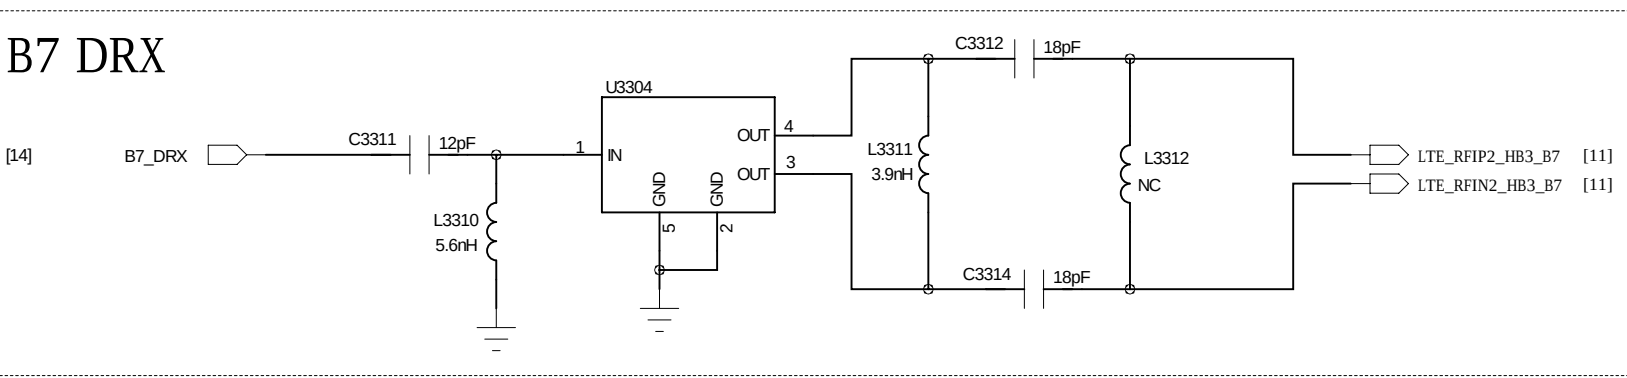


B8 DRX

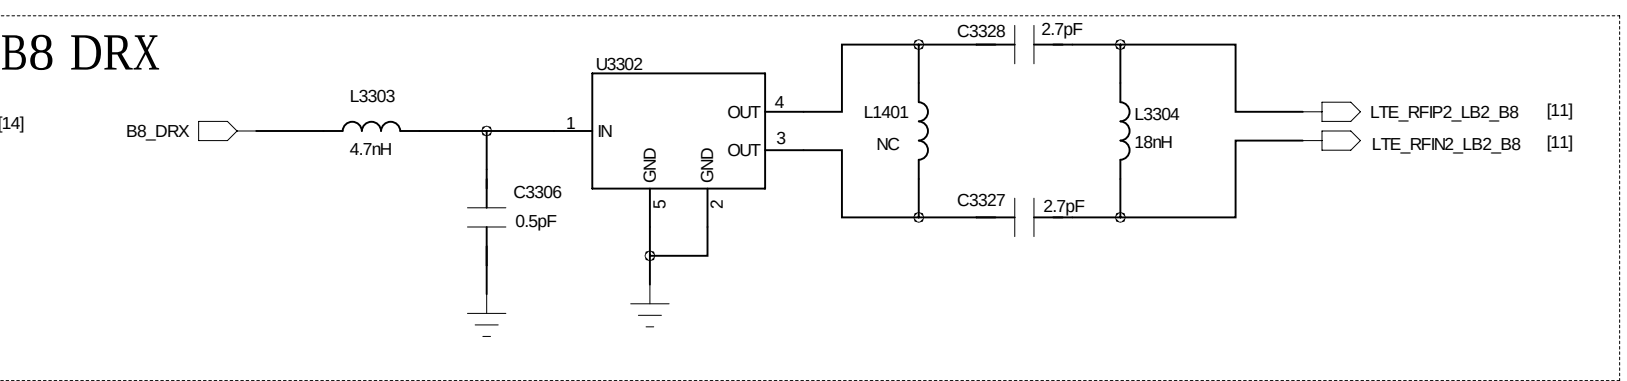


B20 DRX

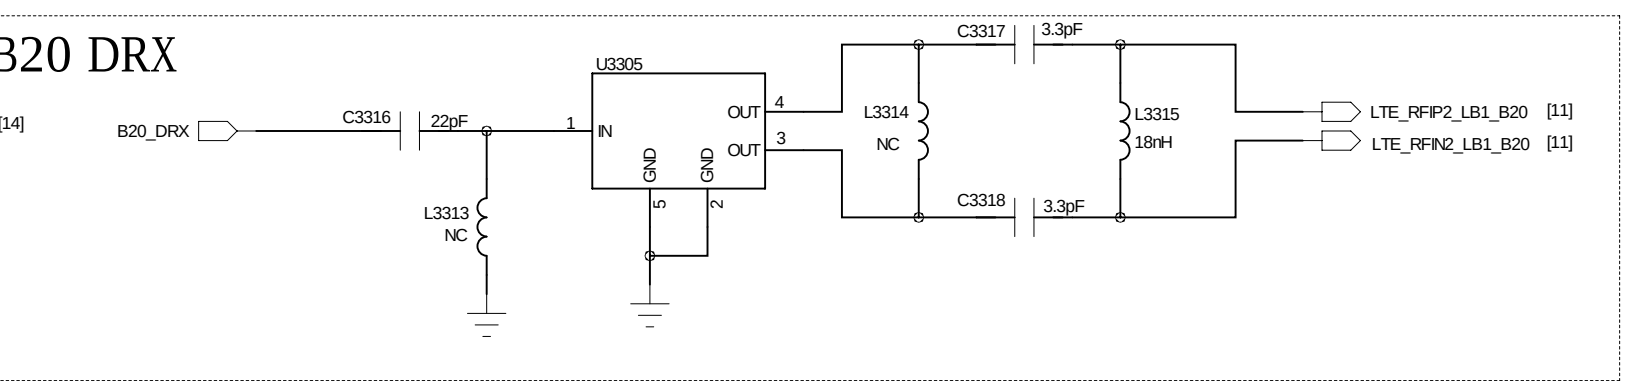

B38 DRX

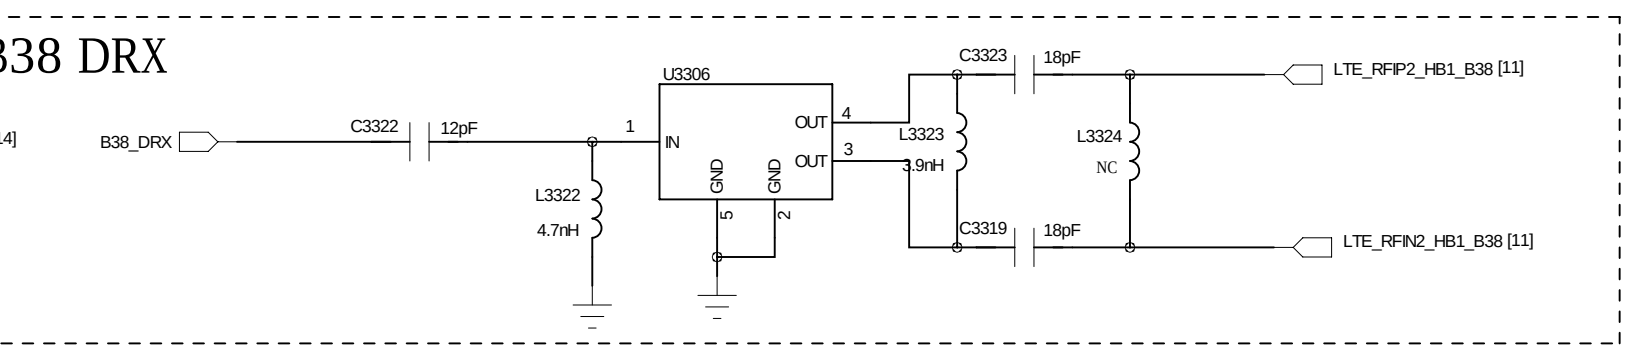

B40 DRX

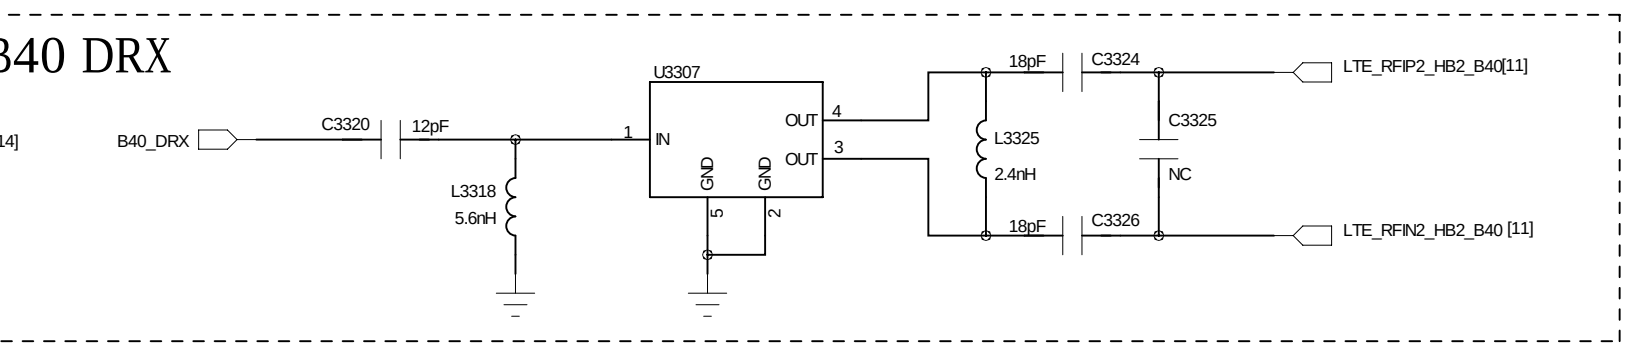


COMPANY: Shanghai ReallyTek Information Technology Co.,Ltd				MODEL: H952		Modified Date: 2015-7-14	
DRAWN	ZY/TS	DATED	20140512	TITLE: 33_RF_MT6169_RF_DRX		VERSION: V1.0	SHEET: 14 OF 22
CHECKED	< >	DATED	< >				

MEMORY_EMMC

REVISION RECORD			
LTR	ECO NO.	APPROVED:	DATE:

169 ball eMMC / eMMC+LPDDR1

1 bit mode for eMMC boot

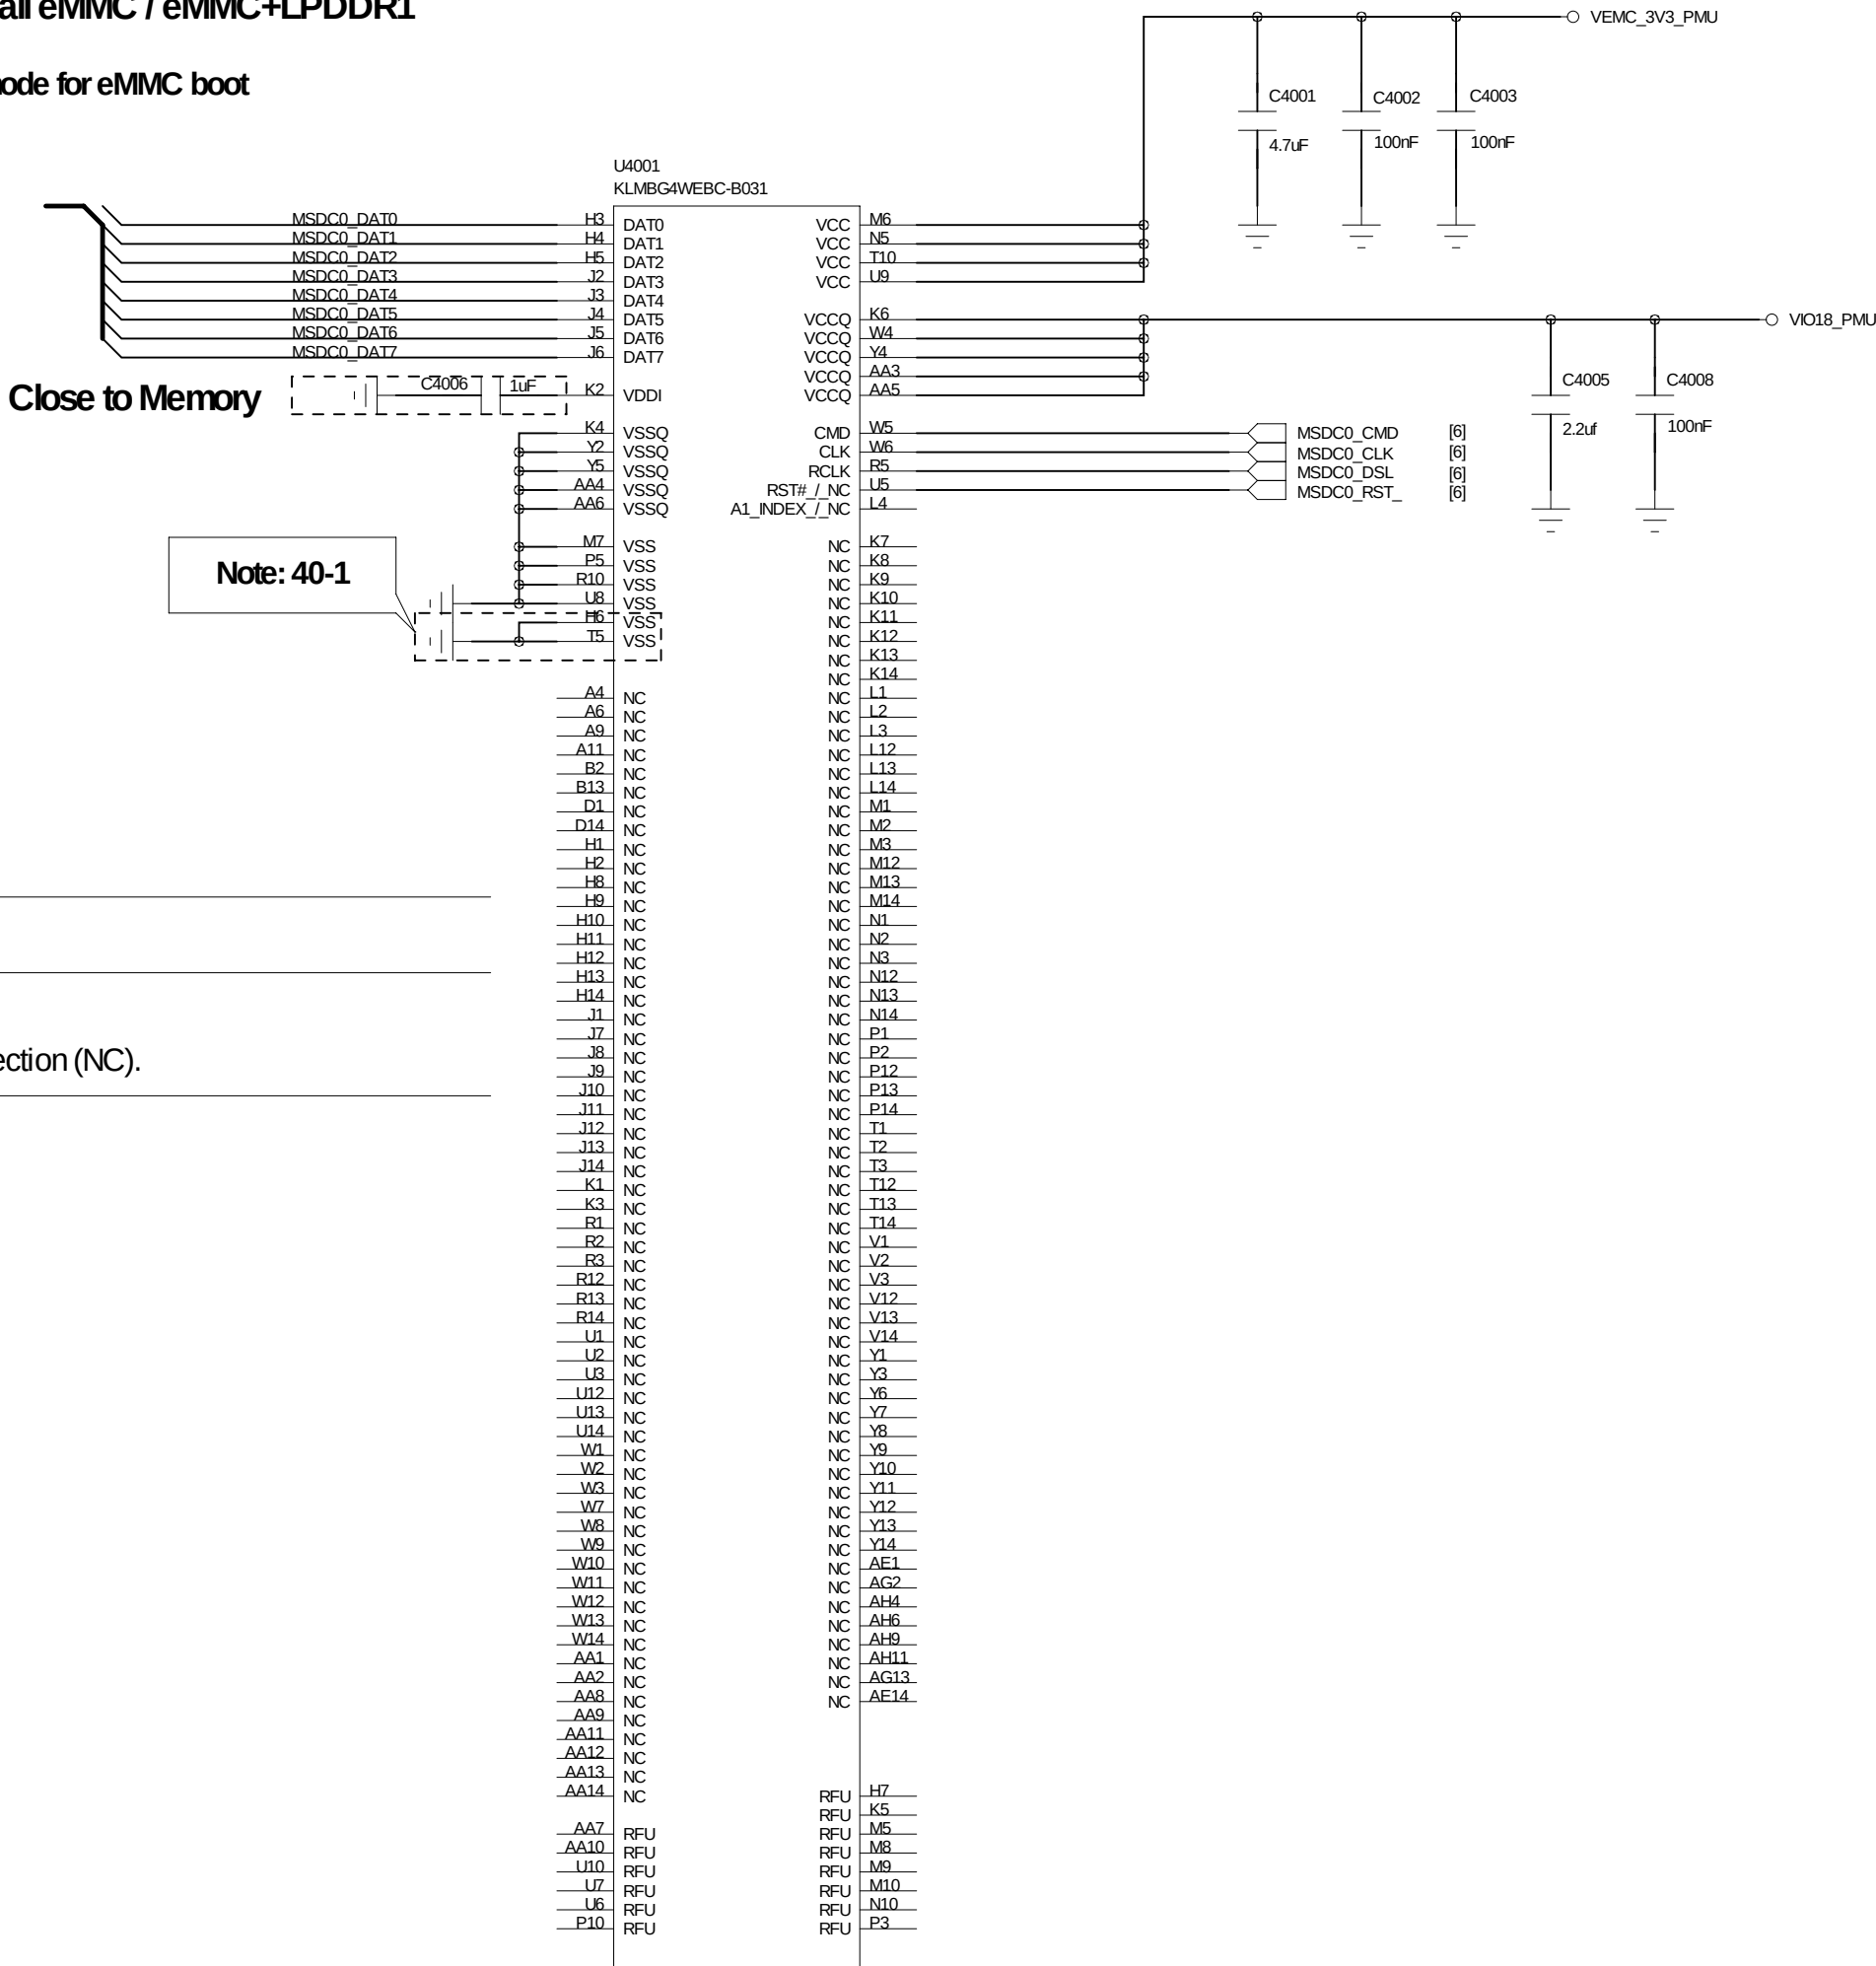


Schematic design notice of "40_MEMORY_eMMC" page.	
Note 40-1:	For eMMC 5.0, connect eMMC's H6 & T5 pin to GND. For eMMC 4.5, check eMMC's H6 & T5 is real no connection (NC).

COMPANY: Shanghai ReallyTek Information Technology Co.,Ltd				MODEL:	H952	Modified Date:	2015-7-14	
DRAWN	ZY/TS	DATED	20140512	TITLE:	40_MEMORY_EMMC	VERSION:	V1.0	SHEET: 15 OF 22
CHECKED	< >	DATED	< >					

REVISION RECORD			
LTR	ECO NO.	APPROVED:	DATE:

The diagram shows the H335 SUB board with three antenna connectors. ANT5001 is labeled GND, ANT5002 is labeled BT/WIFI/GPS, and ANT5003 is labeled GND. Each connector is represented by a vertical line with a horizontal bar at the top and a ground symbol at the bottom.

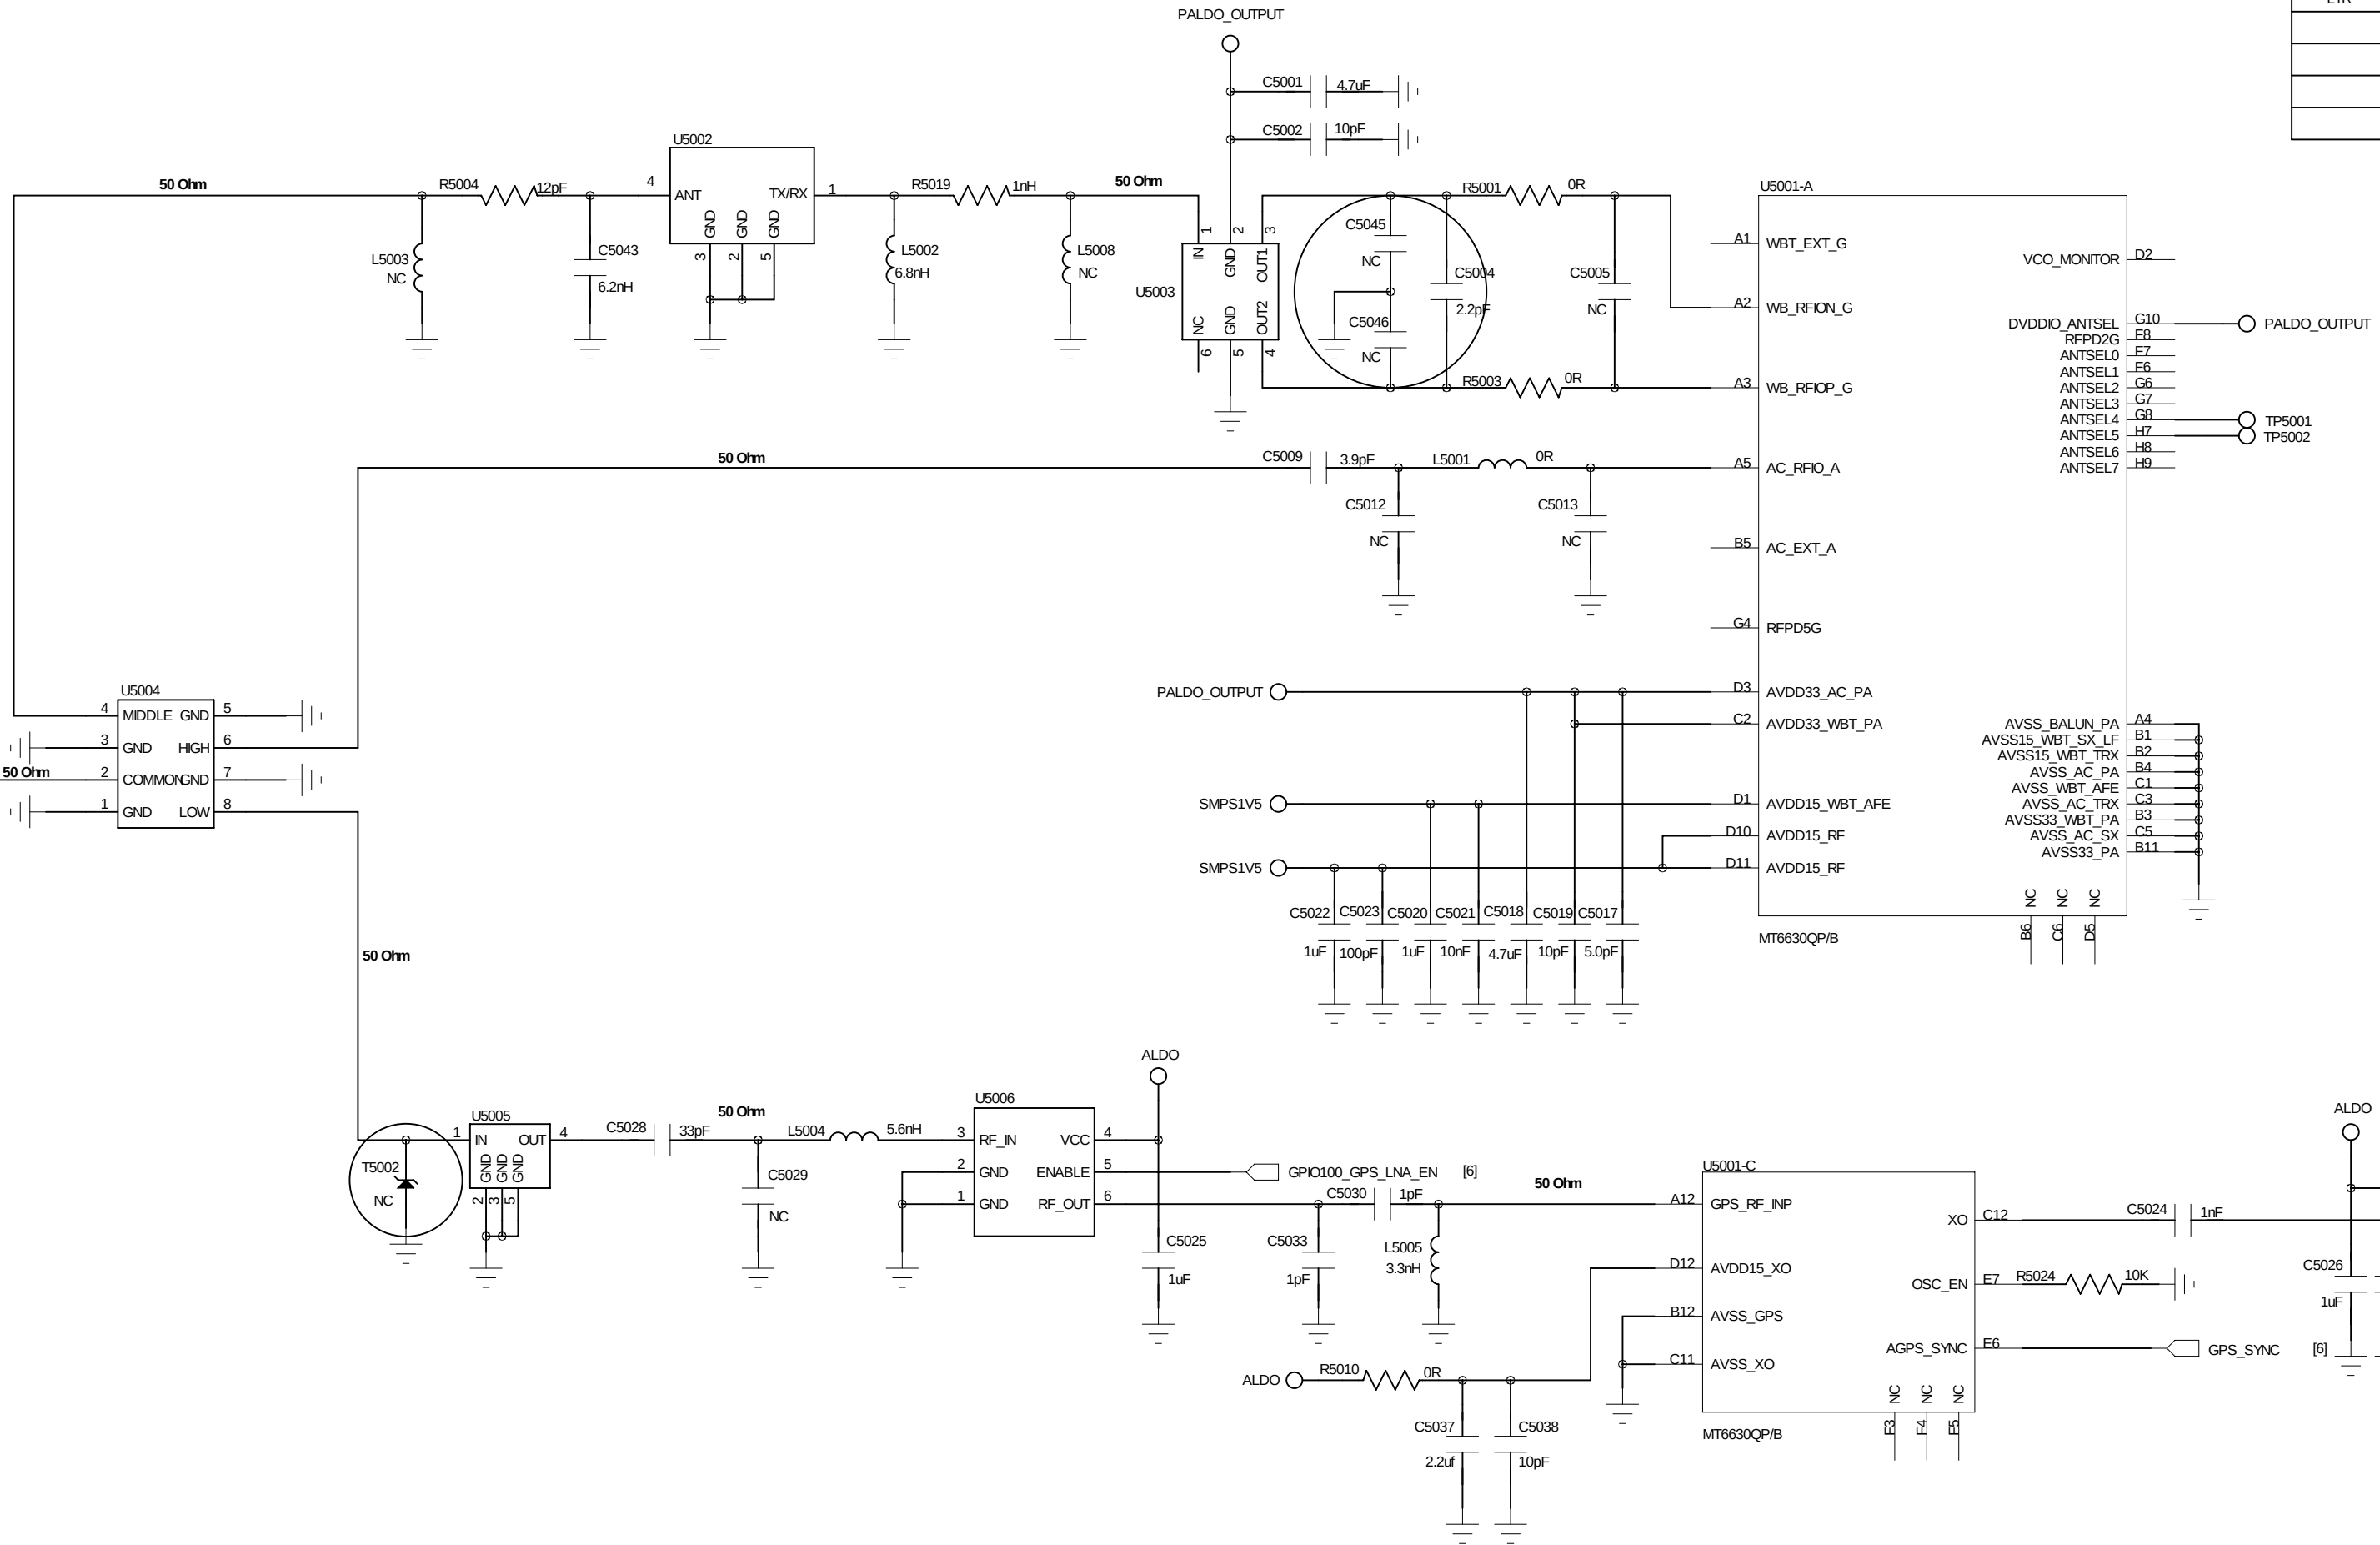

The schematic diagram illustrates the internal components and pin connections of the MT6630 QP/B module. The module is labeled U5001-E at the top left. The internal components include:

- WIFI INT_B** (E8), **BGF_INT_B** (E3), and **SYSRST_B** (F1) pins.
- VRTC** (Vibration Resonator) connected to **G11** and **AVDD28_32K**.
- C5027** (Capacitor) connected to **G11** and **AVDD28_32K**.
- 100nF** (Capacitor) connected to **F12** and **RTCCCLK_O**.
- RTC32K2V8** (Resistor) connected to **F11** and **RTCCCLK**.
- VCORE** (Voltage Core) connected to **G9** and **DVDD**.
- C5035** (Capacitor) connected to **G9** and **DVDD**.
- C5036** (Capacitor) connected to **J3** and **DVDD**.
- 1uF** (Capacitor) connected to **J4** and **DVSS**.
- 1uF** (Capacitor) connected to **H10** and **DVSS**.
- K6** (Pin) connected to **DVSS**.

The module is connected to the MT6630 QP/B chip, which has the following pins and connections:

- I2S_DATA_IN** (K3), **I2S_WS** (K2), **I2S_CLK** (J2), and **I2S_DATA_OUT** (K3) are connected to the MT6630_I2S_DA pin.
- UART_RX** (G2), **UART_TX** (G1), **UART_CTS** (H1), and **UART_RTS** (H2) are connected to the MT6630_UART pin.
- PCM_SYNC** (K1), **PCM_CLK** (I2), **PCM_IN** (I1), and **PCM_OUT** (M1) are connected to the MT6630_PCM pin.
- VIO18_PMU** (VIO18_PMU) is connected to the MT6630_VIO18_PMU pin.
- DVDDIO_SDIO** (M2), **SDIO_CMD** (K4), **SDIO_CLK** (K5), **SDIO_DAT0** (M6), **SDIO_DAT1** (L6), **SDIO_DAT2** (M4), and **SDIO_DAT3** (L4) are connected to the MT6630_SDIO pin.
- DVDDIO** (J1) is connected to the MT6630_DVDDIO pin.

The module is also connected to the MT6630 QP/B chip, which has the following pins and connections:

- MSDC3_0** (M2), **MSDC3_1** (K4), **MSDC3_2** (K5), **MSDC3_3** (M6), **MSDC3_4** (L6), **MSDC3_5** (M4), and **MSDC3_6** (L4) are connected to the MT6630_MSDC3 pin.
- MT6630_VIO18_PMU** (VIO18_PMU) is connected to the MT6630_VIO18_PMU pin.
- MT6630_DVDDIO** (J1) is connected to the MT6630_DVDDIO pin.

The module is also connected to the MT6630 QP/B chip, which has the following pins and connections:

- MT6630_I2S_DA** (K3), **MT6630_UART** (G2), **MT6630_PCM** (K1), **MT6630_VIO18_PMU** (VIO18_PMU), **MT6630_SDIO** (M2), **MT6630_DVDDIO** (J1), **MT6630_MSDC3** (M2), **MT6630_VIO18_PMU** (VIO18_PMU), **MT6630_DVDDIO** (J1), and **MT6630_MSDC3** (M2) are connected to the MT6630 pin.

[illegible]

The schematic diagram illustrates the power management IC (MT6630 QP/B) and its connections to external components. The IC is shown with various pins and their corresponding connections:

- VBAT_BUCK:** Connected to the VBAT pin via a resistor R5021 and a 0R inductor. The current limit is $I_{max} 900mA$.
- AVDD45_MISC:** Connected to pin L11 via a 4.7uF capacitor C5006.
- AVSS45_MISC:** Connected to pin K11 via a 4.7uF capacitor C5006.
- AVDD45_SMPS:** Connected to pin M11 via a 4.7uF capacitor C5007.
- AVSS45_SMPS:** Connected to pin L10 via a 4.7uF capacitor C5007.
- AVDD25_V2PSNA:** Connected to pin K9 via a 100nF capacitor C5008.
- AVDD25_ALDO:** Connected to pin L12 via a 1uF capacitor C5010.
- VOUT_VRF:** Connected to pin L9 via a 10uF capacitor C5014.
- VOUT_VCORE:** Connected to pin M8 via a 10uF capacitor C5015.
- PALDO:** Connected to pin M12 via a 4.7uF capacitor C5016.
- PMUEN:** Connected to pin H12 via a 1M resistor R5002.
- AVSS28_ADC:** Connected to pin J11.
- AUXIN:** Connected to pin J12.
- VREF:** Connected to pin K12 via a 1uF capacitor C5011.
- LX1:** Connected to pin M10 via a 2.2uH inductor PL5001.
- LX2:** Connected to pin M9.

The diagram also shows the current limits for various inductors:

- $I_{max} 30mA$ for the inductor connected to VBAT_BUCK.
- $I_{max} 350mA$ for the inductor connected to VOUT_VRF.
- $I_{max} 450mA$ for the inductor connected to VOUT_VCORE.
- $I_{max} 500mA$ for the inductor connected to PALDO.

The MT6630 QP/B IC is shown with pins F9 and E10 connected to ground.


COMPANY: Shanghai ReallyTek Information Technology Co.,Ltd				MODEL: H952	Modified Date: 2015-7-14	
DRAWN	ZY/TS	DATED	20140512	TITLE: 50_4IN1_MT6630	VERSION: V1.0	SHEET: 16OF 22
CHECKED	< >	DATED	< >			

REVISION RECORD			
LTR	ECO NO.	APPROVED:	DATE:

5.46FHD

LCD_CTP_INTERFACE

CTP (GT910) I2C address: (Write:0x28, Read:0x29 or Write:0xBA, Read:0xBB)

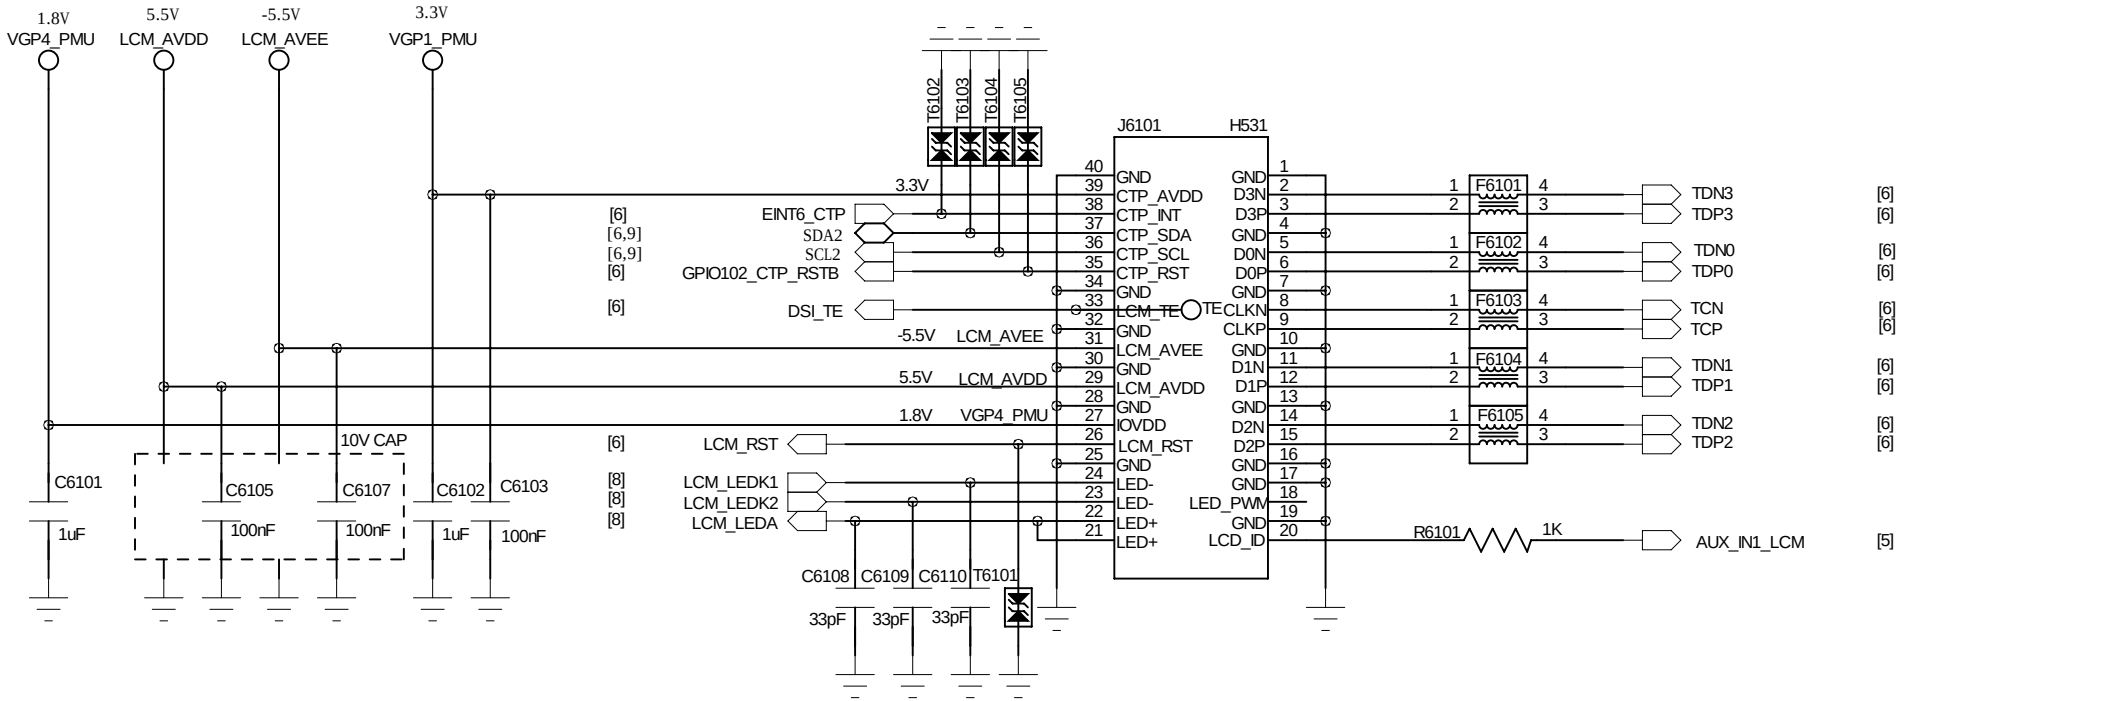


COMPANY: Shanghai ReallyTek Information Technology Co.,Ltd				MODEL: H952	Modified Date: 2015-7-14	
DRAWN	ZY/TS	DATED	20140512	TITLE: 61_PERI_LCD_CTP	VERSION: V1.0	SHEET: 18OF 22
CHECKED	< >	DATED	< >			

PERI_CAMERA

REVISION RECORD			
LTR	ECO NO.	APPROVED:	DATE:


Rear Camera (20.7M+AF)

Rear camera (IMX230) I2C address: (Write:0x20, Read:0x21) or (Write:0x34, Read:0x35)
AF driver (BU64297GWZ) I2C address: (Write:0x18, Read:0x19)
EEPROM (GT24C16) I2C address: (Write:0xA0, Read:0xA1)

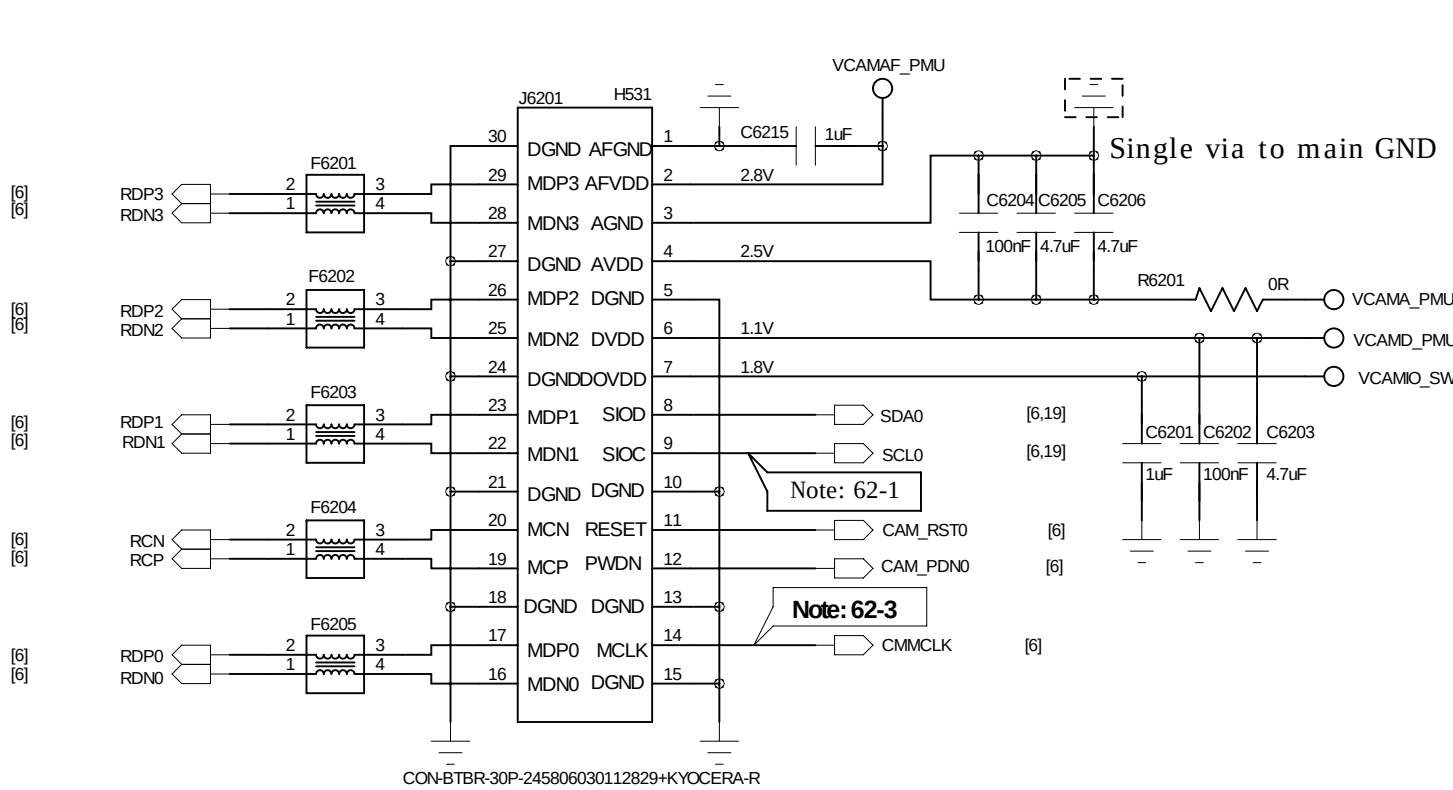


Front Camera (5M+FF)

Front camera (OV5648) I2C address: (Write:0x6C, Read:0x6D)

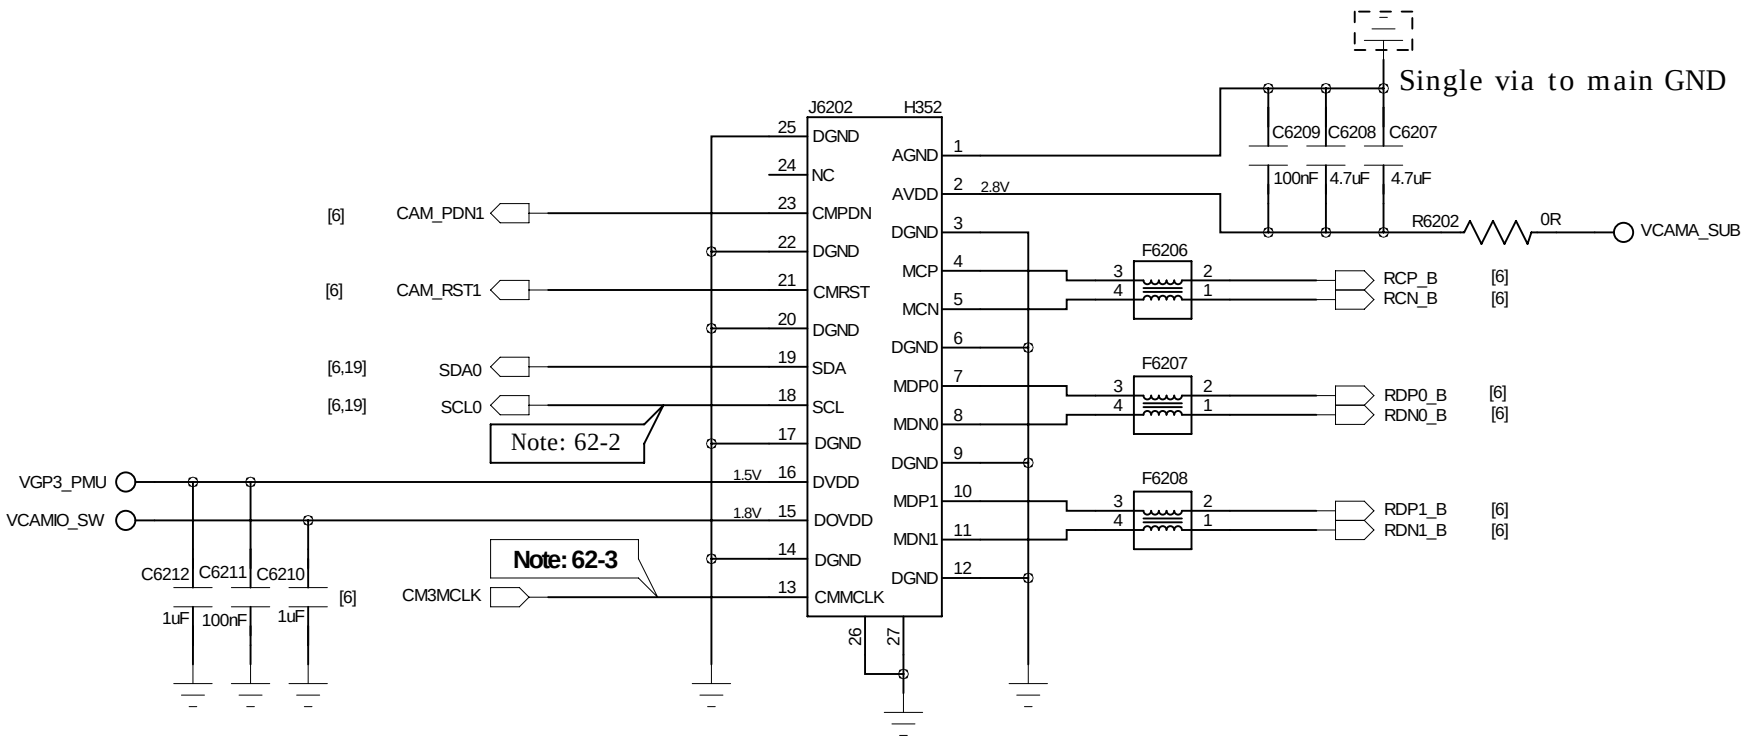

VCAM_IO 1.8V SW

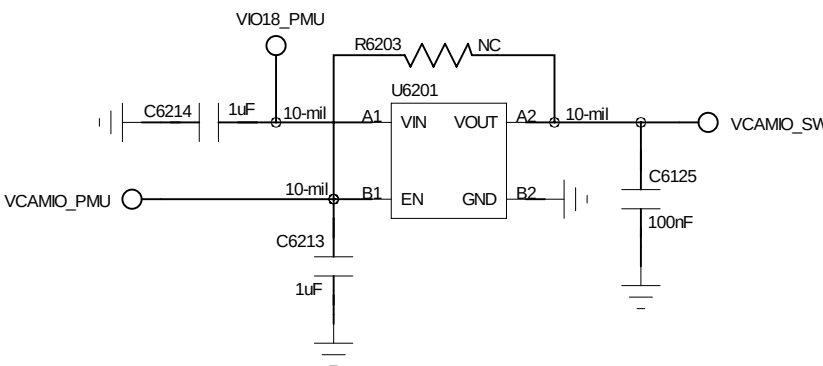

Schematic design notice of "62_PERI_CAMERA_KEYPAD" page.

Note 62-1: The VCC of I2C_0 is pulled to "VCAM_IO_PMU".

Note 62-2: I2C control interface of front camera (with AF) must be assigned to I2C-3 bus when PIP/VIV feature be supported.


Note 62-3: Reserve a capacitor (27pF) on camera's MCLK and shunt it to GND to prevent GPS de-sense.

COMPANY: Shanghai ReallyTek Information Technology Co.,Ltd				MODEL: H952		Modified Date: 2015-7-14	
DRAWN	ZY/TS	DATED	20140512	TITLE: 62_PERI_CAMERA		VERSION: V1.0	SHEET: 19OF 22
CHECKED	< >	DATED	< >				


PERI_SENSORS

REVISION RECORD			
LTR	ECO NO.	APPROVED:	DATE:


M-Sensor (COMPASS)
MMC35240PJ:I2C ADDRESS:0x60(Write)/0x61(Read)

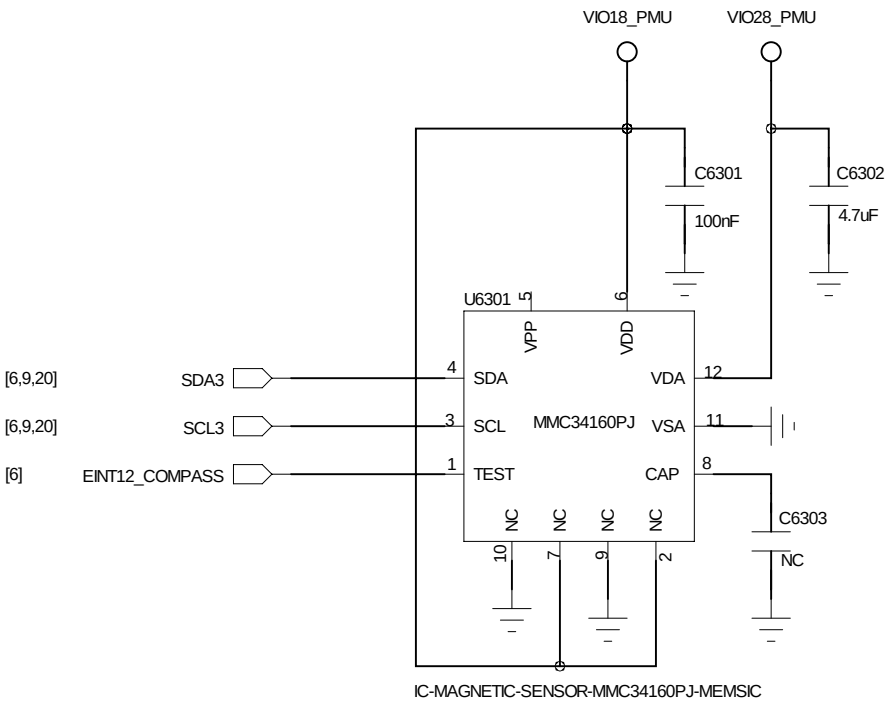


AL& PS Sensor
LTR-559ALS-034:I2C address: Write:0x46, Read:0x47

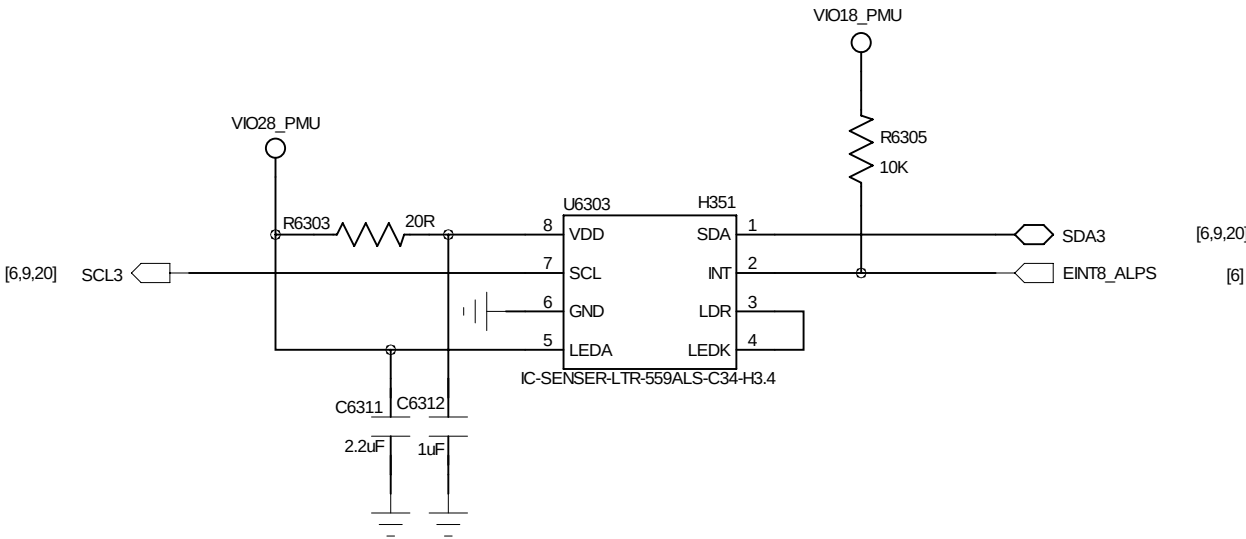


Unipolar HALL

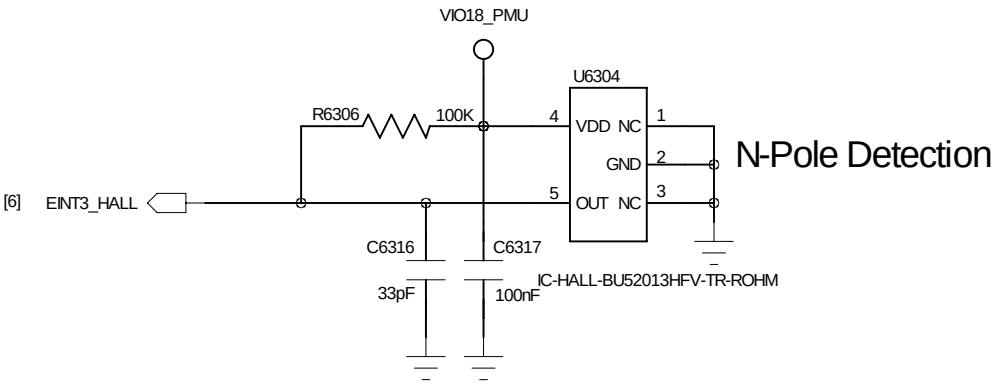

G-Sensor (x)
Default KXTJ2-1009:I2C ADDRESS:0x1C(Write)/0x1D(Read)
BMA222E:I2C ADDRESS:0x30(Write)/0x31(Read)

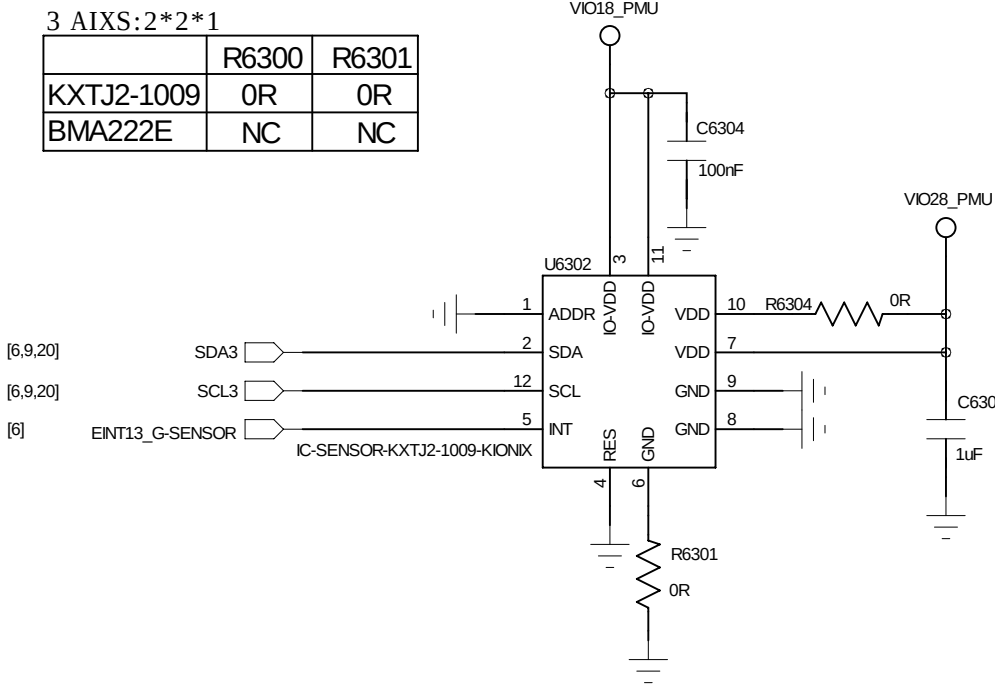


Thermister / To sense board level temperature

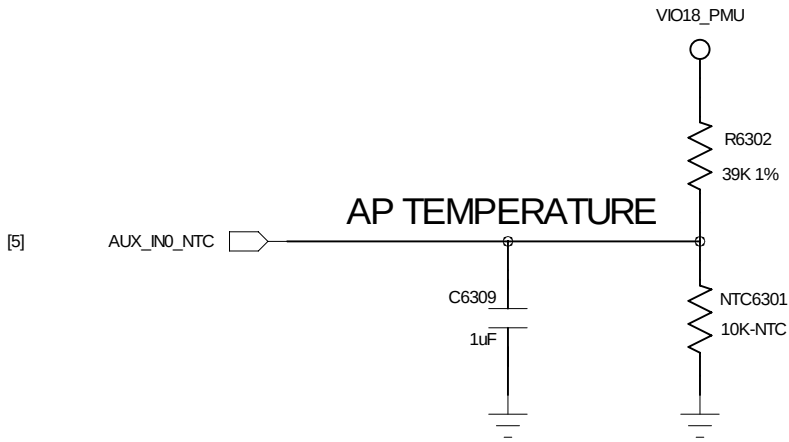

COMPANY: Shanghai ReallyTek Information Technology Co.,Ltd				MODEL: H952		Modified Date: 2015-7-14	
DRAWN	ZY/TS	DATED	20140512	TITLE: 63_PERI_SENSORS		VERSION: V1.0	SHEET: 20OF 22
CHECKED	< >	DATED	< >				

REVISION RECORD			
LTR	ECO NO.	APPROVED:	DATE:

EXCHANGE IO

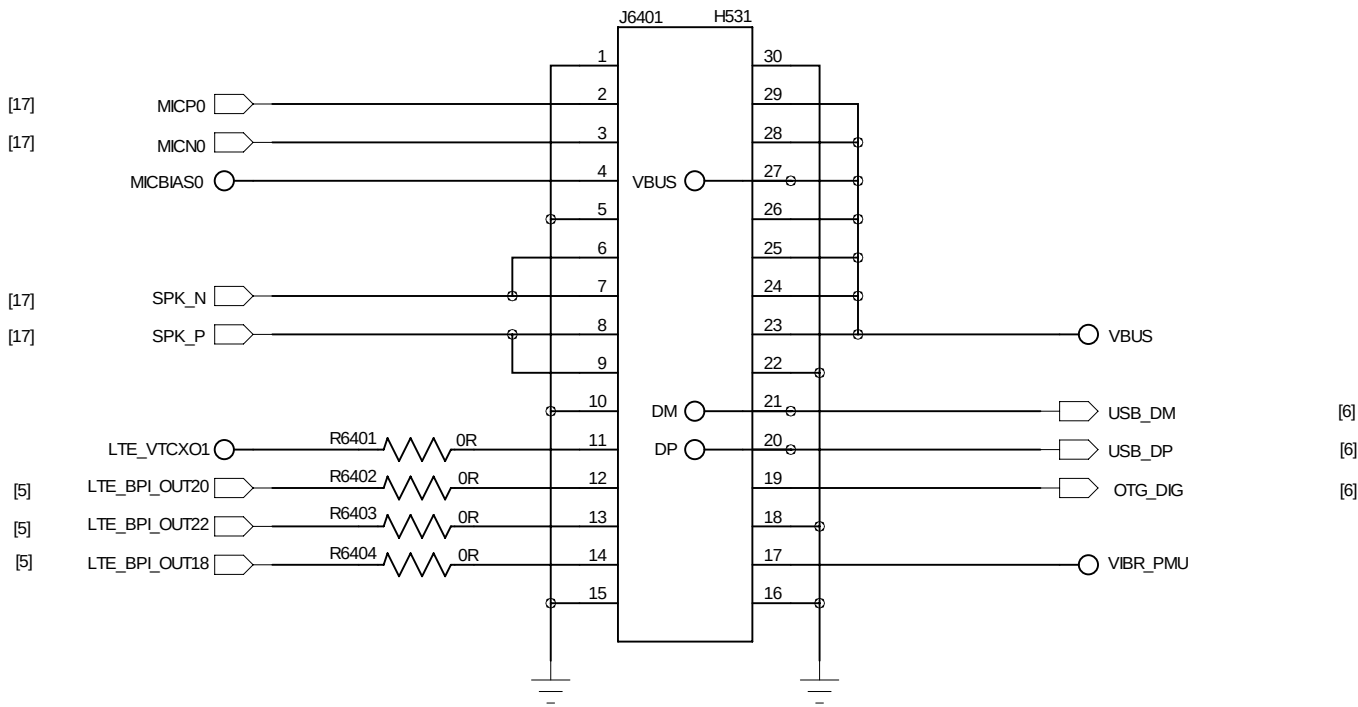


COMPANY: Shanghai ReallyTek Information Technology Co.,Ltd				MODEL: H952		Modified Date: 2015-7-14	
DRAWN	ZY/TS	DATED	20140512	TITLE: 64_PERI_EXCH_IO		VERSION: V1.0	SHEET: 21 OF 22
CHECKED	< >	DATED	< >				


PERI_DUAL_SIM_KEYPAD

REVISION RECORD			
LTR	ECO NO.	APPROVED:	DATE:

SIM CARD

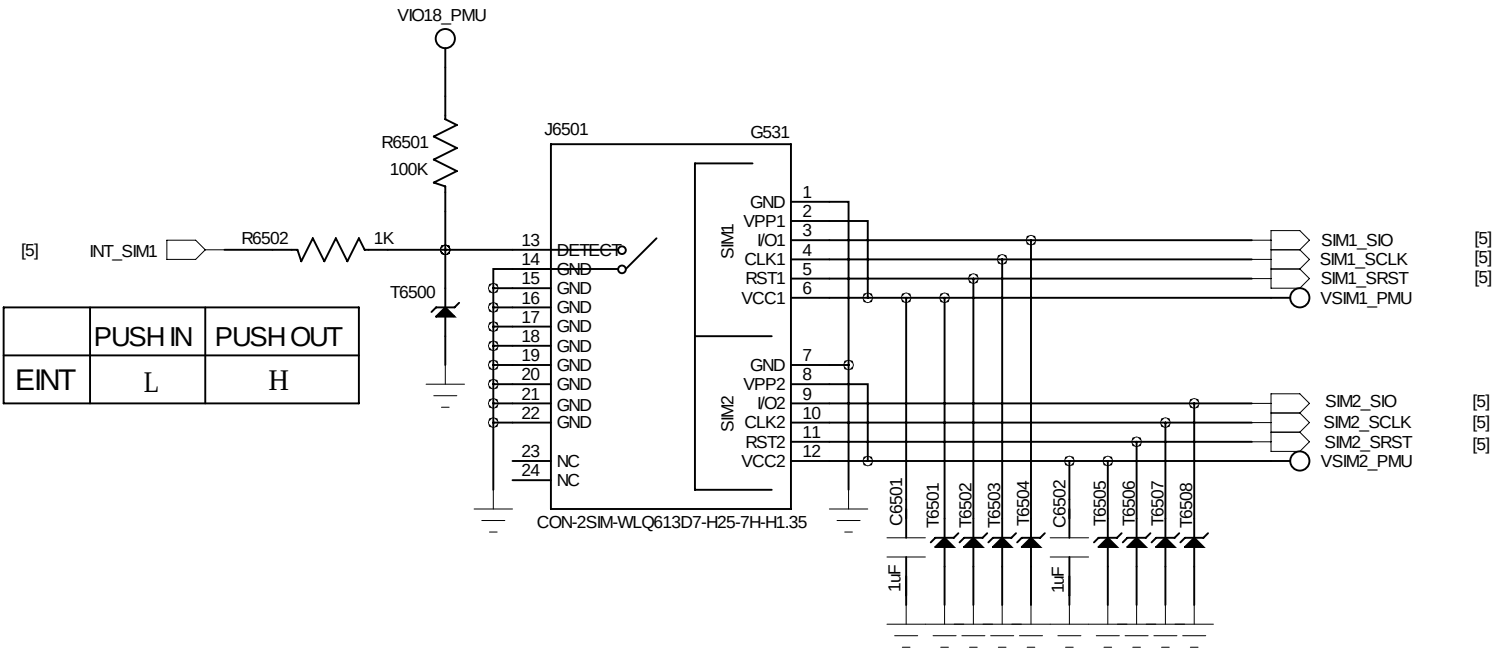


TF-CARD

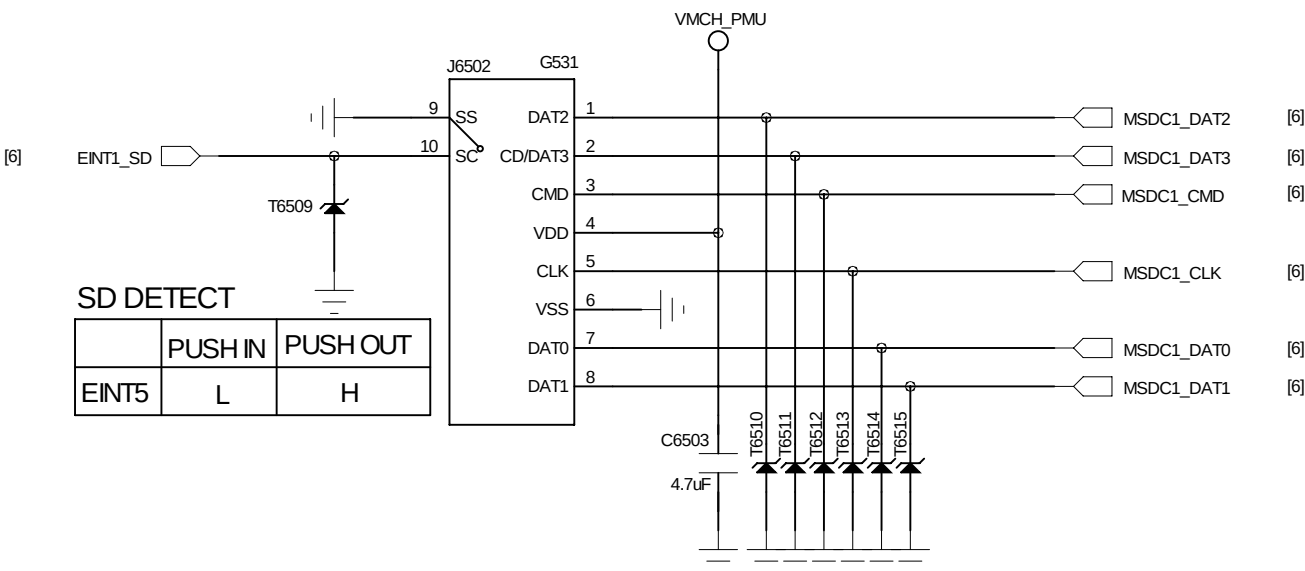


Power Key&Volume Key

DO NOT put pull-up resistor on PWRKEY

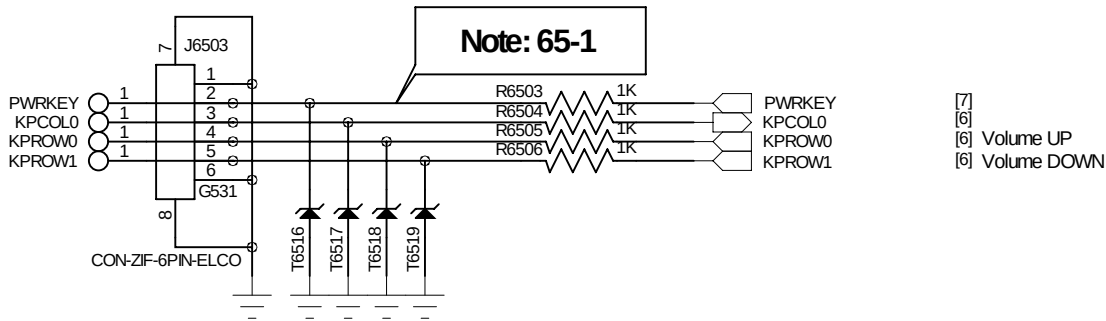

LED Indicators

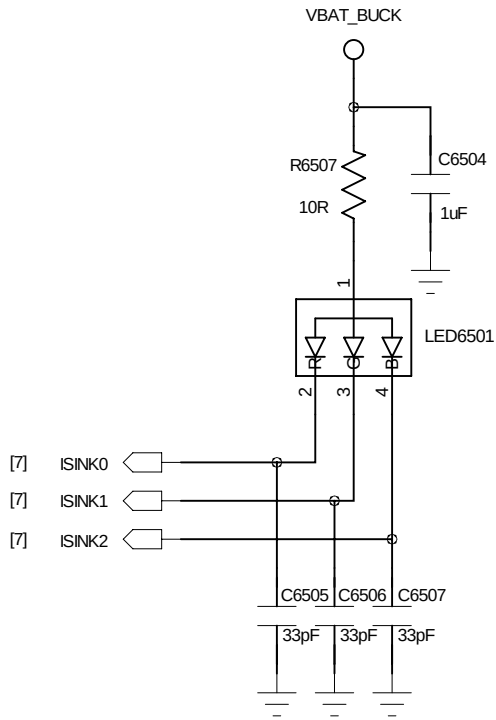

Schematic design notice of "65_PERI_Dual_SIM_ICUSB_KEYPAD" page.

Note 65-1: DO NOT put pull-up resistor on PWRKEY

Note 65-3: Depends on system design to add ESD protection component or not.

COMPANY: Shanghai ReallyTek Information Technology Co.,Ltd				MODEL: H952		Modified Date: 2015-7-14	
DRAWN	ZY/TS	DATED	20140512	TITLE: 65_PERI_DUAL_SIM_SD_KEYPAD		VERSION: V1.0	SHEET: 22 OF 22
CHECKED	< >	DATED	< >				