



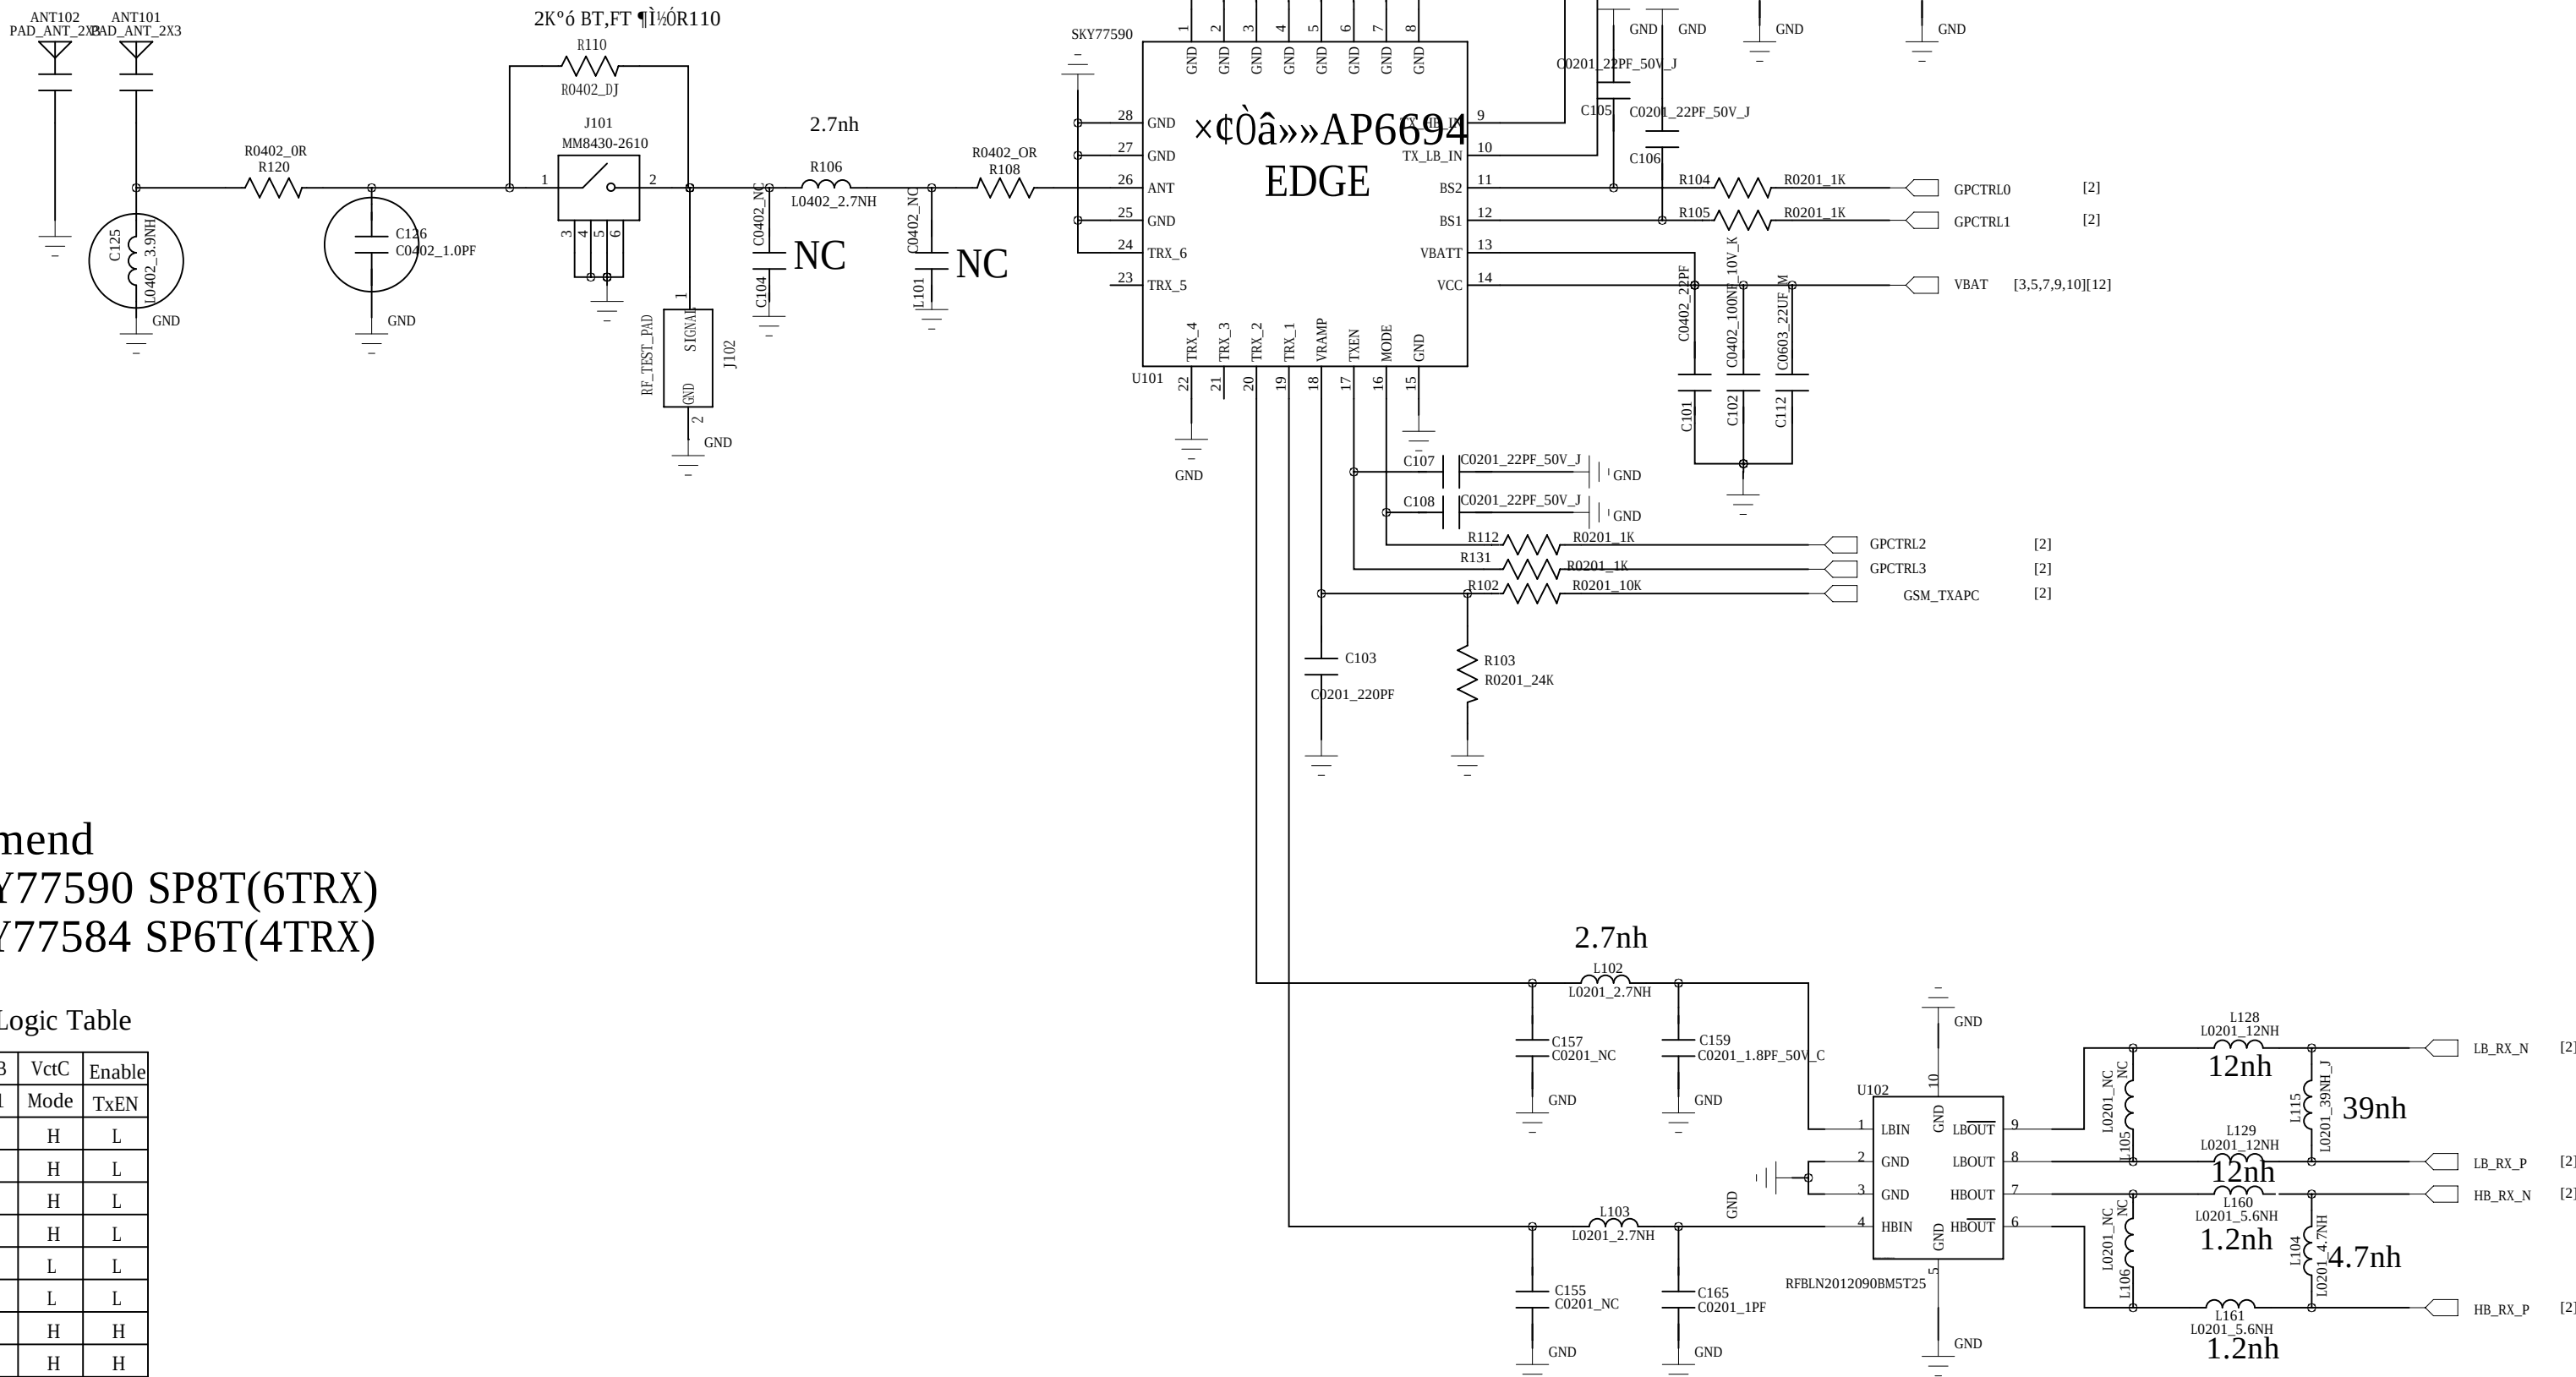


MTK Recommend
W/EDGE:SKY77590 SP8T(6TRX)
W/GPRS:SKY77584 SP6T(4TRX)

SKY77590 Control Logic Table

	VctA	VctB	VctC	Enable
	BS2	BS1	Mode	TxEN
TRX1	L	L	H	L
TRX2	L	H	H	L
TRX3	H	L	H	L
TRX4	H	H	H	L
TRX5	L	H	L	L
TRX6	H	L	L	L
EDGETX_L	H	L	H	H
EDGETX_H	H	H	H	H
GMSKTX_L	H	L	L	H
GMSKTX_H	H	H	L	H
STANDBY	L	L	L	L

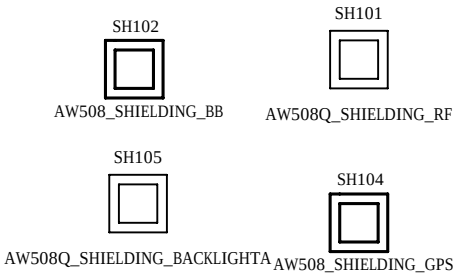

INFINIX				HOT5		2019-03-12	
DRAWN		DATED		TITLE: ANT_SWITCH,GSM_RF		VERSION:	SHEET: 1/12
CHECKED		DATED					

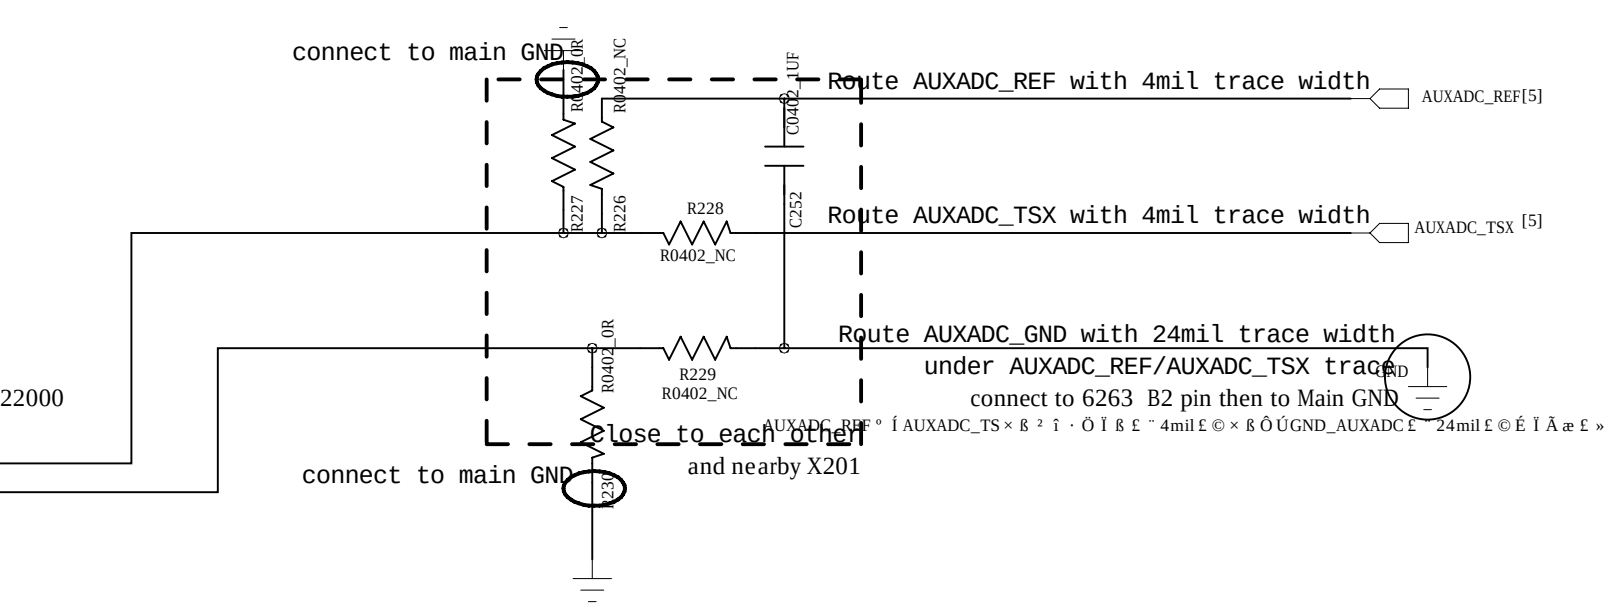

Route AUXADC_REF/AUXADC_TSX as differential trace with well GND shielding and route AUXADC_GND with 24mil trace width under AUXADC_TSX/AUXADC_REF trace to provide return current path.

[5] VRF18_PMU  R0402_OR R203  VRF18-1 [2]



[4,5] VTCXO_PMU  R239 R0402_OR  VTCX028-1 [2]






BOOT MODE

	NAND	eMMC
R311	NC	1K




PIN NAME	PIN OUT	LPDDR1(x32) VM=1V8	LPDDR2(x32) VM=1V2
PMIC_SPI_CS	T1	R302 4K7	NO PULL

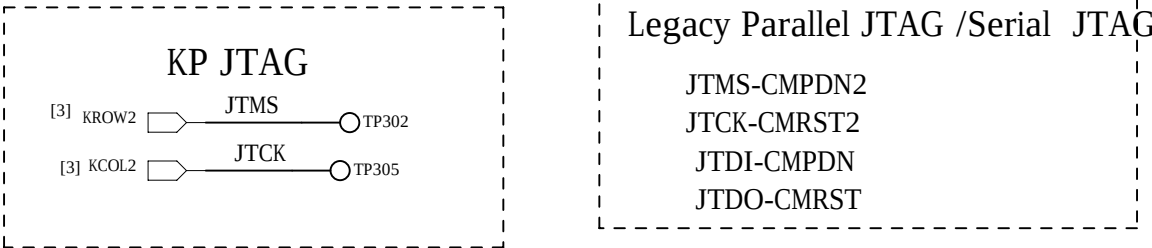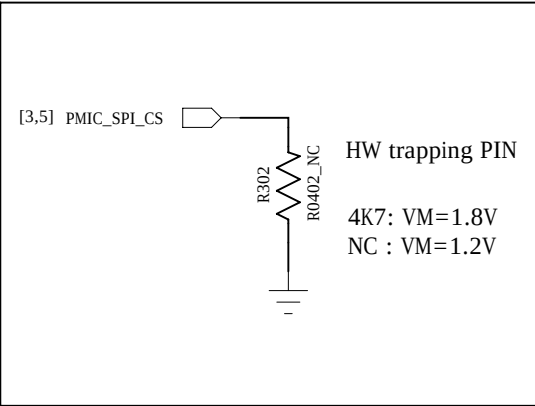

pin name	pin out	Normal mode LPDDR1 Efuse disable	Normal mode LPDDR2 Efuse disable	Efuse enable
PMIC_SPI_CSN	T1	4K7 pull to GND	no pull	follow DDR1/2
TESTMODE	M2	GND	GND	GND
DVDD18_FSRC	V7	GND	GND	VGP2(2.0V)
KCOL0	D24	not pull down, just floating or PU, refer to USB download		

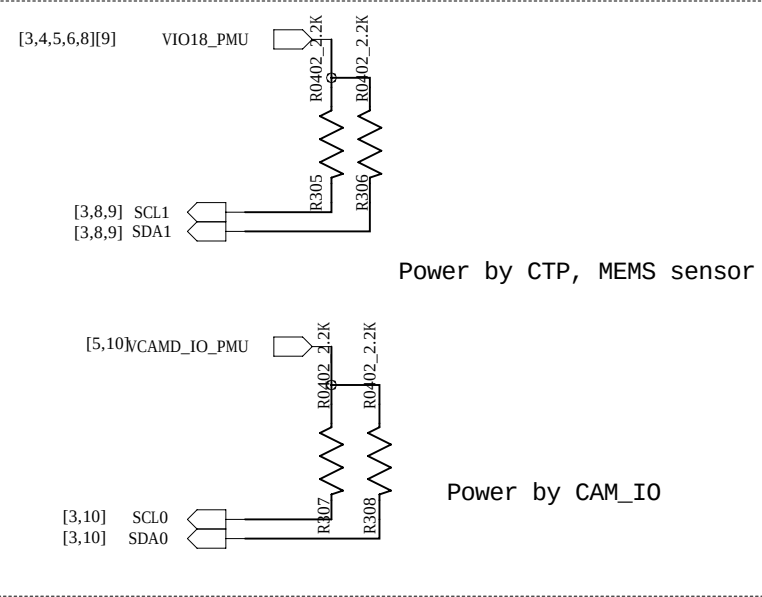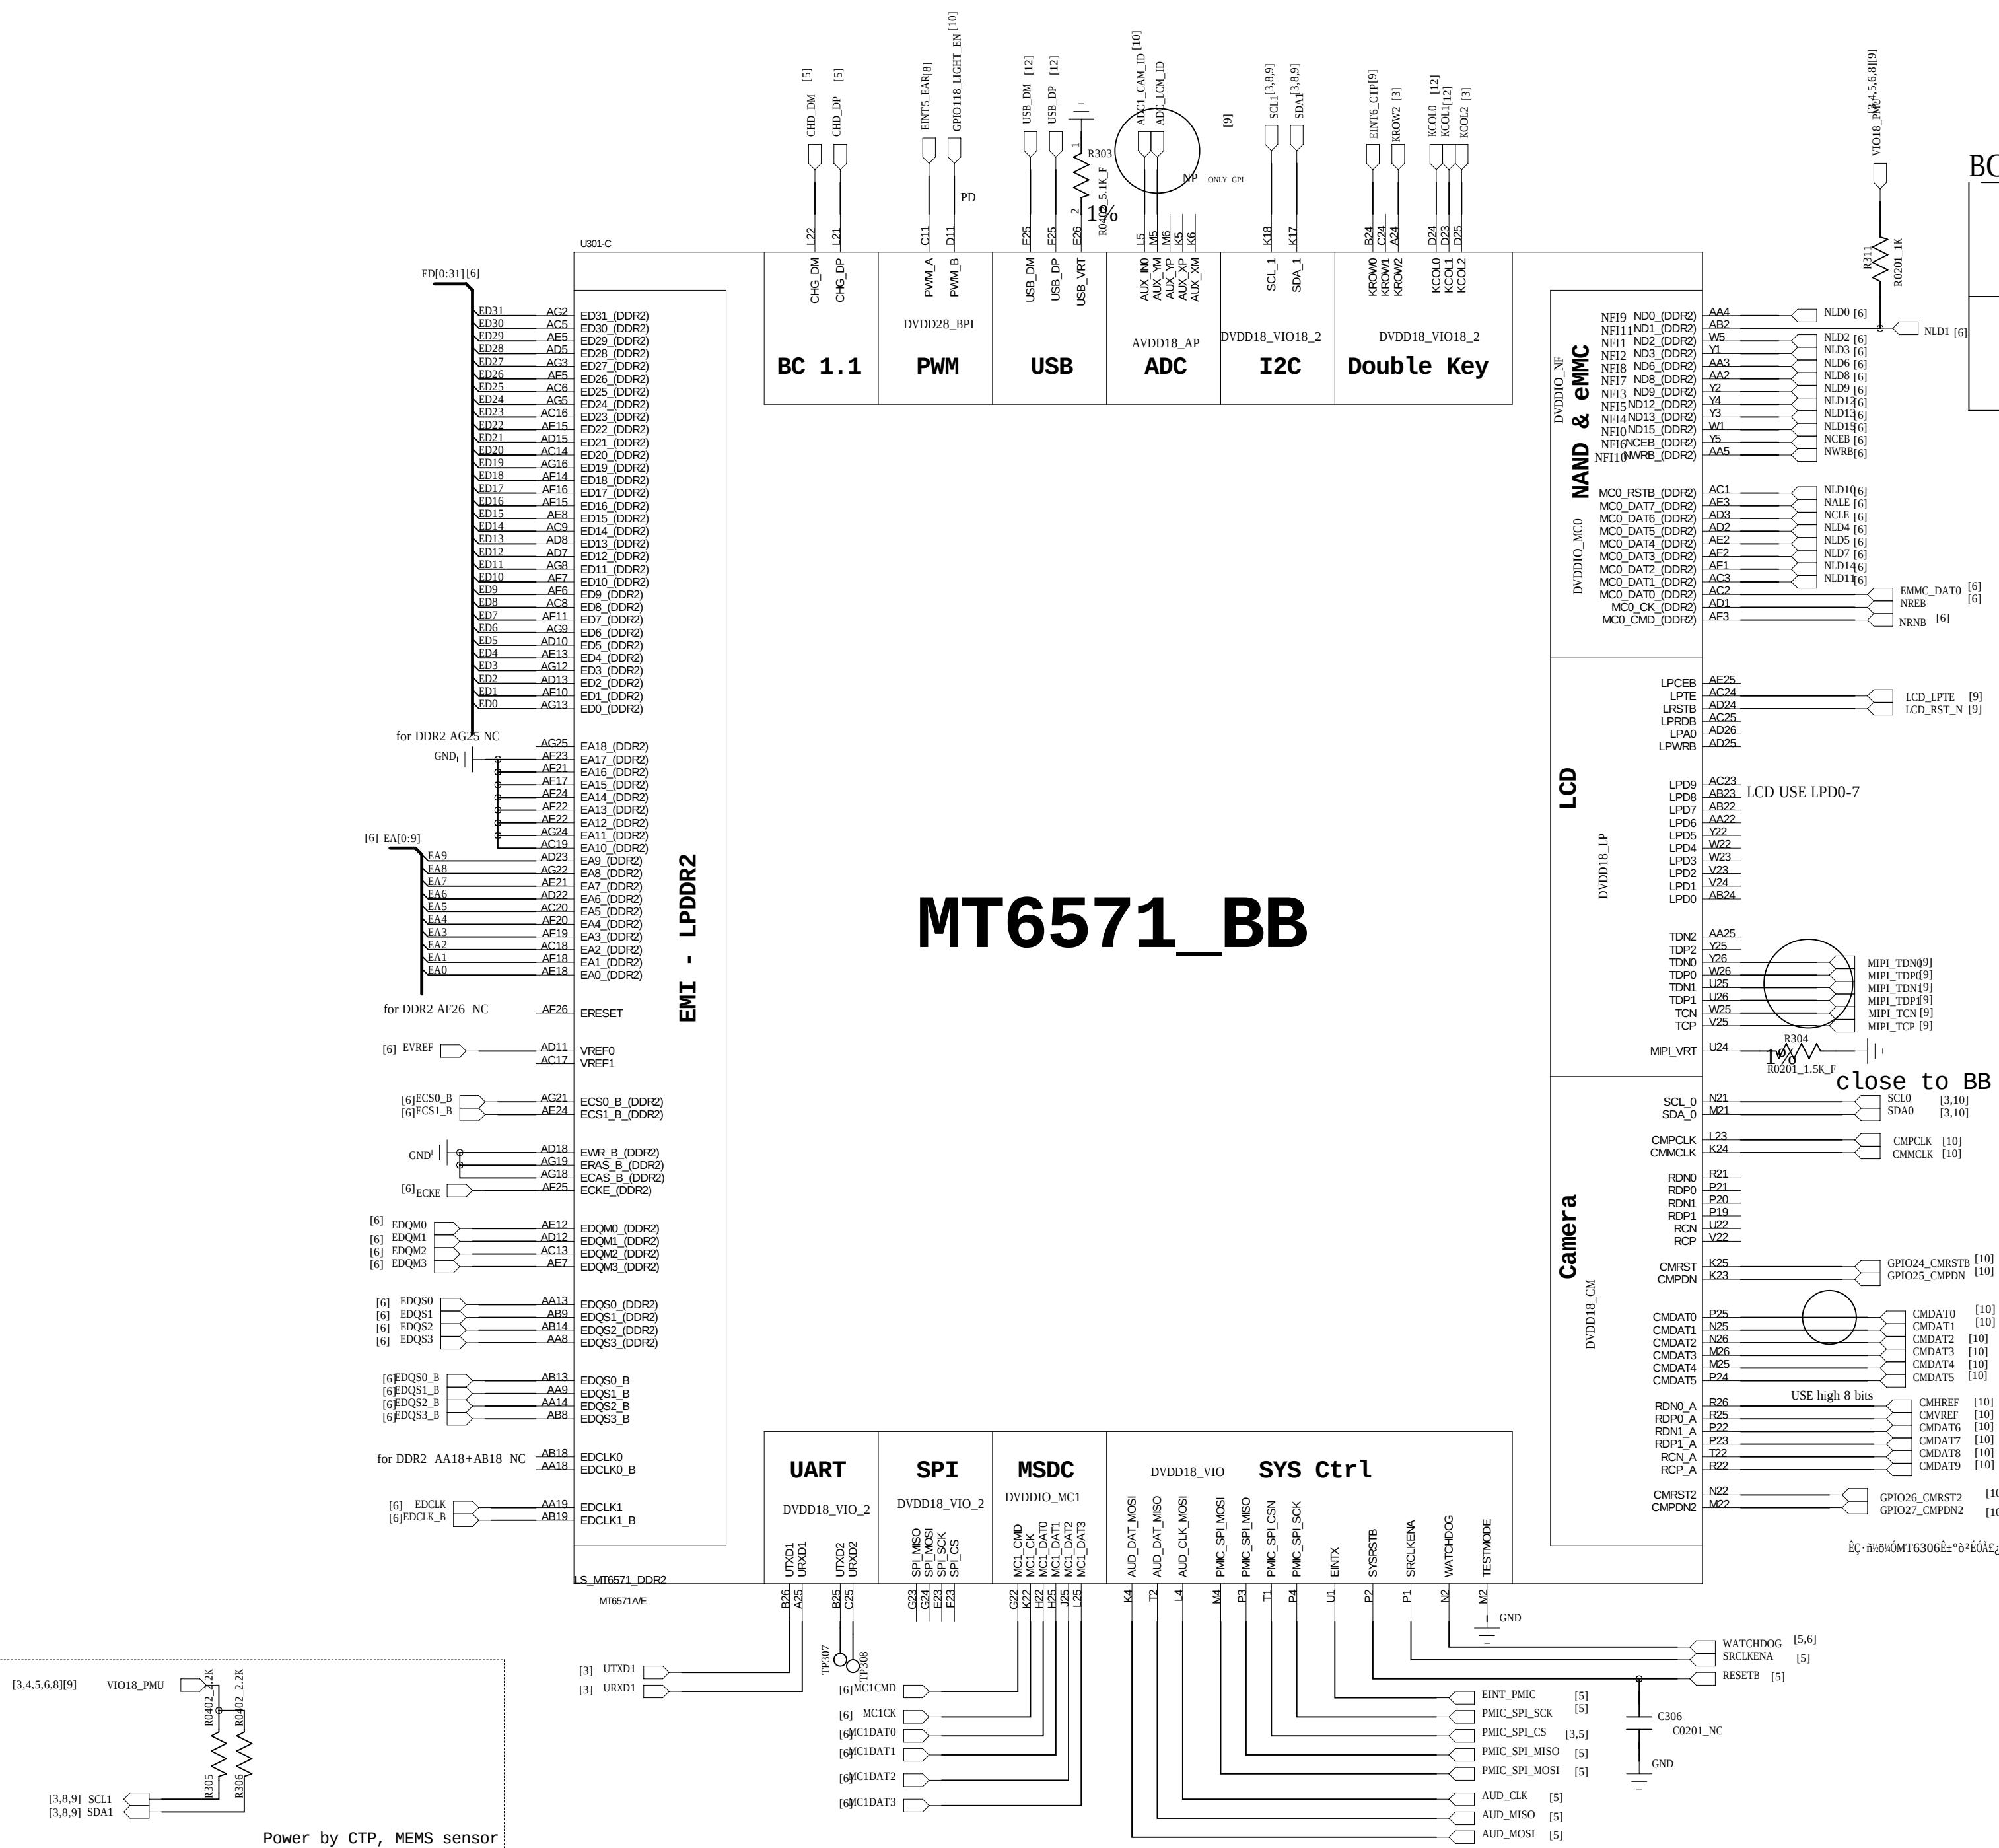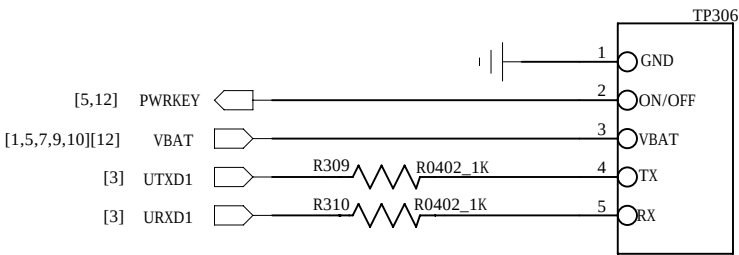


INFINIX				HOT5		2019-03-12	
DRAWN	LIZHENHUA	DATED		TITLE: MT6571_DBB		VERSION:	SHEET: 3/12
CHECKED		DATED					

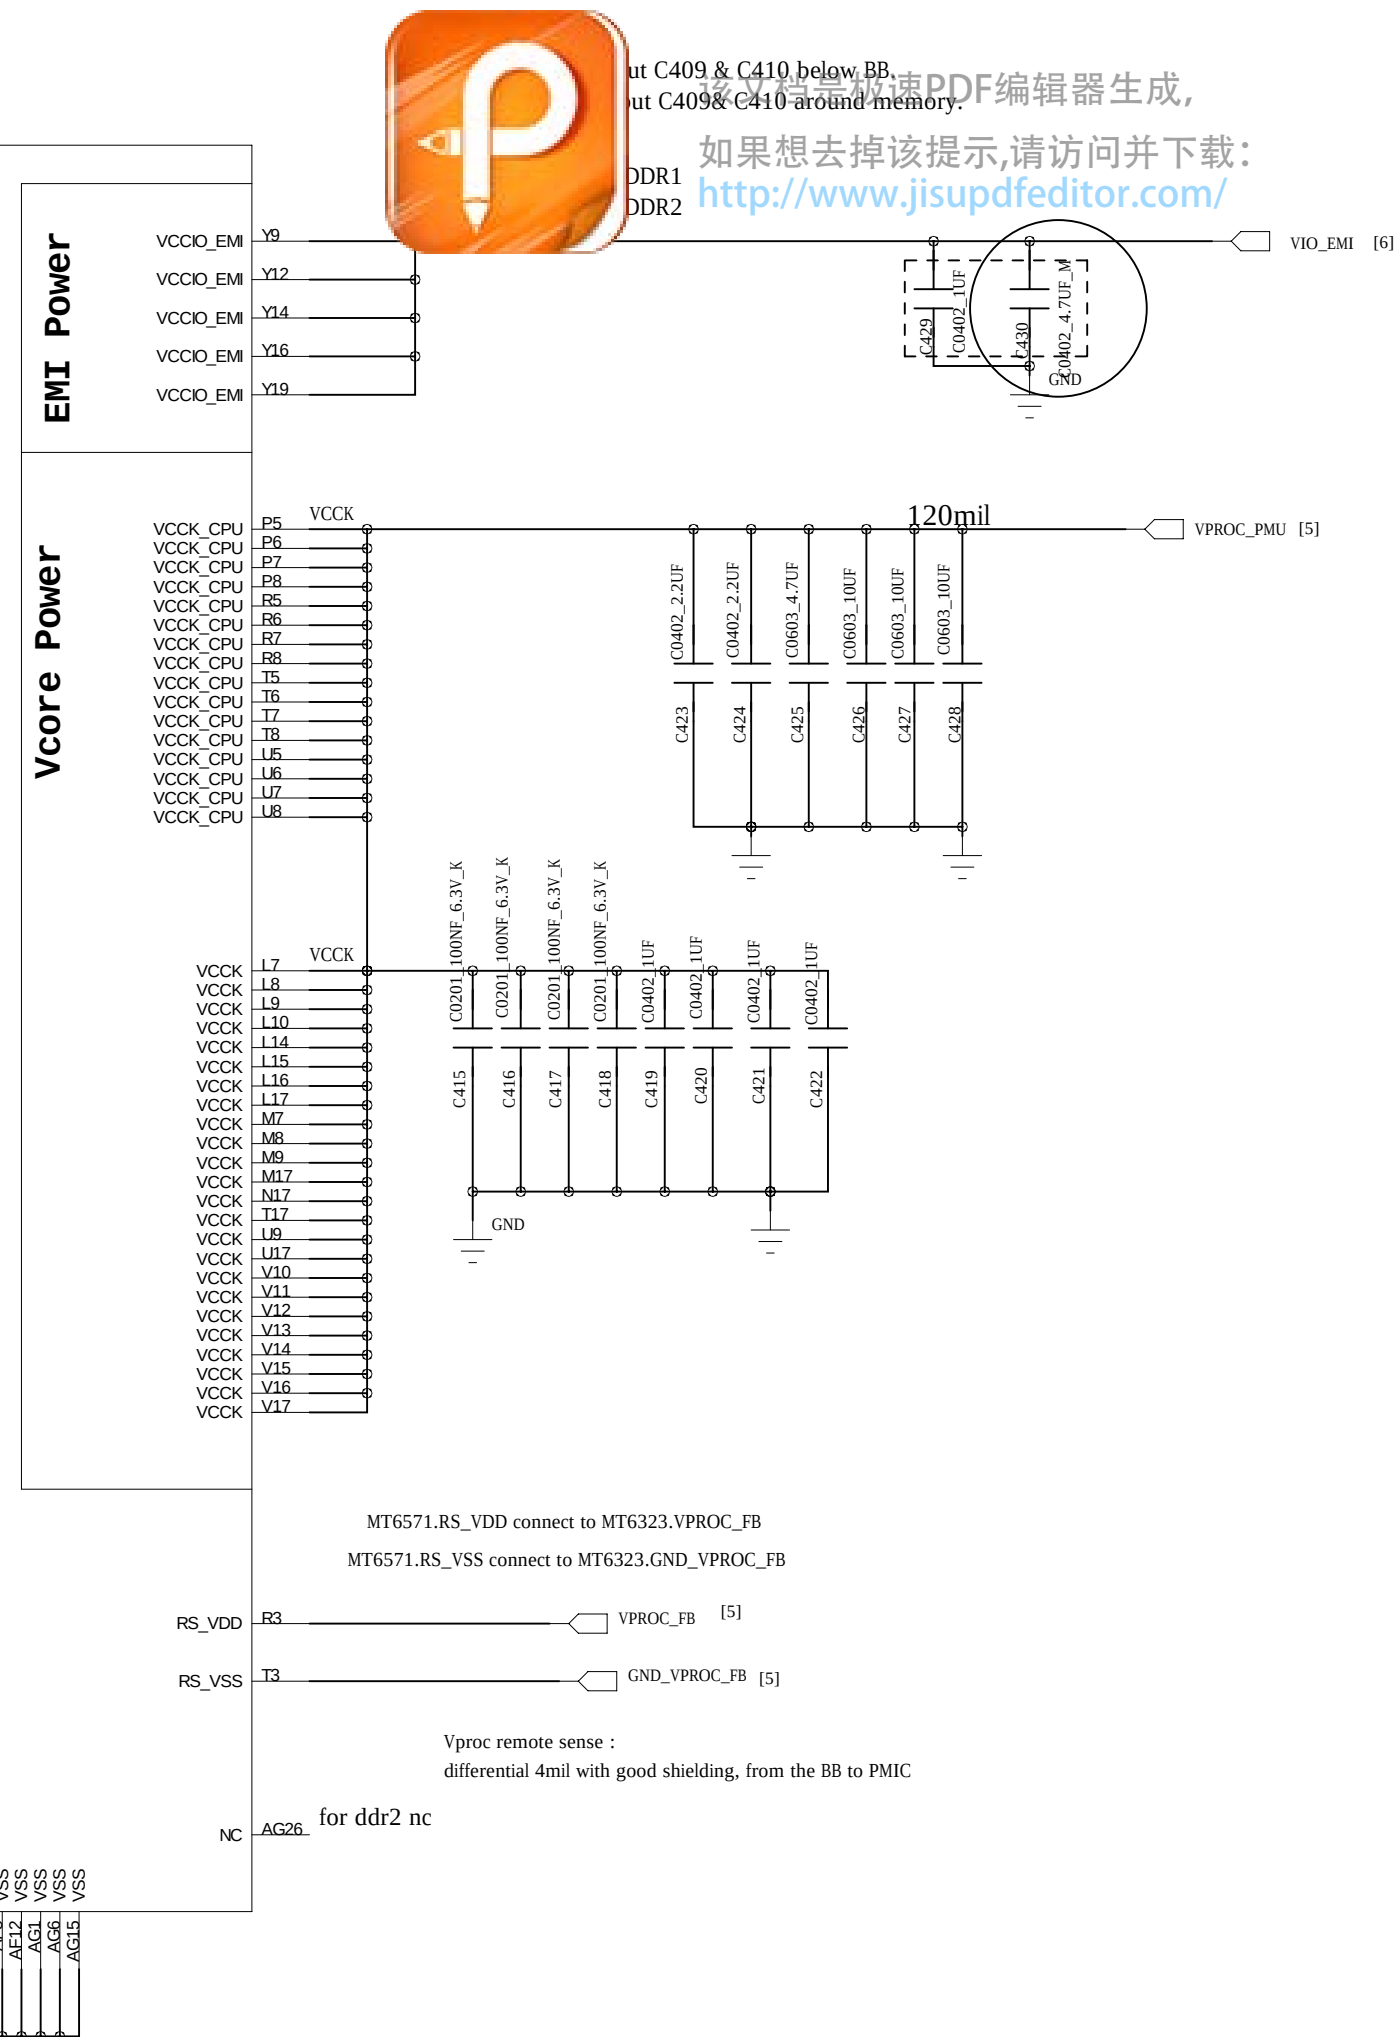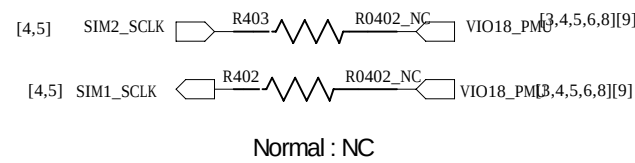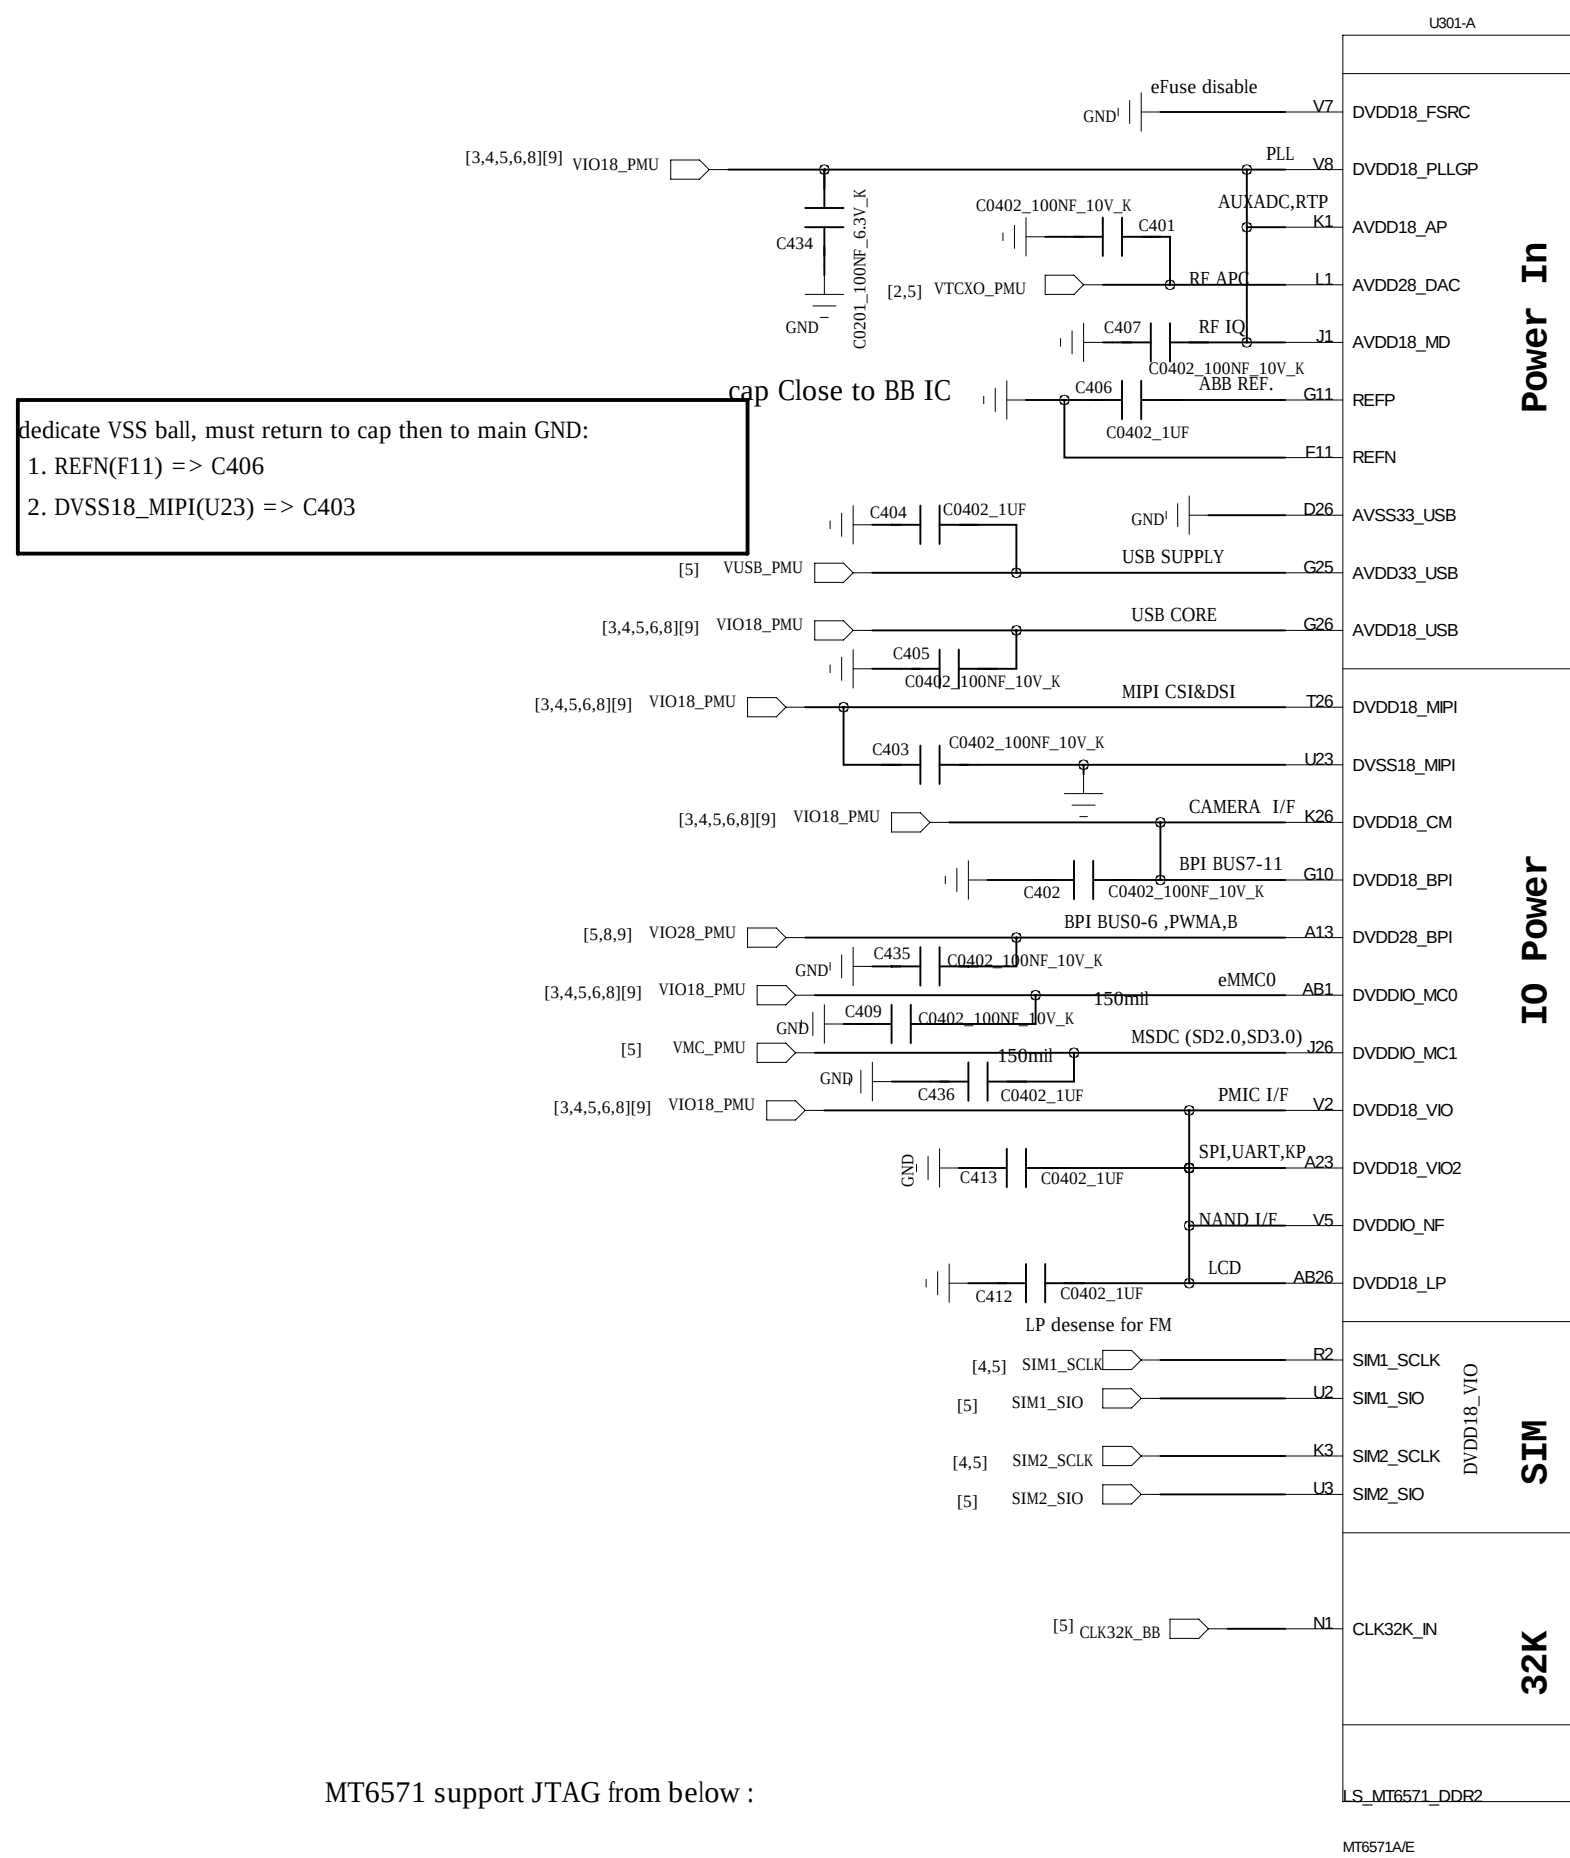

PIN NAME	PIN OUT	NORMAL MODE no JTAG	DEBUG MODE JTAG - KP	DEBUG MODE JTAG- MSDC1	DEBUG MODE JTAG- CMRST
SIM1_SCLK	R2	NO PULL	R402 4.7K	NO PULL	R402 4.7K
SIM2_SCLK	K3	NO PULL	NO PULL	R403 4.7K	R403 4.7K

INFINIX				HOT5	2019-03-12	
DRAWN	LIZHENHUA	DATED		TITLE: MT6571_ABB	VERSION:	SHEET: 4/12
CHECKED		DATED				


PMIC

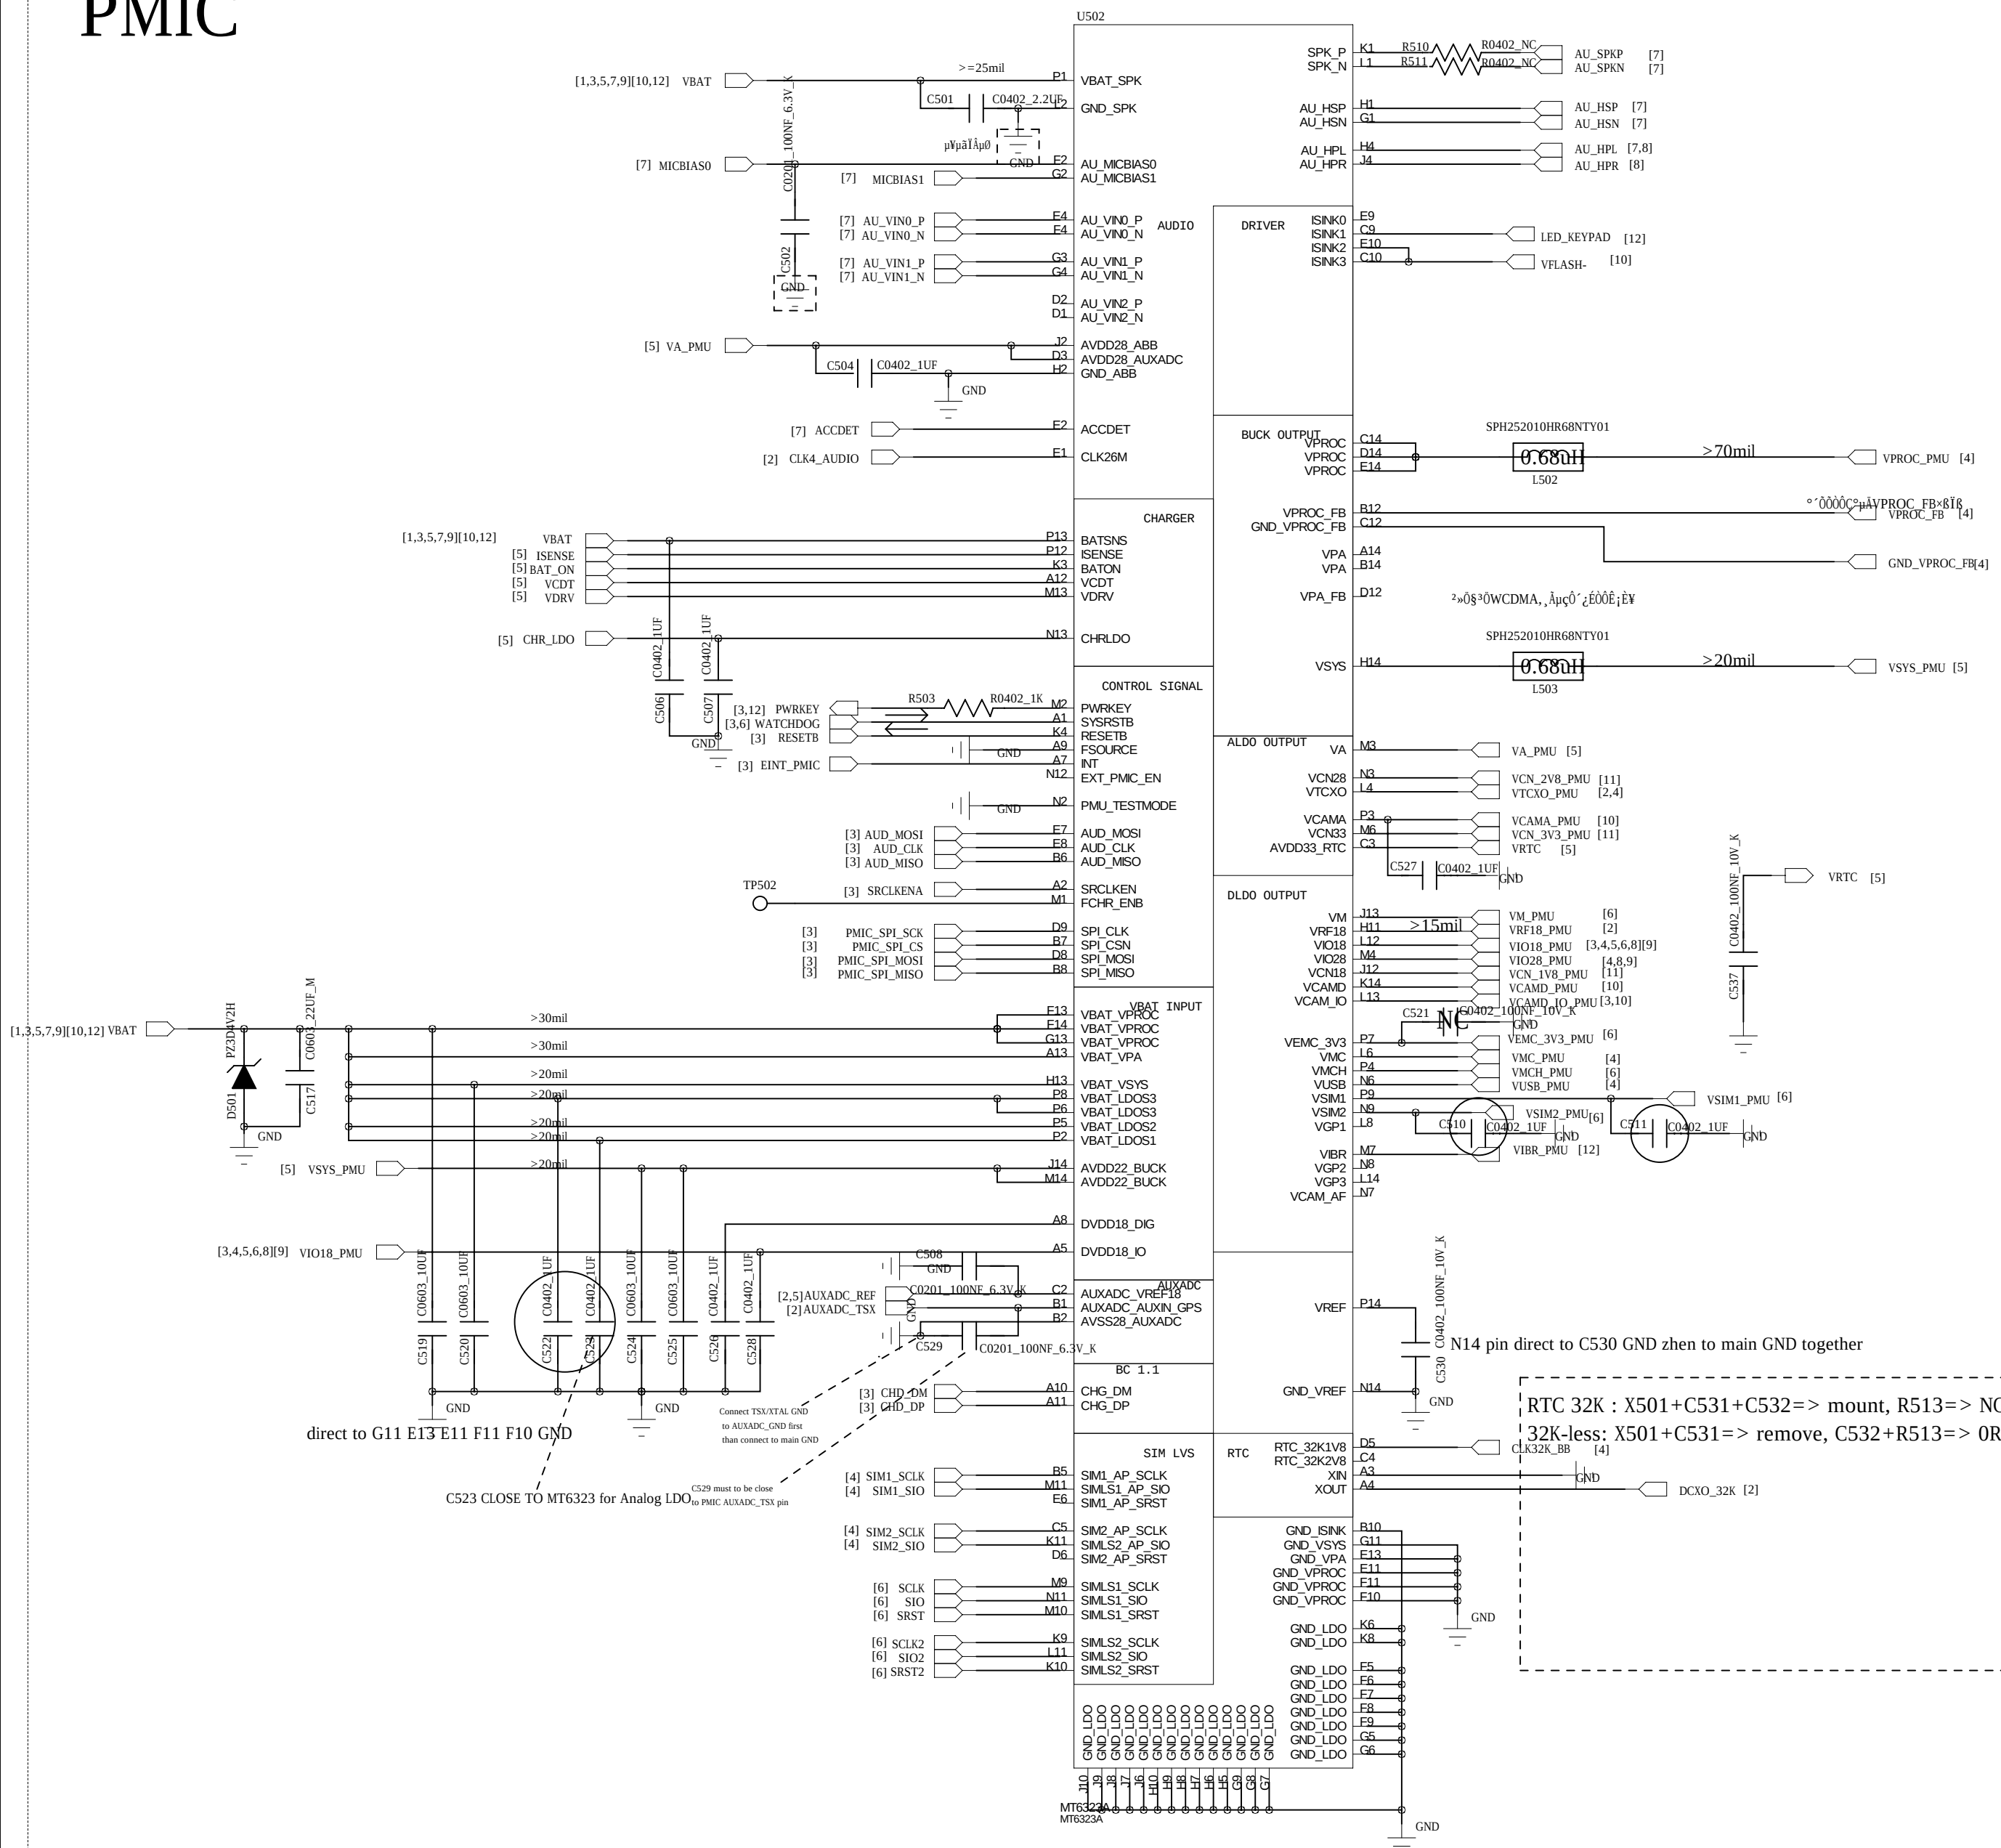

BATTERY CON



该文档是极速PDF编辑器生成,
如果想去掉该提示,请访问并下载:
<http://www.jisupdfeditor.com/>

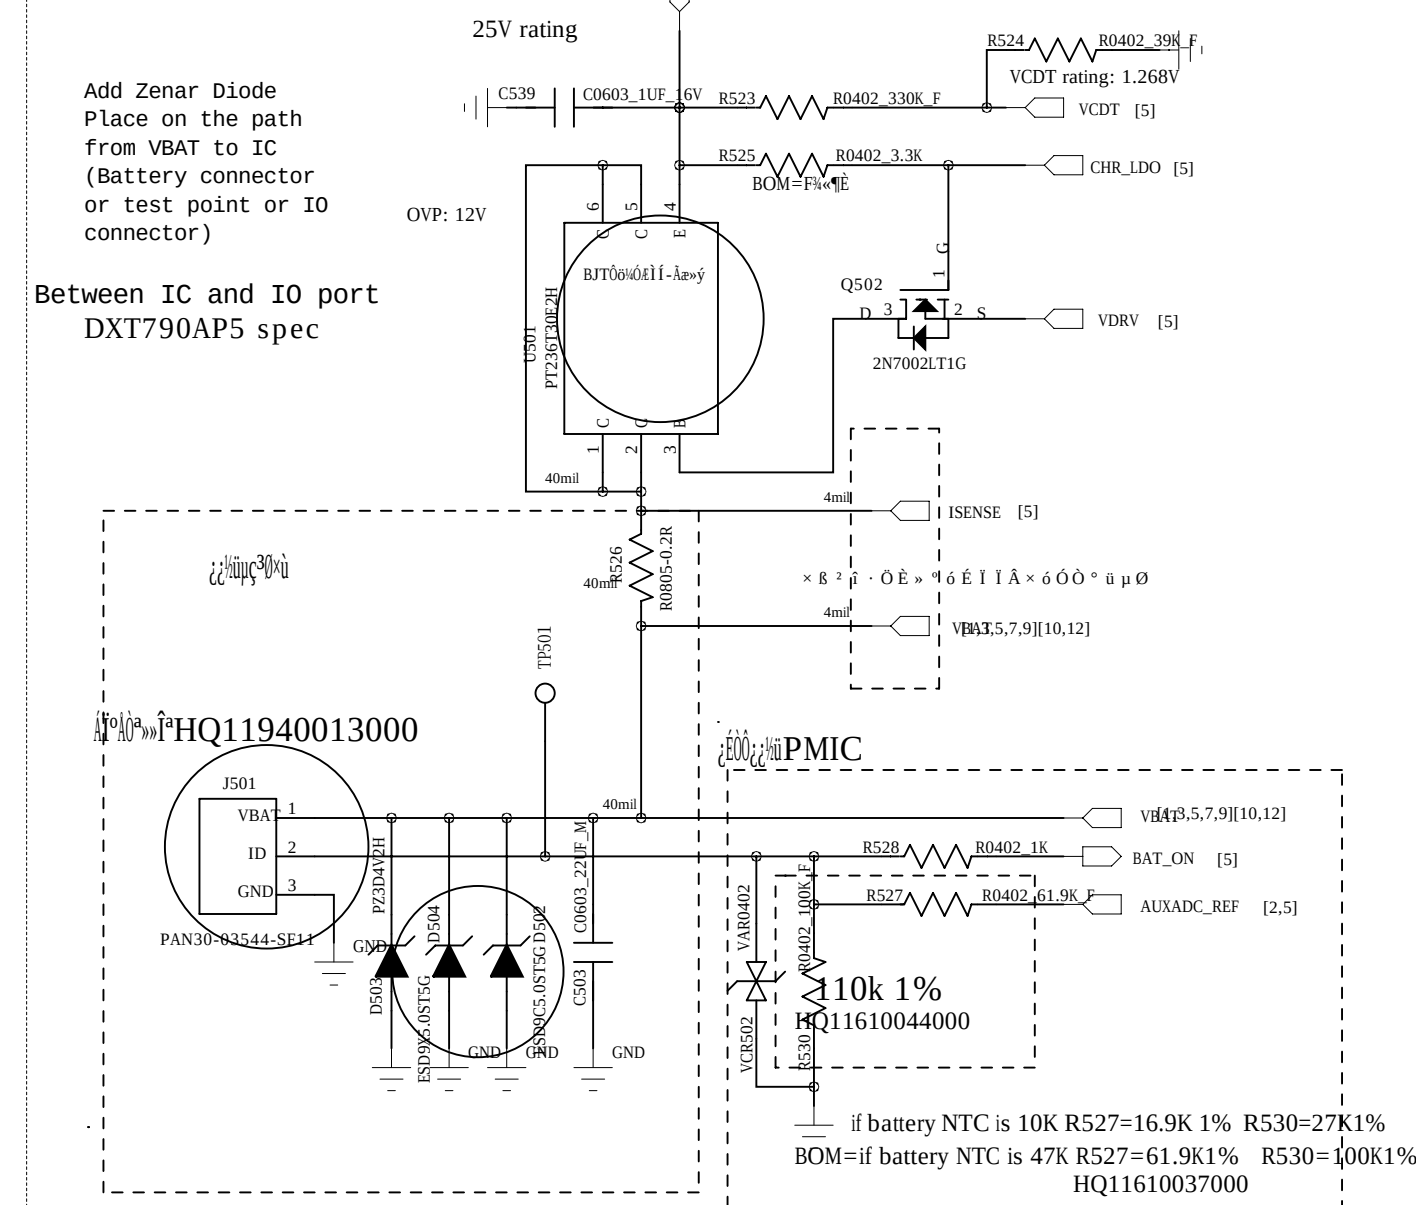

Buck	VPROC	0.7~1.4	2800mA	
	VPA	0.5~3.4	600mA	
	VSYS	2.2	1400mA	
Analog LDO	VRTC	2.8	2mA	
	VA	2.8	150mA	
	VCN28	2.8	30mA	
	VTXCO	2.8	40mA	
	VCAMA	2.8	150mA	
	VCN33	3.3/3.4/3.5/3.6	240mA	
Digital LDO	VIO18	1.8	300mA	
	VMC	1.8/3.3	100mA	
	VMCH	3.0/3.3	400mA	
	VEMC_3V3	3.0/3.3	400mA	
	VM	1.24/1.39/1.54/1.84	700mA	
	VRF18	1.825	200mA	
	VCN_1V8	1.8	120mA	
	VCAMD	1.2/1.3/1.5/1.8	150mA	
	VCAM_IO	1.8	100mA	
	VGP3	1.2/1.3/1.5/1.8	200mA	
	VIO28	2.8	200mA	
	VUSB	3.3	20mA	
	VCAM_AF	1.2/1.3/1.5/1.8/2.0/2.8/3.0/3.3	100mA	
	VSIM1	1.8/3.0	50mA	
vibrator	VSIM2	1.8/3.0	50mA	
	VGP1	1.2/1.3/1.5/1.8/2.0/2.8/3.0/3.3	100mA	
	VGP2	1.2/1.3/1.5/1.8/2.0/2.5/2.8/3.0	100mA	
	VGID18	1.8	20mA	
	VIBR	1.2/1.3/1.5/1.8/2.0/2.8/3.0/3.3	100mA	
RTC				

INFINIX

HOT5

2019-03-12

DRAWN:

LIZHENHUA

DATED

TITLE:

PMIC

VERSION:

SHEET: 5/12

CHECKED


DATED



*** New Part ***



	Samsung	Hynix	Sandisk	KSI	Toshiba	Micron
VDDI	0.1uF	1+0.1uF	0.1uF	0.1uF	0.1uF	1+0.1uF
VCC	4.7+0.2uF	4.7+0.22uF	2.2+0.1uF	1+0.1uF	2.2+0.1uF	4.7+0.22uF
VCCQ	2+0.2uF	2.2+0.1uF	2.2+0.1uF	2.2+0.1uF	2.2+0.1uF	2.2+0.1uF



SIM1

SIM2

The schematic diagram illustrates the SIM2 board layout. Key components and connections include:

- Connectors:** VSIM2_PMU (pin 5), SCLK2 (pin 5), SRST2 (pin 5), SIO2 (pin 5), TP605, TP606, TP607, TP608, and TP610.
- Power and Ground:** C0201 capacitors (C612, C613, C614, C611) and GND connections.
- Board Label:** SIM2.


T_FLASH

H0T5

INFINIX				HOT5	2019-03-12	
DRAWN:	LIZHENHUA	DATED		TITLE: MCP,T_FLASH,SIM	VERSION:	SHEET: 6/12
CHECKED		DATED				


EAR JACK

	Default	
	L R M G	L R G M
R807	OR	NC
R813	NC	OR
B805	Bead	NC
B809	NC	Bead
B806	Bead	NC
B808	NC	Bead

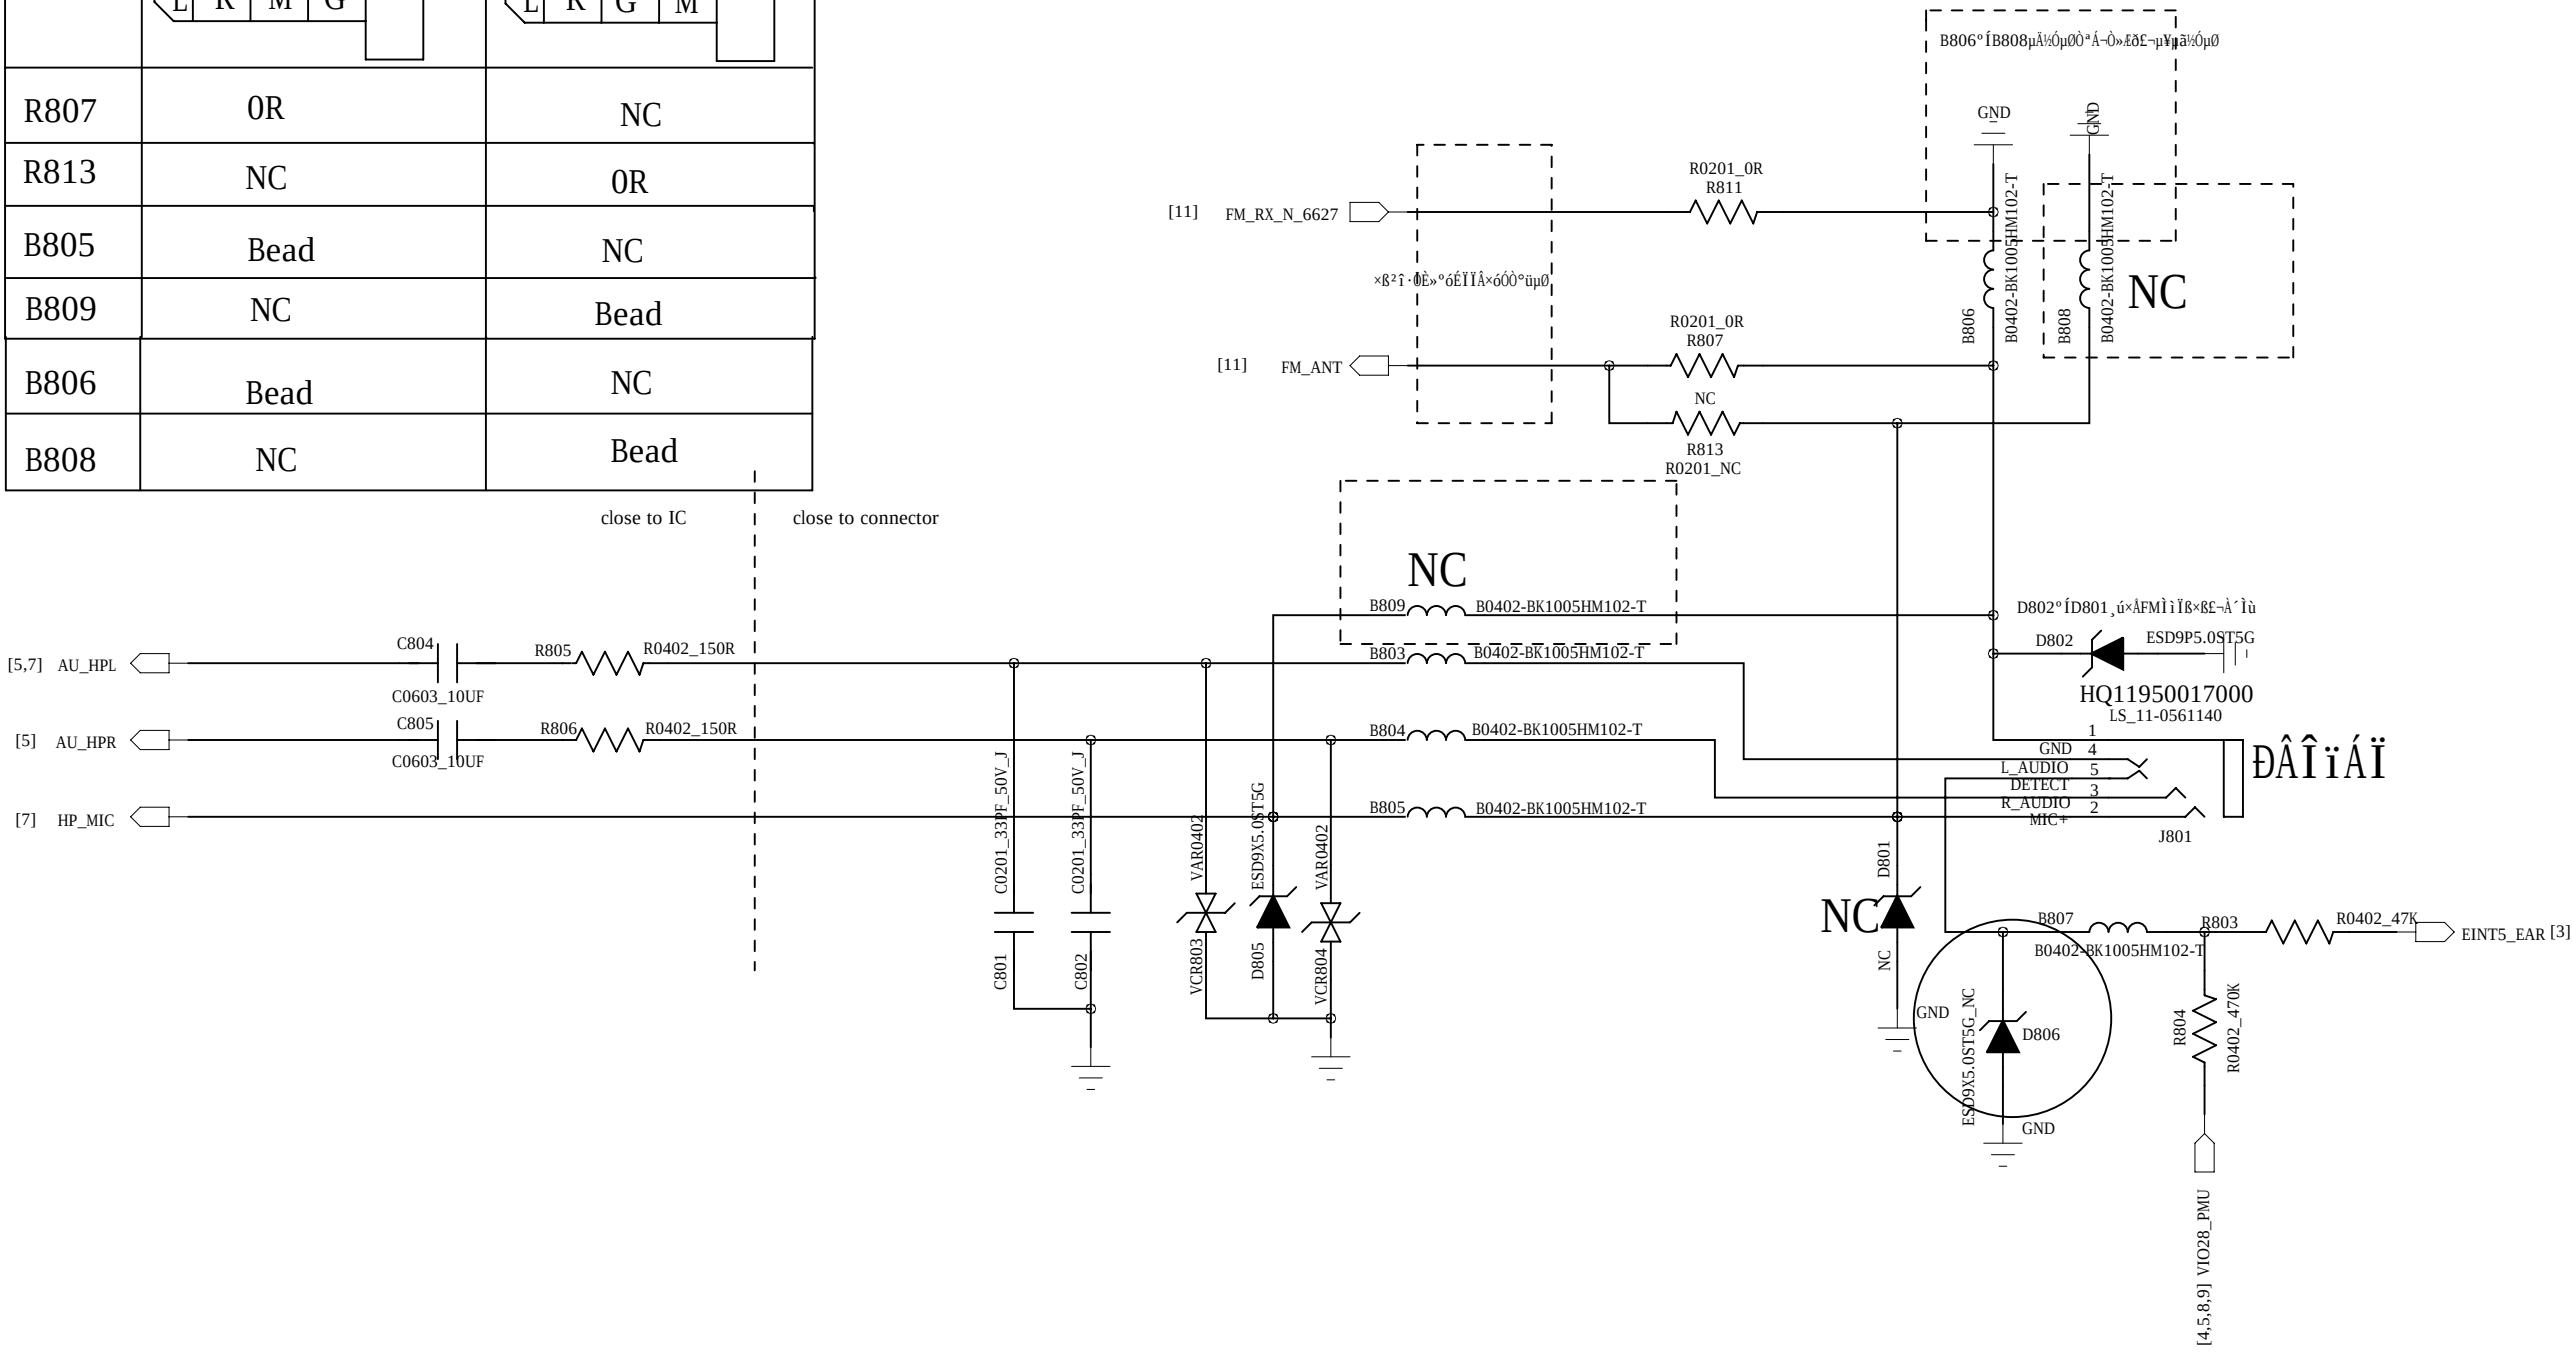


该文档是极速PDF编辑器生成，
如果想去掉该提示,请访问并下载：
<http://www.jisupdfeditor.com/>

Á½Öá¼ÓËÜ¶È´« , ÐÆ÷

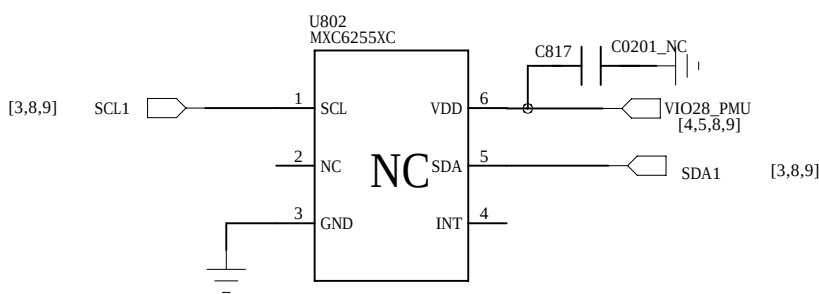

G-sensor

¼æÈÝ£°KXTJ2-1009 BMA223 Supply Voltage=£¬1.62~3.6£®V
IO Power Domain £¬1.2~3.6£®V

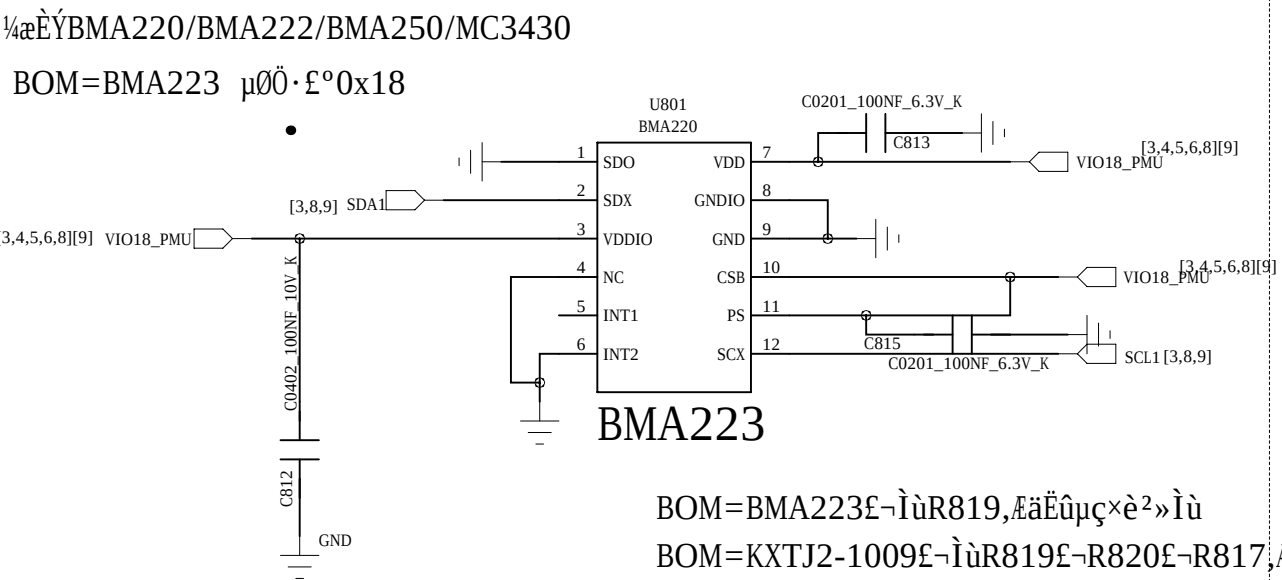



BOM=BMA223£¬ÌùR819,£äÈûµç×è²»Ìù
BOM=KXTJ2-1009£¬ÌùR819£¬R820£¬R817,£äÈûµç×è²»Ìù

INFINIX



HOT5

2019-03-12

DRAWN	LIZHENHUA	DATED		TITLE:	EARJACK,SENSOR,BTB	VERSION:		SHEET:	8/12
CHECKED		DATED							

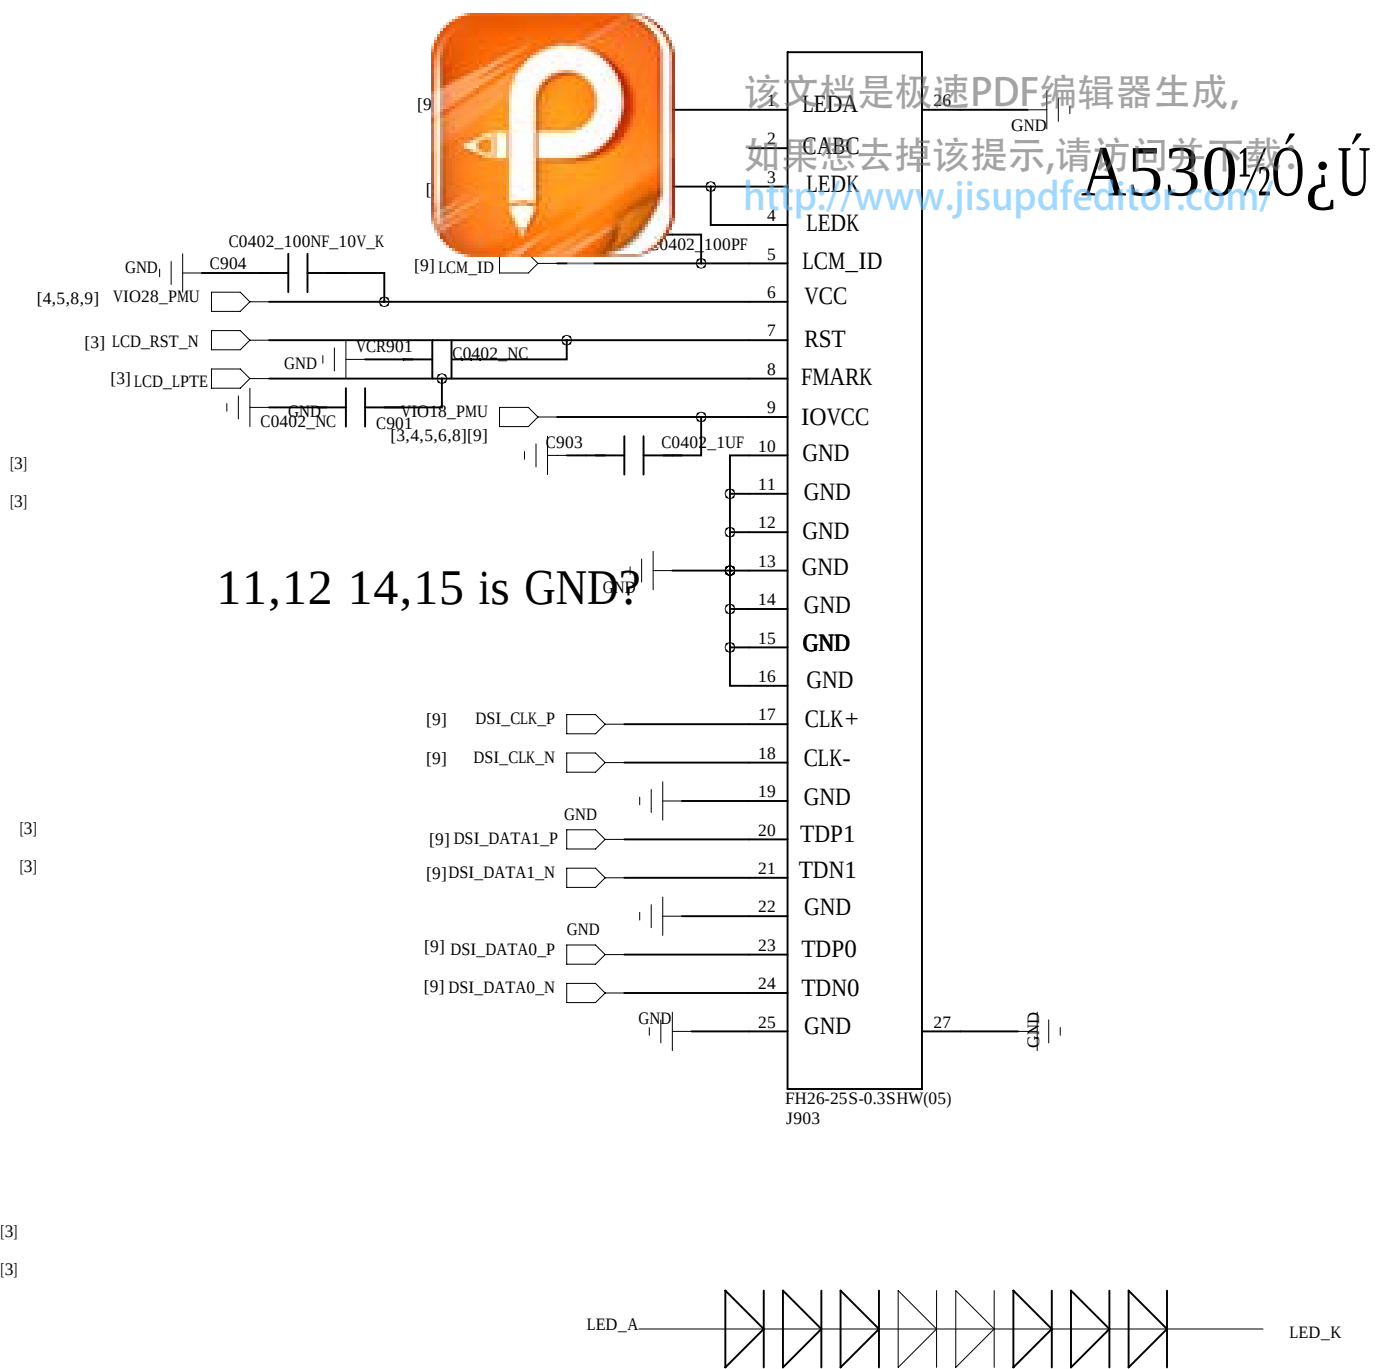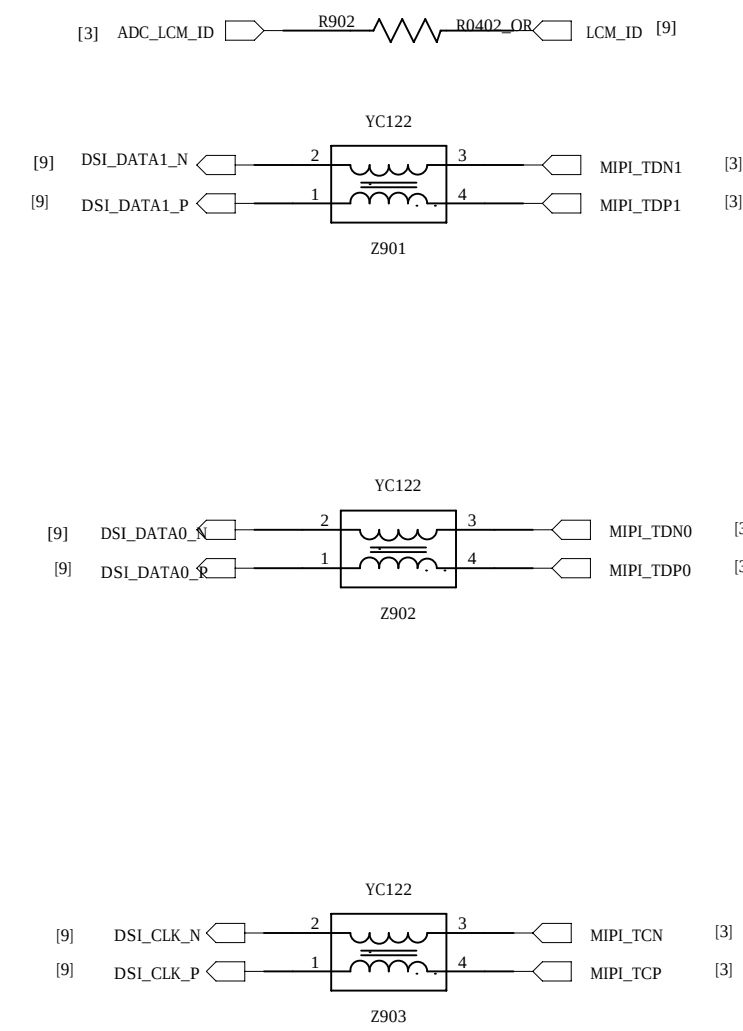


*** Ref A700 ***

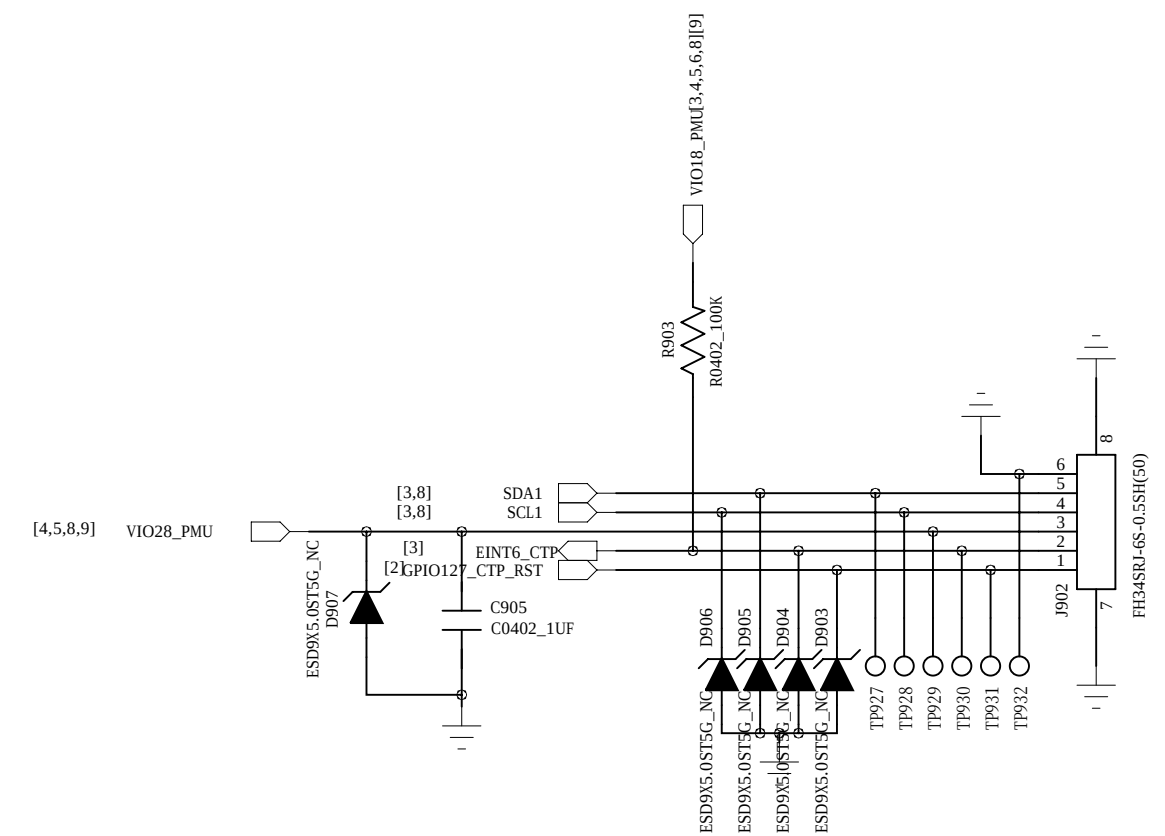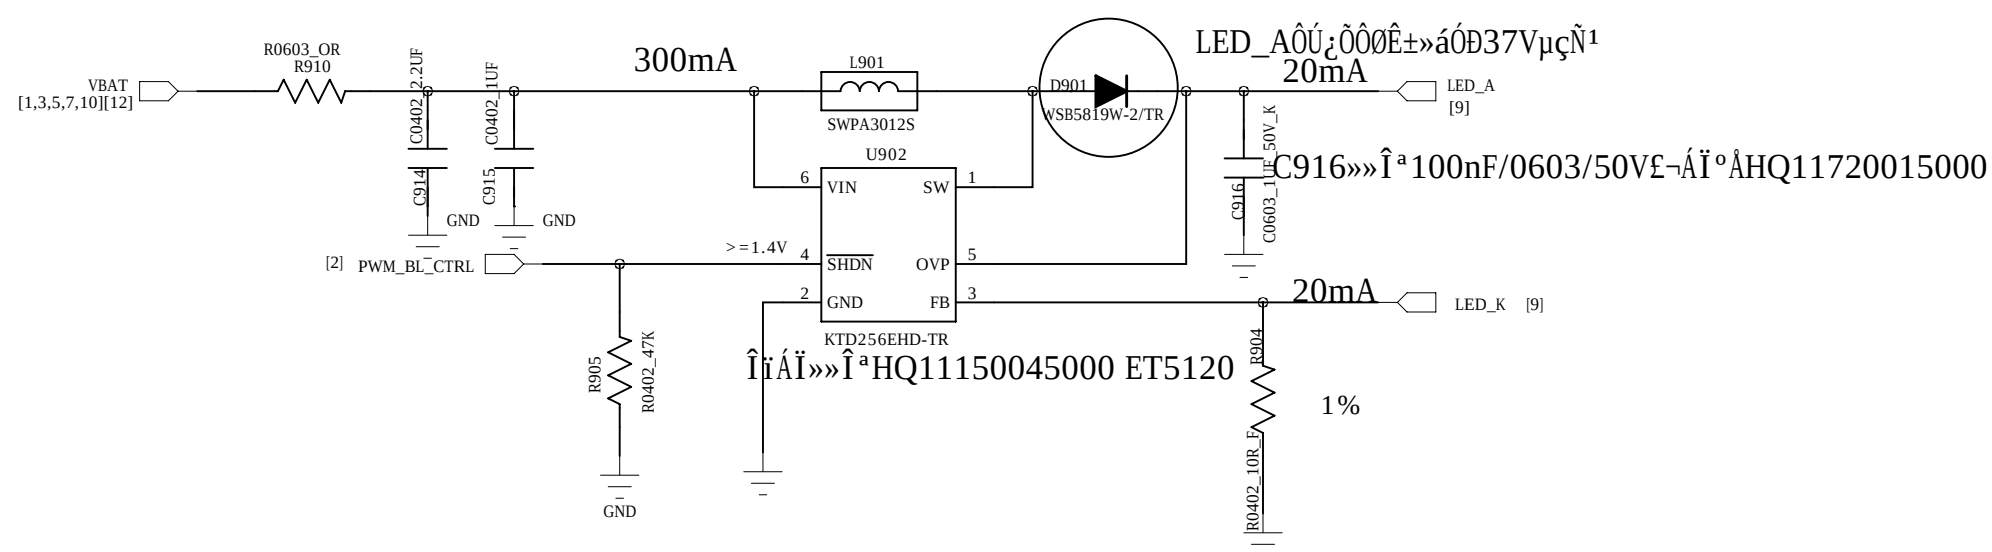

INFINIX				HOT5		2019-03-12	
DRAWN:	LIZHENHUA	DATED		TITLE: LCM,CTP	VERSION:	SHEET:	9/12
CHECKED		DATED					

MAIN CAMERA--200W A200

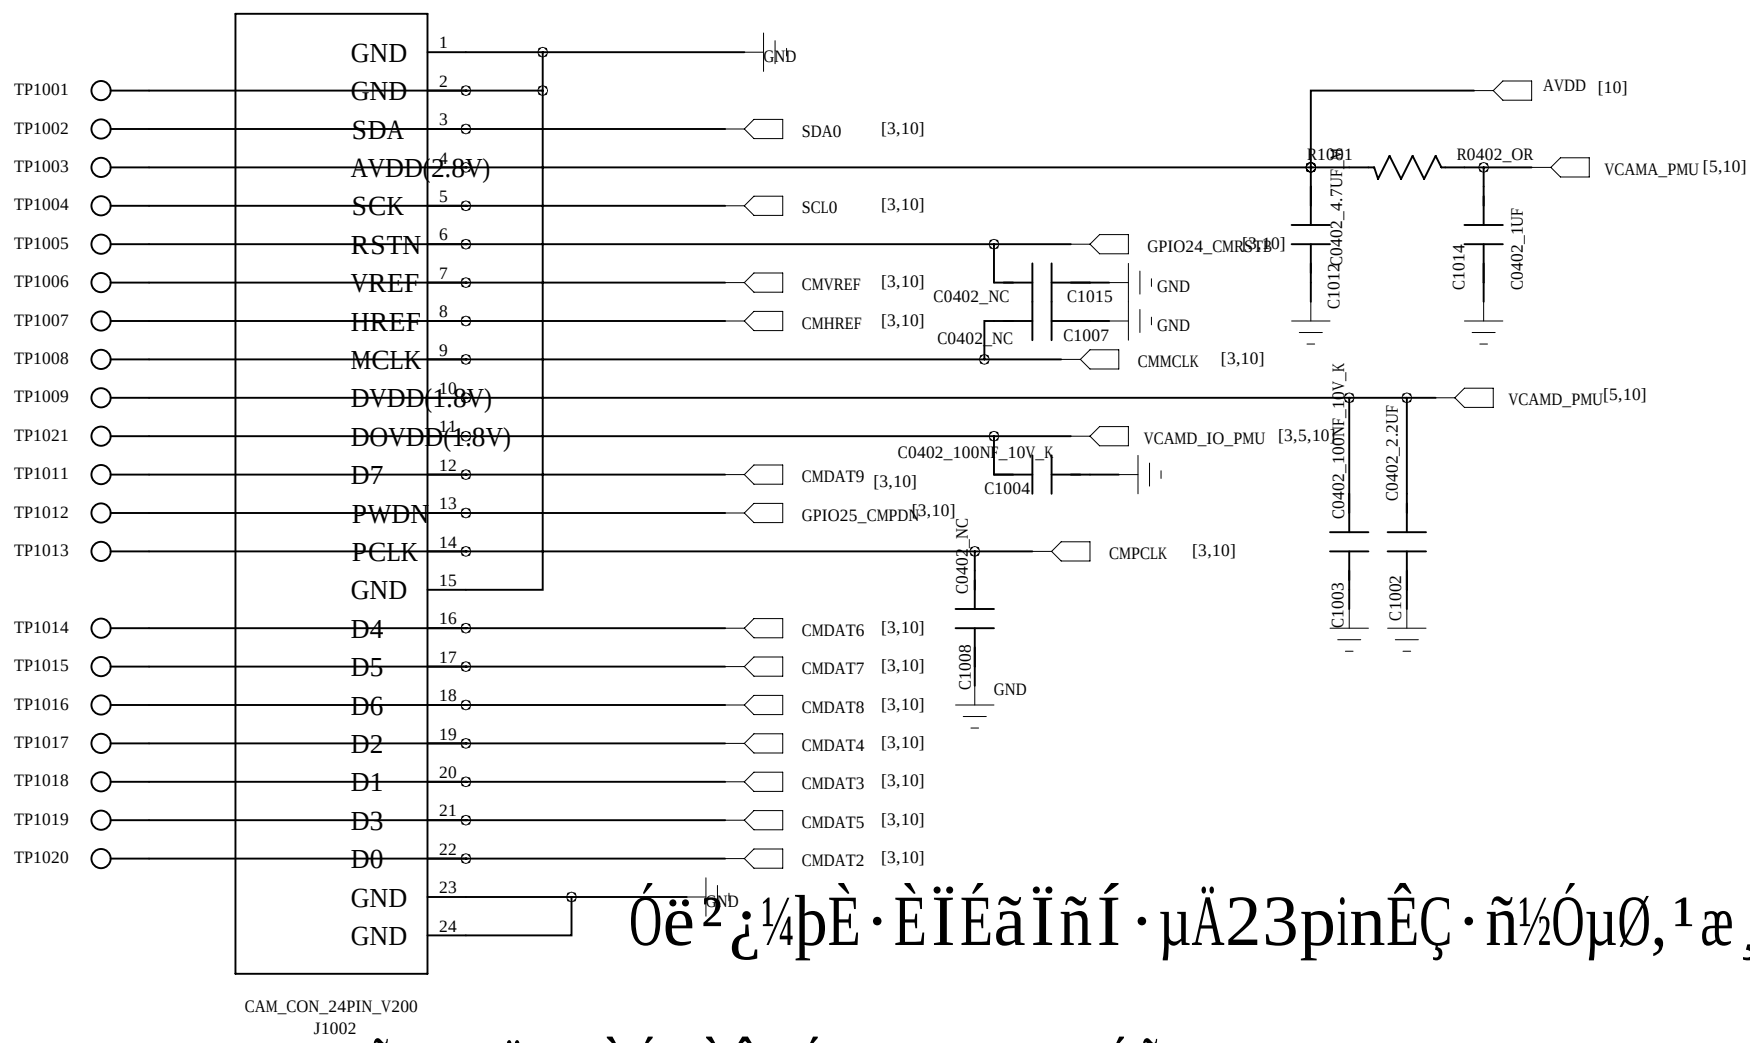


1002
 $\tilde{A}^{\prime} \mid \mu \tilde{A} \mu_{\zeta} \tilde{E} \tilde{Y} \mu \tilde{E} \tilde{E} \zeta \acute{O} \ddot{e} 500 W^1 \text{ } ^2 \acute{O} \tilde{A}$

MAIN CAMERA--5



该文档是极速PDF编辑器生成,

如果想去掉该提示,请访问并下
<http://www.jsupdfeditor.com>

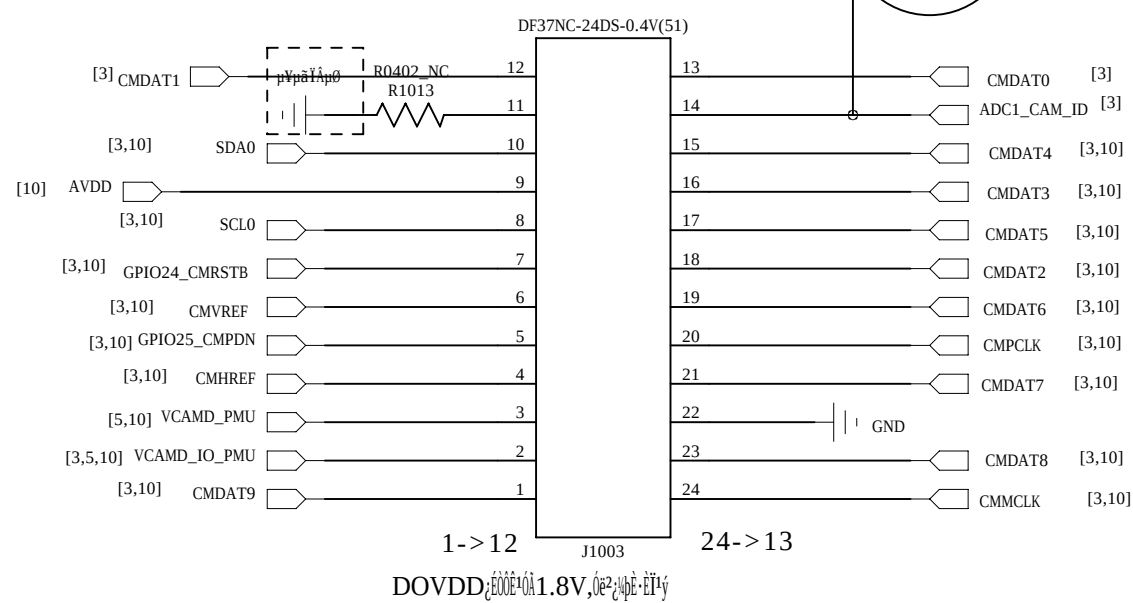


À l'camera o'fice di PINÈ 30-20-04-De' 100 PCB PINÈ 30-6-1, À l'aini·pin f'ò o'fice 30-0-00-04-2-4-6-8-10-12-14-16-18-20-22-24-26-28-30-32-34-36-38-40-42-44-46-48-50-52-54-56-58-60-62-64-66-68-70-72-74-76-78-80-82-84-86-88-90-92-94-96-98-100

DVDD = VDDCAMD0 = 1.8V

$$\text{DOVDD} = \text{VDDCAMD1} = 2.8\text{V}$$
$$AVDD = VDDCAMA = 2.8V$$


Pin	Description
1	D8
2	AGND
3	SIO-D
4	AVDD2V8
5	SIO-C
6	RESET
7	VSYNC
8	PWDN
9	HRFE
10	DVDD1V8
11	DOVDD1V8
12	D7
13	MCLK
14	D6
15	DGND
16	D5
17	PCLK
18	D4
19	D0
20	D3
21	D1
22	D2
23	id
24	D9

FRONT CAMERA I/F 0.3M

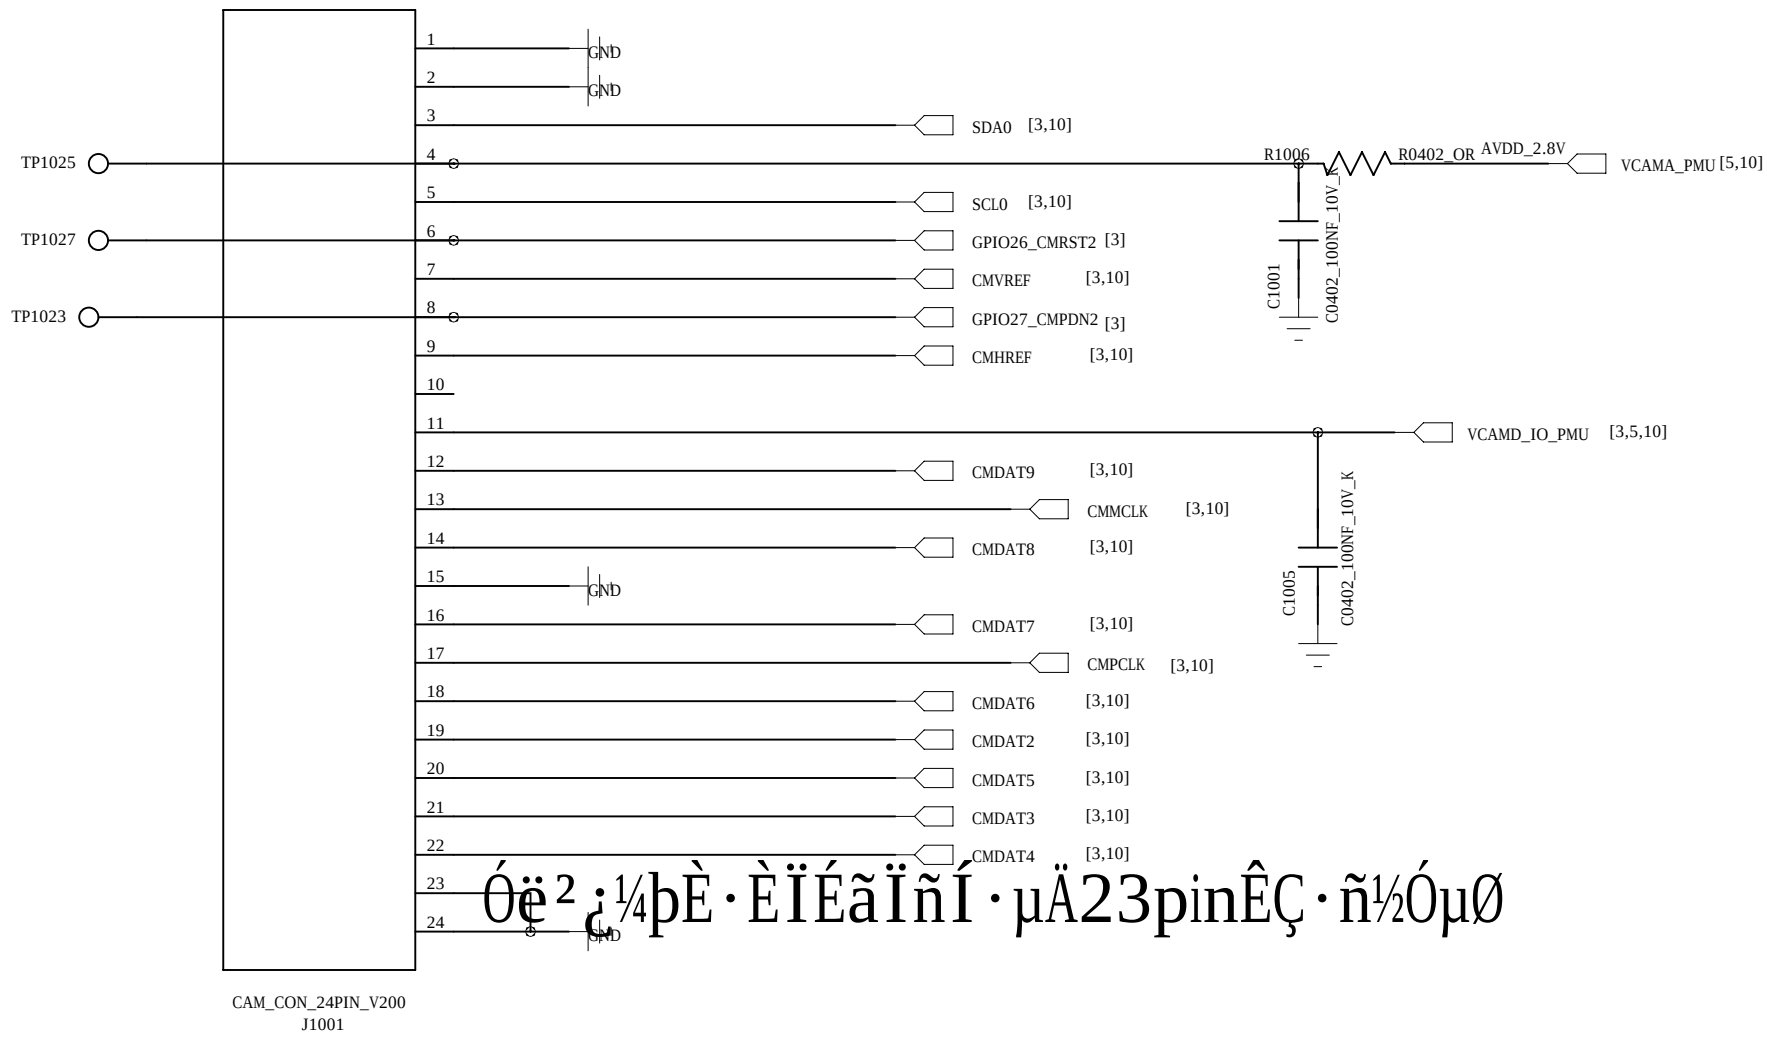

Óë²ç¼þÈ·ÈĬÉãĩñÍ·μÄ23pinÊÇ·ñ½ÓμØ

Flash LED Driver

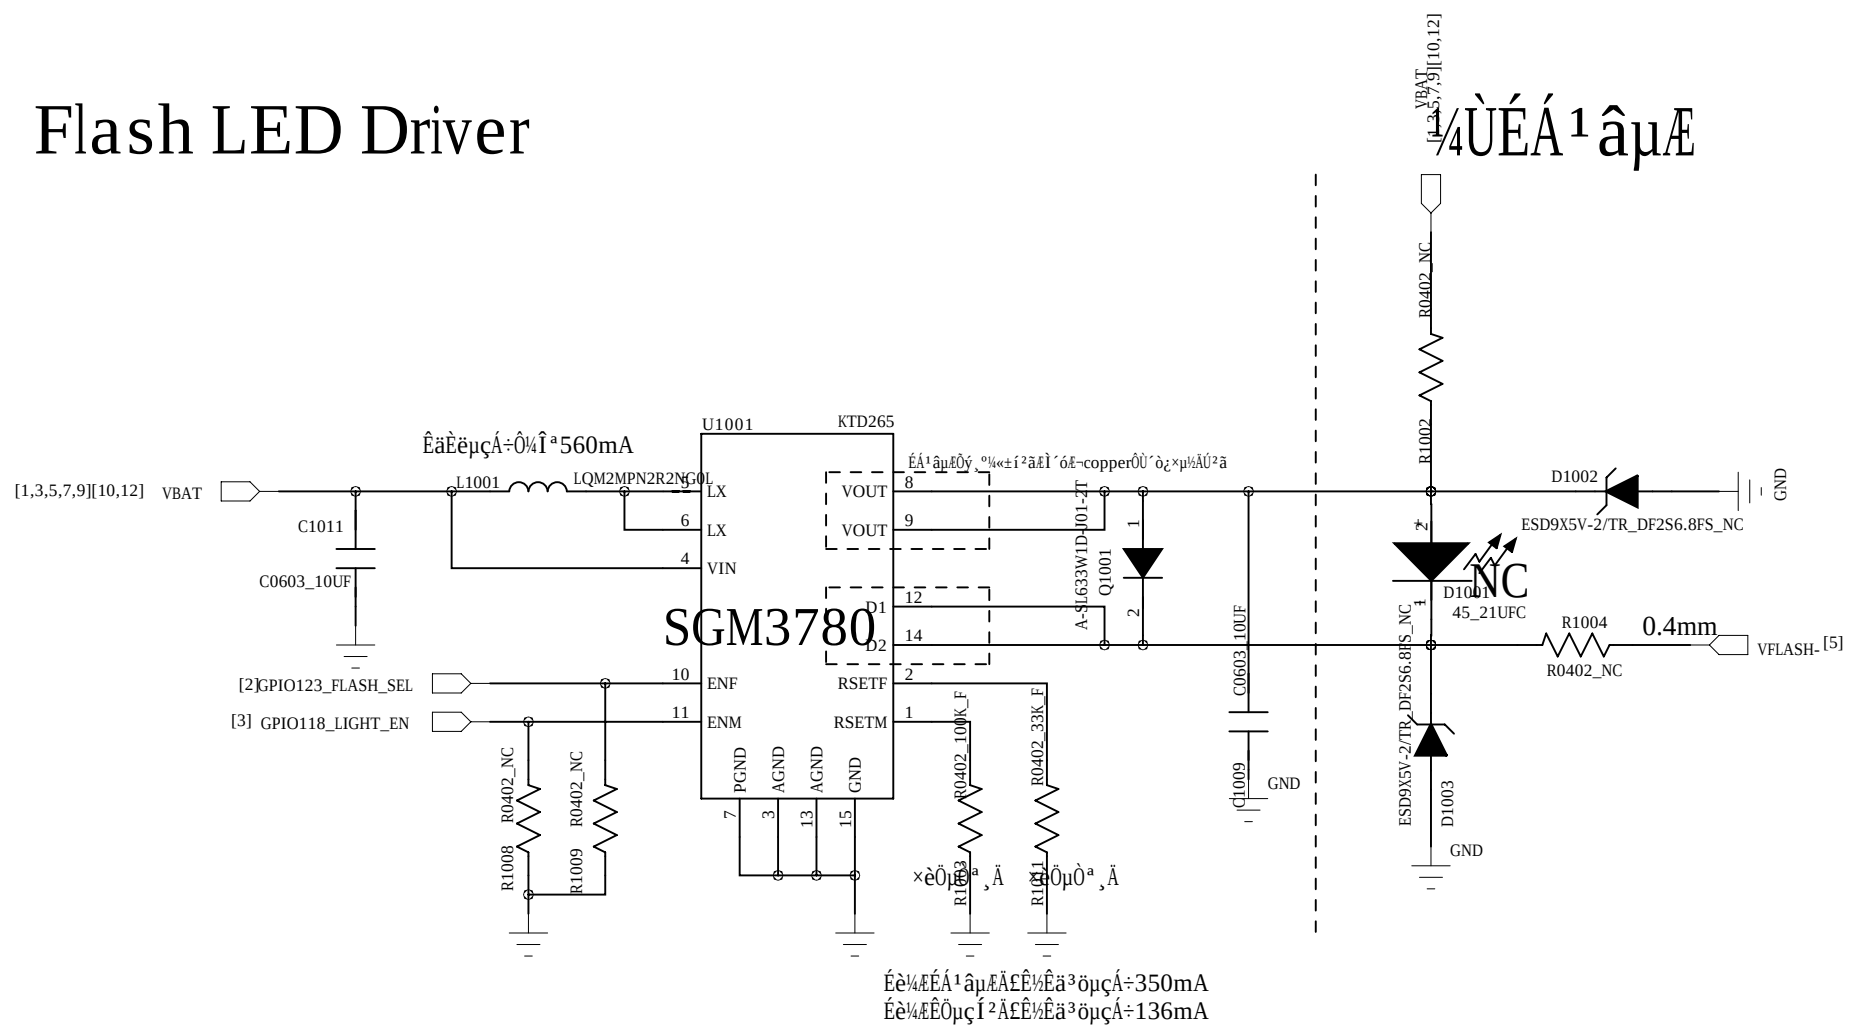
$$\begin{aligned} \dot{E}_1 &= \dot{E}_A^1 \dot{\mu}_A \dot{E}_A^3 \dot{\omega}_A \div 350 \text{ mA} \\ \dot{E}_2 &= \dot{E}_O \dot{\mu}_I^2 \dot{A} \dot{E}_A^3 \dot{\omega}_A \div 136 \text{ mA} \end{aligned}$$

INFINIX

H0T5

2019-03-12

DRAWN


LIZHENHUA

DATED

TITLE: CAM,FLASHLED

VERSION:

SHEET: 10/12

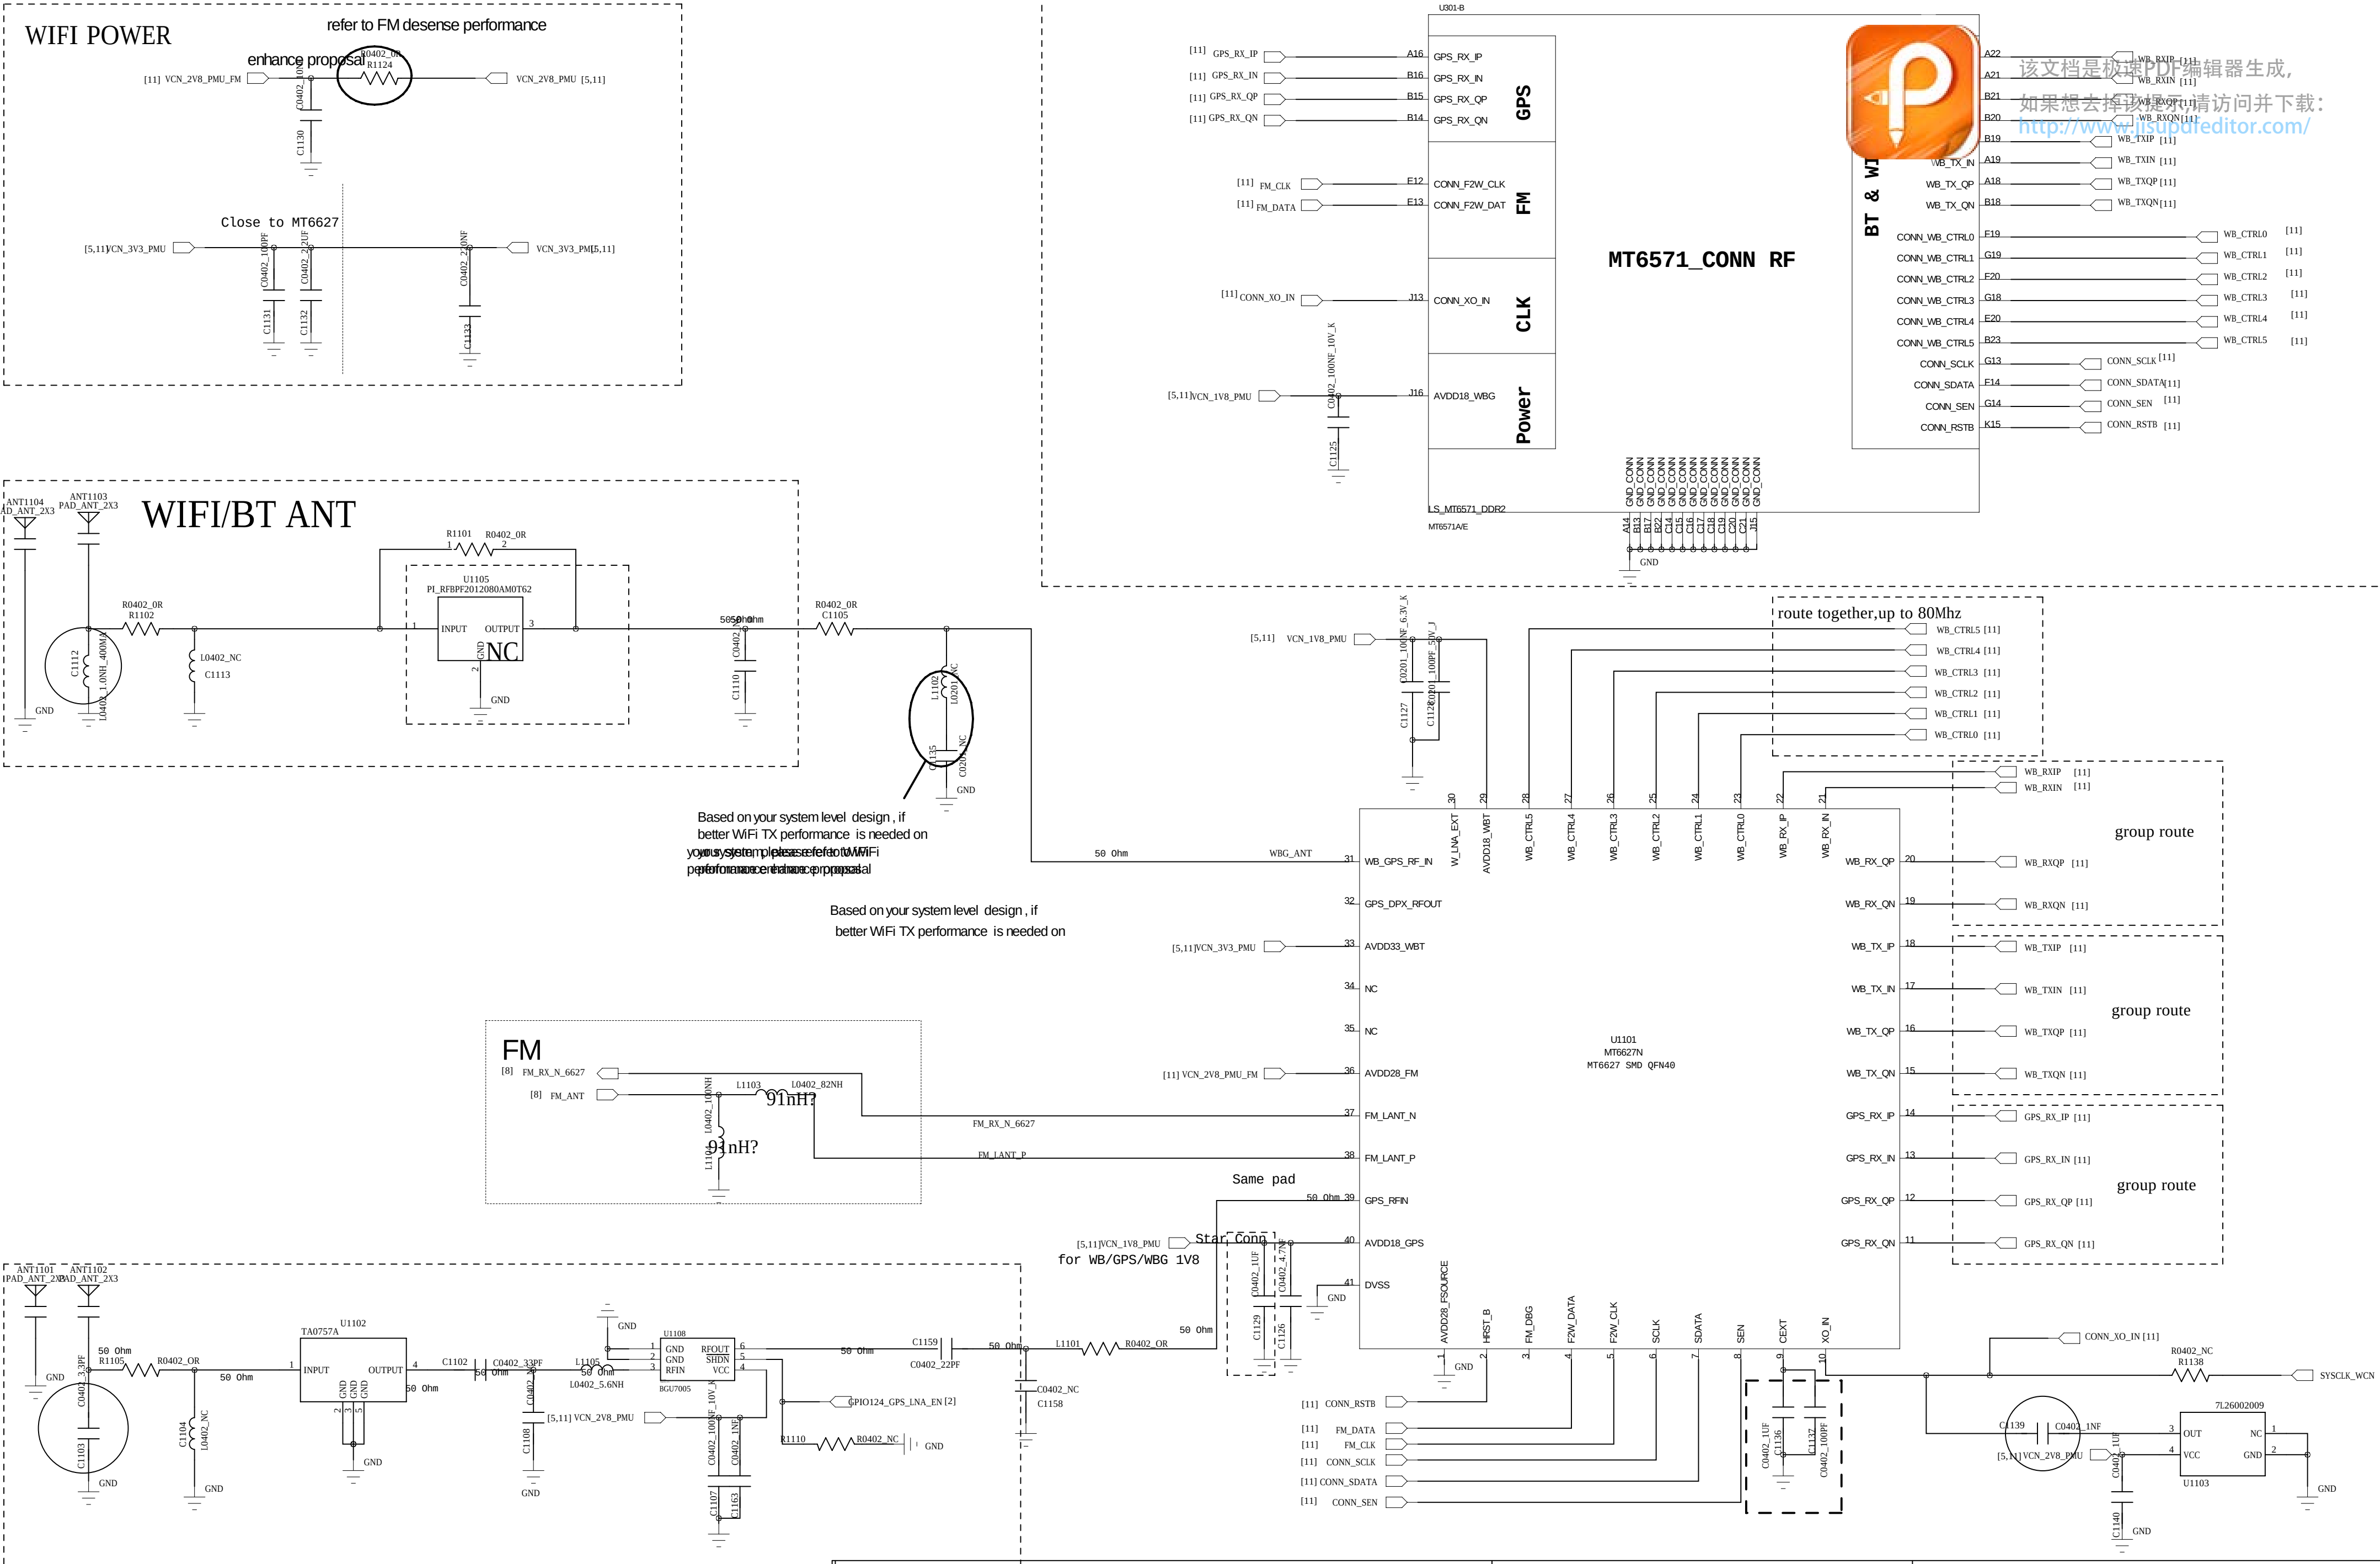

INFINIX


HOT5

2019-03-12


DRAWN:	LIZHENHUA	DATED		TITLE:	GPS,WIFI,BT,FM	VERSION:		SHEET:	11/12
CHECKED		DATED							




KEY

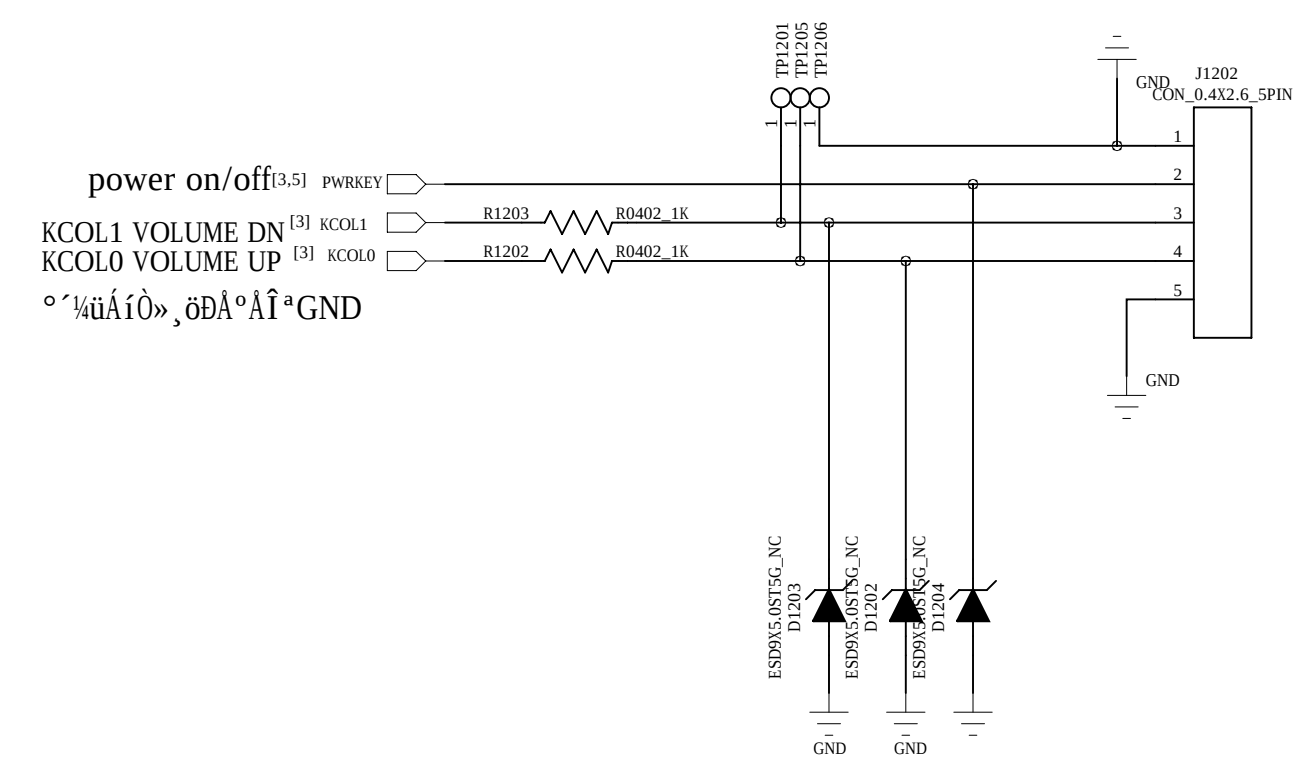


I/O CONNECTOR

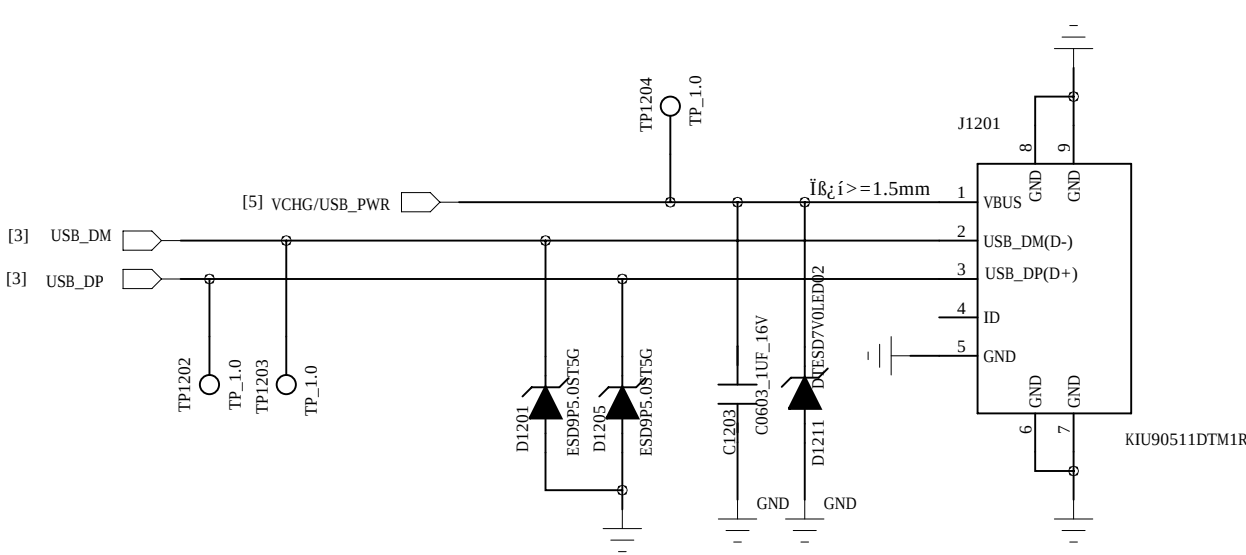


MOTO

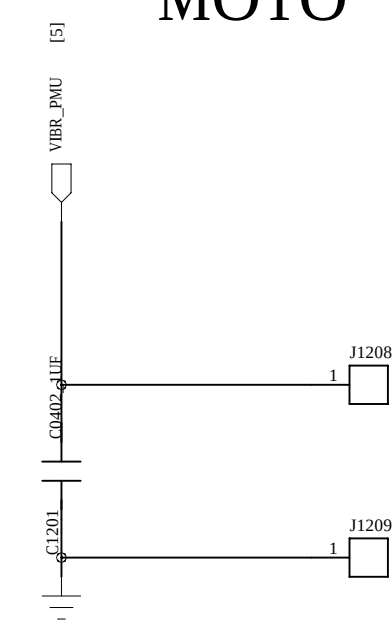

KEY LIGHT

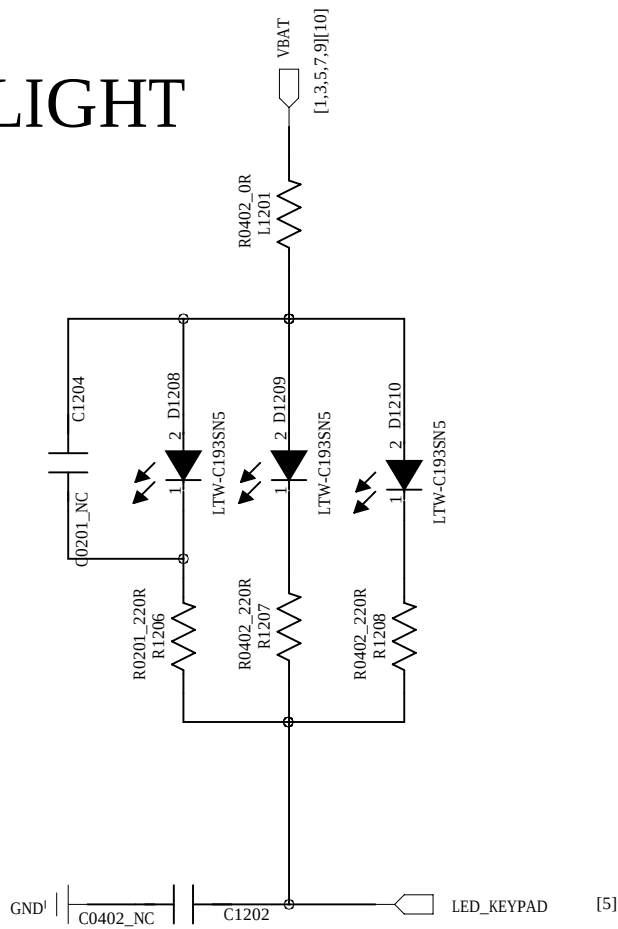

SHIELDING

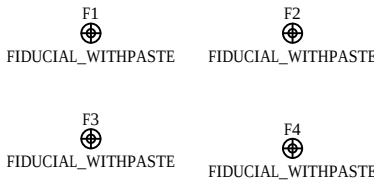

INFINIX				HOT5		2019-03-12	
DRAWN	LIZHENHUA	DATED		TITLE: KEY,SHIELDING,I/O	VERSION:	SHEET: 12/12	
CHECKED		DATED					