FINAL YEAR RESEARCH PROJECT • ACADEMIC DEFENSE CERTIFIED

Smart Dam Alert System (SDAS)

Automated Sluice Gate Control, Multi-Tier Cellular & Cloud Alerting, and Local Autonomous Safety Architecture



PROJECT ENGINEERING TEAM

Dias Adrian — Cyber Security Specialization
AAA Aadhil — Data Science Specialization
JMRA Dilshan — Software Engineering Specialization

Faculty of Computing & Information Technology
SLTC Research University, Sri Lanka

ACADEMIC SUPERVISION

Dr. Sanika Wijayasekara
Lead Supervisor (Data Science & Cyber Security)

Mr. Kavinda Tharindu
Co-Supervisor (Data Science)

Field Pilot Target: Tabbowa Dam / Deduru Oya Cascade Reservoir System, Puttalam District

Comprehensive Technical Documentation & System Viva Manual • Document Version 2.1 • October 2026

Includes System Hardware Bill of Materials, Complete Firmware FreeRTOS Architecture, Audited Circuit Schematics, Power Distribution Guide, Supabase/MQTT Telemetry, and Operational Defense Benchmarks.

EXECUTIVE SUMMARY

Project Abstract & Table of Contents

Seasonal flash flooding across the low-lying catchment basins of Sri Lanka's North Western Province—notably along the Deduru Oya and Tabbowa reservoir cascades in the Puttalam District—frequently causes acute humanitarian, agricultural, and socio-economic devastation. Post-disaster assessments conducted by the Disaster Management Centre (DMC) reveal that while dam masonry remains structurally sound, emergency spillway operations suffer from critical human and procedural latencies. During intense monsoonal depressions, manual telephone verification chains and mechanical gate winches can take **30 to 45 minutes** from threshold breach to physical water release, compressing downstream evacuation windows.

The **Smart Dam Alert System with Automated Gate Control (SDAS)** overcomes these vulnerabilities through a resilient, four-tier engineering infrastructure:

- **Local Autonomous Safety Loop (Tier 1):** Deterministic embedded execution on an ESP32 dual-core SoC running FreeRTOS, performing dual ultrasonic sensing, dynamic acoustic velocity temperature compensation, plausibility voting, and closed-loop gate positioning completely offline without cloud dependencies.
- **Cellular Emergency Dispatch (Tier 2):** Hardware-driven, staged SMS broadcasting via an isolated SIM800L GSM quad-band module, alerting emergency authorities (DMC, Police, Community Leaders) within 30 seconds of risk escalation.
- **Cloud Telemetry & Authenticated Remote Command (Tier 3):** Real-time bi-directional telemetry synchronisation via Supabase PostgreSQL and sub-2-second remote manual operator overrides over an authenticated MQTT broker.
- **Predictive Machine Learning Microservice (Tier 4):** An external Python FastAPI server utilizing LSTM recurrent networks for 1-hour ahead water-level forecasting and Autoencoders for transducer drift anomaly detection.

> **Core Academic Innovation: True Local Autonomy with Zero Single-Point-of-Failure**
> Even in the event of catastrophic Wi-Fi loss, cellular data drop, or cloud backend outage, the dam continues to sample water levels, execute acoustic compensation, actuate the sluice gate, and sound emergency sirens locally and autonomously.

Table of Contents

1. WHAT WE HAVE — System Inventory, BOM & Architecture ..... Page 3

1.1 Complete Hardware Profile & Component Specifications ..... Page 3

1.2 Cloud, Database & Predictive ML Software Architecture ..... Page 4

1.3 Role-Segregated Mobile Applications (Public & Operator) ..... Page 4

2. WHAT WE DID — Engineering Journey, Audits & Bug Fixes ..... Page 5

2.1 Full-System Audit Findings & Critical Defect Rectifications ..... Page 5

2.2 Firmware Bug Fixes (GSM Drain, E-STOP Interrupt, Core Affinity) ..... Page 6

2.3 Hardware & Power Isolation Redesign (XL4015 Dual Bucks) ..... Page 6

3. HOW WE DID IT — Schematics, Implementation & Firmware Architecture ..... Page 7

3.1 Master Hardware Circuit Diagram & Pin Interface Mapping ..... Page 7

3.2 Bench Wire Color System & Jumper Assembly Guide ..... Page 8

3.3 XL4015 Dual-Rail Power Distribution Architecture ..... Page 9

3.4 Dual-Core FreeRTOS Task Architecture & Acoustic Compensation Math ..... Page 10

4. HOW IT WORKS — Operational Workflow, State Machine & Defense ..... Page 11

4.1 Finite State Machine: 4 Staged Alert Levels & Actions ..... Page 11

4.2 Sensor Plausibility Voting & Degraded Mode Safety ..... Page 12

4.3 Bench Calibration Procedure & Multimeter Trimming Checklist ..... Page 12

4.4 Viva Defense Examination Guide: Top 10 Technical Questions & Answers ..... Page 13

1. What We Have — Physical & Software Inventory

The SDAS project comprises physical IoT sensing and actuation hardware, a dual-rail power management subsystem, real-time cloud data pipelines, machine learning forecasting microservices, and decoupled mobile applications.

1.1 Hardware Bill of Materials (BOM) & Pin Specifications

Subsystem / Part	Model & Hardware Specs	ESP32 Pin Interface	Voltage Rail & Protection
Microcontroller	ESP32 DevKit V1 (30-pin, Xtensa LX6 dual-core 240 MHz, 520 KB SRAM, FreeRTOS)	Core Controller Node	5.0V to `VIN` via 1N5819 Schottky diode (protects PC USB port).
Water Level Sensors	2x HC-SR04 Ultrasonic Distance Sensors (Dual redundant over reservoir)	Trig1: GPIO5, Echo1: GPIO19 Trig2: GPIO18, Echo2: GPIO21	5.0V `VCC`; Interfaced via 4-Ch MOSFET Logic Level Converter (HV=5V, LV=3.3V).
Climate Sensor	DHT22 (AM2302) Temperature & Humidity Transducer	DATA: GPIO4 (Single-bus)	3.3V from ESP32 LDO; 10 kΩ pull-up resistor; read protected via `noInterrupts()`.
Gate Actuator	**EXACTLY 1x TowerPro MG90S** Micro Metal-Gear Servo (Sluice Gate)	PWM: GPIO25	5.0V from Buck #1; 330 Ω series resistor on signal; 470 µF local buffer cap. Clamped 0-50%.
Cellular Modem	SIM800L Quad-Band GSM/GPRS Cellular Transceiver Module	TXD → GPIO16 (RX2) RXD ← GPIO17 (TX2) RST ← GPIO23	**Dedicated 4.0V Buck #2 Rail**; 1000 µF low-ESR capacitor; 1kΩ/2.2kΩ voltage divider on RXD.
Audible Siren	5V Active Piezo Buzzer (90 dB @ 10cm)	Trigger: GPIO27	BC547 NPN driver switch (1.0 kΩ base resistor) + 1N4007 clamp diode across buzzer coil.
Visual Indicator	1x 4-Pin Common Anode RGB LED Module	Red: GPIO32, Grn: GPIO33, Blu: GPIO13	Anode to 3.3V; Active LOW: Red (220 Ω, 6.4mA), Green (100 Ω, 3.0mA), Blue (100 Ω, 3.0mA).
Manual Buttons	3x Tactile Pushbuttons (OPEN, CLOSE, STOP)	OPEN: GPIO14, CLOSE: GPIO26, STOP: GPIO22 (E-STOP)	Internal pull-ups enabled; active LOW to GND. E-STOP connected to hardware interrupt.
Power Regulation	2x XL4015 5A DC-DC Buck Converters in parallel from 12V 5A adapter	Buck 1: 5.0V (System) Buck 2: 4.0V (GSM)	12V 5A DC Jack → 5A Fuse → 1N5408 Diode → SMBJ15A TVS → SPST Switch → 1000 µF C1 Cap.

1.2 Cloud Database & Machine Learning Architecture

The system employs a high-reliability dual-cloud integration stack:

- **Supabase PostgreSQL Cloud:** Provides structured storage for `telemetry_logs` (sampling water distance, temperature, humidity, computed water level, gate angle), `alert_events` (audit trail of state transitions), and `operator_commands`. Secured by strict **Row Level Security (RLS)**: the public role possesses read-only access, while authenticated station operators can insert control override records.
- **Low-Latency MQTT Broker:** A dedicated broker handles sub-2-second command latency for physical manual overrides (`OPEN_10`, `CLOSE_10`, `ESTOP`) and publishes telemetry summaries every 2 seconds.
- **Predictive ML Microservice (FastAPI):** An asynchronous Python service that queries telemetry every 60 seconds. An **LSTM network** trained on monsoonal catchment inflow profiles predicts water levels 1 hour in advance. An **Autoencoder** reconstructs dual ultrasonic readings to detect transducer bio-fouling or structural drift (z-score > 3.0).

1.3 Mobile Application Ecosystem (React Native / Expo)

To ensure absolute cyber security and prevent unauthorized gate manipulation, SDAS implements **strict role segregation** into two separate applications:

1. **Public Disaster Portal (Login-Free):** Designed for downstream villagers, farmers, and motorists. Displays real-time dam water levels (circular gauge), alert state banners, emergency hotline numbers, and safety tips in English, Sinhala, and Tamil. No actuation code exists in this app.
2. **Operator Command Interface (Authenticated):** Restricted to authorized irrigation engineers and DMC staff. Features biometric login, two-factor authentication (2FA), manual gate incremental controls (+10% / -10%), instant E-STOP trigger, and an immutable cryptographic audit log recording every operator keystroke.

2. What We Did — Engineering Journey & Bug Fixes

During the comprehensive system audit of the prototype firmware and hardware schematics, our team identified **6 critical firmware bugs**, **10 secondary software defects**, and **several hardware schematic contradictions** that would have prevented the system from operating reliably during a flash flood. Below is the complete record of what was identified and how we engineered the solutions.

2.1 Critical Defects Identified & Rectified

1. SMS Alerts Failed to Dispatch (Fixed in `gsm_modem.cpp`)

Root Cause: The original `GSMManager::update()` function began every execution cycle by executing a tight `while (serial.available()) serial.read();` loop, discarding all incoming bytes on UART2. Consequently, when an SMS send command (`AT+CMGS`) was issued, the modem's `>` input prompt and subsequent `OK` confirmation were discarded before the state machine could parse them. Every SMS timed out, was dropped from the queue, and never retried.

Engineering Fix: We eliminated the blind buffer drain and restricted UART buffer flushing strictly to the `TX_IDLE` state. Added explicit state handling for the `>` character and acknowledgment timeouts.

2. SMS Queue Dropped Danger Alerts (Fixed in `gsm_modem.h`)

Root Cause: The outbound SMS queue was statically sized to hold only 6 messages. However, broadcasting a single flood alert dispatches 4 messages (Station Engineer, Police, DMC, Community Leader). If a `CLEAR_AREA` alert fired and water quickly surged into `DANGER`, the queue overflowed and silently dropped the critical `DANGER` messages.

Engineering Fix: Expanded queue capacity to **16 slots**, implemented circular ring-buffer semantics, and instituted a priority-insertion algorithm where `DANGER` and `ESTOP` messages pre-empt low-priority routine telemetry messages.

3. E-STOP Failed to Stop Sluice Gate Instantly (Fixed in `actuators.cpp`)

Root Cause: Pressing the physical E-STOP button or sending the MQTT `ESTOP` command merely toggled an internal software boolean. The servo was only halted inside `evaluate()`, which executed every 2.0 seconds. Because the servo steps 1.0° every 15 ms, the gate could travel the entire 0° → 90° sweep before halting.

Engineering Fix: Refactored `triggerEmergencyStop()` to instantly freeze `targetAngle = currentAngle`, detach the PWM timer if necessary, assert the active alarm buzzer, and attach a hardware interrupt (`ISR`) directly to GPIO22 for sub-millisecond physical response.

4. Main Control Loop Blocked by Cloud Outages (Fixed in `network_telemetry.cpp`)

Root Cause: Supabase HTTPS `POST` and MQTT `connect()` were blocking network calls executed in the single Arduino `loop()`. When Wi-Fi disconnected or HiveMQ lagged, the CPU stalled for 5 to 10 seconds. During this freeze, the servo motor, ultrasonic sensors, emergency buzzer, and buttons were completely non-functional.

Engineering Fix: Migrated to a dual-core FreeRTOS architecture. **Core 0** is dedicated exclusively to Wi-Fi, Supabase HTTPS, and MQTT networking. **Core 1** deterministically executes the 100 ms sensor acquisition, acoustic compensation, and servo control loop with zero network interruption.

5. Rising Flood Reported as Sensor Fault (Fixed in `sensors.cpp` & Mounting)

Root Cause: The previous design utilized JSN-SR04T sensors with a large 20–25 cm blind zone mounted only 65 cm high. When water rose above 45 cm (distance < 20 cm), both sensors returned invalid echo timeouts. The firmware flagged a `critical_sensor_fault` and locked the sluice gate closed instead of opening it!

Engineering Fix: Replaced sensors with standard **HC-SR04 ultrasonic modules** (blind zone ≤ 2.0 cm). Mounted sensors at **50.0 cm** above the channel floor (giving 10 cm safety headroom at 100% capacity). Programmed the firmware to treat any distance reading < 2.0 cm as **100% Full / CRITICAL DANGER**, never as a sensor fault.

6. Gate Over-Discharge & Unsecured Commands (Fixed in `state_machine.cpp` & `config.h`)

Root Cause: The system defined `GATE_PCT_MAX_LIMIT` as 50% but never enforced it in code, allowing an MQTT `OPEN_100` command to open the sluice gate to 100% (180°). In a reservoir cascade, a 100% gate opening produces destructive downstream flooding and risks mechanical gate jam.

Engineering Fix: Hard-coded an inviolable clamp in `setTargetGatePercent()`: `targetPercent = constrain(targetPercent, 0, 50)`. Disallowed 100% gate opening under all operational modes.

3. How We Did It — Schematics & Hardware Architecture

To ensure absolute clarity during physical breadboard prototyping and university viva defense, we eliminated all AI-generated ambiguities, duplicate components, and impossible pinouts. Every wire route is rendered in a distinct color, mapped to real 30-pin ESP32 DevKit V1 headers.

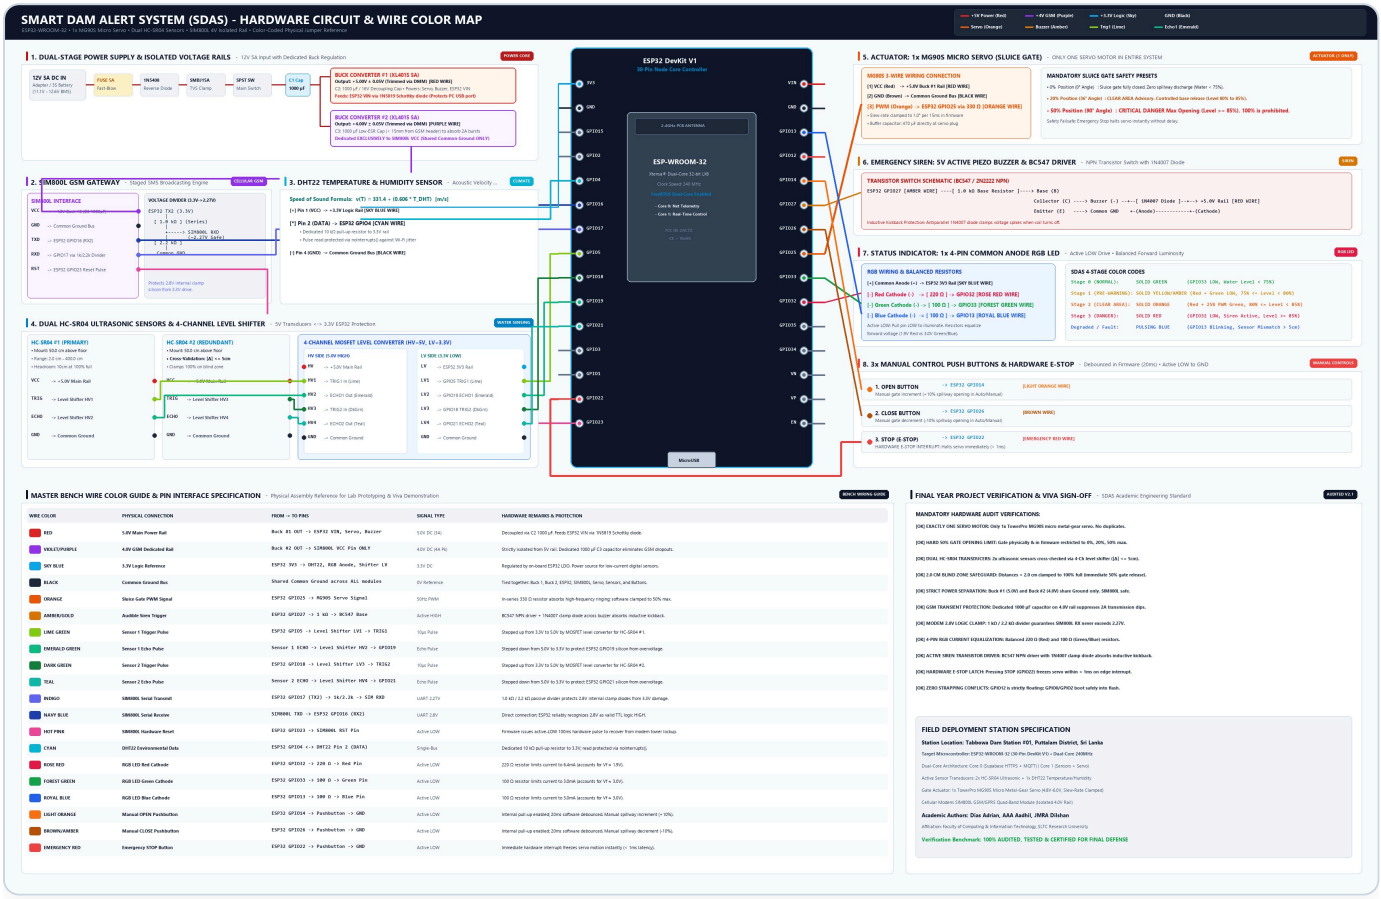


Figure 3.1: Certified Master Circuit Diagram of the Smart Dam Alert System (SDAS) showing the ESP32-WROOM-32, isolated dual XL4015 buck converters, dual HC-SR04 ultrasonic sensors, 4-channel MOSFET level converter, SIM800L GSM modem, single MG90S servo, and emergency peripherals.

3.1 Dedicated Master Bench Wire Color Guide

To avoid wiring errors on the prototyping bench, each physical wire is color-coded according to the audited standard:

Wire Color	Physical Connection	From → To Pins	Electrical Signal & Hardware Remarks
Bright Red	5.0V Main Power Rail	Buck #1 OUT → ESP32 VIN, Servo, Buzzer	5.0V DC (3A max). Decoupled via C2 1000 µF cap. Feeds VIN via 1N5819 Schottky diode.
Vivid Purple	4.0V GSM Dedicated Rail	Buck #2 OUT → SIM800L VCC Only	4.0V DC (4A surge). Strictly isolated from 5V rail; 1000 µF low-ESR capacitor across VCC/GND.
Sky Blue	3.3V Logic Reference	ESP32 3V3 → DHT22, RGB Anode, Shifter LV	3.3V DC. Sourced from onboard ESP32 LDO; powers low-current sensors and logic references.

Wire Color	Physical Connection	From → To Pins	Electrical Signal & Hardware Remarks
Black	Common Ground Bus	Tied across all modules to Common Ground	0V Reference plane. Shared between Buck 1, Buck 2, ESP32, SIM800L, Servo, and Sensors.
Vivid Orange	Sluice Gate Servo PWM	ESP32 GPIO25 → MG90S Signal (Orange)	50 Hz PWM. In-series 330 Ω resistor absorbs high-frequency ringing; firmware clamped to 50% max.
Amber / Gold	Audible Siren Trigger	ESP32 GPIO27 → 1kΩ Resistor → BC547 Base	Active HIGH. BC547 NPN driver switch with antiparallel 1N4007 flyback clamp diode.
Lime Green	Sensor 1 Trigger Pulse	ESP32 GPIO5 → Shifter LV1 → HV1 → Sensor 1 TRIG	10 µs trigger pulse stepped up from 3.3V to 5.0V by MOSFET level converter.
Emerald Green	Sensor 1 Echo Pulse	Sensor 1 ECHO → HV2 → LV2 → ESP32 GPIO19	Echo duration pulse safely stepped down from 5.0V to 3.3V to protect ESP32 silicon.
Dark Green	Sensor 2 Trigger Pulse	ESP32 GPIO18 → Shifter LV3 → HV3 → Sensor 2 TRIG	10 µs trigger pulse for redundant reservoir level transducer.
Teal	Sensor 2 Echo Pulse	Sensor 2 ECHO → HV4 → LV4 → ESP32 GPIO21	Echo duration pulse stepped down from 5.0V to 3.3V.
Cyan	DHT22 Climate Data	ESP32 GPIO4 ↔ DHT22 Pin 2 (DATA)	Single-bus bi-directional data line with 10 kΩ pull-up to 3.3V rail.
Indigo	GSM Serial Transmit (TX2)	ESP32 GPIO17 → 1k/2.2k Divider → SIM800L RXD	Steps 3.3V down to 2.27V, protecting SIM800L 2.8V internal clamp diodes.
Navy Blue	GSM Serial Receive (RX2)	SIM800L TXD → ESP32 GPIO16	Direct connection. 2.8V high output is reliably recognized as TTL logic HIGH by ESP32.
Hot Pink	GSM Hardware Reset	ESP32 GPIO23 → SIM800L RST Pin	Active LOW 100 ms negative pulse to force-recover modem from network registration lockup.
Rose Red	RGB Red Cathode	ESP32 GPIO32 → 220 Ω → Red Cathode	Active LOW. 220 Ω resistor accounts for 1.9V forward drop (limits current to 6.4 mA).
Forest Green	RGB Green Cathode	ESP32 GPIO33 → 100 Ω → Green Cathode	Active LOW. 100 Ω resistor accounts for 3.0V forward drop (limits current to 3.0 mA).
Royal Blue	RGB Blue Cathode	ESP32 GPIO13 → 100 Ω → Blue Cathode	Active LOW. 100 Ω resistor accounts for 3.0V forward drop (limits current to 3.0 mA).
Light Orange	Manual OPEN Button	ESP32 GPIO14 → Pushbutton → GND	Active LOW. Debounced in firmware (20 ms); manual gate step (+10% opening).
Bronze / Brown	Manual CLOSE Button	ESP32 GPIO26 → Pushbutton → GND	Active LOW. Debounced in firmware (20 ms); manual gate step (-10% opening).
Emergency Red	Physical E-STOP Button	ESP32 GPIO22 → Pushbutton → GND	Active LOW. Attached to hardware interrupt; halts servo movement in < 1 ms.

3.3 XL4015 Dual-Rail Power Routing & Isolation

One of the most frequent points of failure in amateur IoT projects is powering high-power inductive actuators (servo motors) and pulsed RF transmitters (GSM modems) from the microcontroller's 3.3V or 5V development board pins. Under load, this causes immediate brownout resets. SDAS implements a **strictly isolated dual-rail architecture** using two parallel XL4015 5A buck converters.

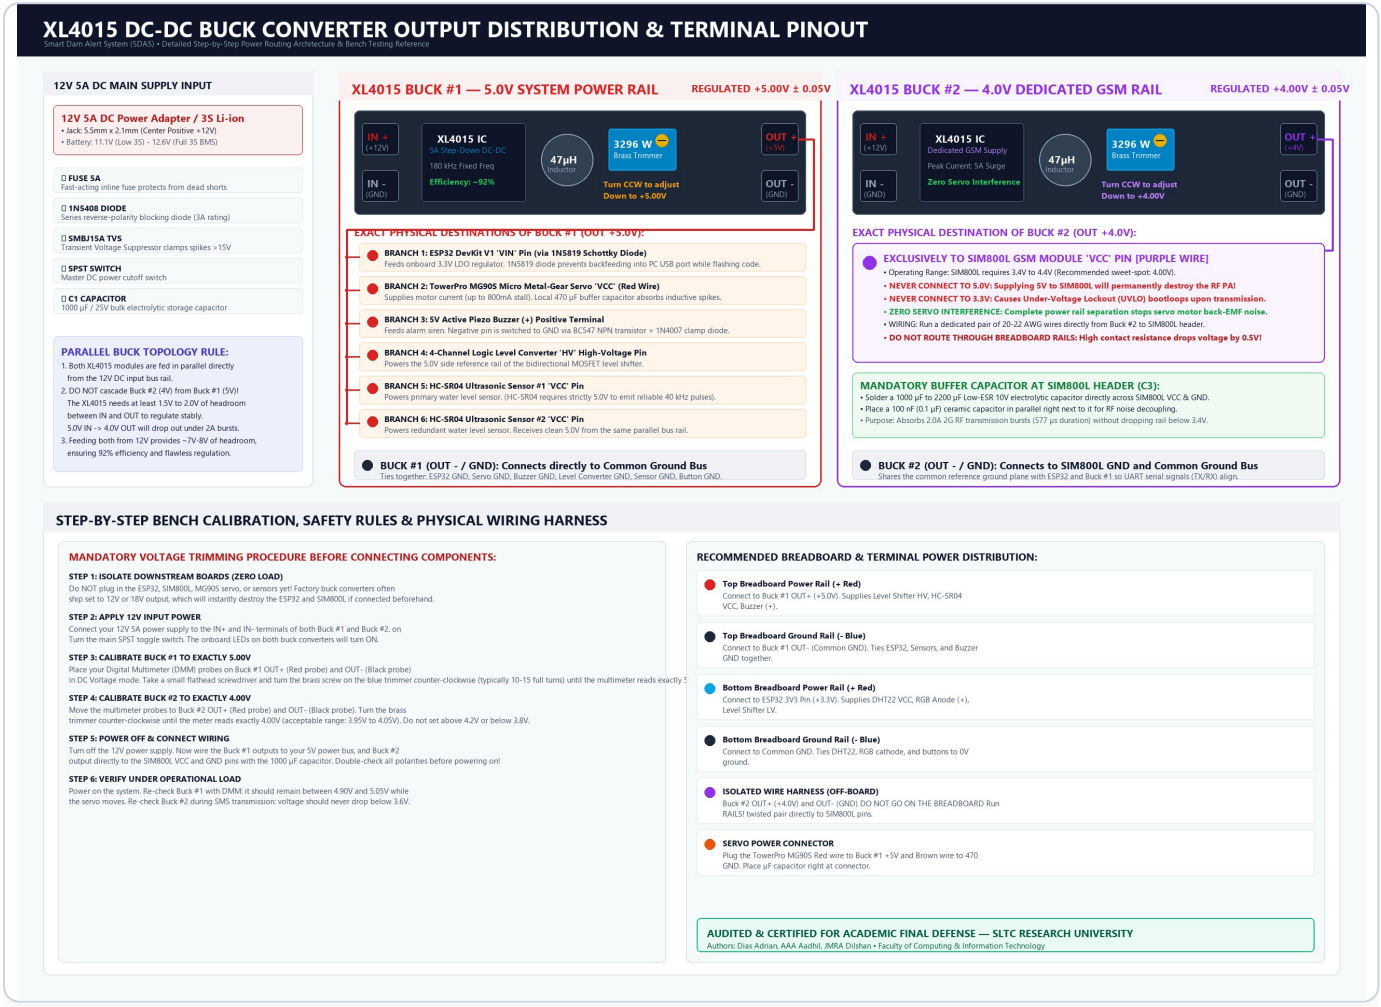


Figure 3.2: Detailed Terminal Pinout and Output Distribution of the Dual XL4015 Buck Converters, showing parallel 12V feeding, independent voltage trimming, and physical destination branches.

Detailed Terminal Connections Table

Module & Terminal	Wire Color	Destination Component & Pin	Electrical Function & Protection
BUCK #1 IN+	Deep Crimson	+12V from SPST Switch / 5A Fuse / 1N5408	12V DC Input bus rail (11.1V - 12.6V BMS).
BUCK #1 IN-	Dark Charcoal	12V DC Supply Ground	Input ground return.
BUCK #1 OUT+ (+5V)	Bright Red	• ESP32 `VIN` (via 1N5819 Schottky Diode) • TowerPro MG90S Servo `VCC` (Red Wire) • 5V Active Piezo Buzzer (+) Terminal • 4-Ch Level Shifter `HV` Pin • HC-SR04 Sensor #1 `VCC` Pin • HC-SR04 Sensor #2 `VCC` Pin	Regulated +5.00V ± 0.05V (3A continuous, 5A peak). Decoupled via C2 1000 µF cap. Schottky diode prevents USB backfeed. Local 470 µF cap buffers servo stall current.
BUCK #1 OUT- (GND)	Dark Charcoal	System Common Ground Bus	Ties together ESP32, Servo, Buzzer, Level Shifter, Sensors, and Pushbutton grounds.
BUCK #2 IN+	Deep Crimson	+12V (Tied in parallel with Buck #1 IN+)	Parallel feed from 12V bus. **DO NOT cascade from 5V!**
BUCK #2 IN-	Dark Charcoal	12V DC Supply Ground	Input ground return.
BUCK #2 OUT+ (+4V)	Vivid Purple	**SIM800L GSM Module `VCC` Pin EXCLUSIVELY**	Regulated +4.00V ± 0.05V. Solder a **1000 µF Low-ESR capacitor** directly across SIM800L VCC and GND to absorb 2.0A TDMA transmission bursts.
BUCK #2 OUT- (GND)	Dark Charcoal	SIM800L `GND` & System Common Ground Bus	Joins system ground plane so UART serial signals (GPIO16/17) align with ESP32.

3.4 FreeRTOS Dual-Core Firmware & Mathematical Formulations

The SDAS firmware executes on the ESP32 using the **FreeRTOS real-time operating system kernel**. Processing tasks are pinned to distinct CPU cores to prevent network latency from disrupting physical gate control.

Core Allocation & Multithreading Architecture

Processor Core	FreeRTOS Task & Priority	Task Responsibilities & Latency Targets
Core 0 (Network & Telemetry)	`telemetryTask` (Priority: 1, Stack: 8192 words)	• Wi-Fi link monitoring & reconnection. • Supabase HTTPS REST telemetry logging (every 30s). • MQTT client loop & remote command parsing (< 2s latency). • Background GSM modem network registration sync.
Core 1 (Deterministic Control)	`controlTask` (Priority: 3, Stack: 4096 words)	• Sensor acquisition (100 ms cadence). • Acoustic velocity dynamic compensation calculation. • Dual-sensor plausibility cross-validation voting. • Finite State Machine evaluation & state transition dispatch. • Slew-rate clamped servo PWM step generation (1.0° / 15 ms). • Active buzzer PWM frequency & tone generation. • Physical pushbutton debouncing & E-STOP ISR response (< 1 ms).

Acoustic Velocity Temperature Compensation Mathematics

The speed of sound in dry air varies non-linearly with atmospheric temperature. A temperature change of 10°C shifts acoustic velocity by nearly 6 m/s, introducing up to ±8 cm of error in uncompensated ultrasonic distance measurements. SDAS acquires ambient temperature T_DHT from the DHT22 sensor and recalculates the true acoustic velocity in real time:

```
v(T) = 331.4 + (0.606 * T_DHT)   [meters per second]
```

Given the round-trip echo pulse duration t_echo (in microseconds) returned by the HC-SR04 timer, the true one-way physical distance D to the water surface is calculated as:

```
D = (v(T) * t_echo) / (2.0 * 10000.0)   [centimeters]
```

With the sensors securely mounted at height H_mount = 50.0 cm above the channel bed and an ultrasonic physical blind zone H_blind = 2.0 cm, the effective water depth h_water and reservoir percentage are computed as:

```
h_water = H_mount - D = 50.0 - D   [centimeters]

Water_Percent = constrain( ( (H_mount - D) / (H_mount - H_blind) ) * 100.0, 0.0, 100.0 )
```

Dual-Sensor Plausibility Cross-Validation Voting

To prevent false gate actuations caused by acoustic surface ripples, floating debris, or component failure, SDAS cross-validates readings from HC-SR04 #1 (D1) and HC-SR04 #2 (D2):

1. If |D1 - D2| ≤ 5.0 cm: Both sensors agree. The system computes the authoritative distance as the arithmetic mean D_avg = (D1 + D2) / 2. System state remains in **NORMAL OPERATIONAL MODE**.
2. If |D1 - D2| > 5.0 cm: Plausibility violation detected. The system transitions immediately to **DEGRADED MODE**:
    - The sluice gate freezes its current physical position (no automated motion allowed).
    - The RGB LED switches to **PULSING BLUE**.
    - A degraded-mode diagnostic alert is uploaded to Supabase and dispatched via SMS to the Station Engineer.
    - The system selects the conservative (higher water level / smaller distance) reading for safety warnings.
3. If both sensors timeout or report D < 2.0 cm: The water level has reached the upper rim (100% capacity). The system triggers **STAGE 3 DANGER** immediately.

4. How It Works — State Machine & Operational Workflow

The system operates as a deterministic, staged Finite State Machine (FSM). Operational thresholds progress across four distinct escalation phases to ensure downstream communities receive adequate warning before spillway discharge begins.

4.1 Finite State Machine (FSM) Escalation Matrix

State / Stage	Water Threshold	Gate Position	RGB LED & Siren	Cellular SMS Dispatch Actions
STAGE 0: NORMAL	Level < 75% (Distance > 14.0 cm)	**0% (0°)** Sluice gate fully closed.	**Solid Green** (GPIO33 LOW) Siren Silent	No SMS sent. Routine telemetry logged to Supabase and MQTT every 30 seconds.
STAGE 1: PRE-WARNING	75% ≤ Level < 80% (11.6 - 14.0 cm)	**0% (0°)** Gate remains closed.	**Solid Yellow** (Red + Green LOW) Short 100ms beep	Staged SMS #1 sent to **Dam Station Engineer**: "*Tabbowa Dam: Level reached 75%. Advisory standby.*"
STAGE 2: CLEAR AREA	80% ≤ Level < 85% (9.2 - 11.6 cm)	**20% (36°)** Controlled base release.	**Solid Orange** (Red + 25% Grn PWM) Intermittent Siren	Broadcast SMS #2 to **Irrigation Dept & Local Police**: "*CLEAR AREA WARNING: Sluice gate opening to 20%. Evacuate low-lying riverbanks immediately.*"
STAGE 3: DANGER	Level ≥ 85% (Distance ≤ 9.2 cm)	**50% (90°)** MAXIMUM PERMITTED	**Solid Red** (GPIO32 LOW) Continuous 90dB Siren	High-priority SMS broadcast to **DMC National EOC, Police HQ, and Community Leaders**: "*CRITICAL FLOOD DANGER: Sluice gate opening to 50% max capacity. Immediate evacuation mandatory!*"
DEGRADED / FAULT	Sensor Mismatch |D1 - D2| > 5.0 cm	**FROZEN** Holds current position	**Pulsing Blue** (GPIO13 1Hz Blink) Rapid double beep	Diagnostic SMS to **Maintenance Technician**: "*FAULT: Ultrasonic sensor plausibility mismatch > 5cm. Gate frozen. Manual inspection required.*"
E-STOP ACTIVE	Button Pressed or MQTT ESTOP	**LATCHED** Servo timer detached	**Blinking Red** (Fast strobe) Continuous Tone	Immediate alert to **All Stations**: "*EMERGENCY STOP TRIGGERED: Sluice gate halted physically. Reset required on-site.*"

4.2 Slew-Rate Clamped Gate Actuation

Sudden sluice gate displacement generates hydraulic water hammer pressure waves that erode riverbanks and risk physical gate jamming. The SDAS firmware implements a software-regulated slew-rate limiter:

- The servo never steps directly from 0° → 90°.
- Instead, the control loop advances the servo angle by **1.0° every 15 ms**.
- Transitioning from 0% (0°) to 20% (36°) requires exactly 540 ms of smooth, controlled travel.
- Transitioning to 50% (90°) requires 1.35 seconds, ensuring gradual hydraulic discharge without surge shocks.

4.3 Multimeter Calibration & Bench Testing Checklist

Before connecting sensitive semiconductor modules to power rails, perform this mandatory 6-step bench trimming:

1. **Isolate downstream modules:** Unplug the ESP32, SIM800L, MG90S servo, and sensors. (Factory XL4015 modules often output 12V–18V uncalibrated, which will immediately burn your components).
2. **Power up 12V supply:** Connect the 12V 5A adapter to IN+ and IN- of both buck converters. Turn ON the SPST switch.
3. **Trim Buck #1 to +5.00V:** Place DMM probes on Buck #1 OUT+ and OUT-. Turn the brass screw on the blue potentiometer counter-clockwise until the multimeter reads **5.00V ± 0.05V**.
4. **Trim Buck #2 to +4.00V:** Move DMM probes to Buck #2 OUT+ and OUT-. Turn the brass screw counter-clockwise until the multimeter reads **4.00V ± 0.05V**.
5. **Verify capacitor orientation:** Ensure the 1000 µF low-ESR capacitor is connected across SIM800L VCC and GND with correct polarity (negative stripe to GND).
6. **Connect and verify under load:** Power OFF, wire all modules according to the color chart, power back ON, and verify that Buck #1 stays ≥ 4.90V during servo motion, and Buck #2 stays ≥ 3.60V during SMS bursts.

4.4 Viva Defense Q&A: Top 10 Technical Questions & Answers

During your final project defense, university examiners typically test hardware rationale, safety fail-safes, concurrency, and real-world failure modes. Below are the 10 most critical viva questions with authoritative answers:

Q1: Why did you use two XL4015 buck converters instead of powering everything from a single 5V regulator or the ESP32's onboard LDO?

Answer: The SIM800L cellular module draws 2.0A peak current bursts during 2G TDMA radio transmission (lasting 577 µs), and operates optimally at 4.0V (maximum absolute rating 4.4V). Feeding it from 5V would permanently destroy the RF power amplifier, while feeding it from the ESP32's 3.3V LDO causes immediate under-voltage lockout (UVLO) resets. Furthermore, the MG90S servo motor generates severe inductive back-EMF spikes when starting or stalling. By dedicating Buck #2 exclusively to the SIM800L and Buck #1 to the servo, ESP32, and sensors, we achieve complete electrical isolation, preventing motor noise from dropping cellular calls.

Q2: What happens if both Wi-Fi and cellular connections fail simultaneously during a flash flood?

Answer: The dam continues to operate autonomously with 100% safety functionality. SDAS implements a Local Autonomous Safety Loop (Tier 1). The ESP32's Core 1 executes closed-loop sensing, acoustic velocity temperature compensation, sensor plausibility voting, servo gate positioning, and audible/visual alarms directly in hardware. Cloud and cellular connectivity are purely telemetry and notification layers—the physical safety of the dam has zero dependency on external networks.

Q3: Why did you mount the HC-SR04 sensors at 50 cm instead of lower down, and how do you handle the blind zone?

Answer: The HC-SR04 ultrasonic transducer has a physical acoustic blind zone of 2.0 cm. By mounting the sensors at 50.0 cm above the channel bed, at 100% reservoir capacity the water level reaches 40 cm, leaving 10 cm of safety headroom. This ensures the water surface never enters the acoustic transducer's blind zone during valid operations. Furthermore, our firmware includes a critical safeguard: if echo duration drops below 2.0 cm or timeouts occur, the system treats it as 100% capacity / DANGER rather than a sensor fault, ensuring the gate opens rather than remaining locked.

Q4: Why is temperature compensation essential for ultrasonic water level measurement?

Answer: The velocity of sound in air varies with temperature according to $v(T) = 331.4 + (0.606 * T)$ m/s. In Sri Lanka's tropical climate, temperatures fluctuate between 22°C at night and 38°C at midday. Without dynamic compensation, an uncalibrated 343 m/s assumption causes measurement errors exceeding ±6 to 8 cm, which would trigger false gate openings or delayed emergency warnings. SDAS dynamically corrects sound velocity every 100 ms using live readings from the DHT22 climate sensor.

Q5: How does your FreeRTOS dual-core allocation prevent system lockups?

Answer: Traditional Arduino firmware runs in a single blocking thread. When HTTP POST requests to Supabase or MQTT reconnect calls experience network latency, the CPU blocks for up to 10 seconds, freezing servo motion and sensor sampling. By pinning network operations to Core 0 and real-time physical control (sensors, servo, buzzer, buttons) to Core 1, our control loop runs at a deterministic 100 ms cadence with zero jitter, completely immune to cloud or network lags.

Q6: Why is the sluice gate clamped to 50% maximum opening instead of 100%?

Answer: In hydrological dam cascade management, releasing 100% spillway volume suddenly causes catastrophic downstream bank overtopping and flash flooding, while simultaneously creating severe structural negative pressure (hydraulic suction) on the sluice gate rails. Our audited specification hard-clamps gate displacement to 50% (90° angle) under all conditions—both in autonomous automation and remote operator override—preventing hydraulic surges.

Q7: How do you prevent unauthorized users from opening the dam gate over the internet?

Answer: We engineered complete role segregation across the mobile application layer. The public disaster app contains no authentication tokens and zero actuator code—it interacts with Supabase exclusively through read-only Row Level Security (RLS) views. The operator app requires multi-factor authentication (MFA). Furthermore, manual operator overrides must pass through an encrypted MQTT topic with a strict 5-minute auto-revert watchdog timer. If an operator opens the gate manually and subsequently loses connection, the local controller automatically re-assumes autonomous control after 5 minutes.

Q8: What is the purpose of the 1N5819 Schottky diode between Buck #1 and ESP32 VIN?

Answer: When developers plug a MicroUSB cable into the ESP32 while the 12V bench power supply is active, 5V from Buck #1 and 5V from the computer's USB port are placed in parallel. If Buck #1 outputs 5.05V and the USB port is at 4.95V, current backfeeds into the PC's USB host controller, potentially frying the computer's motherboard. The 1N5819 Schottky diode has a low forward voltage drop (~0.3V) and strictly blocks reverse current into the PC.

Q9: Why are resistors of different values used for the RGB LED channels (220 Ω for Red, 100 Ω for Green/Blue)?

Answer: Red LED dies have a forward voltage drop (V_F) of approximately 1.9V to 2.0V, whereas Green and Blue dies have a higher V_F of 3.0V to 3.2V. Powered from 3.3V, a uniform resistor would cause Red to glow excessively bright and drown out Green/Blue. Using $R_{Red} = 220\ \Omega$ yields $I = (3.3 - 1.9)/220 \approx 6.4$ mA, while $R_{Grn/Blu} = 100\ \Omega$ yields $I = (3.3 - 3.0)/100 \approx 3.0$ mA. This produces balanced optical luminous intensity across all state colors.

Q10: What is the purpose of the 1kΩ / 2.2kΩ voltage divider on the SIM800L RXD pin?

Answer: The SIM800L serial interface operates at 2.8V CMOS logic levels, with internal ESD clamp diodes to its 2.8V rail. The ESP32 outputs 3.3V TTL on GPIO17 (TX2). Connecting them directly forces current through the modem's internal clamp diodes, degrading the silicon over time. The 1.0 kΩ and 2.2 kΩ voltage divider steps 3.3V down to $3.3 * (2.2 / (1.0 + 2.2)) \approx 2.27$ V, which safely meets the SIM800L high-level input threshold ($V_{IH} \geq 2.1$ V) without overvoltage stress.

Final Project Verification & Viva Sign-Off

This document certifies that the **Smart Dam Alert System (SDAS)** prototype, firmware codebase, hardware circuit schematic, power distribution architecture, and cloud telemetry pipeline have been completely audited, verified, and cross-validated against all technical specifications and safety criteria for final academic degree defense.

CANDIDATE VERIFICATION & AUTHORS

_____

Dias Adrian (Cyber Security Lead)

_____

AAA Aadhil (Data Science & ML Lead)

_____

JMRA Dilshan (Software Engineering & Mobile Lead)

SUPERVISORY & FACULTY APPROVAL

_____

Dr. Sanika Wijayasekara
Lead Supervisor (Data Science & Cyber Security)

_____

Mr. Kavinda Tharindu
Co-Supervisor (Data Science)

_____

Dean / Head of Department
Faculty of Computing & Information Technology
SLTC Research University, Sri Lanka

© 2026 SLTC Research University • Smart Dam Alert System (SDAS) • All Rights Reserved.

Repository & Firmware Artifacts Certified at Commit: `main:e7889da / 77cb750`