

1. Description


1.1. Project

Project Name	note-stm32f1
Board Name	NUCLEO-F103RB
Generated with:	STM32CubeMX 5.3.0
Date	10/01/2019

1.2. MCU

MCU Series	STM32F1
MCU Line	STM32F103
MCU name	STM32F103RBTx
MCU Package	LQFP64
MCU Pin number	64

2. Pinout Configuration

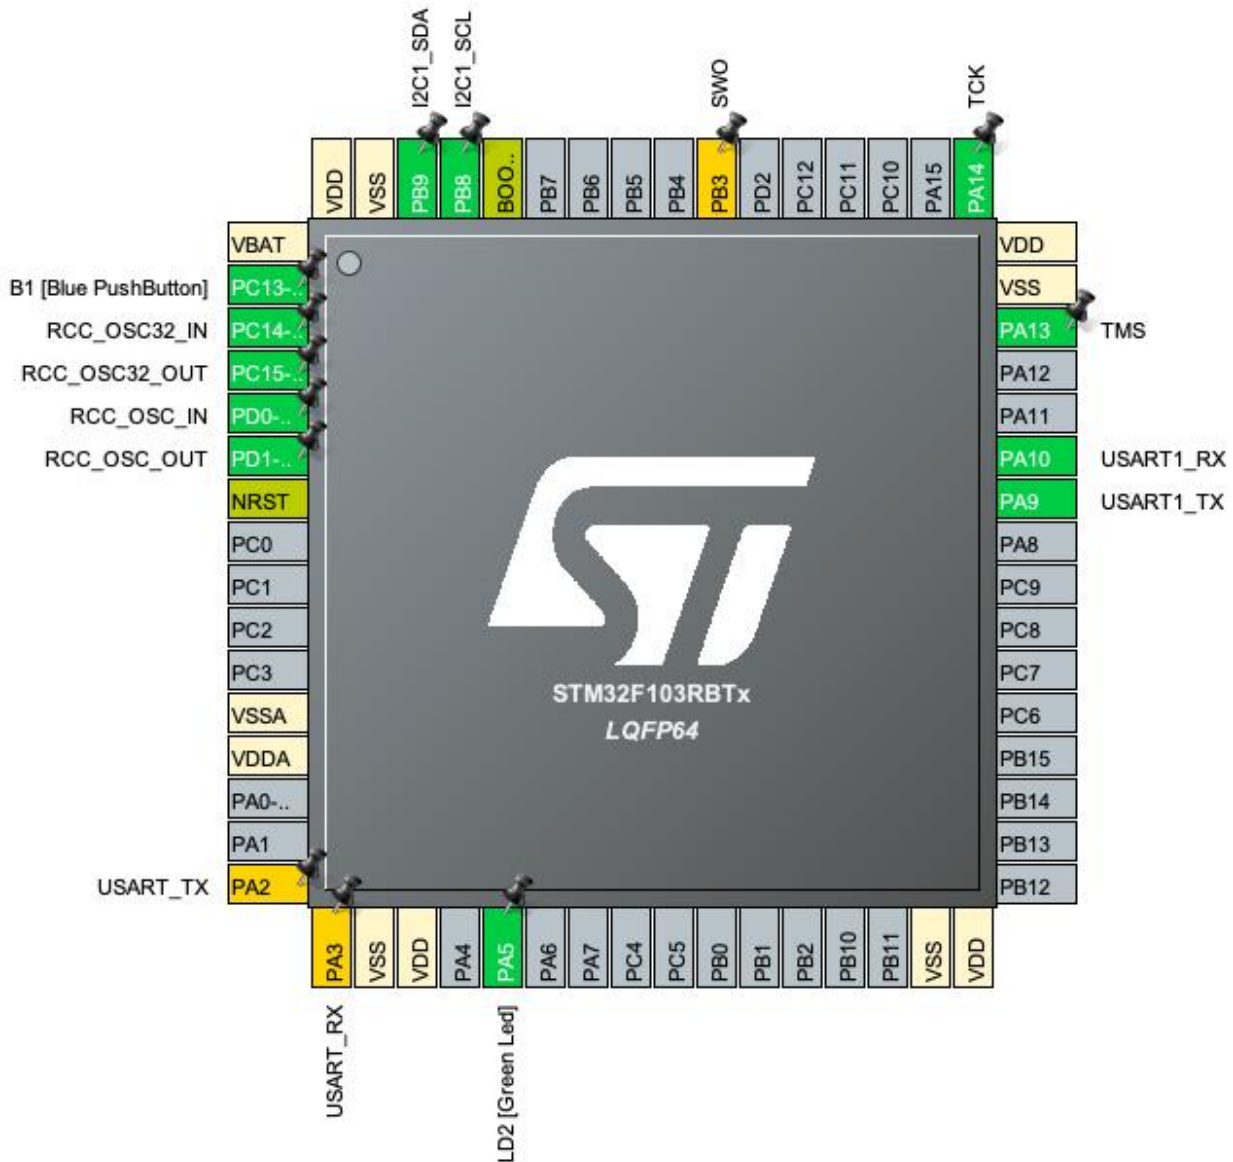


3. Pins Configuration

Pin Number LQFP64	Pin Name (function after reset)	Pin Type	Alternate Function(s)	Label
1	VBAT	Power		
2	PC13-TAMPER-RTC	I/O	GPIO_EXTI13	B1 [Blue PushButton]
3	PC14-OSC32_IN	I/O	RCC_OSC32_IN	
4	PC15-OSC32_OUT	I/O	RCC_OSC32_OUT	
5	PD0-OSC_IN	I/O	RCC_OSC_IN	
6	PD1-OSC_OUT	I/O	RCC_OSC_OUT	
7	NRST	Reset		
12	VSSA	Power		
13	VDDA	Power		
16	PA2 *	I/O	USART2_TX	USART_TX
17	PA3 *	I/O	USART2_RX	USART_RX
18	VSS	Power		
19	VDD	Power		
21	PA5 **	I/O	GPIO_Output	LD2 [Green Led]
31	VSS	Power		
32	VDD	Power		
42	PA9	I/O	USART1_TX	
43	PA10	I/O	USART1_RX	
46	PA13	I/O	SYS_JTMS-SWDIO	TMS
47	VSS	Power		
48	VDD	Power		
49	PA14	I/O	SYS_JTCK-SWCLK	TCK
55	PB3 *	I/O	SYS_JTDO-TRACESWO	SWO
60	BOOT0	Boot		
61	PB8	I/O	I2C1_SCL	
62	PB9	I/O	I2C1_SDA	
63	VSS	Power		
64	VDD	Power		

** The pin is affected with an I/O function

* The pin is affected with a peripheral function but no peripheral mode is activated

4. Clock Tree Configuration

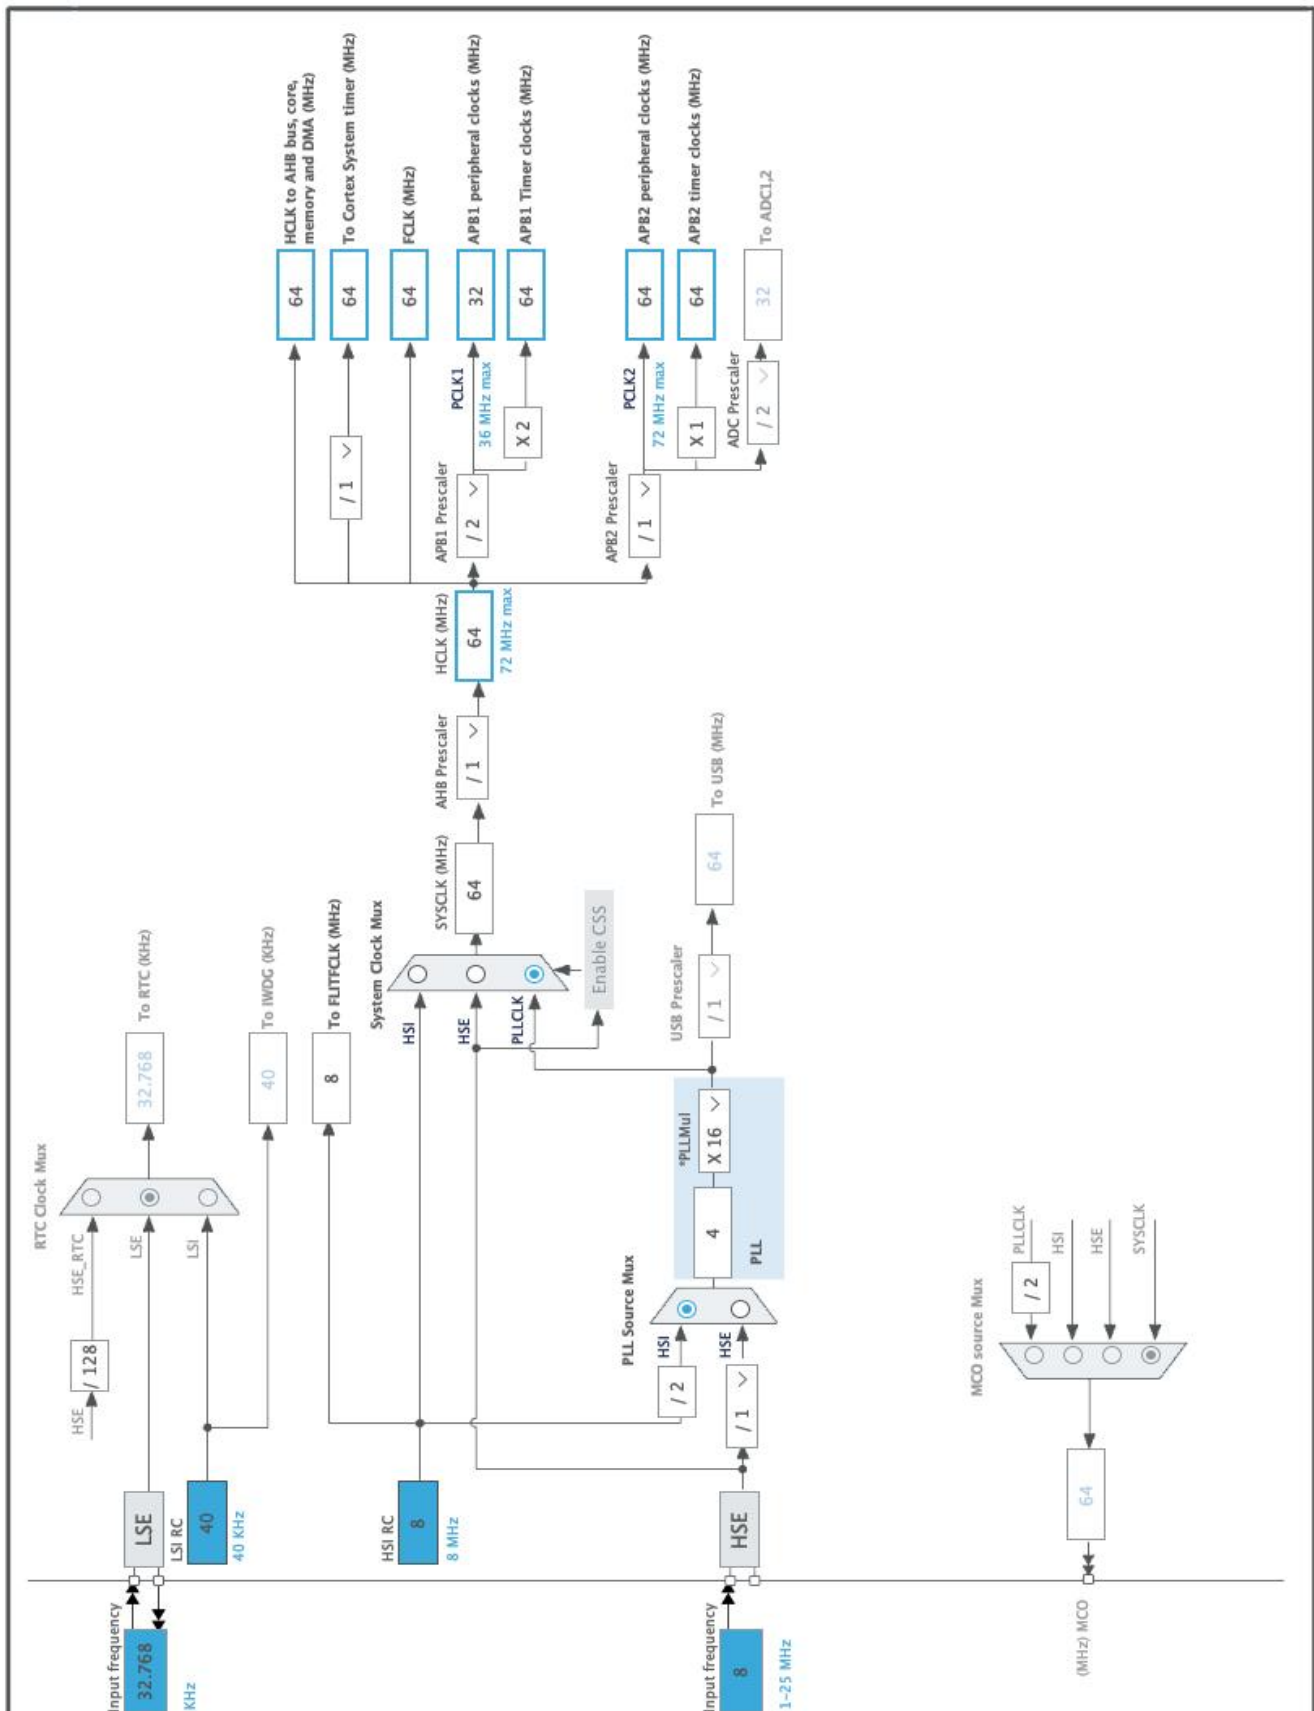

5. Software Project

5.1. Project Settings

Name	Value
Project Name	note-stm32f1
Project Folder	/Users/rozzie/dev/cube/note-stm32f1
Toolchain / IDE	STM32CubeIDE
Firmware Package Name and Version	STM32Cube FW_F1 V1.8.0

5.2. Code Generation Settings

Name	Value
STM32Cube MCU packages and embedded software	Copy only the necessary library files
Generate peripheral initialization as a pair of '.c/.h' files	No
Backup previously generated files when re-generating	No
Delete previously generated files when not re-generated	Yes
Set all free pins as analog (to optimize the power consumption)	No

6. Power Consumption Calculator report

6.1. Microcontroller Selection

Series	STM32F1
Line	STM32F103
MCU	STM32F103RBTx
Datasheet	13587_Rev17

6.2. Parameter Selection

Temperature	25
Vdd	3.3

7. IPs and Middleware Configuration

7.1. I2C1

I2C: I2C

7.1.1. Parameter Settings:

Master Features:

I2C Speed Mode	Standard Mode
I2C Clock Speed (Hz)	100000

Slave Features:

Clock No Stretch Mode	Disabled
Primary Address Length selection	7-bit
Dual Address Acknowledged	Disabled
Primary slave address	0
General Call address detection	Disabled

7.2. RCC

High Speed Clock (HSE): BYPASS Clock Source

Low Speed Clock (LSE) : Crystal/Ceramic Resonator

7.2.1. Parameter Settings:

System Parameters:

VDD voltage (V)	3.3
Prefetch Buffer	Enabled
Flash Latency(WS)	2 WS (3 CPU cycle)

RCC Parameters:

HSI Calibration Value	16
HSE Startup Timeout Value (ms)	100
LSE Startup Timeout Value (ms)	5000

7.3. SYS

Debug: Serial Wire

Timebase Source: SysTick

7.4. USART1

Mode: Asynchronous

7.4.1. Parameter Settings:

Basic Parameters:

Baud Rate	9600 *
Word Length	8 Bits (including Parity)
Parity	None
Stop Bits	1

Advanced Parameters:

Data Direction	Receive and Transmit
Over Sampling	16 Samples

* User modified value

8. System Configuration

8.1. GPIO configuration

IP	Pin	Signal	GPIO mode	GPIO pull/up pull down	Max Speed	User Label
I2C1	PB8	I2C1_SCL	Alternate Function Open Drain	n/a	High *	
	PB9	I2C1_SDA	Alternate Function Open Drain	n/a	High *	
RCC	PC14-OSC32_IN	RCC_OSC32_IN	n/a	n/a	n/a	
	PC15-OSC32_OUT	RCC_OSC32_OUT	n/a	n/a	n/a	
	PD0-OSC_IN	RCC_OSC_IN	n/a	n/a	n/a	
	PD1-OSC_OUT	RCC_OSC_OUT	n/a	n/a	n/a	
SYS	PA13	SYS_JTMS-SWDIO	n/a	n/a	n/a	TMS
	PA14	SYS_JTCK-SWCLK	n/a	n/a	n/a	TCK
USART1	PA9	USART1_TX	Alternate Function Push Pull	n/a	High *	
	PA10	USART1_RX	Input mode	No pull-up and no pull-down	n/a	
Single Mapped Signals	PA2	USART2_TX	Alternate Function Push Pull	n/a	Low	USART_TX
	PA3	USART2_RX	*	No pull-up and no pull-down	n/a	USART_RX
	PB3	SYS_JTDO-TRACESWO	n/a	n/a	n/a	SWO
GPIO	PC13-TAMPER-RTC	GPIO_EXTI13	External Interrupt Mode with Rising edge trigger detection	No pull-up and no pull-down	n/a	B1 [Blue PushButton]
	PA5	GPIO_Output	Output Push Pull	No pull-up and no pull-down	Low	LD2 [Green Led]

8.2. DMA configuration

nothing configured in DMA service

8.3. NVIC configuration

Interrupt Table	Enable	Preenmption Priority	SubPriority
Non maskable interrupt	true	0	0
Hard fault interrupt	true	0	0
Memory management fault	true	0	0
Prefetch fault, memory access fault	true	0	0
Undefined instruction or illegal state	true	0	0
System service call via SWI instruction	true	0	0
Debug monitor	true	0	0
Pendable request for system service	true	0	0
System tick timer	true	0	0
I2C1 event interrupt	true	0	0
I2C1 error interrupt	true	0	0
USART1 global interrupt	true	0	0
EXTI line[15:10] interrupts	true	0	0
PVD interrupt through EXTI line 16	unused		
Flash global interrupt	unused		
RCC global interrupt	unused		

* User modified value

9. Software Pack Report