

# Exploring the self capacitance of single-layer solenoid inductors with the TSSP's VSD

Bart H. McGuyer

<https://bartmcguyer.com/notes/note-14-SelfCapTSSP.pdf>

(Dated: April 26, 2021. Revision: December 15, 2025.)

**TL;DR:** Tests of simple models for the self capacitance of single-layer solenoid inductors based on low-frequency capacitance or unloaded resonances using numerical results from the Tesla Secondary Simulation Project's Virtual Secondary Database.

## CONTENTS

|                                                                                          |    |
|------------------------------------------------------------------------------------------|----|
| <b>I. Setup</b>                                                                          | 2  |
| <b>II. Simple models</b>                                                                 | 3  |
| A. Approach                                                                              | 3  |
| B. Model using uniform capacitance (Miller self-capacitance)                             | 5  |
| C. Model using unloaded resonant frequencies and $L_s$                                   | 6  |
| D. Correcting for missing gradient energy                                                | 7  |
| <b>III. TSSP's Virtual Secondary Database</b>                                            | 7  |
| A. Extracting $C_0$ , $C_{\text{load}}$ , and $C_{\text{self}}$                          | 8  |
| B. Applicability of $C_{\text{self}}$ models                                             | 9  |
| C. Comparing $C_{\text{self}}$ with Medhurst                                             | 10 |
| D. Comparing $C_{\text{self}}$ with simple models                                        | 10 |
| <b>IV. Additional tests</b>                                                              | 11 |
| A. Using theoretical capacitances                                                        | 11 |
| B. Using experimental measurements                                                       | 11 |
| <b>V. Discussion</b>                                                                     | 13 |
| <b>A. Medhurst accuracy notes</b>                                                        | 14 |
| <b>B. Literature quotes</b>                                                              | 15 |
| <b>C. Partial exploration of future work</b>                                             | 15 |
| 1. Extracting $C_{\text{top}}$ using resonant frequencies                                | 15 |
| a. Support for artificially inflating $C_{f1}$                                           | 16 |
| 2. Formulas to estimate $C_{\text{top}}$ for Tesla coil toroids                          | 17 |
| 3. Test of $C_{\text{self}}$ and $C_{\text{top}}$ estimates with Tesla coil measurements | 19 |
| a. Discrepancy between $C_{\text{total}}$ from VSD and from measurements                 | 21 |

## I. SETUP

Consider a solenoid arranged as shown in Fig. 1(a). Let the solenoid be a single layer of wire reasonably close-wound around a cylindrical dielectric form that's insulating and non-magnetic. Let the solenoid be grounded at one end and connected in parallel with an ideal lumped capacitive load  $C_{\text{load}}$ . What's the lowest resonant frequency  $f_1$  of this setup, say, if you were to excite it inductively or with an ideal signal generator?

The traditional approach to estimate  $f_1$  is to model the setup with the lumped-element equivalent circuit shown in Fig. 1(b), which is known as the “classic” model of an inductor.<sup>1,2</sup> For simplicity, let  $R_s = 0$  and ignore any other sources of loss going forward. This series RLC circuit then predicts resonance at a frequency

$$f_1 = \frac{1}{2\pi\sqrt{L_s(C_{\text{self}} + C_{\text{load}})}} \quad (1)$$

given by an inductance  $L_s$  and a total capacitance that is the sum of  $C_{\text{load}}$  and a correction  $C_{\text{self}}$  from the solenoid. By convention,  $L_s$  is the low-frequency inductance of the solenoid.

Empirically, it was discovered at least as early as 1911 that the self-capacitances  $C_{\text{self}}$  of single-layer solenoids are practically constant for reasonably large  $C_{\text{load}}$ .<sup>3</sup> Surprisingly, there is still no accepted analytical model for this empirical  $C_{\text{self}}$ , even after more than a century of attention in the scientific and engineering literature.<sup>4</sup> Today, this unresolved subject is mostly an intriguingly stubborn curiosity, because numerical modeling can estimate  $f_1$  in any important modern application. Nevertheless, it's compelling to explore for fun.

This Note attempts to “demystify”  $C_{\text{self}}$  by exploring a few simple analytical models for it using numerical results available in the Tesla Secondary Simulation Project's Virtual Secondary Database (TSSP's VSD).<sup>5</sup> The approach here does not attempt to derive  $C_{\text{self}}$  from first principles, but instead connects it to other observables that can be measured or numerically estimated. This approach circumvents a potentially important issue, which

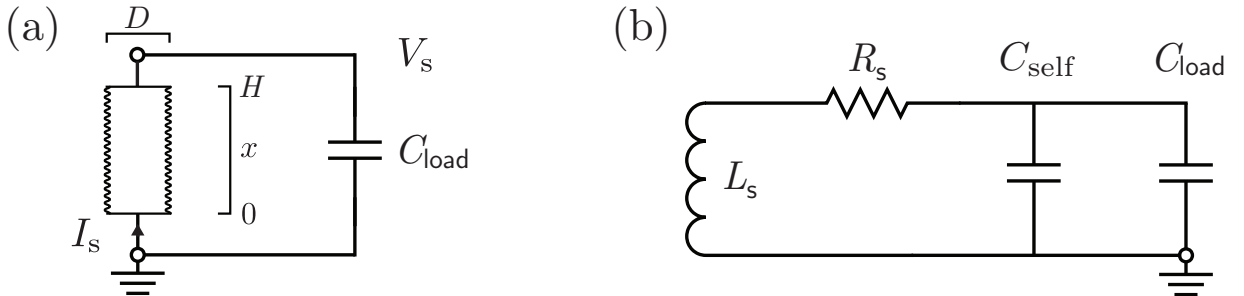


FIG. 1. Solenoid self-capacitance. (a) Physical setup of a grounded solenoid inductor with a lumped capacitive load  $C_{\text{load}}$ . (b) Equivalent circuit intended only to determine the lowest resonant frequency  $\omega_1 = 2\pi f_1$ , which includes a “self-capacitance”  $C_{\text{self}}$  for the solenoid in addition to resistance  $R_s$  and self-inductance  $L_s$ .

is that the usual problem setup as outlined above isn't fully specified: In practice, the solenoid in Fig. 1(a) is perturbed by an undefined environment, including any leads. In a transmission-line perspective, the solenoid is only one wire of a fundamental pair, and there are no explicit constraints for the second wire. While a full derivation would have to address these details directly, the approach here approximately includes them indirectly through their influence on the observables used as inputs.

Additionally, this Note explores the most widely used estimate for  $C_{\text{self}}$ , the Medhurst empirical formula from 1947,<sup>6</sup>

$$C_{\text{Medhurst}} = \left( 0.1126 \frac{H}{D} + 0.08 + 0.27 \sqrt{\frac{D}{H}} \right) D \text{ pF/cm}, \quad (2)$$

which is essentially synonymous with  $C_{\text{self}}$ . What's particularly remarkable about this formula and its longevity is that it implies the only important variables in practice are the solenoid's length (or height)  $H$  and diameter  $D$ . While its accuracy is not known (see Appendix A), it seems to be widely regarded as trustworthy. There are no standard corrections for the environment, dielectrics (including the coil form and wire insulation), or other potentially relevant details, though estimates are available.<sup>7</sup>

## II. SIMPLE MODELS

This section presents the two simplest models I'm aware of for  $C_{\text{self}}$ , along with some variations. Each assumes we can compute  $C_{\text{self}}$  as the quasistatic capacitive energy stored by the solenoid when it has an approximately linear voltage distribution. The first model uses the uniform-voltage capacitance  $C_0$  as an observable, and the second model uses the unloaded ( $C_{\text{load}} = 0$ ) resonant frequencies  $f'_\nu$  along with  $L_s$  as observables. Both need a correction to approximately include energy stored directly by the voltage gradient.

The justification for this assumption is that the value of  $C_{\text{self}}$  is supposed to be constant for  $C_{\text{load}} \gg C_{\text{self}}$ . In the lumped regime of  $C_{\text{load}}$  approaching infinity, the current in the solenoid becomes very nearly spatially uniform, so the voltage  $V(x, t)$  at any position  $x \in [0, H]$  along its length should vary approximately linearly,  $V(x, t) \approx (x/H)V_s(t)$ , at least for solenoids that are not short ( $H \gtrsim D$ ). Additionally, in this regime, some subtleties with nonuniqueness of circuit parameters and misrepresentation of energy should be negligible, so we shouldn't have to worry about competing definitions of capacitance.<sup>8,13</sup>

However, the TSSP's VSD entries do not satisfy  $C_{\text{load}} \gg C_{\text{self}}$ . Nevertheless, the approach here still applies because both its extracted values of  $C_{\text{self}}$  represent energy well, as we'll see below, and its entries are said to have approximately linear voltage profiles.<sup>5</sup>

### A. Approach

Following the notation and conventions of Ref. 9, the stored energy can be modeled using the distributed capacitances  $c(x_n, x_j) \approx C_{nj}/h^2 = -\mathbb{C}_{nj}/h^2$  and  $c(x_n) = -\int_0^H c(x_n, y)dy \approx C_n/h = \sum_{j=1}^N \mathbb{C}_{nj}/h$ , where  $C_{nj}$  is a mutual capacitance between the  $n$ -th and  $j$ -th turns

in a discrete network model of  $N$  turns,  $h = H/N$  is a uniform turn spacing, and  $\mathbb{C}$  is the capacitance matrix of electrostatics. This leads to a theory definition of

$$C_{\text{self}} = - \int_0^H \int_0^H c(x, y) \langle V(x, t) V(y, t) \rangle dx dy \Big/ \langle V(H, t)^2 \rangle \quad (3)$$

(c.f.,  $C_U$  on p. 9 of Ref. 9), where brackets denote a time average. Approximating the voltage as varying linearly gives an expression that separates into a sum of two terms,

$$C_{\text{self}} \approx C_{\text{linear}} = - \int_0^H \int_0^H c(x, y) \left( \frac{x}{H} \right) \left( \frac{y}{H} \right) dx dy \quad (4)$$

$$= \frac{1}{H^2} \int_0^H c(x) x^2 dx \quad (5)$$

$$+ \frac{1}{2H^2} \int_0^H \int_0^H c(x, y) (x - y)^2 dx dy. \quad (6)$$

As discussed in Ref. 9, the first term (5) provides an approximate lower bound for  $C_{\text{self}}$  and the second term (6) is a positive correction for excluded gradient energy that is expected to be small for long solenoids.

The next two sections present estimates for the lower-bound term (5). To simplify things as much as possible, both models assume a uniformly distributed capacitance

$$c(x) \approx c = \frac{1}{H} \int_0^H c(x) dx. \quad (7)$$

The third section then presents an estimate for the gradient-energy term (6).

Before we continue, note that we could also estimate an upper bound for  $C_{\text{self}}$  as follows. At first, it's tempting to consider the uniform-voltage capacitance

$$C_0 = - \int_0^H \int_0^H c(x, y) dx dy = \int_0^H c(x) dx = cH \quad (8)$$

as an upper bound, but this fails because  $c(x, y)$  is negative near the diagonal  $x \approx y$  and positive elsewhere.<sup>9</sup> However, keeping only the diagonal contributions produces an upper bound. This is clear rewriting (4) in a discrete network form following Ref. 9:

$$C_{\text{linear}} \approx - \sum_{n=1}^N \sum_{j=1}^N C_{nj} \left( \frac{x_n}{H} \right) \left( \frac{x_j}{H} \right) \quad (9)$$

where  $x_n = nh$ . Noting that  $C_{nj}$  is positive for  $n \neq j$  but negative for  $n = j$  gives

$$C_{\text{linear}} \approx - \sum_{n=1}^N \sum_{j=1}^N C_{nj} \left( \frac{nj}{N^2} \right) \leq - \sum_{n=1}^N C_{nn} \left( \frac{n}{N} \right)^2 \leq - \sum_{n=1}^N C_{nn} = \sum_{n=1}^N \mathbb{C}_{nn}. \quad (10)$$

Each coefficient of capacity  $\mathbb{C}_{nn}$  is the positive self-capacitance of the  $n$ -th turn when all other turns are grounded. These capacitances could be estimated numerically<sup>9</sup> or analytically<sup>10</sup> to construct an approximate upper bound for  $C_{\text{self}}$ .



## B. Model using uniform capacitance (Miller self-capacitance)

The first model uses the uniform-voltage capacitance  $C_0$  of (8) as an observable, which is experimentally and numerically accessible. Multiplying (5) by  $C_0/C_0$  and using (8) to rewrite  $C_0$  in the denominator gives the lower bound

$$C_{\text{self}} \geq \int_0^H c(x)(x/H)^2 dx = \frac{\int_0^H c(x)(x/H)^2 dx}{\int_0^H c(x) dx} C_0. \quad (11)$$

For uniform  $c(x) = c$ , this lower bound evaluates to the remarkably simple result

$$C_{\text{Miller}} = \frac{1}{3} C_0. \quad (12)$$

This model was presented at least as early as 1918 by J. M. Miller,<sup>11,12</sup> the famous electrical engineer after whom the “Miller capacitance” in amplifiers is named. I’ve called this the Miller self-capacitance of a solenoid in three previous notes: Ref. 9 provides background and an alternate version of the above derivation; Ref. 13 provides a detailed transmission-line derivation of it; and Ref. 14 experimentally demonstrated it in controlled conditions.

For real solenoids, the shape of  $c(x)$  controls whether the Miller self-capacitance (12) overestimates or underestimates the lower bound (11). This is because  $c(x)$  tends to resemble a bathtub shape with sharp peaks near the edges at  $x = 0$  and  $H$ , whose details depend sensitively on the environment. Exploring shapes numerically, it seems reasonable to expect  $C_{\text{Miller}}$  to be a slight underestimate for a typical free solenoid with symmetric peaks [ $c(x) = c(H - x)$ ]. However, if the bottom end ( $x = 0$ ) is near a ground plane, then the bottom peak likely contributes significantly more (c.f. Fig. 3 of Ref. 15), which seems to make  $C_{\text{Miller}}$  an overestimate. Conversely, a dominant contribution from the top peak seems likely to make  $C_{\text{Miller}}$  an underestimate.

Note that the factor of  $1/3$  estimates how much energy is stored by a linear voltage distribution compared to a uniform distribution. In principle, this factor could be improved by replacing it with a function that gives the exact ratio of these energies, say as a function of  $H$  and  $D$  for a free solenoid approximated as a cylinder with conductive endcaps. However, you would still need to account for the environment, directly or indirectly. This refinement is beyond the scope of this Note and its simple models, but might be worth future exploration.

Later, we’ll compare  $C_{\text{Miller}}$  and  $C_{\text{Medhurst}}$  using two standard theoretical  $C_0$  values,<sup>16</sup>

$$C_{\text{Butler}} = \begin{cases} 2\pi^2 D \epsilon_0 / \ln(16D/H) & H/D \lesssim 4 \\ -2\pi H \epsilon_0 / [1 + \ln(D/(4H))] & H/D \gtrsim 4 \end{cases} \quad (13)$$

$$C_{\text{Smythe}} = \epsilon_0 D [4.00 + 3.475(H/D)^{0.76}]. \quad (14)$$

These assume no dielectrics and no nearby conductors.  $C_{\text{Butler}}$  is the capacitance of a hollow tube and should be widely applicable (Ref. 16 examined it for  $1/4 < H/D < 200$  and found a worst error of about 4%).  $C_{\text{Smythe}}$  is the capacitance of a solid right cylinder with conductive endcaps and is meant only for  $1/8 < H/D < 8$ .

### C. Model using unloaded resonant frequencies and $L_s$

The second model uses the unloaded ( $C_{\text{load}} = 0$ ) resonant frequencies  $f'_\nu$  and  $L_s$  as observables. Following the approach of Ref. 8 and assuming  $c(x) = c$ , the lower-bound term (5) is equivalent to

$$C_{\text{freq}} = \frac{2}{\pi^4 L_s} \sum_{\nu=1}^{\infty} \frac{1}{[(2\nu-1)f'_\nu]^2}, \quad (15)$$

where  $\nu$  indexes the unloaded quarter-wave resonances with increasing frequency. I don't think I've seen this model, or its variations below, presented elsewhere.

The derivation of (15) follows from Ref. 8 after expanding a linear voltage spatial distribution with a quarter-wave Fourier series,

$$V(x, t) = \left(\frac{x}{H}\right) V_s(t) = V_s(t) \sum_{\nu=1}^{\infty} a_\nu \sin(k_\nu x), \quad (16)$$

where  $k_\nu = (2\nu-1)\pi/(2H)$ . The coefficients evaluate to  $a_\nu = (-1)^{\nu+1} 8/[\pi(2\nu-1)]^2$ . Using this series, its orthogonality, and  $c(x) \approx c$ , (5) becomes

$$\int_0^H c(x) (x/H)^2 dx = \sum_{\nu=1}^{\infty} \sum_{\mu=1}^{\infty} a_\nu a_\mu \int_0^H c(x) \sin(k_\nu x) \sin(k_\mu x) dx \approx \sum_{\nu=1}^{\infty} a_\nu^2 C_\nu^U \quad (17)$$

where  $C_\nu^U = cH/2$ . Then, rewriting  $C_\nu^U = (C_\nu^U/C_\nu)(L_s/L_\nu)(L_\nu C_\nu)/L_s$  and using  $C_\nu/c = L_\nu/l = 1/k_\nu$ ,  $L_s = lH$ , and  $L_\nu C_\nu = 1/(2\pi f'_\nu)^2$  gives (15). Intuitively, this follows from the unloaded resonances sampling  $c(x) \approx c$  with different orthogonal basis functions for the voltage, which lets us reconstruct a linear voltage distribution. It might be possible to extend this approach to handle nonuniform  $c(x)$  using some knowledge of the actual voltage and current spatial profiles during the resonances.

In practice, only the first or the first few frequencies  $f_\nu$  are usually known. Partial sums including only a few known terms, such as

$$C_{f1} = \frac{2}{\pi^4 L_s} \left( \frac{1}{f_1'^2} \right) \quad (18)$$

$$C_{f123} = \frac{2}{\pi^4 L_s} \left( \frac{1}{f_1'^2} + \frac{1}{9f_2'^2} + \frac{1}{25f_3'^2} \right) \quad (19)$$

that will be used later, are variations of (15) and also lower bounds for it. Roughly, these should be decent models because the significance of the terms decrease rapidly: For a uniform transmission line,  $f'_\nu = (2\nu-1)f'_1$ . Using this to complete the sum, the fractional contributions of the first three terms are  $\{0.9855, 0.0122, 0.0016, \dots\}$ . Correcting for excluded terms gives the additional variations

$$C_{f1\text{inf}} = 1.015 C_{f1} \quad (20)$$

$$C_{f123\text{inf}} = 1.007 C_{f123}, \quad (21)$$

which show how little correction is expected for an ideal line. Solenoids are not ideal, of course, so we'll return to examine experimental data for  $f_\nu$  near the end of this Note.

For real solenoids, and as discussed for  $C_{\text{Miller}}$  above, the shape of  $c(x)$  controls whether  $C_{\text{freq}}$  or its variations overestimate or underestimate the lower bound (5). Roughly speaking, though,  $C_{\text{freq}}$  should likely be less sensitive than  $C_{\text{Miller}}$  to this shape, because it uses a quarter-wave sine series instead of uniform and parabolic weights to sample  $c(x)$ . In particular, the dominant contribution comes from the fundamental resonance ( $\nu = 1$ ) that closely resembles a linear voltage distribution.

Note that the factor of  $L_s$  in (15) cancels when using this model for  $C_{\text{self}}$  in (1), giving

$$f_1 = \frac{1}{2\pi\sqrt{L_s C_{\text{load}} + 2\pi^{-4} \sum_{\nu=1}^{\infty} [(2\nu-1)f'_\nu]^{-2}}} \approx \frac{1}{2\pi\sqrt{L_s C_{\text{load}} + 2(\pi^2 f'_1)^{-2}}}. \quad (22)$$

#### D. Correcting for missing gradient energy

The first term (5) and the models given above that come from it neglect some energy stored directly by voltage gradients captured in the second term (6). This is because they are based on the distributed capacitance  $c(x)$  that assumes no gradient by construction. For example, for a long solenoid with conductive endcaps,  $c(x)$  assumes there is no energy stored by electric fields inside the solenoid interior. However, for a nearly linear voltage distribution, the field in the interior would resemble that of an ideal parallel-plate capacitor, clearly storing energy. Similarly, the fields outside the solenoid would be different than assumed by  $c(x)$ . All of these effects are captured by  $c(x, y)$  in (6).

Therefore, a crude underestimate for the missing gradient energy (6) is the energy stored by an ideal parallel-plate capacitor filling the solenoid interior,

$$C_{\text{pp}}(\epsilon_r) = \frac{\epsilon_r \epsilon_0 \pi D^2}{4H}, \quad (23)$$

where the relative permittivity  $\epsilon_r$  accounts for the coil form or any other dielectrics in the interior and  $\epsilon_0$  is the vacuum permittivity. This capacitance can be added as a correction to the models given above. (“Plus” indicates this in some plots.) As a correction, it should be reasonable for long coils ( $H \geq D$ ) or coils with endcaps. It's an underestimate because it does not attempt to correct for gradient energy in the exterior. For more on this correction, please see Ref. 9. Ref. 17 uses it to estimate a dispersion-relation parameter.

Later below we'll explore this correction in comparisons of  $C_{\text{Miller}}$  and  $C_{\text{Medhurst}}$  using theoretical values for  $C_0$ . We'll see that such gradient energy likely helps create the local minimum observed in  $C_{\text{Medhurst}}/D$  versus  $H/D$  near  $H/D \approx 1$ . While the approach here is crude, the detailed modeling in Ref. 18 adds a similar correction, the capacitance between two rings representing the solenoid ends, to a sheath-helix model to explain this local minimum.

### III. TSSP'S VIRTUAL SECONDARY DATABASE

The TSSP's Virtual Secondary Database (VSD) contains the results of electromagnetic simulations of a broad range of typical “secondary coil” arrangements for Tesla transformers

(or Tesla coils). Each simulation modeled a single-layer solenoid suspended vertically above a ground plane, with or without a toroidal top electrode (or topload). The database and its documentation are available online in Ref. 5.

The VSD contains 13,578 entries formed by varying seven parameters: solenoid length  $H \in [0.1, 3.179]$  m (16 values), solenoid diameter  $D$  (6 values of  $H/D \in [1, 10]$ ), solenoid base height  $B$  above the ground plane (units of  $H$ , 3 values), wire size (4 values), wire spacing (3 values), toroid outer diameter  $TD$  (units of  $H$ , 2 values or no toroid), and height  $TB$  of the toroid central plane above the solenoid's top (units of  $H$ , 2 values or no toroid). I've kept the notation the same except for capitalization.

As best as I can tell, the VSD entries did not model any dielectrics such as coil forms.

### A. Extracting $C_0$ , $C_{\text{load}}$ , and $C_{\text{self}}$

The VSD provides nearly all parameters of interest, but does not explicitly provide the main capacitances we need. This is the approach used here to extract them:

For each “loaded” entry that includes a toroid electrode there is a corresponding “unloaded” entry that is identical except for having no electrode. Both entries contain a bulk low-frequency capacitance  $C_{\text{dc}}$ . The value of  $C_{\text{dc}}$  from the unloaded entry provides an estimate of

$$C_0 \approx C_{\text{dc}}(\text{unloaded}). \quad (24)$$

The value of  $C_{\text{dc}}$  from the loaded entry is the capacitance of both the solenoid and electrode as a single conductor. Together, these two values provide an estimate of

$$C_{\text{load}} \approx C_{\text{top}} = C_{\text{dc}}(\text{loaded}) - C_{\text{dc}}(\text{unloaded}) \quad (25)$$

for the electrode of the loaded entry. (Many thanks to Paul Nicholson for suggesting this approach.) Let's call this quantity  $C_{\text{top}}$  to flag that the separation of  $C_0$  and  $C_{\text{top}}$  isn't ideal. That is, the proximity of the electrode to the solenoid likely perturbs the true value of  $C_0$  for the loaded entry away from the value of the unloaded entry. Thus, there is some slight error expected in both  $C_0$  and  $C_{\text{top}}$  when extracted this way. Relatedly, the VSD includes capacitive coupling between the electrode and solenoid that's assumed negligible in Fig. 1.

Note that the extracted values of  $C_{\text{top}}$  generally differ significantly from the typical formulas used for the electrostatic self-capacitance of isolated toroidal electrodes. Fig. 2 shows that this is likely due to various factors. (For more on this, see Appendix C.)

Finally, we can estimate an effective  $C_{\text{self}}$  satisfying (1) for the loaded entry as

$$C_{\text{self}} \approx \frac{1}{L_{\text{dc}}[2\pi f_1(\text{loaded})]^2} - C_{\text{top}} \quad (26)$$

where  $f_1$  is the calculated fundamental resonant frequency from the loaded entry and  $L_{\text{dc}} = L_s$  is the low-frequency inductance from either entry. Again, this extracted value likely inherits error from  $C_{\text{top}}$  as discussed above.

This extraction succeeded for 10,827 pairs of loaded and unloaded entries in the VSD, providing a dataset for the analysis below. For each solenoid and ground plane arrangement, this dataset has four  $C_{\text{top}}$  variations from the different combinations of  $TB$  and  $TD$ .

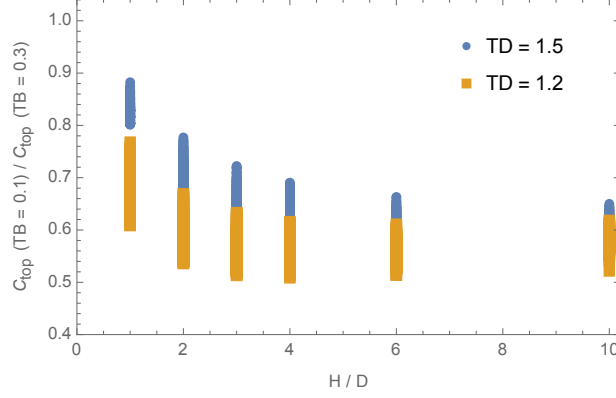


FIG. 2. Ratio of the extracted capacitance  $C_{\text{top}}$  of (25) for identical toroid electrodes at two different heights TB above the solenoid. Raising the height generally decreases  $C_{\text{top}}$  by up to almost half, depending on  $H/D$  and the toroid diameter TD. The overlap of thousands of data points covering all parametric variations gives the appearance of lines at each discrete value of  $H/D$  used in the VSD. Data points for different TD overlap significantly at large  $H/D$ .

## B. Applicability of $C_{\text{self}}$ models

As warned above, at first glance it doesn't seem like we can use the VSD to study  $C_{\text{self}}$  because we're not in the "Howe" regime: Fig. 3 shows that the loaded VSD entries do not satisfy  $C_{\text{load}} \approx C_{\text{top}} \gg C_{\text{self}}$ . Instead,  $C_{\text{top}} < C_{\text{self}}$ . Additionally, the typical current spatial profiles appear to be decently nonuniform.<sup>5</sup>

Fortunately, we may still proceed to test the simple models because the VSD satisfies their assumptions outlined above. Fig. 3 shows that the extracted  $C_{\text{self}}$  represents energy reasonably well, and the typical voltage spatial profiles are said to be approximately linear.<sup>5</sup> In other words, the VSD satisfies the assumptions capturing the "Howe" regime despite not being in it, so the extracted  $C_{\text{self}}$  can be interpreted as if they were in that regime.

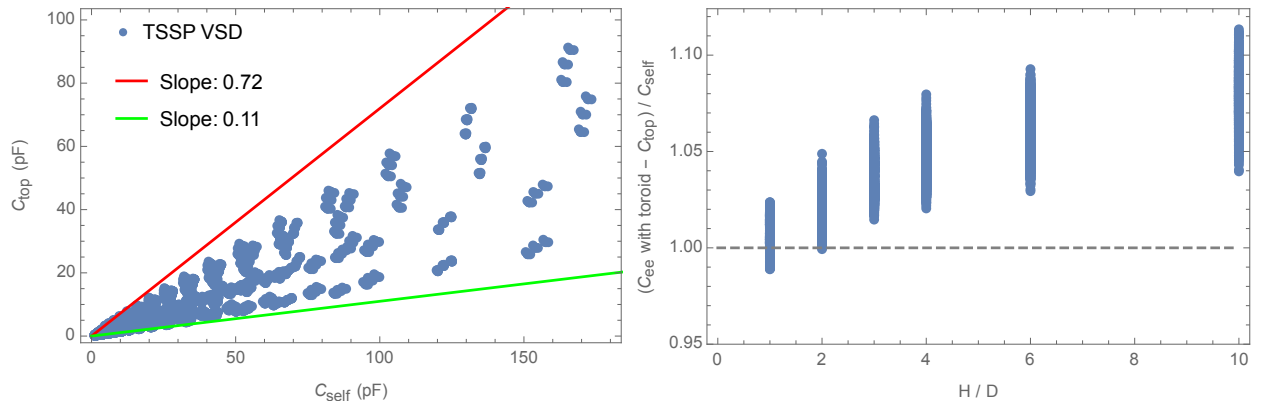


FIG. 3. Exploring the applicability of  $C_{\text{self}}$ . (Top) Extracted  $C_{\text{top}}$  versus  $C_{\text{self}}$ , showing  $C_{\text{top}} < C_{\text{self}}$  for all entries. (Left) Comparison of  $C_{\text{self}}$  and VSD energy-equivalent capacitance  $C_{\text{ee}}$  showing that  $C_{\text{self}}$  represents energy correctly for  $V_s(t)$  to within about 12% error.

### C. Comparing $C_{\text{self}}$ with Medhurst

Remarkably, Fig. 4 shows that the extracted  $C_{\text{self}}$  are quite close to the Medhurst empirical formula (2) – wow! Even with all its parametric variation, the spread in VSD data points at each allowed value of  $H/D$  is rather small. This provides support for the Medhurst formula’s implication that the most important variables in practice are  $H$  and  $D$ .

Such good agreement is a bit surprising because of differing environments: Medhurst measured small solenoids of insulated wire wound around solid polystyrene rods and oriented horizontally above a metal box (Twin-T impedance bridge). The VSD simulated ideal solenoids with no dielectrics oriented vertically above a ground plane and with top electrodes.

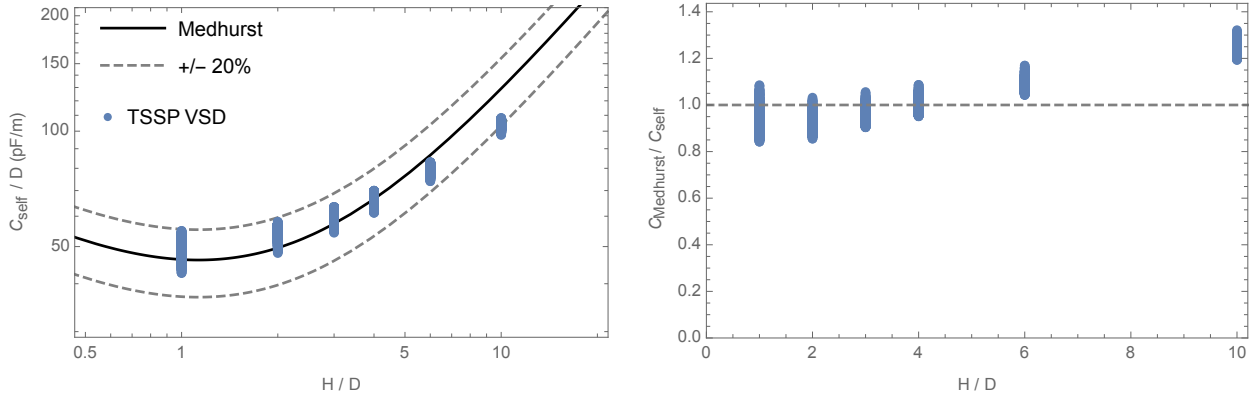


FIG. 4. Comparison of  $C_{\text{self}}$  with  $C_{\text{Medhurst}}$  of (2). (Left) Conventional log-log plot of capacitance/ $D$  versus  $H/D$ . The VSD values of  $C_{\text{self}}$  are within roughly  $[-30\%, 20\%]$  of  $C_{\text{Medhurst}}$ . (Right) Alternative plot of the ratio of values versus  $H/D$ , for direct comparison with later plots.

### D. Comparing $C_{\text{self}}$ with simple models

Fig. 5 compares the Miller self-capacitance (12) using  $C_0$  with  $C_{\text{self}}$ . For the two largest solenoid heights  $B$  above the ground plane,  $C_{\text{Miller}}$  is a decent underestimate of  $C_{\text{self}}$ . However, for the smallest height  $B$ ,  $C_{\text{Miller}}$  increases and switches between being a slight underestimate at large  $H/D$  to being an overestimate at small  $H/D$ . This behavior seems consistent with the ground plane leading (12) to overestimate (5), as discussed above. Including a gradient correction (23) slightly improves the agreement for small  $H/D$  for the two larger heights  $B$ . Using a theoretical value (14) instead of the extracted  $C_0$  gives a slightly worse underestimate that’s visually similar to the results with the two larger heights  $B$ .

Fig. 6 compares the frequency-based model (15) and its variations with  $C_{\text{self}}$ . Overall, this model is a decent underestimate of  $C_{\text{self}}$  with less sensitivity to the environment than  $C_{\text{Miller}}$ , as forecast earlier. The difference between the variations are minimal, suggesting that really only the first unloaded resonant frequency is needed for this method. Adding a gradient correction improves the agreement for small  $H/D$ .

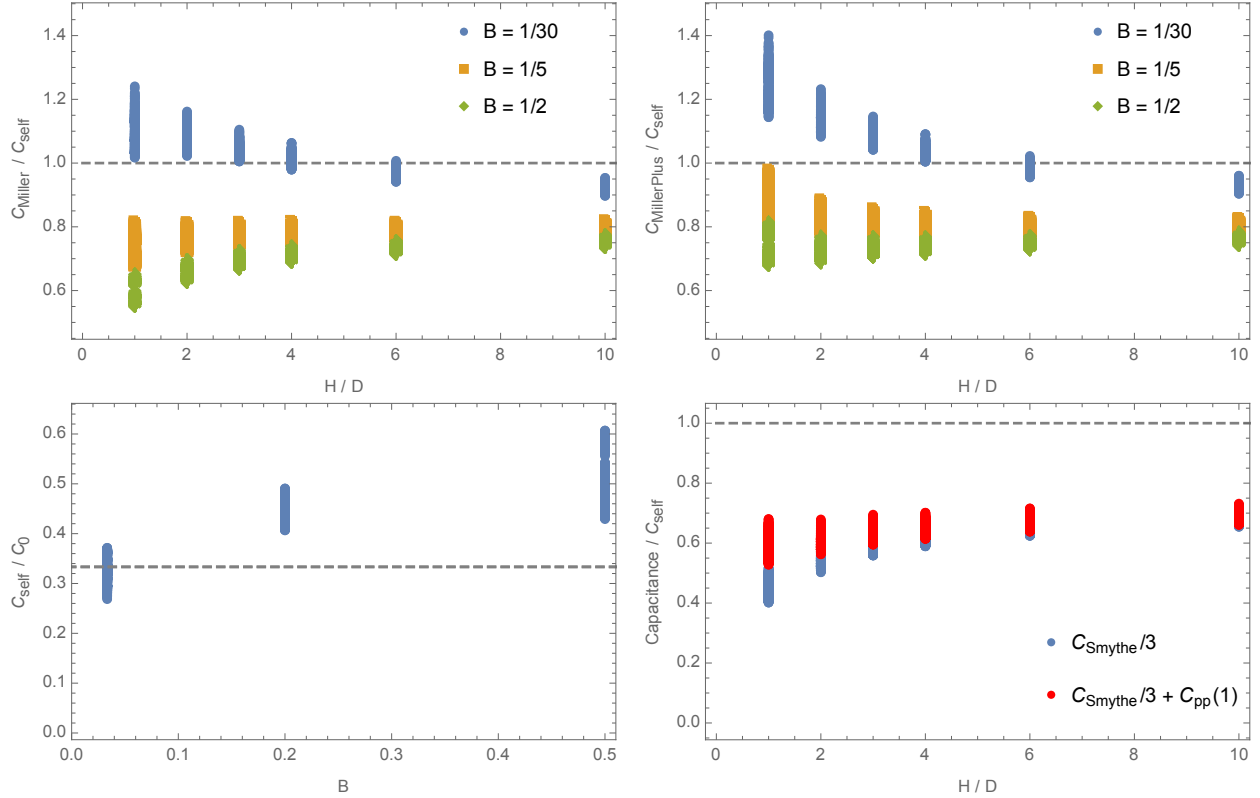


FIG. 5. Tests of the Miller self-capacitance (12). (Top left)  $C_{\text{Miller}}$  versus  $H/D$  for different solenoid heights  $B$  above the ground plane. (Top right) Adding a gradient correction (23):  $C_{\text{MillerPlus}} = C_{\text{Miller}} + C_{\text{pp}}(1)$ . (Bottom left) Alternate plot of  $C_{\text{self}}/C_0$  versus  $B$  to compare with the ideal Miller value of  $1/3$ . (Bottom right) Comparison using a theoretical estimate (14) for  $C_0$ .

## IV. ADDITIONAL TESTS

### A. Using theoretical capacitances

Fig. 7 compares the Miller self-capacitance using theoretical values of isolated tubes or solid cylinders for  $C_0$  given above with  $C_{\text{Medhurst}}$ . Generally, this leads to an underestimate by almost a factor of 2. Adding a gradient correction (23) improves the agreement a bit, in a way that suggests it contributes to the observed minimum, though note that this correction isn't intended for  $H < D$ . (The choice of  $\epsilon_r \approx 2.5$  follows from Medhurst using solenoids wound on polystyrene rods.) Some rough tests with a model from Ref. 15 for a tube above a ground plane (not shown) suggest Medhurst's Twin-T impedance bridge may also have contributed to the minimum in the log-log plot.

### B. Using experimental measurements

Fig. 8(left) shows partial sums of the frequency-based model (15) using experimental resonance frequencies and inductances of typical Tesla transformer secondary coils (magnet

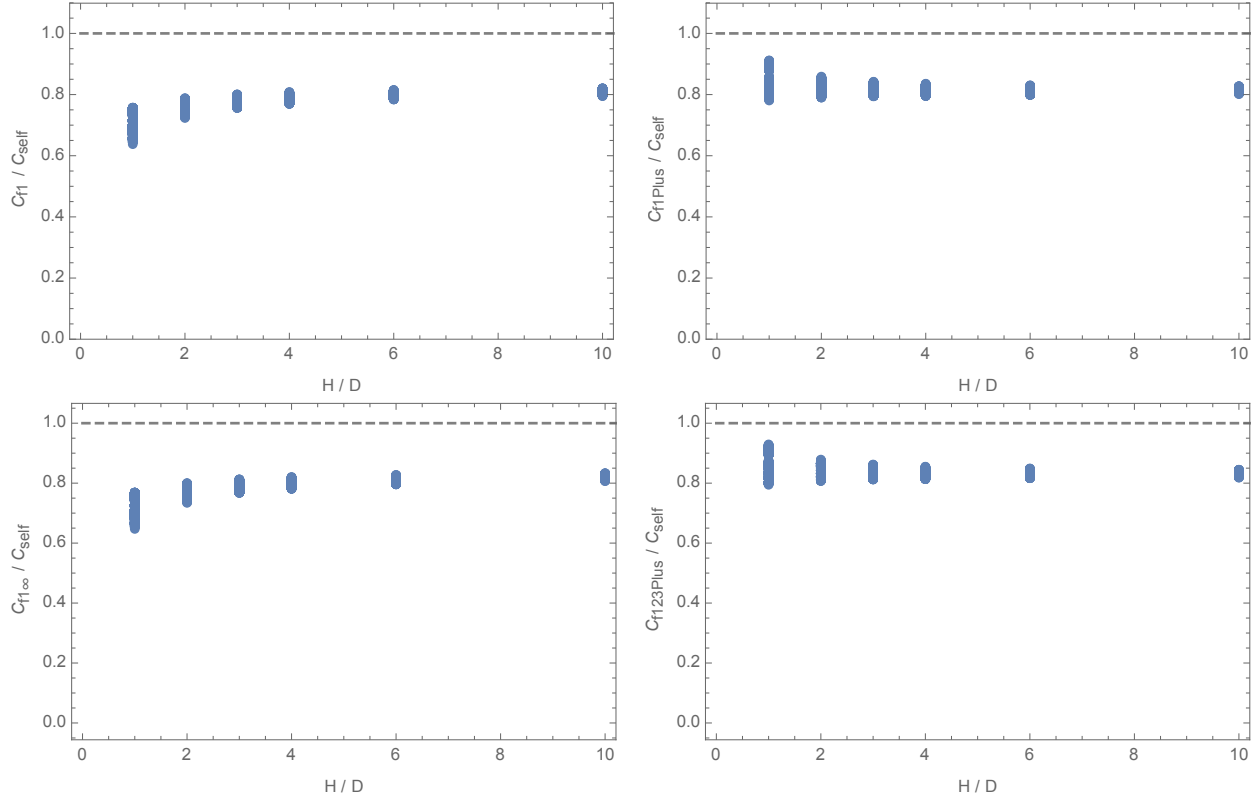


FIG. 6. Tests of the frequency-based model (15) and its variations. (Top left) Using the first resonant frequency with (18). (Top right) Adding the gradient correction  $C_{pp}(1)$  of (23). (Bottom left) Using the first resonant frequency with (20), which has a slight correction. (Bottom right) Using the first three resonant frequencies with (19), and adding the gradient correction  $C_{pp}(1)$ .

wire wound on PVC pipe forms). One data set comes from Ref. 19, and the rest come from values the TSSP used to test its software.<sup>5</sup> Comparing with Fig. 4(left), this test slightly underestimates both  $C_{\text{Medhurst}}$  and the extracted VSD  $C_{\text{self}}$ .

Fig. 8(right) illustrates the convergence of the frequency-based model (15) using measured resonances from Ref. 19. Note that this reference contains quarter- and half-wave resonances, but only the quarter-wave resonances are used in (15). The sum converges to a slightly lower value than the estimate (20) because of the typical curvature in solenoid dispersion relations.  $C_{\text{Medhurst}}$  evaluates to  $9.66 \pm 0.07$  pF for this solenoid, propagating uncertainty in  $H$  and  $D$ , so the model (18) underestimates  $C_{\text{Medhurst}}$  by about 13%. Unfortunately, I do not have a useful measurement of  $C_{\text{self}}$  from Ref. 14 that used the same solenoid.

Ref. 9 reports a measurement of  $C_0 \approx 22 \pm 2$  pF for the same solenoid as Refs. 14 and 19, which leads to a  $C_{\text{Miller}} = 7.3 \pm 0.7$  pF. This underestimates  $C_{\text{Medhurst}}$  by about 24%. A gradient correction of  $C_{pp}(1)$  would add only about 0.12 pF.



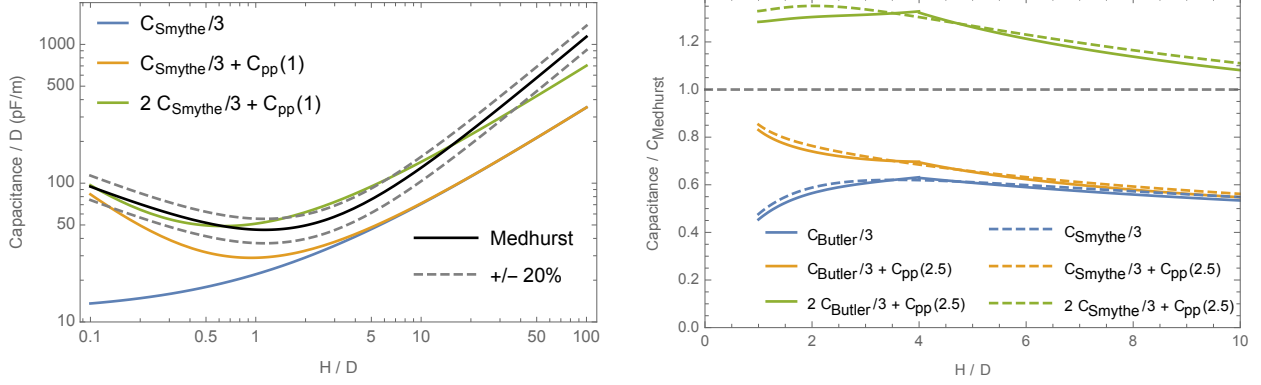


FIG. 7. Comparison of the Miller self-capacitance (12) and  $C_{\text{Medhurst}}$  using the theoretical values (13) or (14) for  $C_0$ . (Left) Conventional log-log comparison using (14). The results are similar for (13). (Right) Alternative linear plot of ratio.

## V. DISCUSSION

All together, the simple models presented here worked surprisingly well with the TSSP's VSD. For as crude as they are, the models came reasonably close to the extracted values of  $C_{\text{self}}$ , well within a factor of 2. In particular, the frequency-based model with a gradient correction generally reproduced roughly 80% of  $C_{\text{self}}$ . The remaining discrepancy is likely a combination of both model limitations (oversimplifications, neglecting gradient energy) and error from extracting  $C_{\text{top}}$ .

Given that  $C_{\text{top}} < C_{\text{self}}$  for the VSD, it's tempting to use the unloaded limit of a uniform transmission-line model for  $C_{\text{self}}$  discussed in Refs. 13 and 14. This limit gives  $C_{\text{self}} = (4/\pi^2)C_0$ , so naively predicts that both the Miller and frequency-based models should reproduce  $C_{\text{self}}$  only up to  $(1/3)/(4/\pi^2) \approx 82\%$ , rather close to what's observed in Figs. 5

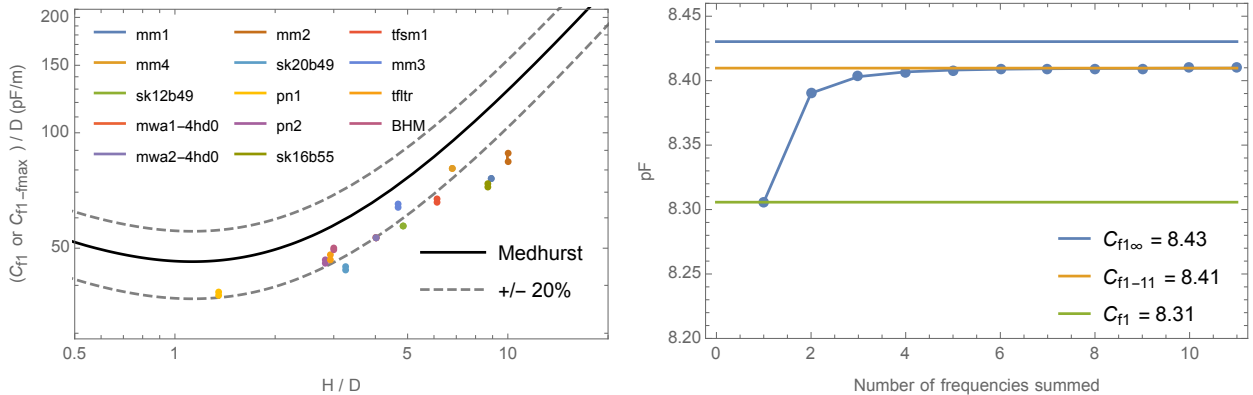


FIG. 8. Tests of the frequency-based model (15) and its variations using experimental values. (Left) Using measurements provided in the TSSP's online documentation<sup>5</sup> and from Ref. 19 ("BHM"). For each solenoid, there are points for both (18) and a partial sum of (15) up to the highest reported resonance. (Right) Sum convergence using measured frequencies from Ref. 19.

and 6. However, the derivation of this unloaded limit isn't fully justified for the VSD, so this is likely just an interesting coincidence.

All together, I think these results paint the following rough picture: Figs. 5 and 6 suggest that the majority of  $C_{\text{self}}$  comes from “external” capacitance [meaning, modeled by  $c(x)$  in (5)] with a decent contribution (maybe,  $\sim 20\%$ ?) from “internal” or “gradient” capacitance [meaning, modeled by  $c(x, y)$  in (6)]. The additional tests with theoretical  $C_0$  in Fig. 7 seem to suggest that, in practice, typical VSD environmental perturbations are a decent portion (maybe,  $\sim 25\%$ ?) of the external part of  $C_{\text{self}}$ . (Note that the VSD excluded dielectrics.)

The agreement of the VSD and the Medhurst formula adds support to that formula's implication that the most important variables in practice are  $H$  and  $D$ . It also provides support for that formula's longevity, including its long use by Tesla coil enthusiasts. However, the VSD seems to show that  $C_{\text{top}}$  generally doesn't follow typical formulas for isolated toroids. Therefore, there's an opportunity to generate improved formulas using the VSD. (See Appendix C.)

Please take all of this discussion with a grain of salt (or a healthy factor of 2, give or take). To truly make confident assertions would require additional simulation and experiments. Simulations with commercial or TSSP software would need to be in the right regime ( $C_{\text{load}} \gg C_{\text{self}}$ ), to cleanly separate  $C_{\text{load}}$  from  $C_0$ , and include typical dielectrics. And, given how little data seems available, direct verification through experiments with real solenoids or, perhaps, substitutes (e.g., resistive pipes that simulate linear voltage profiles) in representative environments would be ideal.

Potential areas for future work include exploring the refinement mentioned in Section IIB, the upper bound in Section IIA, or better formulas (or measurement techniques) for  $C_{\text{top}}$  (see Appendix C). I'd be very interested to learn whether the models presented here are practically useful with real solenoids, such as Tesla secondary coils. For example, Figs. 6 and 8 suggests that  $C_{f1}$  of (18) might be a decent practical way to estimate  $C_{\text{self}}$ , and that it could be improved by artificially inflating its value by about 22% or so (and optionally adding the gradient correction). That is, measuring the lowest resonant frequency  $f'_1$  of the secondary in situ, while it is unloaded (topload disconnected or removed), gives  $C_{\text{self}} \approx 1.22 C_{f1} \approx 0.025/(L_s f_1'^2)$ , which appears to be a good estimate (needs confirmation). Or, perhaps  $C_{\text{top}}$  and  $C_0$  could be carefully measured in practice? (See Appendix C for a partial exploration of these topics, and a justification for multiplying  $C_{f1}$  by roughly 1.22.)

## Appendix A: Medhurst accuracy notes

I've been unable to find any documented tests of the accuracy of the Medhurst empirical formula (2), which is a bit odd given its longevity and popularity.<sup>a</sup> The original work by Medhurst<sup>6</sup> in 1947 claims a fit error of about 5% for (2), but does not provide data.<sup>b</sup> There

<sup>a</sup> The closest I've found is an assertion in Ref. 20 without data.

<sup>b</sup> Table V in Medhurst<sup>6</sup> looks like data, but seems to be a table of values for the convenience of a 1940's era audience. In particular, the values of Length / Diameter don't seem to match the scatter in Figure 9. Interestingly, Table V's values have up to 8% error compared to (2). If there was a typographic error where the values given for {3.0,3.5,4.0,4.5} were meant for {3.5,4.0,4.5,5.0}, that would reduce this error.

is also lore about Medhurst providing alternate formulas (c.f., Eq. (2) of Ref. 21). If you know of any such documentation, please share!

Inaccuracy could have escaped notice because (1) is rather insensitive to  $C_{\text{self}}$  errors in the applicable regime of  $C_{\text{load}} \gg C_{\text{self}}$ . For example, if initially  $C_{\text{load}} = 5C_{\text{self}}$  and we double the value of  $C_{\text{self}}$ , then  $f_1$  only changes by a factor of  $\sqrt{6/7} \approx 0.93$  ( $-7\%$ ). For the same reason, it's difficult to measure  $C_{\text{self}}$  accurately.<sup>14</sup>

## Appendix B: Literature quotes

Here are some fun quotes about the stubborn nature of this topic from its vast literature: Hubbard (1917):<sup>22</sup> “The problem of a coil oscillating in its own free period has proved one of the most difficult in mathematical physics.”

Breit (1921):<sup>23</sup> “This paper is intended to call the attention of physicists and mathematicians to some interesting aspects of the subject of distributed capacity of coils. . . . The subject has been largely neglected by mathematical physicists.” (Gregory Breit’s Ph.D. dissertation was on  $C_{\text{self}}$ .)

Rhea (1997):<sup>24</sup> “This author is unaware of any worker who mathematically attacked either the resistance or capacitance problem and was rewarded for doing so.”

Lee p. 142 (2004):<sup>4</sup> “This latter capacitance is somewhat difficult to compute analytically. To the best of the author’s knowledge, no correct general analytical solution has ever been published. . . . Many have been offered, but close inspection reveals gross errors.”

## Appendix C: Partial exploration of future work

(Added December 2025.)

### 1. Extracting $C_{\text{top}}$ using resonant frequencies

This Note extracted  $C_{\text{top}}$  using a difference of electrostatic capacitances  $C_{\text{dc}}$  via (25). An alternate way to estimate  $C_{\text{top}}$  would be to use loaded and unloaded resonant frequencies, which are more experimentally accessible than  $C_{\text{dc}}$ . However, at first glance, this approach is questionable since the unloaded resonant frequency violates the assumption of a large  $C_{\text{load}}$  (or linear voltage gradient) that’s needed for  $C_{\text{self}}$  to be stable. Nevertheless, it’s interesting to explore such an approach, and fortunately we’ll find it turns out to work rather well.

To proceed, let’s define the resonant-frequency estimate

$$C_{\text{top},f_1} = \frac{1}{4\pi^2 L_s} \left( \frac{1}{f_1(\text{loaded})^2} - \frac{1}{f_1(\text{unloaded})^2} \right) = \frac{1}{4\pi^2 L_s} \left( \frac{1}{f_1^2} - \frac{1}{f_1'^2} \right), \quad (\text{C1})$$

where the toplead is removed for the unloaded  $f_1'$ . Fig. 9(left) shows a comparison of  $C_{\text{top},f_1}$  and  $C_{\text{top}}$  using the TSSP VSD, where the VSD values for  $L_{\text{dc}}$  were used for  $L_s$ . Surprisingly, the agreement is quite good, though it worsens for small  $H/D$  in a way that resembles a

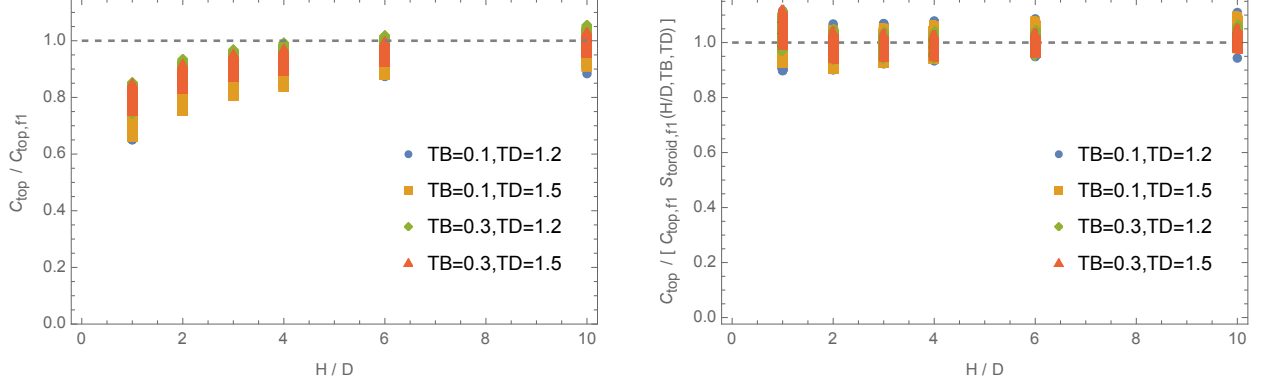


FIG. 9. Comparison of estimates for  $C_{\text{load}}$  using electrostatic capacitances or resonant frequencies. (Left) Ratio of the electrostatic estimate  $C_{\text{top}}$  of (25) over the resonant-frequency estimate  $C_{\text{top},f1}$  of (C1) versus  $H/D$ . (Right) Adjusting the ratio using the fitted correction factor  $S_{\text{toroid},f1}$  of (C3) removes most of the dependence on  $H/D$ .

missing gradient correction (see Fig. 6). Defining a correction factor  $S_{\text{toroid},f1}$  such that

$$C_{\text{top}} = C_{\text{top},f1} S_{\text{toroid},f1} \quad (\text{C2})$$

and then fitting gives the estimate

$$\begin{aligned} S_{\text{toroid},f1} &\approx (0.9746 - 0.2391 D/H)(1 + 0.2964 \text{TB})(1 + 0.03586 \text{TD}) \\ &= (0.9746 - 0.2391 D/H)(1 + 0.2964 \text{TB})(1 + 0.03586 D_1/H), \end{aligned} \quad (\text{C3})$$

where the second line uses a toroid outer diameter  $D_1$  introduced later below. As Fig. 9(right) shows, this correction factor removes most of the dependence on  $H/D$ , as well as some slight dependence on TB and TD. The vertical spread in data points shows there's residual dependence on other parameters.

In summary, the resonant-frequency approach gives results that are surprisingly close to the electrostatic-capacitance approach, and the correction factor given above provides a way to translate between the two for the VSD data.

#### a. Support for artificially inflating $C_{f1}$

Even more surprising, the definition (C1) for  $C_{\text{top},f1}$  provides support for the suggestion in the Discussion above that  $C_{\text{self}} \approx 1.22 C_{f1}$ . This support seems important, so let me belabor it as follows: Note that the total capacitance needed to reproduce the  $f_1$  of (1) is

$$C_{\text{total}} = 1/[(2\pi f_1)^2 L_s] \equiv C_{\text{top}} + C_{\text{self}}. \quad (\text{C4})$$

Suppose that  $C_{\text{total}} = x C_{f1} + C_{\text{top},f1}$  for some value of  $x$ . To find  $x$ , let's rewrite the sum as

$$x C_{f1} + C_{\text{top},f1} = [1 + (f_1/f'_1)^2(8\pi/\pi^2 - 1)]/[(2\pi f_1)^2 L_s]. \quad (\text{C5})$$

using (18). Then, the value of  $x$  that removes  $f'_1$  is  $x = \pi^2/8 \approx 1.234$ , which guarantees that

$$C_{\text{total}} = (\pi^2/8) C_{f1} + C_{\text{top},f1} \approx 1.234 C_{f1} + C_{\text{top},f1}. \quad (\text{C6})$$

Comparing this with (C4), we can choose how to apportion the terms between the self and top capacitances. When the top capacitance is simply

$$C_{\text{top}} \approx C_{\text{top},f1}, \quad \text{then this gives} \quad C_{\text{self}} \approx (\pi^2/8) C_{f1}. \quad (\text{C7})$$

Or, being more careful to involve the correction factor  $S_{\text{toroid},f1}$ , when

$$C_{\text{top}} \approx S_{\text{toroid},f1} C_{\text{top},f1}, \quad \text{then this gives} \quad C_{\text{self}} \approx (\pi^2/8) C_{f1} + (1 - S_{\text{toroid},f1}) C_{\text{top},f1}, \quad (\text{C8})$$

though  $(1 - S_{\text{toroid},f1}) C_{\text{top},f1}$  should be a small correction. All together, this suggests that

$$\begin{aligned} C_{\text{self}} &\approx (\pi^2/8) C_{f1} + (1 - S_{\text{toroid},f1}) C_{\text{top},f1} \\ &\approx (\pi^2/8) C_{f1} = 1/[(2\pi f'_1)^2 L_s] \approx 1.234 C_{f1} \approx 0.0253 / (L_s f_1'^2), \end{aligned} \quad (\text{C9})$$

which supports the suggestion in the Discussion. (Note that in the end this is not surprising, but does feel a bit circular:  $(\pi^2/8) C_{f1} = 1/[(2\pi f'_1)^2 L_s]$ , which is exactly the effective capacitance needed for  $f'_1$ . That seems out of step with the expectation of a difference between  $C_{\text{self}}$  for  $f'_1$  and  $f_1$  cases.<sup>14</sup>)

In summary, the experimentally accessible sum  $(\pi^2/8) C_{f1} + C_{\text{top},f1}$  is guaranteed to be a good estimate for  $C_{\text{total}}$ . In addition, the assignments  $C_{\text{top}} \approx C_{\text{top},f1}$  and  $C_{\text{self}} \approx 1.234 C_{f1} \approx 0.0253 / (L_s f_1'^2)$  should be a reasonable way to divide  $C_{\text{total}}$  according to the VSD.

## 2. Formulas to estimate $C_{\text{top}}$ for Tesla coil toroids

Let's compare the  $C_{\text{top}}$  extracted from the TSSP VSD with the ‘‘Bert Pool’’ formula that's commonly used by the Tesla coil community to estimate the capacitance of a toroid,<sup>c</sup>

$$C_{\text{toroid,BP}} = 1.4 \left( 1.2781 - \frac{D_2}{(1 \text{ inch})} \right) \sqrt{\pi \frac{D_2}{D_1} \left( 1 - \frac{D_2}{D_1} \right)} \text{ pF}. \quad (\text{C10})$$

Here,  $D_1$  is the outer (or major) diameter and  $D_2$  is the minor diameter (or height) of the toroid. To connect with the VSD parameters, let:  $D_1 = \text{‘‘TD’’} \times H$ , where the toroid-diameter parameter  $\text{TD} \in \{0, 1.2, 1.5\}$ , with zero indicating no toroid;  $D_2 = (D_1 - D_3)/2$ ; and an inner diameter  $D_3 = 1.05 D = 1.05 H(H/D)$ . Another VSD parameter of interest is TB, which is the height of the toroid above the secondary coil's top turn, with allowed values  $\text{TB} \in \{\text{no toroid}, 0.1, 0.3\}$  in units of  $H$  (with zero or empty indicating no toroid).

Comparing  $C_{\text{top,BP}}$  and  $C_{\text{top}}$  using the VSD data, there was a significant disagreement with a strong dependence on  $H/D$ , as Fig. 10(left) shows. Introducing a correction factor

$$C_{\text{top}} = C_{\text{toroid,BP}} S_{\text{toroid,BP}} \quad (\text{C11})$$

<sup>c</sup> <https://teslacoils4christ.org/TCFormulas/TCFormulas.htm#toroid>

[https://deepfriedneon.com/tesla\\_f\\_calctoroid.html](https://deepfriedneon.com/tesla_f_calctoroid.html)

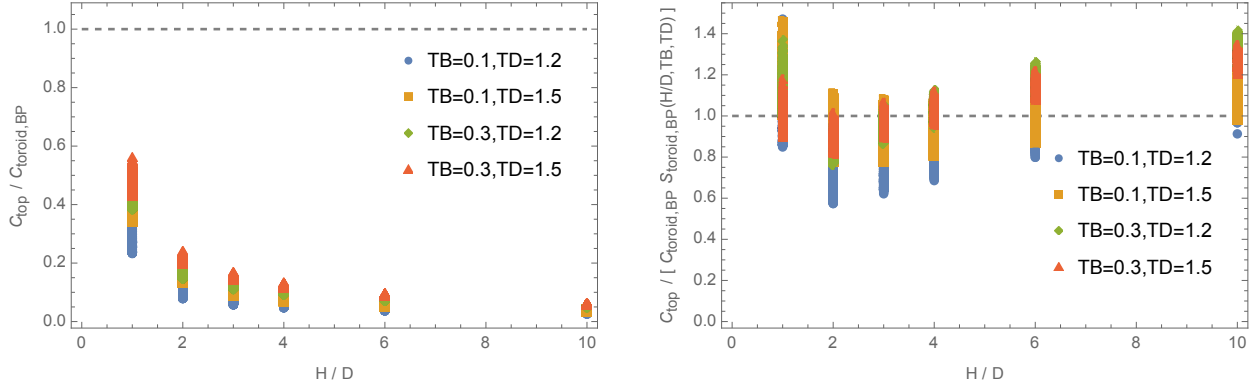


FIG. 10. Comparison of estimates for  $C_{\text{load}}$  using the TSSP VSD and a common formula. (Left) Ratio of the extracted  $C_{\text{top}}$  of (25) over the estimate  $C_{\text{toroid,BP}}$  of (C10). (Right) Adjusting the ratio using the fitted correction factor  $S_{\text{toroid,BP}}$  of (C12) removes most of the dependence on  $H/D$ .

and then fitting gives the estimate

$$\begin{aligned} S_{\text{toroid,BP}} &\approx 0.0070393(D/H)(1 + 2.5016 \text{ TB})(1 + 25.1035 \text{ TD}) \\ &= 0.0070393(D/H)(1 + 2.5016 \text{ TB})(1 + 25.1035 D_1/H). \end{aligned} \quad (\text{C12})$$

Fig. 10(right) shows that this correction factor removes most, but not all, of the strong dependence on  $H/D$ , as well as some minor dependence on TB and TD. There's still a significant vertical spread showing variation with other parameters, limiting the accuracy of this sort of correction. The left-most grouping with  $H/D = 1$  appears to possibly be an outlier, so could be excluded for a better fit in future work. Before this correction, the discrete nature of the data and the strong trend with  $H/D$  made it appear as if there were strong dependencies on other VSD parameters, but after correcting, most of this disappeared. Interestingly, there wasn't much of a dependence on the secondary coil height above the ground plane (parameter B).

The capacitance  $C_{\text{toroid,BP}}$  is meant to estimate the electrostatic capacitance of an isolated toroid in free space over the typical parameter ranges of interest for Tesla coils. The large discrepancy between it and  $C_{\text{top}}$  is potentially concerning. If we assume there's no error, then this discrepancy likely shows that  $C_{\text{top}}$  is typically much less than this electrostatic capacitance, by a factor of 2 to 10 or so, which is larger than anticipated in the discussion after (25). In this case, this discrepancy is likely due to a combination of both how  $C_{\text{top}}$  was extracted, and the capacitive coupling (or shielding) between the secondary coil and toplayer (i.e., overlapping electric-field effects). In particular, its strong dependence on  $H/D$  could indicate how this shielding depends on the environment, a poor separation of  $C_{\text{self}}$  and  $C_{\text{load}}$ , or a combination of both. As a result, and again assuming no error, this discrepancy would suggest that a typical Tesla coil setup is not ideal for studying  $C_{\text{self}}$ . However, in the next sections, we'll find a similar discrepancy between the VSD's  $C_{\text{top}}$  and measurements, so it's possible that there is error, which would complicate all of this interpretation.

In summary, there is a large discrepancy between the values of the effective capacitance  $C_{\text{top}}$  of a toroidal toplayer when extracted from the TSSP VSD or calculated by a common

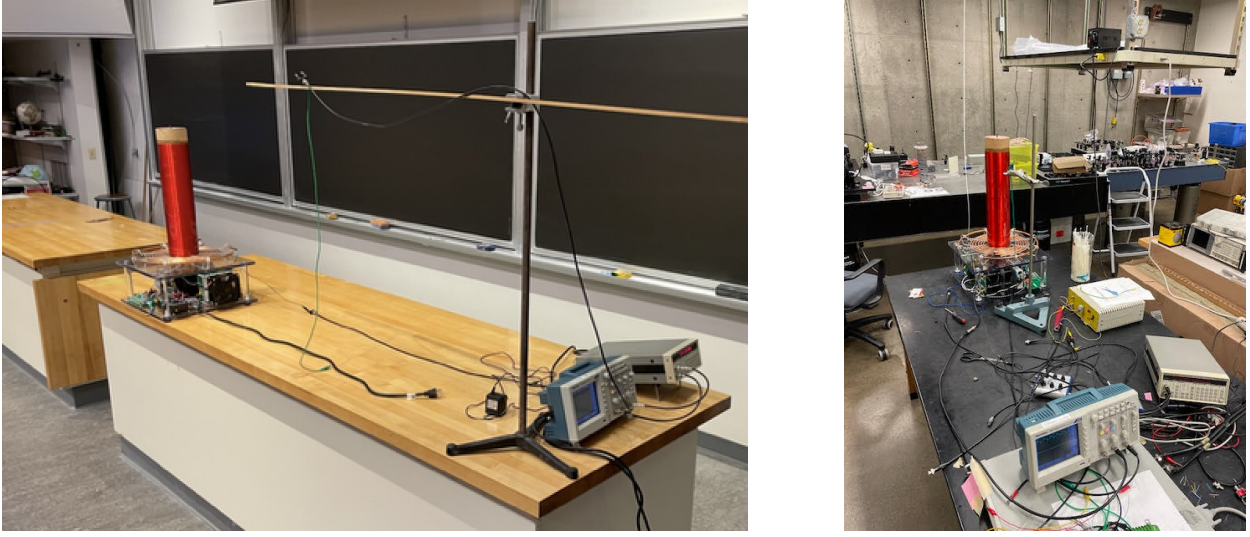


FIG. 11. Pictures of the two measurement setups used for Appendix C3. Both setups used the same Tesla coil. (Left) “Setup A” in a classroom. (Right) “Setup B” in a laboratory with a metal stand nearby holding a probe. Both pictures show a configuration with the toplayer removed.

formula. The correction factor (C12) accounts for most of this discrepancy, and allows for a rough conversion between both values. In turn, the correction factor (C3) then allows a rough conversion to the  $C_{\text{top},f_1}$  of (C1). Concerningly, the next two sections below shows a disagreement between the VSD and some measurements, suggesting that the formulas for  $C_{\text{top}}$  as extracted from the VSD in this Note might not be a good estimate in practice.

### 3. Test of $C_{\text{self}}$ and $C_{\text{top}}$ estimates with Tesla coil measurements

Let’s explore some of the ways this Note proposed to estimate  $C_{\text{self}}$  and  $C_{\text{top}}$  in practice. I’m grateful to B. A. Olsen and M. P. Berghof for providing careful measurements of the Tesla coil shown in Fig. 11 for this purpose. Here’s a rough analysis of their data, followed by a summary and suggestions for future work.

To begin, here’re background details: The secondary coil dimensions were  $H \approx 0.4572$  m and  $D \approx 0.1143$  m, which gives  $C_{\text{Medhurst}} \approx 7.6$  pF. The inductance of the secondary coil varied from 59.6 mH at 100 Hz to 61.3 mH at 10 kHz, so  $L_s \approx 61.3$  mH. The toroid toplayer had an outer diameter of  $D_1 \approx 0.4572$  m and minor diameter  $D_2 \approx 0.1143$  m, which gives  $C_{\text{toroid,BP}} \approx 19.9$  pF (which agrees well with the expected ideal, isolated electrostatic self capacitance<sup>d</sup>) and  $S_{\text{toroid,BP}} C_{\text{toroid,BP}} \approx 1.14$  pF.

Next, the measurements details and data: The lowest resonant frequencies were measured with two “setups” and in three toplayer “configurations.” Fig. 11 shows the two setups: a typical clean setup “A” that should have the least perturbing environment, and an atypical perturbed setup “B” with a metal stand nearby the secondary coil. For each setup, the three toplayer configurations were: (i) “normal” (in place and connected); (ii) “disconnected”

<sup>d</sup> See table on p. 9 here: <https://www.coe.ufrj.br/~acmq/tesla/capcalc.pdf>

(in place, but electrically disconnected); and (iii) “removed” (as shown in Fig. 11). The lowest resonant frequencies were measured by disconnecting one end of the primary coil, driving the base of secondary coil with a sine wave from a function generator, and adjusting the sine-wave frequency to maximize the amplitude observed by a capacitive-pickup probe (see Fig. 11). The results in kHz for Setup A were: normal  $f_1(A) = 138.3$ ; disconnected  $f_1''(A) = 139.9$ ; removed  $f_1'(A) = 220.4$ . Likewise, the results for Setup B were: normal  $f_1(B) = 126.6$ ; disconnected  $f_1''(B) = 130.3$ ; removed  $f_1'(B) = 208.8$ . The measurement uncertainties were less than  $\pm 0.1$  kHz.

For this test, our goal is to infer  $C_{\text{self}}$  and  $C_{\text{top}}$  for the normal configuration of each setup. At minimum, these capacitances must sum to the  $C_{\text{total}}$  of (C4) to reproduce  $f_1$ . From the data, the clean  $C_{\text{total}}(A) \approx 21.6$  pF and the perturbed  $C_{\text{total}}(B) \approx 25.7$  pF, which is larger as expected. The uncertainty in these values is likely dominated by the uncertainty of  $L_s$ , which is roughly  $\pm 3\%$  if we crudely estimate it from the shift in measured inductance from 0.1 to 10 kHz.

For a point of comparison, let’s start with the traditional approach to estimate  $C_{\text{total}}$ , which is to use  $C_{\text{Medhurst}} + C_{\text{toroid, BP}} \approx 27.5$  pF. This gives:  $(C_{\text{Medhurst}} + C_{\text{toroid, BP}})/C_{\text{total}}(A) \approx 1.27$  and  $(C_{\text{Medhurst}} + C_{\text{toroid, BP}})/C_{\text{total}}(B) \approx 1.07$ . Given our capacitance uncertainty of  $\sigma \approx 0.03 C_{\text{total}}$ , the most important case of setup A disagrees significantly ( $9\sigma$ ), while the perturbed case B is close ( $2\sigma$ ). However, while not perfect, these estimates are not bad for estimating  $f_1$ : they correspond to an error of only about  $1 - 1/\sqrt{1.27} \approx 11\%$  for  $f_1(A)$ , and  $3\%$  for  $f_1(B)$ . So, while there’s clearly room for improvement, the traditional estimate provides a reasonable estimate of  $f_1$  for our data.

Before we continue, let’s check how similar our test is to simulations within the VSD. Searching, the closest entries have  $H/D = 4$  (correct),  $TD = 1.2$  (should be 1.0), and either  $H = 0.4$  or  $0.5036$  m (should be  $0.4572$  m). Each of these two values of  $H$  has 72 entries. Their corresponding toroid sizes are  $D_1 = 0.480$  m with  $D_2 \approx 0.1875$  m, or  $D_1 \approx 0.604$  m with  $D_2 \approx 0.236$  m, respectively (all a bit larger than the actual). Searching, the VSD, there are 72 entries for each value of  $H$ . For  $H = 4$  m, the extracted values were  $C_{\text{total}} \in [7.4, 8.9]$ ,  $C_{\text{self}} \in [6.3, 6.9]$ , and  $C_{\text{top}} \in [1.0, 2.2]$ , all in pF. For  $H = 0.5036$  m, they were  $C_{\text{total}} \in [9.4, 11.2]$ ,  $C_{\text{self}} \in [8.0, 8.6]$ , and  $C_{\text{top}} \in [1.2, 2.7]$ . These ranges didn’t change much using only the entries with the closest values of  $L_{dc}$  (6 entries each for  $H = 4$  m with  $L_{dc} = 80.3$  mH and  $H = 0.5036$  m with  $L_{dc} = 53.3$  mH). Combining, the VSD then predicts min and max value ranges of  $C_{\text{total}} \in [7.4, 11.2]$ ,  $C_{\text{self}} \in [6.3, 8.6]$ , and  $C_{\text{top}} \in [1.0, 2.7]$ .

Immediately, we see that there’s a rather large discrepancy, because the VSD’s values of  $C_{\text{total}}$  are much smaller than our experimental ones, by a factor of 1.9 to 3.7. For more on this, see Appendix C 3 a below.

Finally, let’s explore the approach of Appendix C 1 a to apportion  $C_{\text{total}}$  into the estimates  $C_{\text{self}} \approx 1.234 C_{f1}$  and  $C_{\text{top}} \approx C_{\text{top}, f1}$ . Let’s do this for both the removed (“R”) and disconnected (“D”) cases. Here’re the results rounded to 0.1 pF:

- Setup A via normal vs removed toroid:  $1.234 C_{f1}(AR) \approx 8.5$  and  $C_{\text{top}, f1}(AR) \approx 13.1$ ;
- Setup B via normal vs removed toroid:  $1.234 C_{f1}(BR) \approx 9.5$  and  $C_{\text{top}, f1}(BR) \approx 16.3$ ;
- Setup A via normal vs disconnected toroid:  $1.234 C_{f1}(AD) \approx 21.1$  and  $C_{\text{top}, f1}(AD) \approx 0.5$ ;
- Setup B via normal vs disconnected toroid:  $1.234 C_{f1}(BD) \approx 24.3$  and  $C_{\text{top}, f1}(BD) \approx 1.5$ .



(By construction, each of these pairings reproduces  $C_{\text{total}}$ (A or B) to within rounding.)

Looking at the values for the removed case, the estimates for  $C_{\text{self}}$  are close to the Medhurst and VSD values, as expected, with the unperturbed  $1.234 C_{f1}(AR)/C_{\text{Medhurst}} \approx 1.12$  and within the VSD's predicted range given above. However, the estimates for  $C_{\text{top}}$  are far out of range for the VSD and instead much closer to  $C_{\text{toroid,BP}}$ , with  $C_{\text{top},f1}(AR)/C_{\text{toroid,BP}} \approx 0.66$ . Looking at the disconnected cases, the balance shifts to larger  $C_{\text{self}}$  and smaller  $C_{\text{top}}$  estimates. Curiously, the  $C_{\text{top}}$  estimates are much closer to the VSD, though below range, with  $C_{\text{top},f1}(AD)/S_{\text{toroid,BP}}C_{\text{toroid,BP}} \approx 0.44$ .

In summary, the frequency-based estimates of Appendix C 1 a are readily experimentally accessible. Using the normal and removed configurations gives  $C_{\text{self}}$  estimates that are similar to the Medhurst and VSD, as expected from this Note. However, the discrepancy in  $C_{\text{total}}$  with the VSD limits a more detailed investigation (see below). As a result, the gradient energy correction and  $C_{\text{top},f1}$  correction factors weren't explored. Using a disconnected configuration gives alternate estimates without direct comparison to the VSD or within this Note, but is as equally accessible to explore experimentally as the removed configuration. What remains is to see whether either of these approaches (removed or disconnected) make conceptual sense or have practical utility. Future work could explore a mixture of secondary and toroid sizes to see if any of these estimates are stable. That is, whether or not there is a pairing of a  $C_{\text{self}}$  estimate that depends only on the secondary coil dimensions, with a  $C_{\text{top}}$  estimate that depends only on the toroid dimensions, both with some assumptions about their environments. If this is possible, then this could lead to improved estimates that could be incorporated in design software like JavaTC. That said, reasonable estimates already exist, and true accuracy probably requires experimental or numerical work. Nevertheless, this remains a conceptual curiosity, and such future work would provide insight into how separable and meaningful  $C_{\text{self}}$  and  $C_{\text{top}}$  are in practice.

#### a. Discrepancy between $C_{\text{total}}$ from VSD and from measurements

The previous section noticed that the VSD's values of  $C_{\text{total}}$  were much smaller than our experimental ones, by a factor of 1.9 to 3.7, which is rather concerning. This discrepancy is a surprise because the TSSP's "Tests and Measurements" webpage<sup>5</sup> reports percent-level agreement with measurements of three loaded Tesla coils. Revisiting the "mdthor" comparison from that webpage, but using the VSD, seems to show a similar disagreement. That comparison is of the "Project Thor" Tesla coil, which is well documented.<sup>25</sup> Its  $f_1 \approx 65.6$  kHz and  $L_s \approx 80.2$  mH, so  $C_{\text{total}} \approx 73.4$  pF. The TSSP's webpage says it reproduces that  $f_1$  to within 1.5% with a tailored simulation. Looking at the VSD entries, the closest have  $H \approx 1.593$  m (supposed to be about 1.5),  $H/D = 4$  (somewhere within 3.75 to 3.94),  $D \approx 0.39825$  m (supposed to be about 0.4),  $D_1 \approx 1.912$  m (supposed to be about 1.5) via  $TD = 1.2$  (should be closer to 1.0), and  $D_2 \approx 0.418$  m (supposed to be 0.2). All together, I would expect these entries to have a larger  $C_{\text{total}}$ , but instead, across all other parameter values, the entries have  $C_{\text{total}} \in [30.1, 35.5]$  pF, which is less than half the expected value. (To highlight this discrepancy differently, of these entries, the ones with the closest  $L_s$  of 50 mH had  $f_1 \geq 119$  kHz, already well above the expectation.) To double check my data

processing, I did spot check a few entries in the raw VSD data file, to make sure they matched.

So, I'm not quite sure what to make of this discrepancy. My suspicion is that it's a mixture of both some of the VSD entries having errors that don't otherwise reflect on later checks of the TSSP software, as well as a possible larger  $C_{\text{total}}$  for our measurements because of their environments (e.g., walls and ceilings not present for the comparable VSD entries). Whatever the case, it does raise some uncertainty about the rest of this Note, unfortunately.

## REFERENCES

- <sup>1</sup>A. Hund, *High-Frequency Measurements*, 2nd ed. (McGraw-Hill, 1951).
- <sup>2</sup>V. G. Welsby, *The Theory and Design of Inductance Coils*, 2nd ed. (Wiley, 1960).
- <sup>3</sup>G. W. O. Howe, "The calibration of wave-meters for radio-telegraphy," *Proceedings of the Physical Society of London* **24**, 251 (1911). DOI: 10.1088/1478-7814/24/1/339
- <sup>4</sup>T. H. Lee, *Planar Microwave Engineering*, Cambridge (2004). Ch. 6.5.2, p. 142. See App. A above.
- <sup>5</sup>Paul Nicholson and the Tesla Secondary Simulation Project collaboration: Virtual Secondary Database (2008). Database and documentation available online: <http://abelian.org/tssp/vsd/>
  - \* Typical voltage and current profiles for entries with toroids: <http://abelian.org/tssp/pn1710/#EX8>
  - \* Comparison of simulations with measurements: <http://abelian.org/tssp/tests.html>
 2025 update: These websites seem down, so here are archival links:
  - \* <https://web.archive.org/web/20250223150014/http://abelian.org/tssp/>
  - \* <https://web.archive.org/web/20240402013100/http://abelian.org/tssp/vsd/>
  - \* <https://web.archive.org/web/20240406012141/http://abelian.org/tssp/pn1710/#EX8>
  - \* <https://web.archive.org/web/20240402154054/http://abelian.org/tssp/tests.html>
 Archive of a related LNetgen effort by the same author:
  - \* <https://www.i2phd.org/abelian/abelian.org/lcnetgen/index.html>
- <sup>6</sup>R. G. Medhurst, "H.F. resistance and self-capacitance of single-layer solenoids," *Wireless Engineer* **24**, 35 (1947); **24**, 80 (1947). Available online: <http://g3ynh.info/zdocs/refs/Medhurst/Medhurst1947.html>
- <sup>7</sup>D. W. Knight, "The self-resonance and self-capacitance of solenoid coils: applicable theory, models and calculation methods," (2016). DOI: 10.13140/RG.2.1.1472.0887
 

Available online: <http://g3ynh.info/zdocs/magnetics/appendix/self-res.html>
- <sup>8</sup>B. McGuyer, "Paul Drude's Prediction of Nonreciprocal Mutual Inductance for Tesla Transformers," *PLoS ONE* **9**, e115397 (2014). Available online: <https://doi.org/10.1371/journal.pone.0115397>
- <sup>9</sup>B. H. McGuyer, "Transmission-line models for single-layer solenoid inductors," technical note, 2021.
 

Available online: <https://bartmcguyer.com/notes/note-13-CoiledLines.pdf>
- <sup>10</sup>G. Grandi, M. K. Kazimierczuk, A. Massarini, and U. Reggiani, "Stray Capacitances of Single-Layer Solenoid Air-Core Inductors," *IEEE Transactions on Industrial Applications* **35**, 1162–1168 (1999). DOI: 10.1109/28.793378
- <sup>11</sup>J. M. Miller, "Electrical oscillations in antennas and inductance coils," *Bulletin of the Bureau of Standards* **14**, 677–696 (1918).
 

Available: [https://nvlpubs.nist.gov/nistpubs/bulletin/14/nbsbulletinv14n4p677\\_A2b.pdf](https://nvlpubs.nist.gov/nistpubs/bulletin/14/nbsbulletinv14n4p677_A2b.pdf)

- <sup>12</sup>J. M. Miller, “Electrical oscillations in antennas and inductance coils,” *Proceedings of the Institute of Radio Engineers* **7**, 299–326 (1919). DOI: 10.1109/JRPROC.1919.217442
- <sup>13</sup>B. H. McGuyer, “Deriving the equivalent circuit of a Tesla coil,” technical note, 2020.  
Available online: <https://bartmcguyer.com/notes/note-11-TcEquations.pdf>
- <sup>14</sup>B. H. McGuyer, “Test of the Miller self-capacitance of a solenoid inductor,” technical note, 2021.  
Available online: <https://bartmcguyer.com/notes/note-12-MillerCapTest.pdf>
- <sup>15</sup>D. F. Rivera and J. P. Casey, “Approximate capacitance formulas for electrically small tubular monopole antennas,” NUWC-NPT Technical Report 10,817 (1995). DTIC accession number: ADA302235.  
Available online: <https://apps.dtic.mil/sti/citations/ADA302235>  
\* Fig. 3 shows a representative charge distribution [giving  $c(x)$ ] with discussion on p. 4.
- <sup>16</sup>C. M. Butler, “Capacitance of a finite-length conducting cylindrical tube,” *J. Appl. Phys* **51**, 5607–5609 (1980). DOI: 10.1063/1.327575
- <sup>17</sup>B. A. Aničin, “Transmission line parameters of video delay lines,” *IEEE Proceedings - Microwaves, Antennas and Propagation* **146**, 355–358 (1999). DOI: 10.1049/ip-map:19990666
- <sup>18</sup>F. S. Chute and F. E. Vermeulen, “On the self-capacitance of solenoidal coils,” *Canadian Electrical Engineering Journal* **7**, 31–37 (1982). DOI: 10.1109/CEEJ.1982.6594621
- <sup>19</sup>Bart McGuyer, “(Dataset) Measured self-resonant frequencies of an air-cored single-layer solenoid inductor,” *Harvard Dataverse*, V1 (2020). <https://doi.org/10.7910/DVN/QV8HQS>
- <sup>20</sup>K. D. Skeldon, A. I. Grant, and S. A. Scott, “A high potential Tesla coil impulse generator for lecture demonstrations and science exhibitions,” *American Journal of Physics* **65**, 744–754 (1997). DOI: 10.1119/1.18645  
\* See comments below Eq. (16) and the last paragraph before Section B on p. 750.
- <sup>21</sup>A. Mariscotti, “Measuring the stray capacitance of solenoids with a transmitting and a receiving coil,” *Metrology and Measurement Systems* **18**, 47 (2011). DOI: 10.2478/v10178-011-0005-4  
Available online: <https://hal.archives-ouvertes.fr/hal-02883572/document>
- <sup>22</sup>J. C. Hubbard, “On the effect of distributed capacity in single layer solenoids,” *Physical Review* **9**, 529–541 (1917). DOI: <https://doi.org/10.1103/PhysRev.9.529>
- <sup>23</sup>G. Breit, “The distributed capacity of inductance coils,” *Physical Review* **17**, 649–677 (1921). DOI: <https://doi.org/10.1103/PhysRev.17.649>
- <sup>24</sup>R. Rhea, “A multimode high-frequency inductor model,” *Applied Microwave & Wireless* **9(6)**, 70–80 (1997).
- <sup>25</sup>Marco Denicolai, “Tesla Transformer for Experimentation and Research,” *Licentiate Thesis*, Helsinki University of Technology (2001). Available online: <https://www.eltem.fi/lthesis.pdf>