


generated by kicad/gen_sch.py - do not edit

Sheet: /
File: other-m68k.kicad_sch

Title: other-m68k: 68000 SBC with 68681 DUART, framebuffer, PS/2, SD, au

Size: A4	Date:	**Rev: C1**
KiCad E.D.A. 9.0.9		Id: 1/8

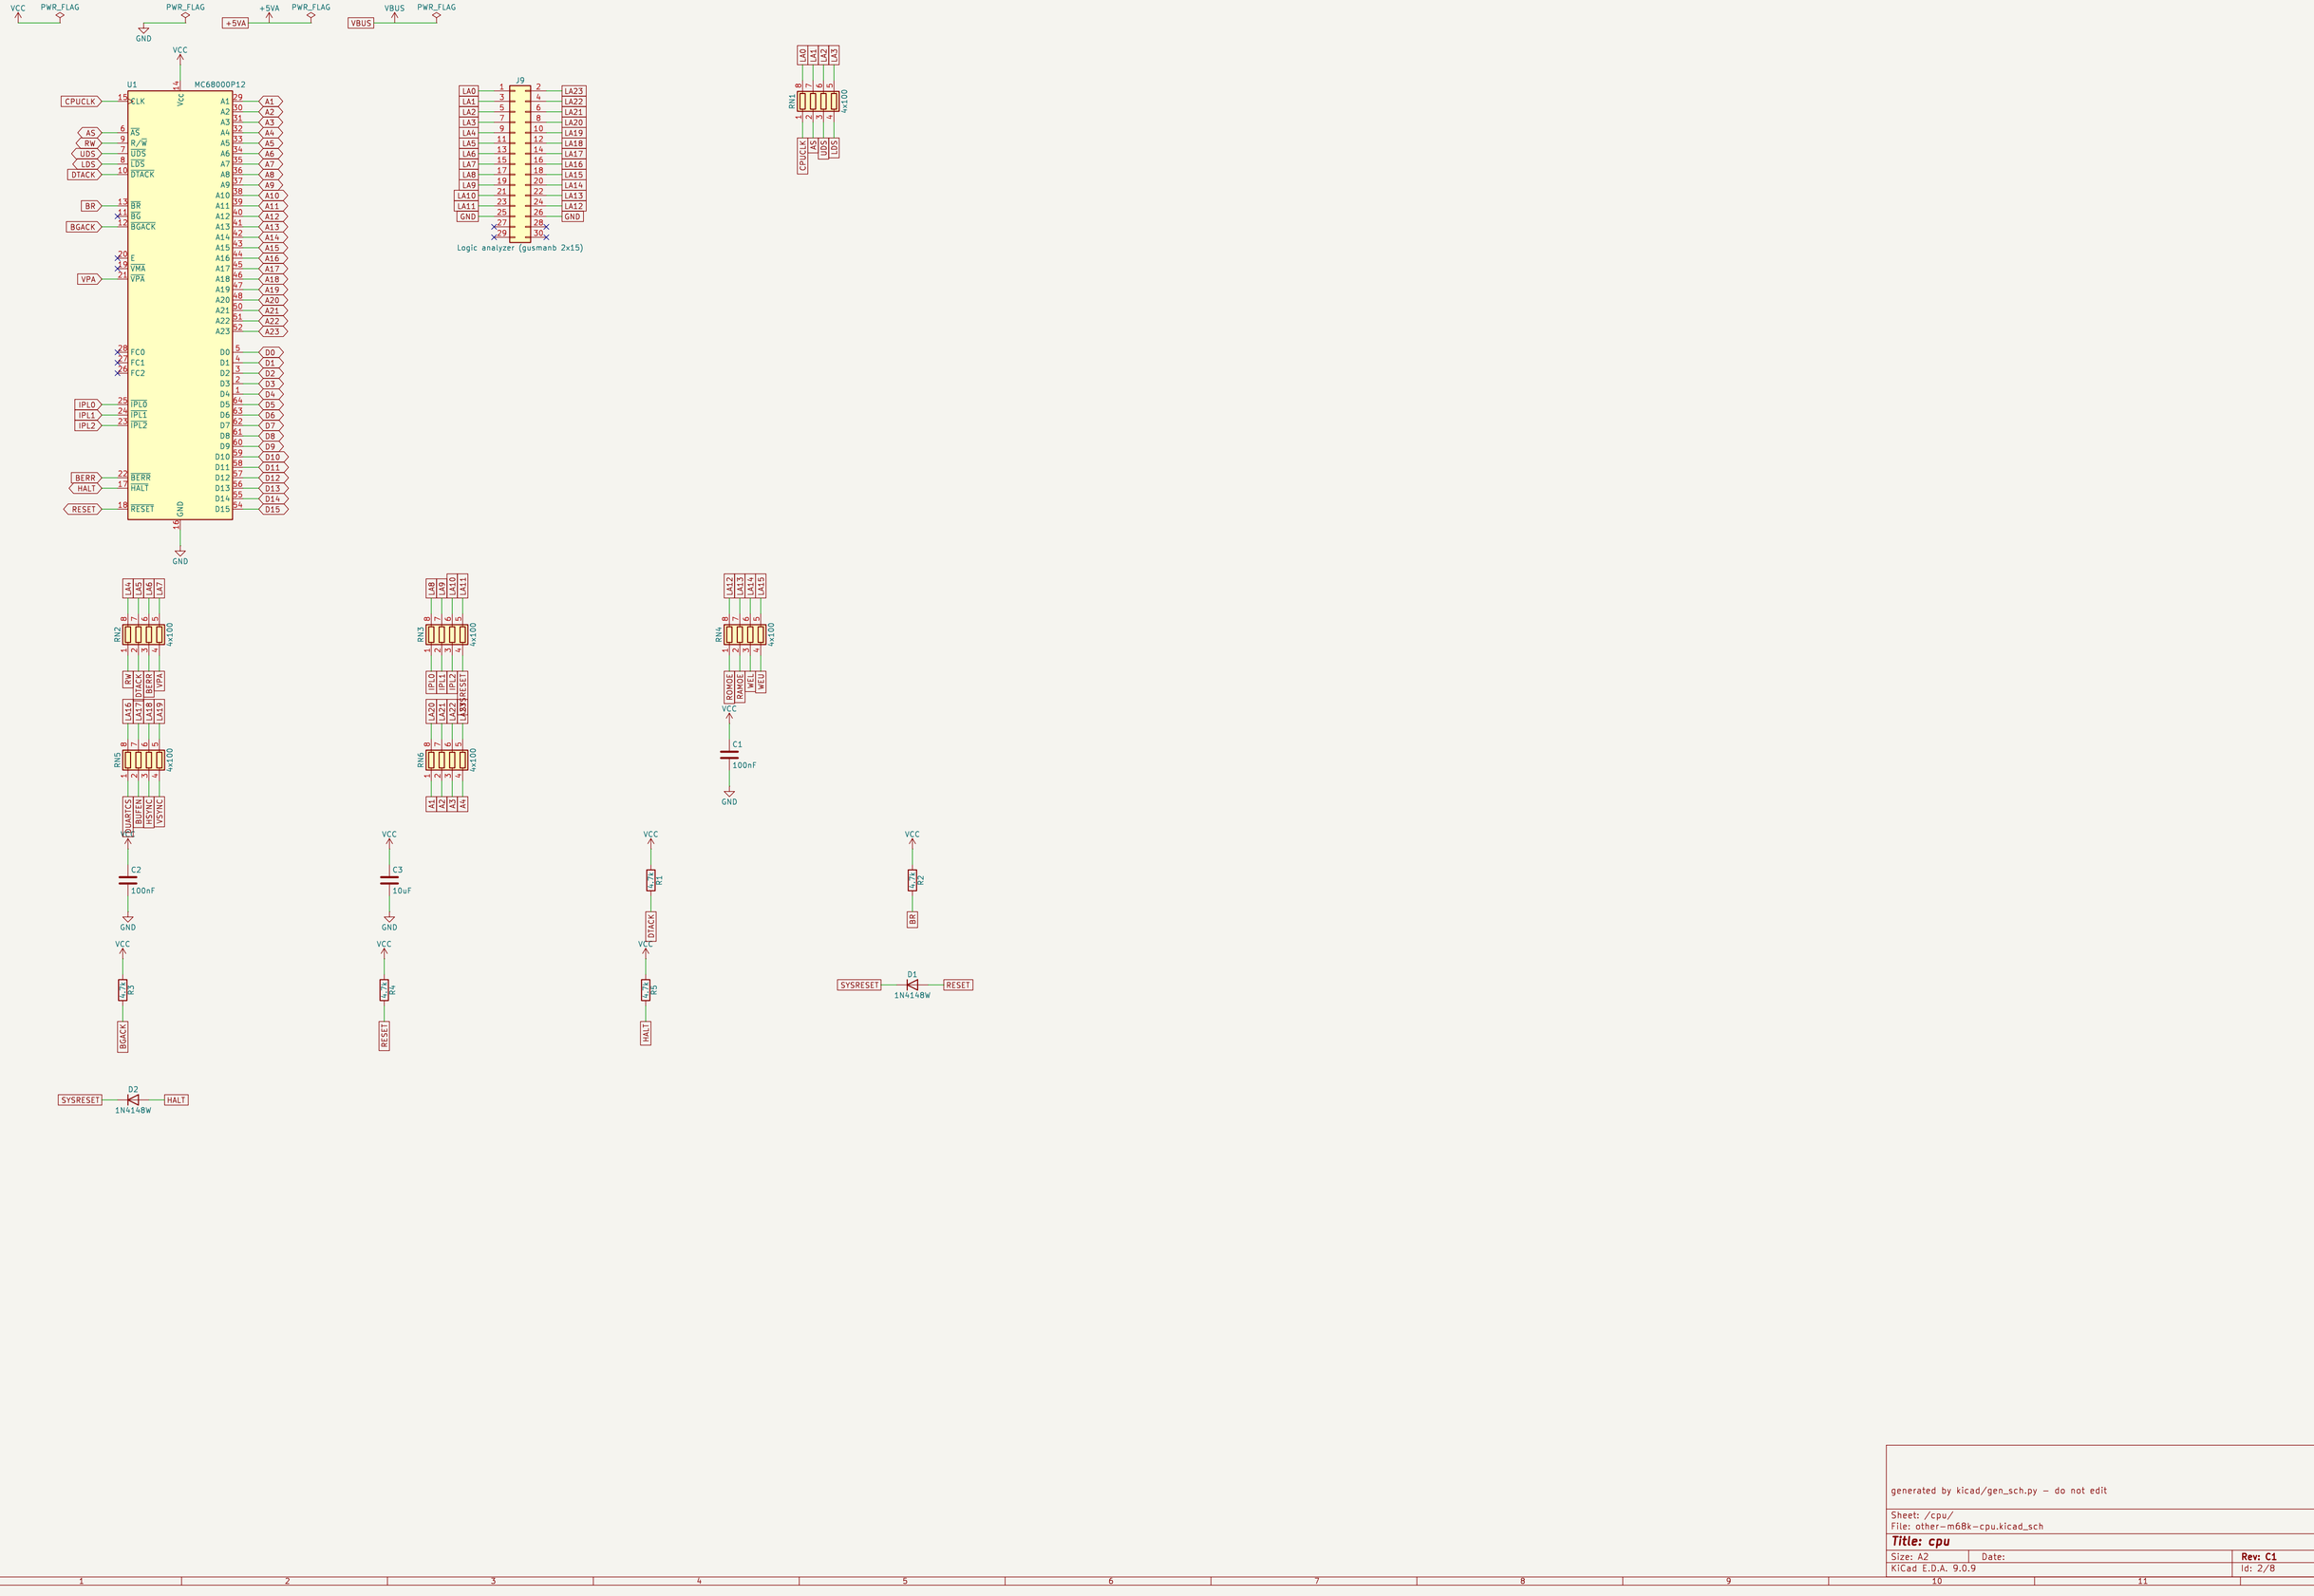



generated by kicad/gen_sch.py – do not edit


Sheet: /cpu/
File: other-m68k-cpu.kicad_sch


Title: cpu


Size: A2	Date:	**Rev: C1**
KiCad E.D.A. 9.0.9		Id: 2/8

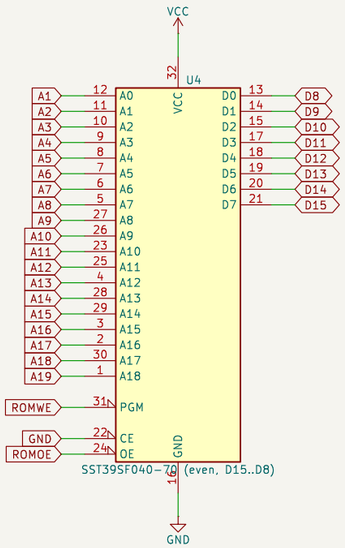


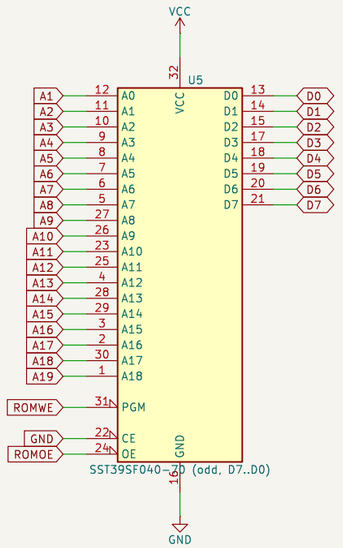

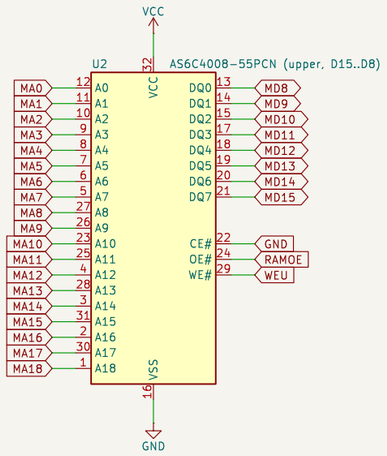

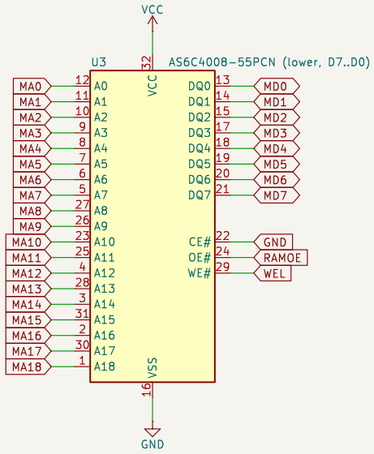

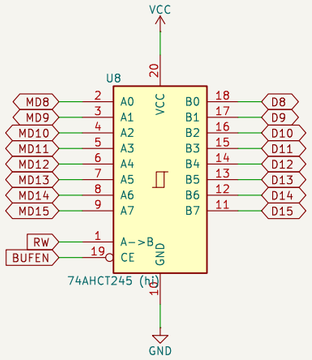

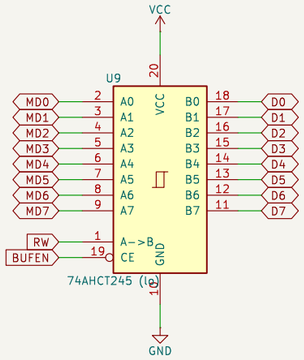
















generated by kicad/gen_sch.py — do not edit


Sheet: /memory/
File: other-m68k-memory.kicad_sch


Title: memory

Size: A3	Date:	**Rev: C1**
KiCad E.D.A. 9.0.9		Id: 3/8

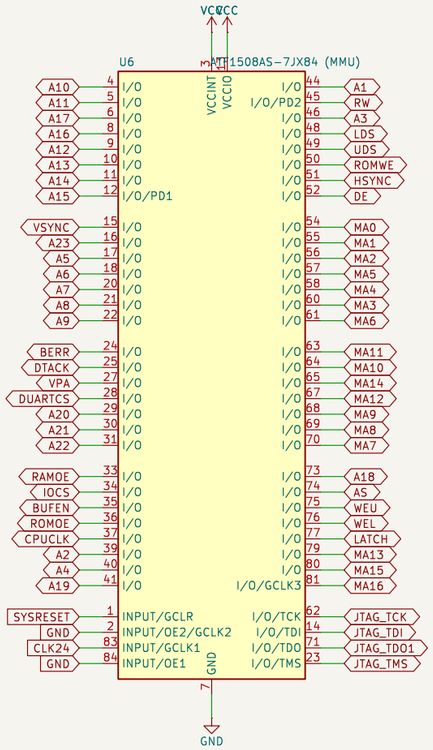





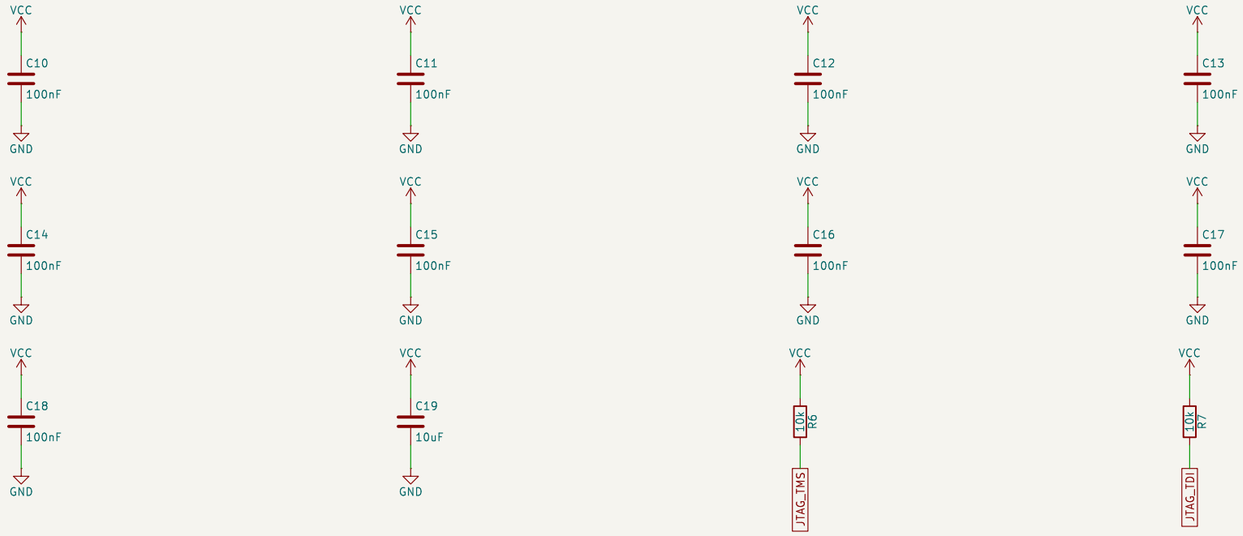



generated by kicad/gen_sch.py — do not edit


Sheet: /cpld1/
File: other-m68k-cpld1.kicad_sch

Title: cpld1

Size: A3	Date:	**Rev: C1**
KiCad E.D.A. 9.0.9		Id: 4/8

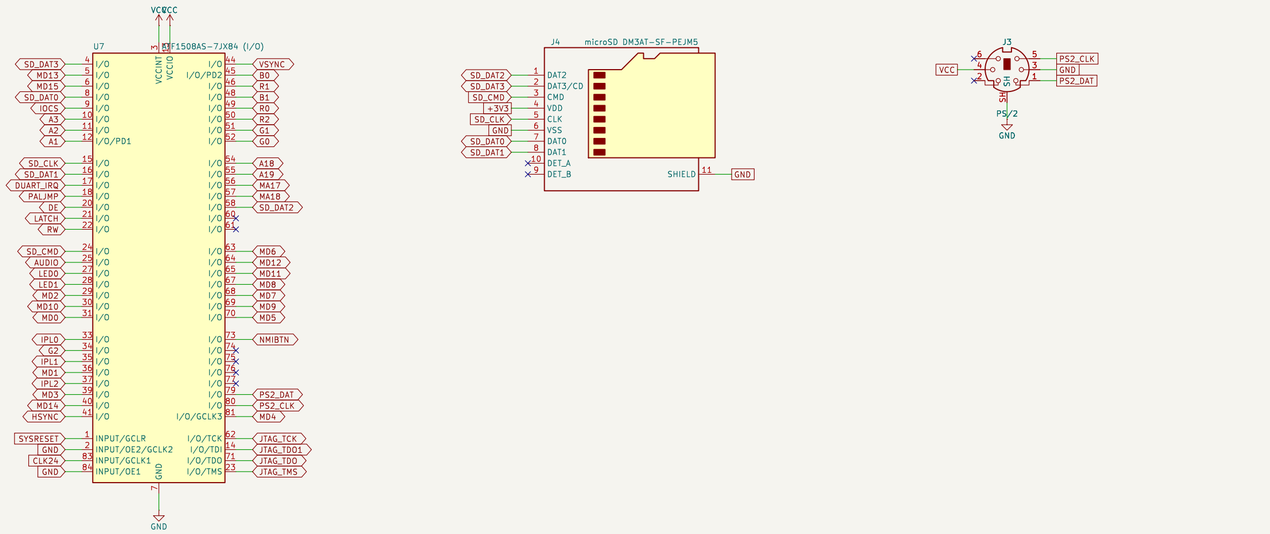



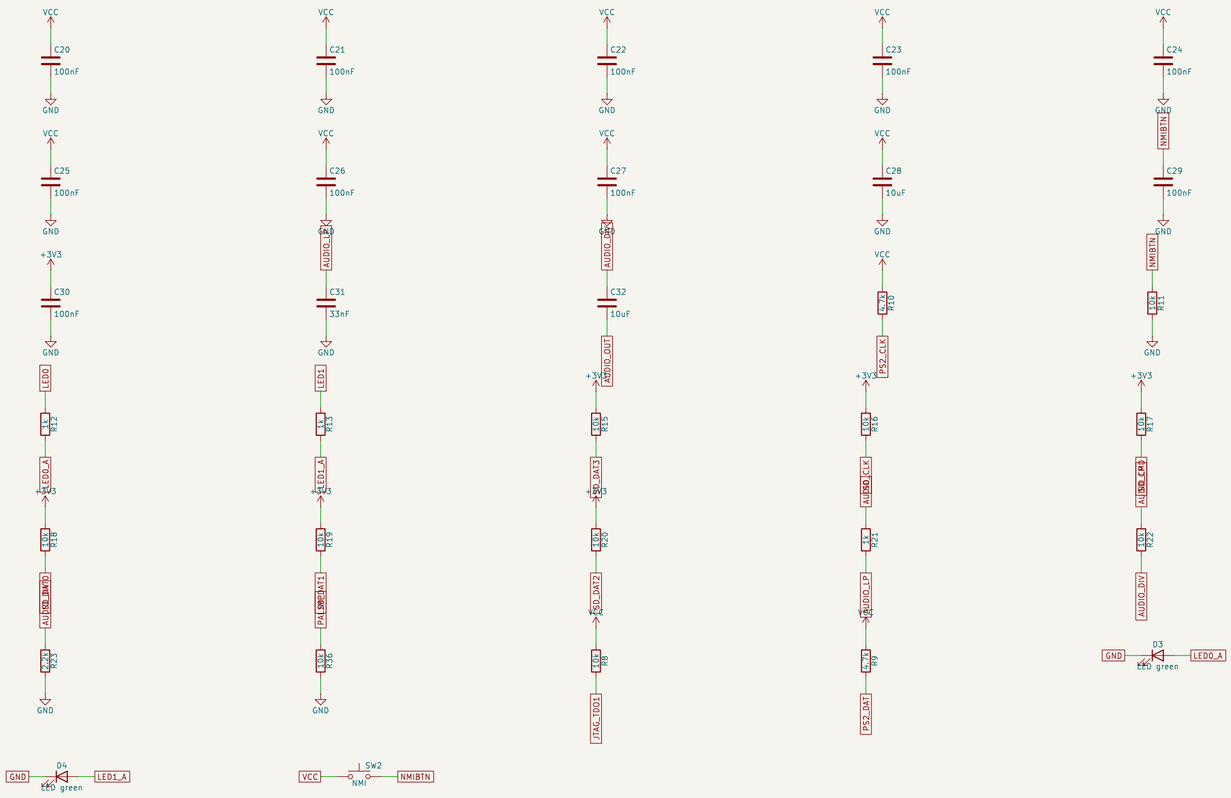

generated by kicad/gen_sch.py — do not edit


Sheet: /cpld2/
File: other-m68k-cpld2.kicad_sch

Title: cpld2

Size: A2	Date:	Rev: C1
KiCad E.D.A. 9.0.9		Id: 5/8


+5VA
VCC
U11
AD724JR
CE
NTSC/PAL
HSYNC
VSYNC
4FSC_CLK
RED
GREEN
BLUE
AVCC
DVCC
AGND
DGND
LUM_OUT
CHROM_OUT
CVBS_OUT
TRAP
VCC
STND
HSYNC
VSYNC
FIN
RIN
GIN
BIN
LUMA
CRMA
COMP
SELECT
GND
J10
SVIDEO_C
SVIDEO_Y
S-video
J5
VIDEO
RCA composite
Y2
3.579545MHz
FB1
600R@100MHz
+5VA
CRMA
C39
220uF
FIN
CRMA_AC
C36
10pF
R_DAC
C33
100nF
RIN
C40
100nF
G_DAC
C34
100nF
GIN
C41
10uF
COMP
C37
220uF
COMP_AC
B_DAC
C35
100nF
BIN
C42
100nF
LUMA
C38
220uF
LUMA_AC
C43
10uF
R2
R1
R0
G2
G1
G0
B1
B0
470
R24
R25
R26
470
R27
R28
R29
470
R31
R32
R33
470
R34
R35
R36
75
R21
R22
R23
100
R30
R37
R38
R39
CRMA_ADJ
SELECT_DAC
COMP_DAC
VIDEO
SVIDEO_Y
SVIDEO_C
LUMA_AC
B_DAC
generated by kicad/gen_sch.py - do not edit
Sheet: /video/
File: other-m68k-video.kicad_sch
Title: video
Size: A2
Date:
Rev: C1
KiCad E.D.A. 9.0.9
Id: 6/8


VCC
U10
MC68681P
X1/CLK
X2
D0
D1
D2
D3
D4
D5
D6
D7
RS1
RS2
RS3
RS4
CS
R/W
IACK
RESET
DTACK
IRQ
TXDA
RXDA
TXDB
RXDB
OP0
OP1
OP2
OP3
OP4
OP5
OP6
OP7
IP0
IP1
IP2
IP3
IP4
IP5
GND
DUART_X1
DUART_X2
D0
D1
D2
D3
D4
D5
D6
D7
A1
A2
A3
A4
DUARTCS
RW
DUART_IACK
SYSRESET
DTACK
DUART_IRQ
FTDI_RXD
FTDI_TXD
FTDIB_RXD
FTDIB_TXD
DUART_OP0
DUART_OP1
DUART_IP0
DUART_IP1
DUART_IP2
DUART_IP3
DUART_IP4
DUART_IP5
J12
Joystick (Atari DE-9)
JOY_POTB
JOY_POTA
JOY_RIGHT
GND
JOY_LEFT
JOY_5V
JOY_DOWN
JOY_FIRE
JOY_UP
JOY_POTA_C
JOY_POTA_END
JOY_POTB_C
JOY_POTB_END
U14A
U14B
U14C
U14D
U14E
U14F
74HC14
U14G
U13
MCP130T-450I/TT
VDD
RST
VSS
J11
FTDI B (GND CTS VCC TXD RXD RTS)
SERB_VCC
FTDIB_TXD
FTDIB_RXD
DUART_OP1
J2
FTDI (GND CTS VCC TXD RXD RTS)
FTDI_TXD
FTDI_RXD
JOY_DIS_B1
JOY_DIS_B2
Q1A
MMDT3904
Q1B
Y1
3.6864MHz
F2
200mA
JOY_5V
F3
SERB_5V_FUSED
C44
15pF
C45
NP (0-5pF)
C46
15nF
C47
15nF
C48
100nF
C49
100nF
C50
100nF
R44
10k
R45
1k
R46
4.7k
R47
10k
R48
1k
R49
4.7k
R50
10k
R51
1k
R52
1k
R53
1k
R54
1k
R55
4.7k
D6
D7
D8
BAT54W
SW1
RESET
generated by kicad/gen_sch.py - do not edit
Sheet: /io/
File: other-m68k-io.kicad_sch
Title: io
Size: A2
Date:
Rev: C1
KiCad E.D.A. 9.0.9
Id: 7/8

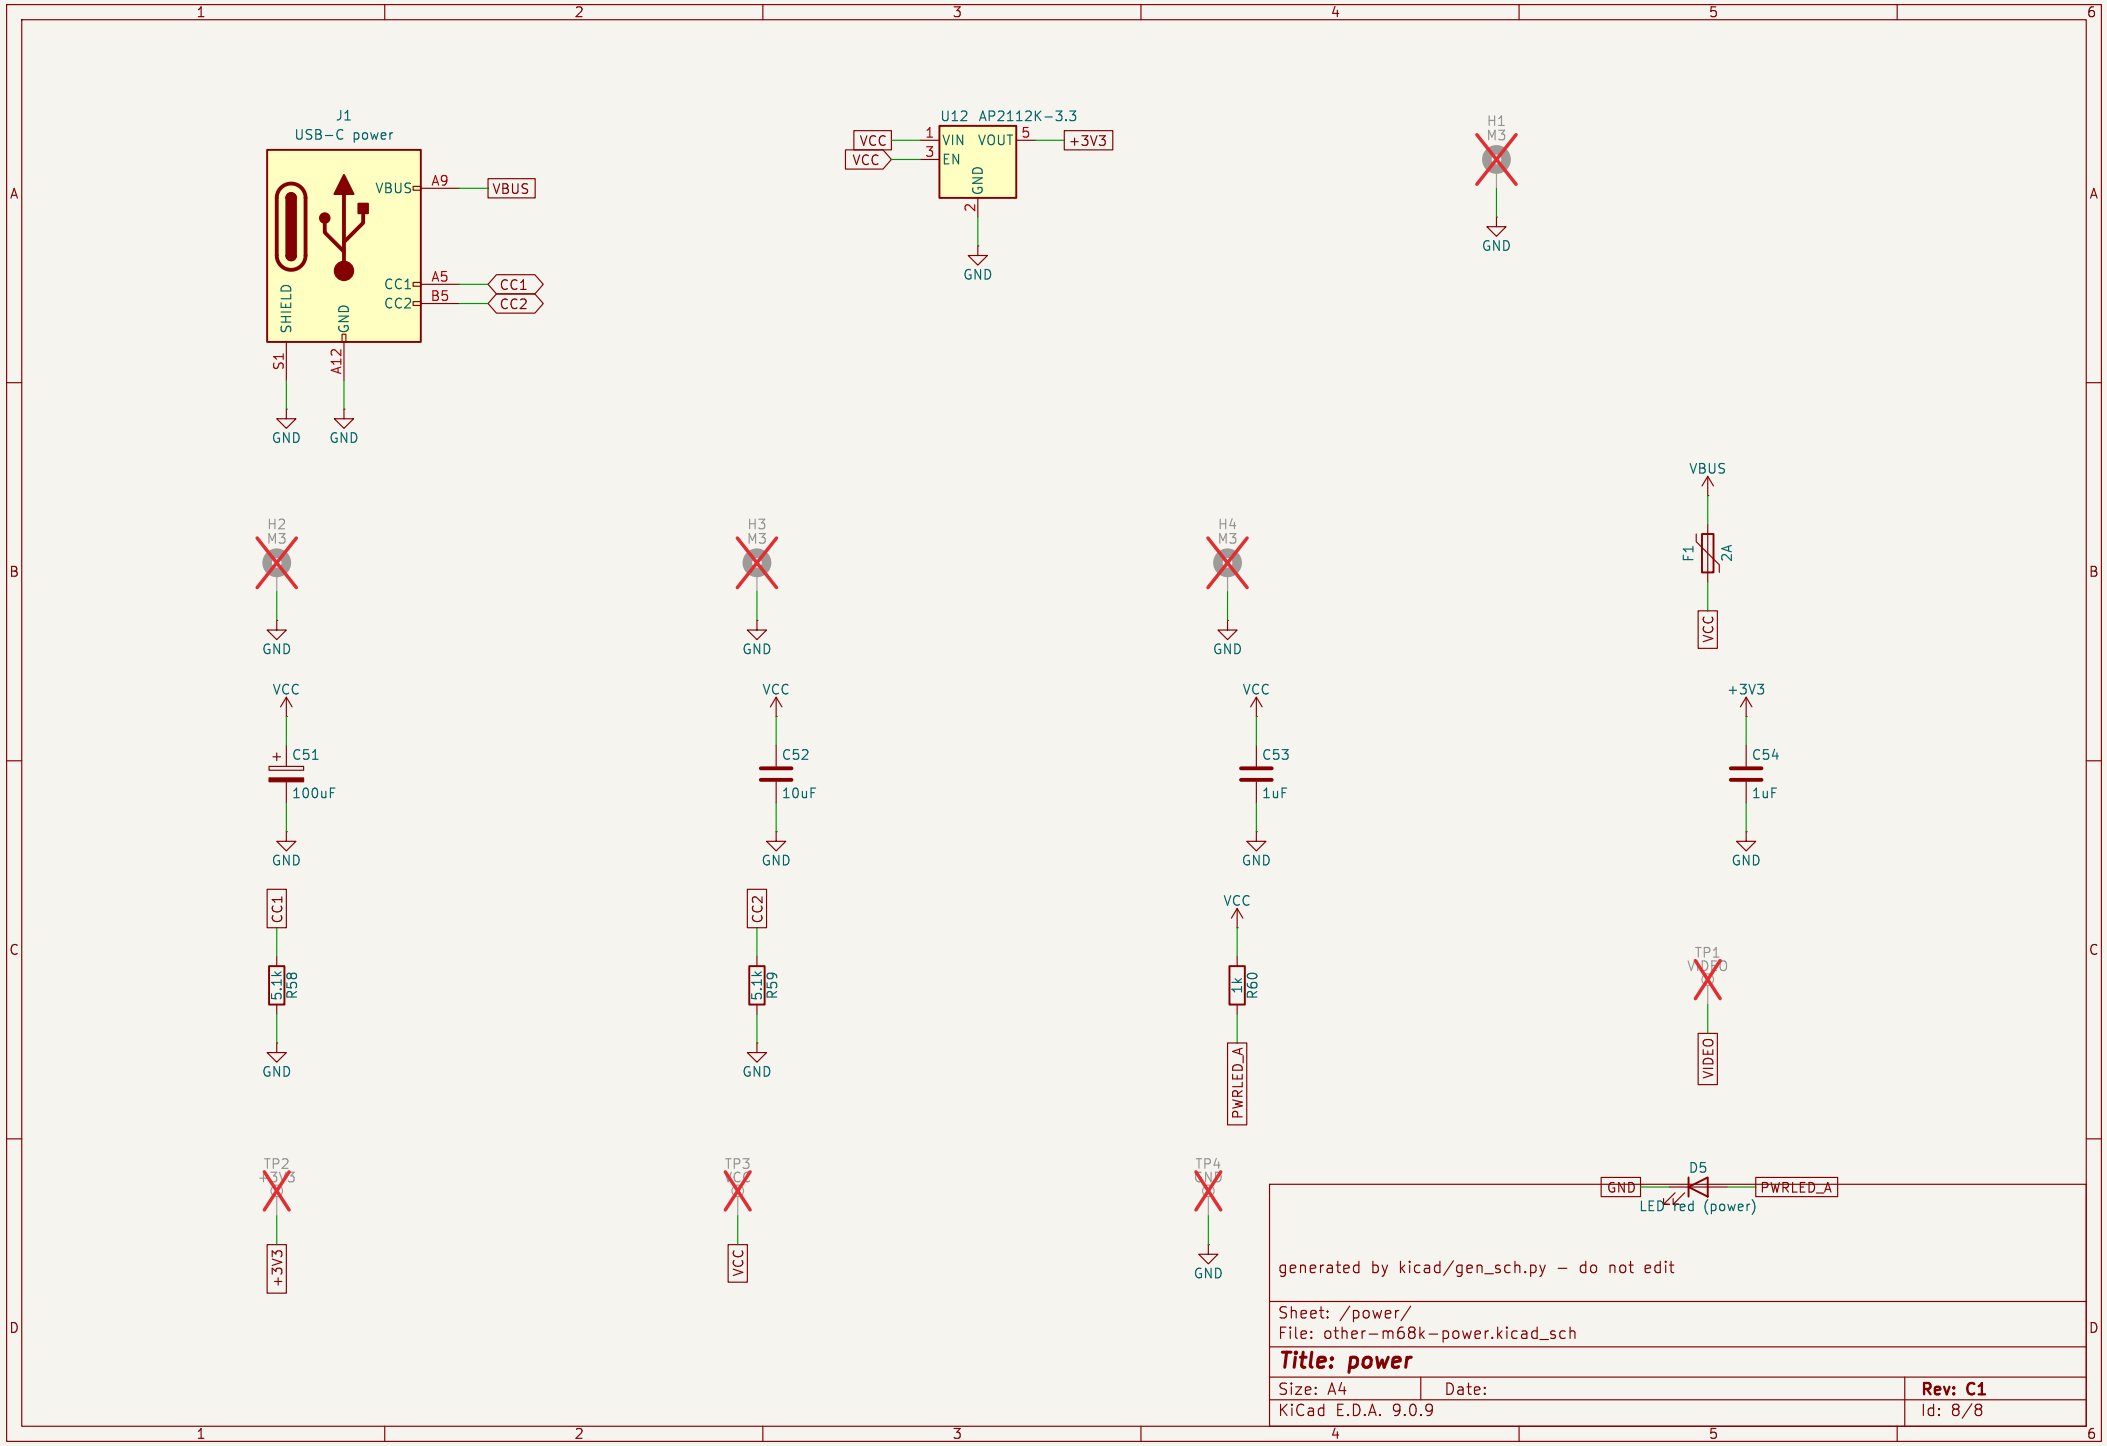
J1
USB-C power
VBUS
A9
VBUS
CC1
A5
CC1
CC2
B5
CC2
SHIELD
GND
S1
A12
GND
GND
U12 AP2112K-3.3
VCC
VCC
1
3
VIN
EN
VOUT
GND
5
+3V3
2
GND
H1
M3
GND
H2
M3
GND
H3
M3
GND
H4
M3
GND
VBUS
F1
2A
VCC
VCC
C51
100uF
GND
VCC
C52
10uF
GND
VCC
C53
1uF
GND
+3V3
C54
1uF
GND
CC1
5.1k
R58
GND
CC2
5.1k
R59
GND
VCC
1k
R60
PWRLED_A
TP1
VIDEO
VIDEO
TP2
+3V3
+3V3
TP3
VCC
VCC
TP4
GND
GND
GND
D5
LED_red (power)
PWRLED_A
generated by kicad/gen_sch.py – do not edit
Sheet: /power/
File: other-m68k-power.kicad_sch
Title: power
Size: A4
Date:
Rev: C1
KiCad E.D.A. 9.0.9
Id: 8/8