

WT901WiFi Firmware Upgrade

1. Unzip the [13032.zip](#) firmware package, which contains the following 4 .bin files::


名称	修改日期	类型
blank.bin	2022/8/26 星期五 17:...	BIN 文件
eagle.flash.bin	2024/12/6 星期五 15:...	BIN 文件
eagle.irom0text.bin	2024/12/6 星期五 15:...	BIN 文件
esp_init_data_default_v08.bin	2022/8/26 星期五 17:...	BIN 文件

2. Unzip the upgrade toolkit [flash_download_tools_v3.6.6.zip](#)


- ①Open the upgrade tool [flash_download_tools_v3.6.6.exe](#):

名称	修改日期	类型
combine	2019/6/17 星期一 11:...	文件夹
configure	2019/6/17 星期一 11:...	文件夹
dl_temp	2021/8/12 星期四 14:...	文件夹
init_data	2019/6/17 星期一 11:...	文件夹
RESOURCE	2019/6/17 星期一 11:...	文件夹
secure	2019/6/17 星期一 11:...	文件夹
.DS Store	2017/9/22 星期五 19:...	DS_STORE 文件
flash_download_tools_v3.6.6.exe	2019/6/17 星期一 11:...	应用程序
Readme.pdf	2017/9/22 星期五 19:...	WPS PDF 文档


- ②Select [ESP8266 DownloadTool](#)

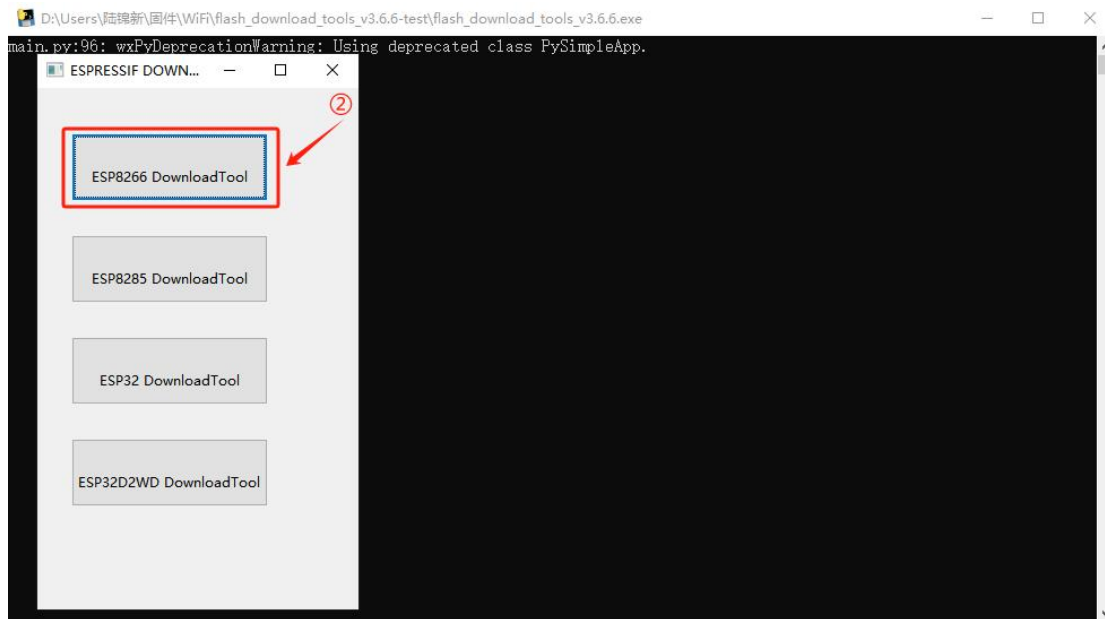


③Select the **eagle.flash.bin** file in the firmware package

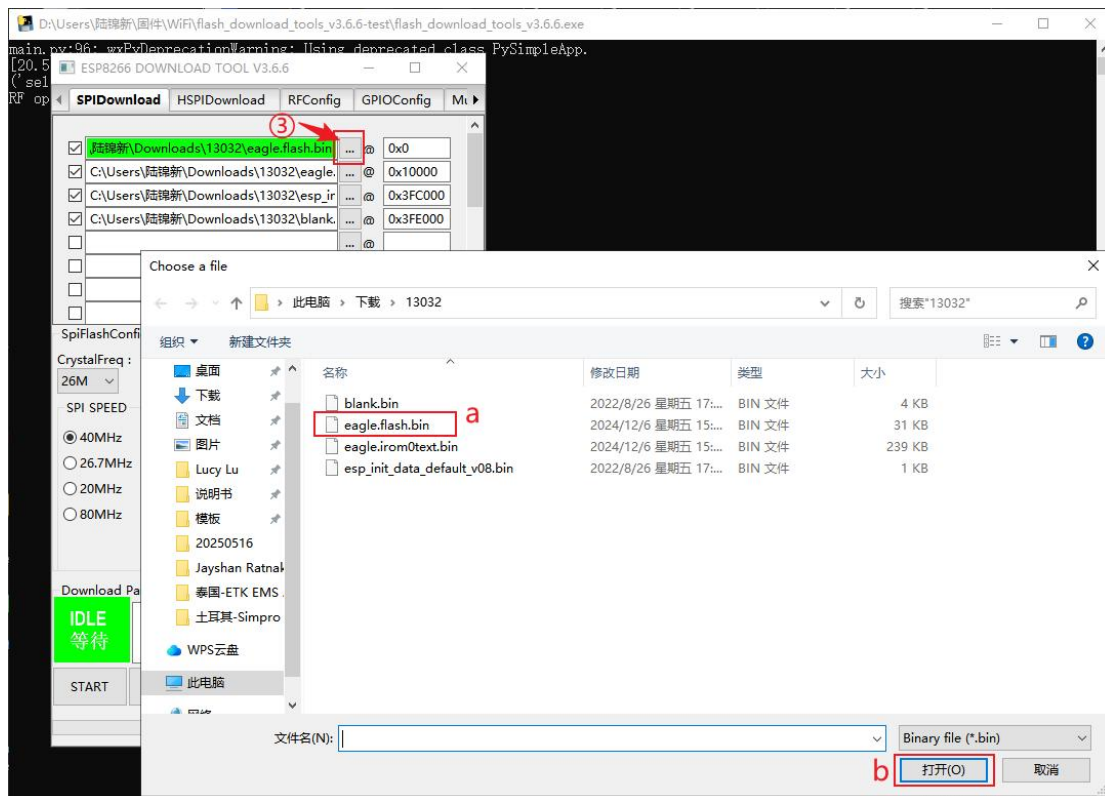


④Select the **eagle.irom0text.bin** file in the firmware package

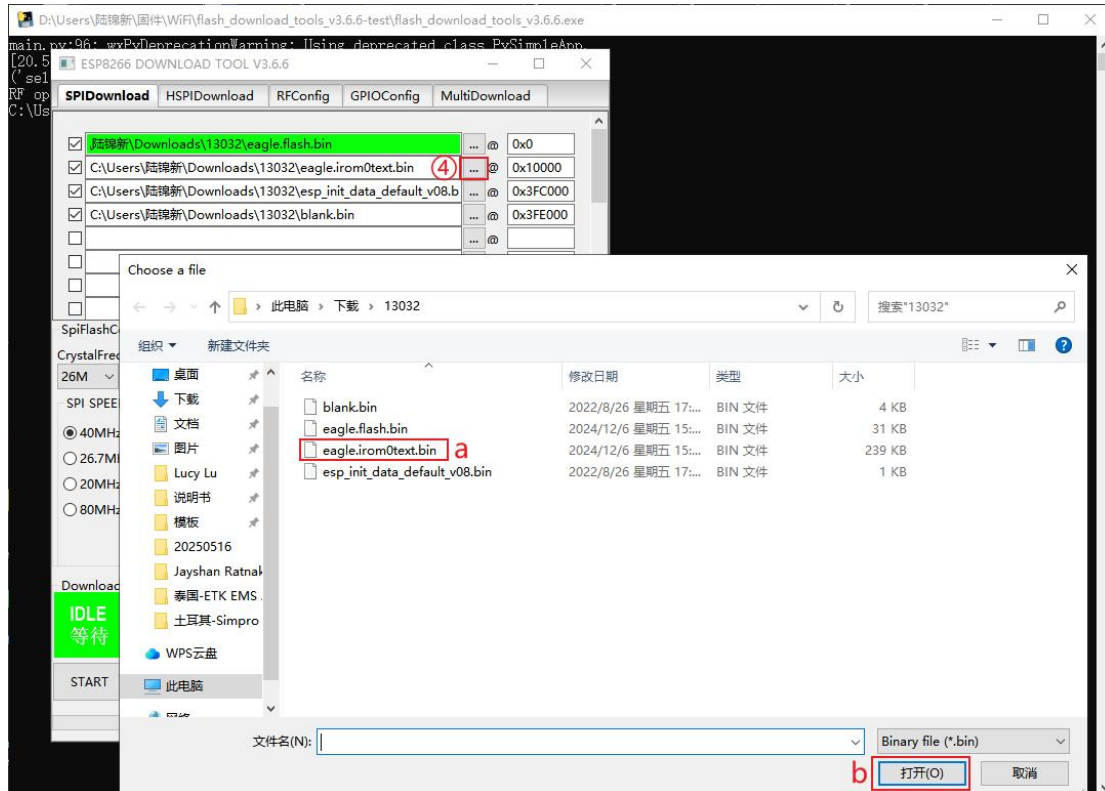


⑤ Select the **esp_init_data_default_v08.bin** file in the firmware package

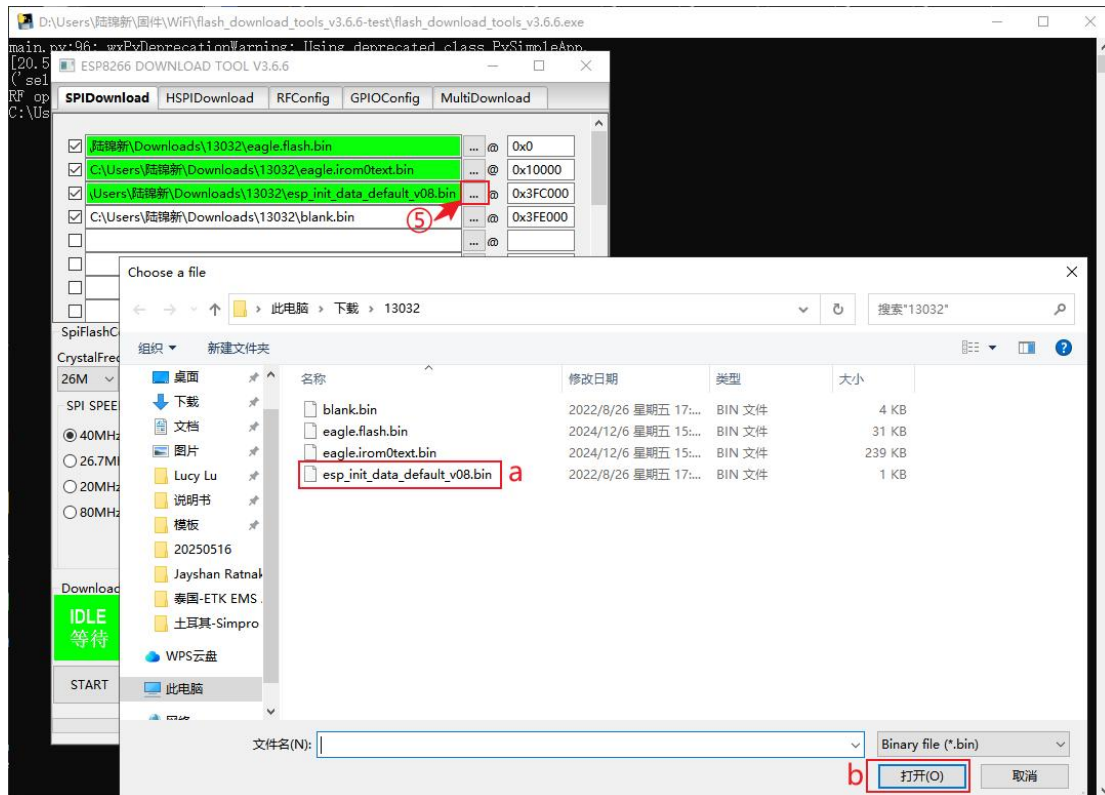


⑥ Select the **blank.bin** file in the firmware package

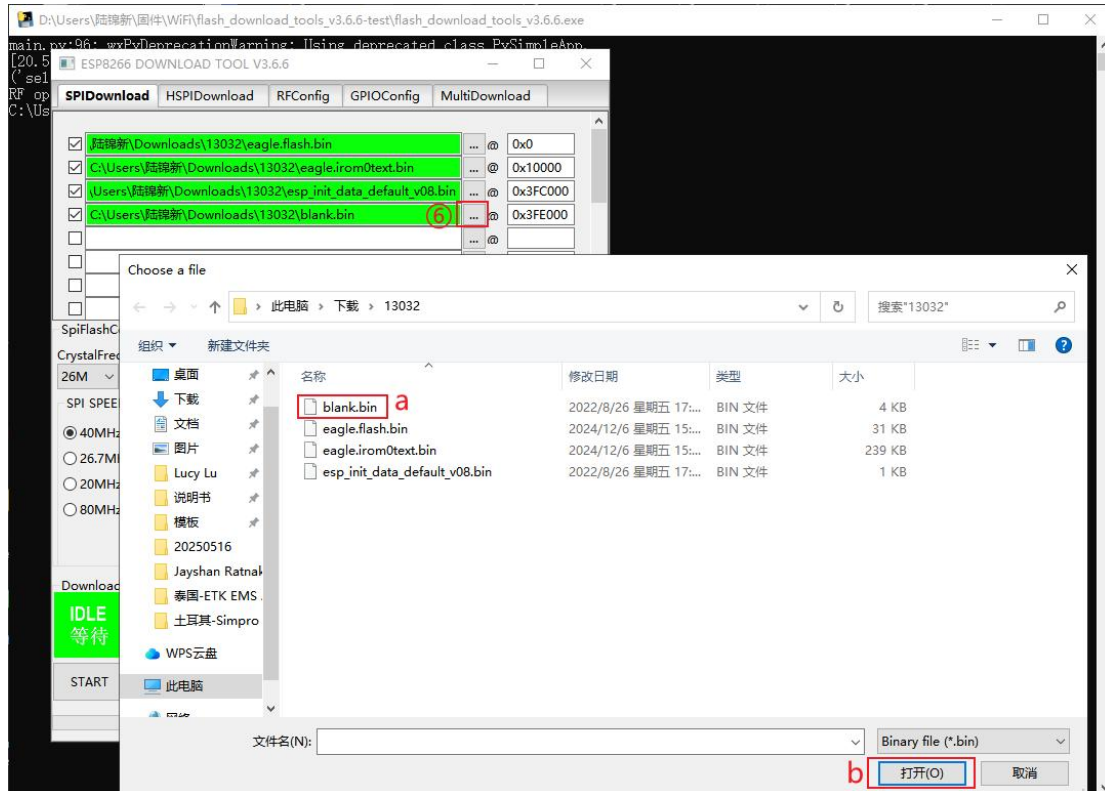


⑦⑧Select the correct serial **port number** and baud rate, select **115200**

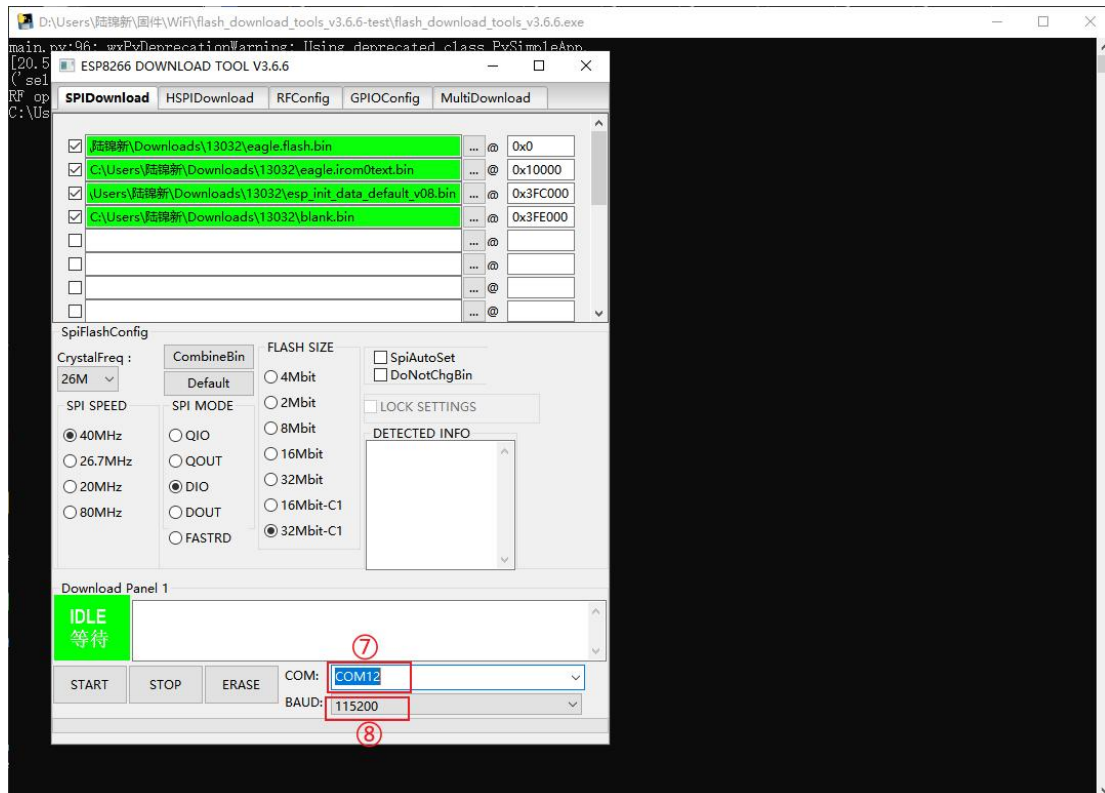


⑨Click **START** to start the upgrade

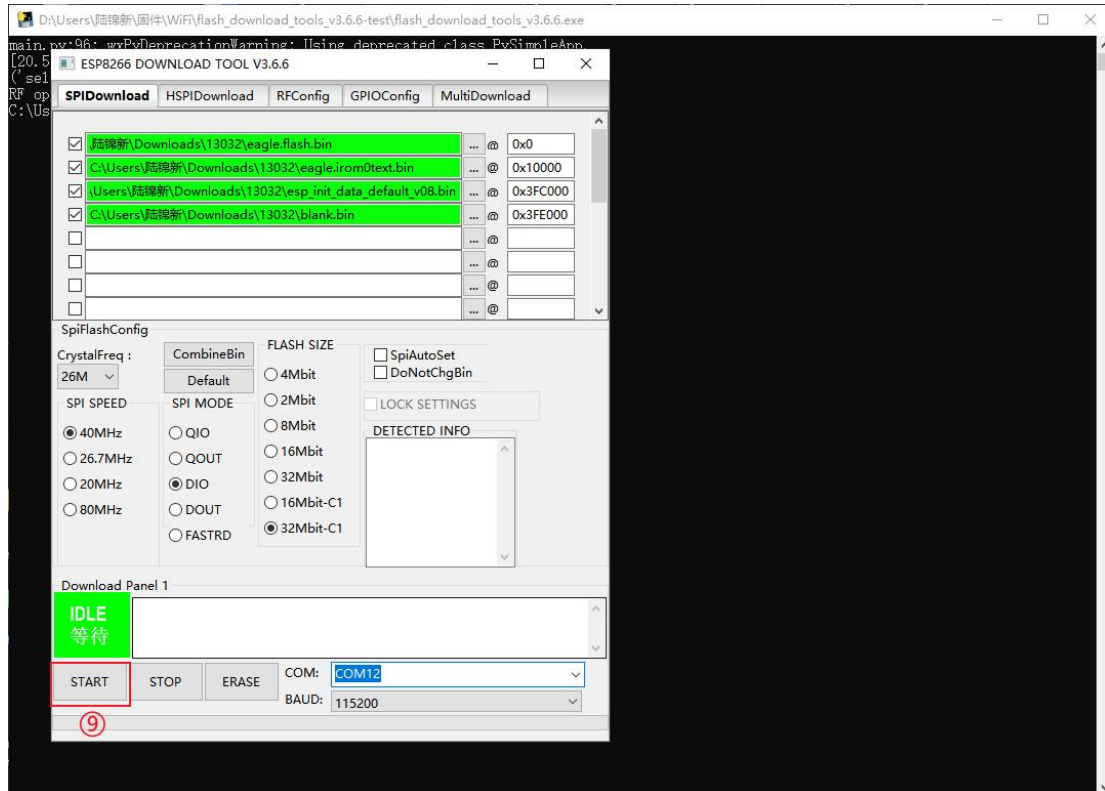

Be careful not to disconnect the sensor or upgrade the software during the upgrade process

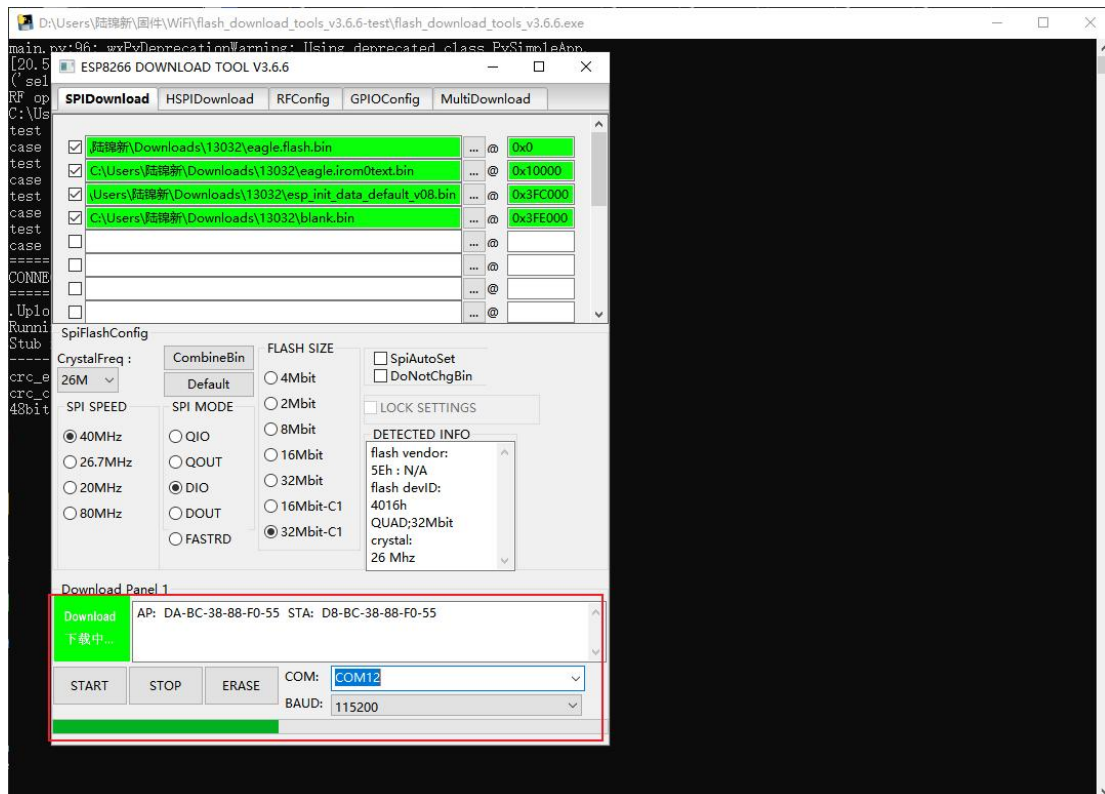

⑩⑩ After the upgrade is completed, close the upgrade software and restart the power of the WT901WiFi sensor

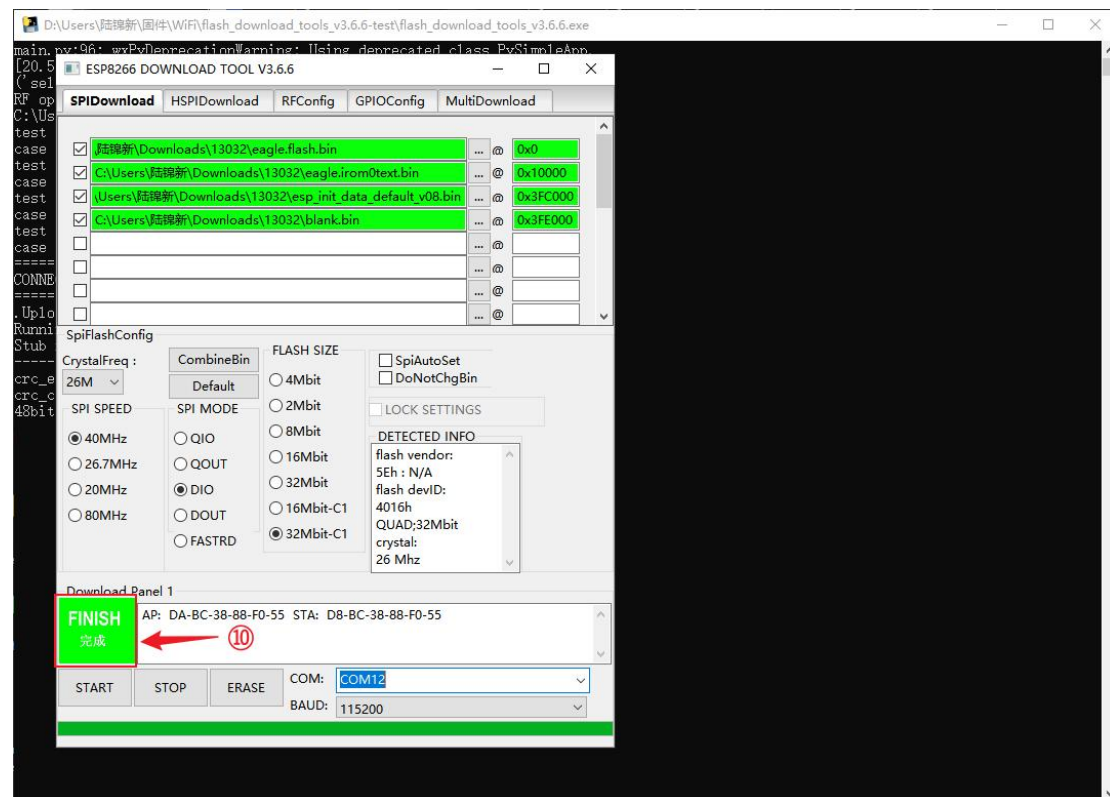

3. Open the PC software and connect to the WT901WiFi sensor:

① Select the model **WT901WiFi**

② Click the **search** button

③ Check the serial port number

④ Open the configuration interface and reconfigure the required parameters

RecordToolsViewAssistLangueConfig

1234

Module category

WT550001B11

COM11

COM12

UDP

TCP

9600

9600

×

+

Q

Q

Q

Q

COM12

Angle X

Angle Y

Angle Z

-92.285°

3.021°

-169.547°

Configuration information

Angle reference

Read Configuration

Calibrate Time

System

Reset

Algorithm: 0 - axis

Install Direction: Horizontal

Calibrate

Acceleration

Magnetic Field

Angle Reference

Reset Z-axis Angle

Range

Band Width: 20 Hz

Communication

Output Rate: 10Hz

Device ID: WT5500001B11

Set

Data forward

Work mode: AP

Station

Protocol: TCP

UDP

Server IP: 192.168.4.2

port: 1399

Set

WiFi name: WTL_SC

password: wtlzmtzn

Version: 13022

ID: WT5500001B11

online

Read Configuration Completed

激活 Windows

转到设置以激活 Windows。

Start Recording

Settings

View files

WT550001B11

COM12

Angle X

Angle Y

Angle Z

-92.285°

3.021°

-169.547°

Configuration information

Angle reference

Read Configuration

Calibrate Time

System

Reset

Algorithm: 0 - axis

Install Direction: Horizontal

Calibrate

Acceleration

Magnetic Field

Angle Reference

Reset Z-axis Angle

Range

Band Width: 20 Hz

Communication

Output Rate: 10Hz

Device ID: WT5500001B11

Set

Data forward

Work mode: AP

Station

Protocol: TCP

UDP

Server IP: 192.168.4.2

port: 1399

Set

WiFi name: WTL_SC

password: wtlzmtzn

Version: 13022

ID: WT5500001B11

online

Read Configuration Completed

激活 Windows

转到设置以激活 Windows。

Start Recording

Settings

View files