

Raspberry Pi Pinout

Home » Boards » Pimoroni » Enviro Plus

3v3 Power
GPIO 2 (I2C1 SDA)
GPIO 3 (I2C1 SCL)
GPIO 4 (GPCLK0)
Ground
GPIO 17
GPIO 27 (PMS5003 Reset)
GPIO 22 (PMS5003 Enable)
3v3 Power
GPIO 10 (SPI0 MOSI)
GPIO 9 (LCD D/C)
GPIO 11 (SPI0 SCLK)
Ground
GPIO 0 (EEPROM SDA)
GPIO 5
GPIO 6
GPIO 13 (PWM1)
GPIO 19 (Mic i2s fs)
GPIO 26
Ground

1	2	5v Power
3	4	5v Power
5	6	Ground
7	8	GPIO 14 (PMS5003)
9	10	GPIO 15 (PMS5003)
11	12	GPIO 18 (Mic i2s clk)
13	14	Ground
15	16	GPIO 23 (ADS1015 Alert)
17	18	GPIO 24 (Gas Heater En)
19	20	Ground
21	22	GPIO 25
23	24	GPIO 8 (SPI0 CE0)
25	26	GPIO 7 (SPI CS)
27	28	GPIO 1 (EEPROM SCL)
29	30	Ground
31	32	GPIO 12 (Backlight)
33	34	Ground
35	36	GPIO 16
37	38	GPIO 20 (Mic i2s data)
39	40	GPIO 21 (PCM DOUT)

Enviro+

An all-in-one hobbyist environmental monitoring board. Measures air quality (particulates and gases), temperature, pressure, humidity, light and noise level.

Features

- BME280 temperature, pressure, humidity sensor
- LTR-559 light and proximity sensor
- MICS6814 analog gas sensor
- ADS1015 analog to digital converter (ADC)
- MEMS microphone
- 0.96" colour LCD (160x80)
- Connector for particulate matter (PM5003) sensor

Details


- Made by [Pimoroni](#)
- pHAT form-factor
- Needs 5v power
- Uses 16 GPIO pins
- Communication over I2C
- 0x76: BME280
- 0x23: LTR559
- 0x49: ADS1015
- [More Information](#)
- [GitHub Repository](#)
- [Buy Now](#)



Legend

Orientate your Pi with the GPIO on the right and the HDMI port(s) on the left.

- GPIO** (General Purpose IO)
- SPI** (Serial Peripheral Interface)
- I²C** (Inter-integrated Circuit)
- UART** (Universal Asynchronous Receiver/Transmitter)
- PCM** (Pulse Code Modulation)
- Ground**
- 5v** (Power)
- 3.3v** (Power)

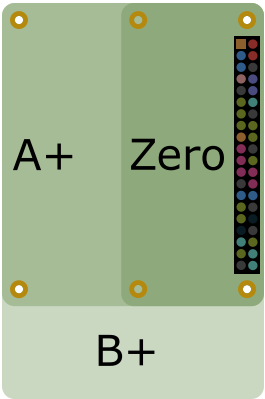

Spotted an error, want to add your board's pinout? [Contribute to Pinout.xyz at GitHub](#)

Part of [gadgetoid.com](#). Maintained by [@Gadgetoid@fosstodon.org](#).

Help make Pinout.xyz better- please sponsor me at [Ko-Fi](#), [GitHub](#) or [Patreon](#)