

## Digital LED « Nixie Tube » like clock

### Features

- Display Hours-Minutes and Seconds
- High precision battery backup clock (requires Seconds can be hidden)
- Alarm
- Chronometer
- 12h/24h display selection
- 9 colors modes


Note : If the clock displays 00:00:00 at startup, the time must be manually setup to start the clock

### User Guide

- At power ON, the device triggers a sound and performs a fast display cleanup. Then time is displayed
- Time/Alarm setup :**
- Hold Button **2** for 2 secs (long press). And release. Hour are displayed in GREEN/WHITE.
  - Push on **1** or **3** to change the value, on **2** to move to the next display.
  - Alarm timer is displayed on RED/WHITE.
  - At the end the settings are store in the RTC (Real Time Clock).
- Switch Alarm ON/OFF :**
- Push on **4** to enable/disable the alarm
  - During Alarm enabling, the Alarm setting is display in RED.
  - If the alarm is enabled, the indicator is WHITE

- **Color Setting :** Push on **1** to switch to the next color.
- **Luminosity Setting :** Push on **3** to modify the intensity 12h/24h mode : Long press on **3** (2 secs) to change the display mode
- **Show/Hide seconds :** long press on **1** (2 secs) to show or hide the seconds
- **Chronometer :**
- Push on **2** to switch to chronometer mode, and back to clock.
- The display becomes : RED=minutes, GREEN=Seconds, BLEU=1/100th seconds
- Push on **4** to start/stop the counter.
- Push on **1** or **3** to reset the counter.

At power ON, the device triggers a sound and performs a fast display cleanup. Then time is displayed

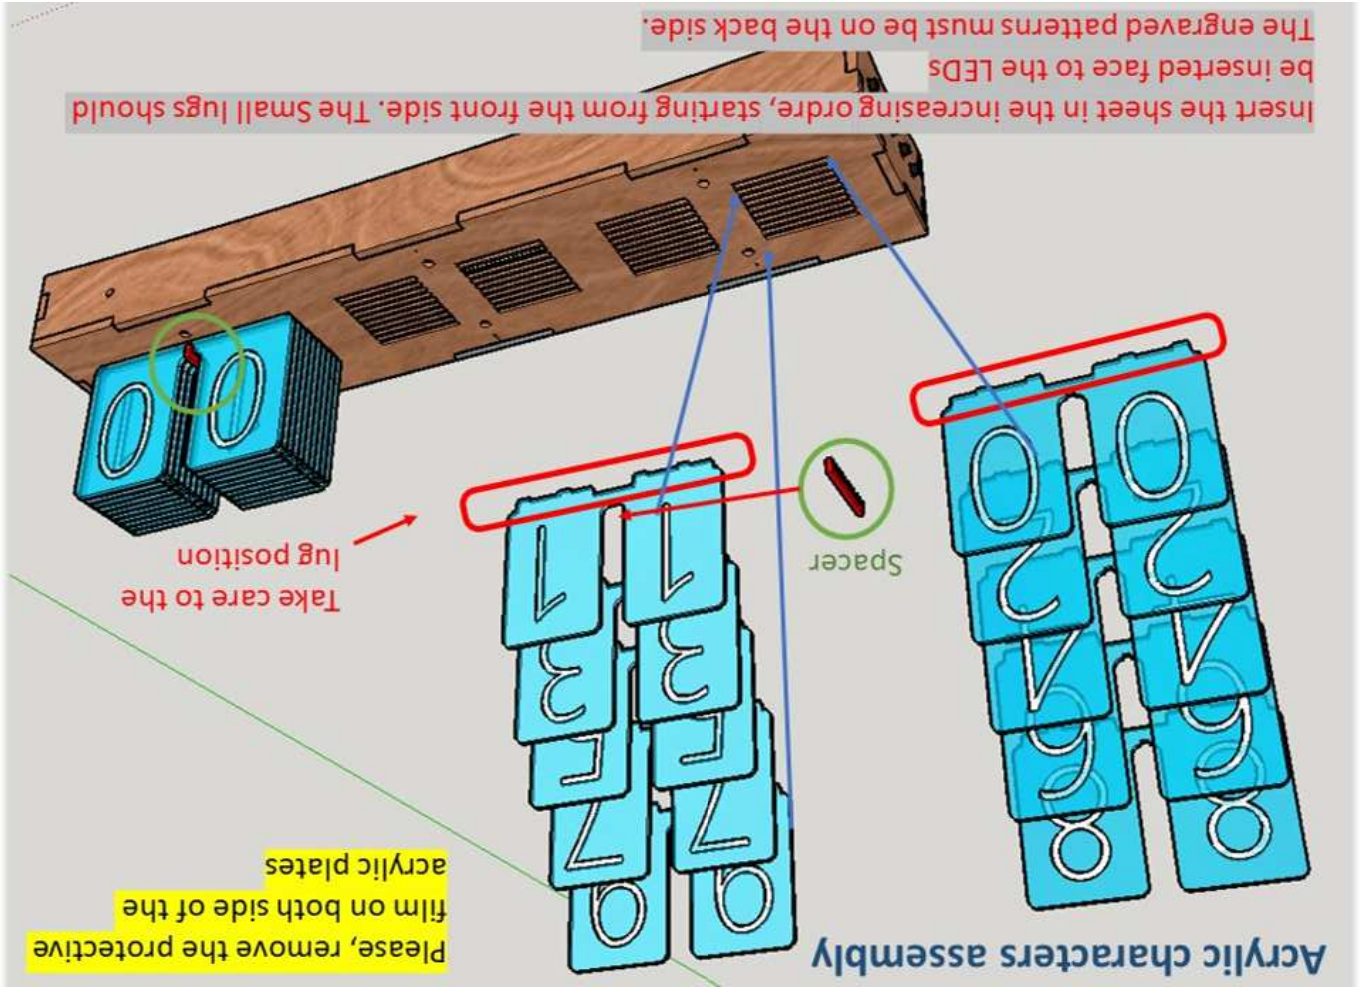

## Insert/Replace battery : Use CR2025 model (option)

