

Visit Our Channel for CS601 Short Lectures

Learning With Abid Ali



<https://www.youtube.com/watch?v=-0kr2sG8JUQ&list=PLAUocDaOe9K6nDHAXKa-7fHsIFAKBPE8q&index=9>

بِسْمِ اللَّهِ الرَّحْمَنِ الرَّحِيمِ

Data Communication CS601 Lecture No 20

Lecture Prepared By
Muhammad Abid Ali

We are also Provide Online Classes for CS601

Contact Us on WhatsApp for join our online Classes

WhatsApp No 03449767315

CS601 Lecture No 20 Topic 100 to 113

What do you mean by transmission medium?


The transmission medium can be defined as a **pathway that can transmit information from a sender to a receiver**. Transmission media are located below the physical layer and are controlled by the physical layer. Transmission media are also called communication channels.

Visit Our Channel for CS601 Short Lectures

Learning With Abid Ali



<https://www.youtube.com/watch?v=-0kr2sG8JUQ&list=PLAUocDaOe9K6nDHAXKa-7fHsIFAKBPE8q&index=9>

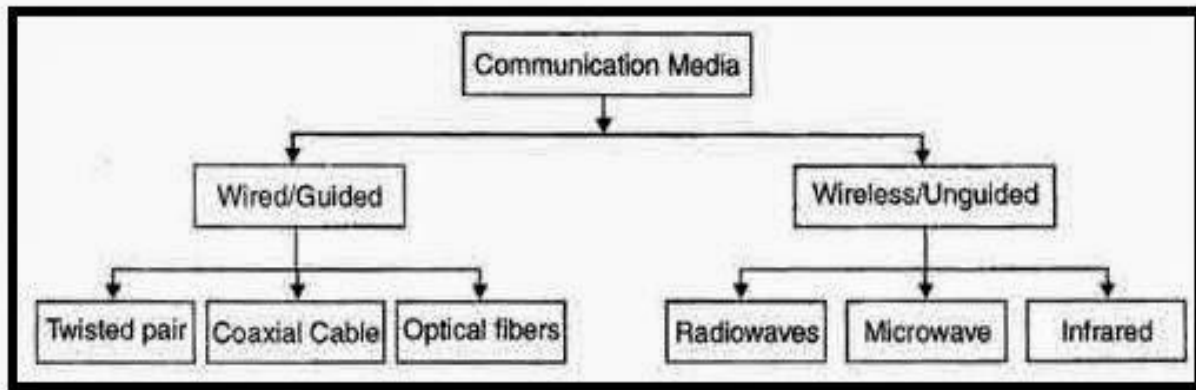

In transmission media is the way the systems are connected to route data signals in a network. Unguided media (wireless).

...

Differences.

Guided media

It is called wired communication or bounded transmission media.

Unguided media

It is called wireless communication or unbounded transmission media.

Visit Our Channel for CS601 Short Lectures

Learning With Abid Ali



<https://www.youtube.com/watch?v=-0kr2sG8JUQ&list=PLAUocDaOe9K6nDHAXKa-7fHsIFAKBPE8q&index=9>


BASIS FOR COMPARISON	GUIDED MEDIA	UNGUIDED MEDIA
Basic	The signal requires a physical path for transmission.	The signal is broadcasted through air or sometimes water.
Alternative name	It is called wired communication or bounded transmission media.	It is called wireless communication or unbounded transmission media.
Direction	It provides direction to signal for travelling.	It does not provide any direction.
Types	Twisted pair cable, coaxial cable and fibre optic cable.	Radio wave, microwave and infrared.

Definition of Guided Media

Guided transmission media are more commonly known as the **wired communication** or **bounded transmission media**. The electromagnetic signals travel between the communicating devices through a physical medium/conductor. As the medium

Visit Our Channel for CS601 Short Lectures

Learning With Abid Ali



<https://www.youtube.com/watch?v=-0kr2sG8JUQ&list=PLAUocDaOe9K6nDHAXKa-7fHsIFAKBPE8q&index=9>

for transmission is a physical conductor, it also provides **direction** to the signal. But there are physical limitations of the conductor in the guided media. Like the length of the conductor, its installation cost, its maintenance, etc.

The guided media is categorized further into three categories that are **twisted-pair cable**, **coaxial cable** and **fiber-optic cable**. The twisted pair cable has two conductors' wires wound around each other and each surrounded by an insulating material. The twisted pair cable is flexible and easy to install. But it has *low bandwidth* and provide *less protection from interference*. Twisted pair cable is also of two types **shielded and unshielded twisted pair cable**.


The **coaxial cable** has a central core conductor (usually copper) enclosed in an insulating sheath, which is further encased in an outer metallic braid, it serves as both protection against noise and as a second conductor which completes the circuit. Now, the outer metallic covering is also covered by an insulating sheath. The coaxial cable carries signals of *higher frequency* than the twisted pair cable.

The third category is the **optical fiber** which is made of glass or plastic, and it transmits signals in the form of light. The optical fiber is *noise resistance*, *has less signal attenuation and has a higher bandwidth* in comparison to twisted pair cable and coaxial cable. But it also has some drawbacks like; it is *very expensive*; it requires a lot of *installation and maintenance charge* as any defect in the cable can diffuse light and alter the signals. As the optical fiber is made of glass, it is very *fragile*.


Difference Between Guided and Unguided Media

Visit Our Channel for CS601 Short Lectures

Learning With Abid Ali



<https://www.youtube.com/watch?v=-0kr2sG8JUQ&list=PLAUocDaOe9K6nDHAXKa-7fHsIFAKBPE8q&index=9>

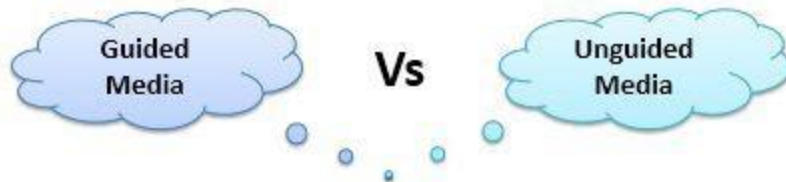

The computer and other communicating devices represent data in the form of signals. The signals transmit between communicating devices in the form of electromagnetic energy, and hence the signals are called **electromagnetic signals**. Electromagnetic signals are the combination of electric and magnetic fields that vibrates in relation to each other. The electromagnetic signals can travel through various transmission media. The transmission media is broadly classified into two categories that are **guided** and **unguided media**.

The basic difference between guided and unguided media is that in the **guided media**, the signal travels through a physical medium whereas, in **unguided media**, the signal travel through the air. There are some more differences between guided and unguided media which I have discussed with the help of comparison chart shown below.

Content: Guided Vs Unguided Media

1. [Comparison Chart](#)
2. [Definition](#)
3. [Key Differences](#)
4. [Conclusion](#)

Comparison Chart

Visit Our Channel for CS601 Short Lectures

Learning With Abid Ali



<https://www.youtube.com/watch?v=-0kr2sG8JUQ&list=PLAUocDaOe9K6nDHAXKa-7fHsIFAKBPE8q&index=9>


BASIS FOR COMPARISON	FOR GUIDED MEDIA	UNGUIDED MEDIA
Basic	The signal requires a physical path for transmission.	The signal is broadcasted through air or sometimes water.
Alternative name	It is called wired communication or bounded transmission media.	It is called wireless communication or unbounded transmission media.
Direction	It provides direction to signal for travelling.	It does not provide any direction.
Types	Twisted pair cable, coaxial cable and fibre optic cable.	Radio wave, microwave and infrared.

Definition of Guided Media

Guided transmission media are more commonly known as the **wired communication** or **bounded transmission media**. The electromagnetic signals travel between the communicating devices through a physical medium/conductor. As the medium for transmission is a physical conductor, it also provides **direction** to the signal. But there are physical limitations of the conductor in the guided media. Like the length of the conductor, its installation cost, its maintenance, etc.

Visit Our Channel for CS601 Short Lectures

Learning With Abid Ali






<https://www.youtube.com/watch?v=-0kr2sG8JUQ&list=PLAUocDaOe9K6nDHAXKa-7fHsIFAKBPE8q&index=9>

The guided media is categorized further into three categories that are **twisted-pair cable**, **coaxial cable** and **fiber-optic cable**.

Twisted Pair Cable

The twisted pair cable has two conductors' wires wound around each other and each surrounded by an insulating material. The twisted pair cable is flexible and easy to install. But it has low bandwidth and provide less protection from interference. Twisted pair cable is also of two types **shielded and unshielded twisted pair cable**.


Twisted Pair Cable

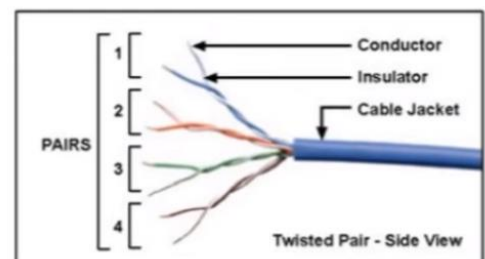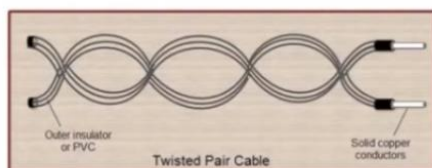

- A twisted pair cable is a pair of **copper wires**.
- Copper wires are the most common wires used for transmitting signals because of good performance at low costs.
- A twisted pair consists of **two conductors** (normally copper), each with its own **plastic insulation**, twisted together to form a single media.



Visit Our Channel for CS601 Short Lectures

Learning With Abid Ali



<https://www.youtube.com/watch?v=-0kr2sG8JUQ&list=PLAUocDaOe9K6nDHAXKa-7fHsIFAKBPE8q&index=9>

Twisted Pair Cable

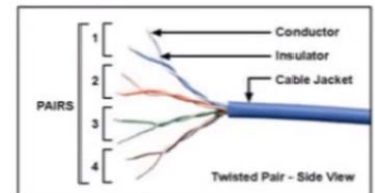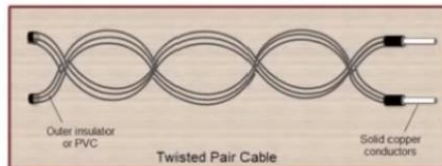

- Out of these two wires, only one carries **actual signal** and another is used for ground reference.
- To identify every cable, these cables are **colour coated**.
- The twists between wires are helpful in **reducing noise** (electro-magnetic interference) and **crosstalk**.
- This type of cable is used in **telephone lines** to provide voice and data channels.

There Are Two Main Types of Twisted Pair Cables

Unshielded Twisted Pair (UTP)


Shielded Twisted Pair (STP)

Visit Our Channel for CS601 Short Lectures

Learning With Abid Ali



<https://www.youtube.com/watch?v=-0kr2sG8JUQ&list=PLAUocDaOe9K6nDHAXKa-7fHsIFAKBPE8q&index=9>

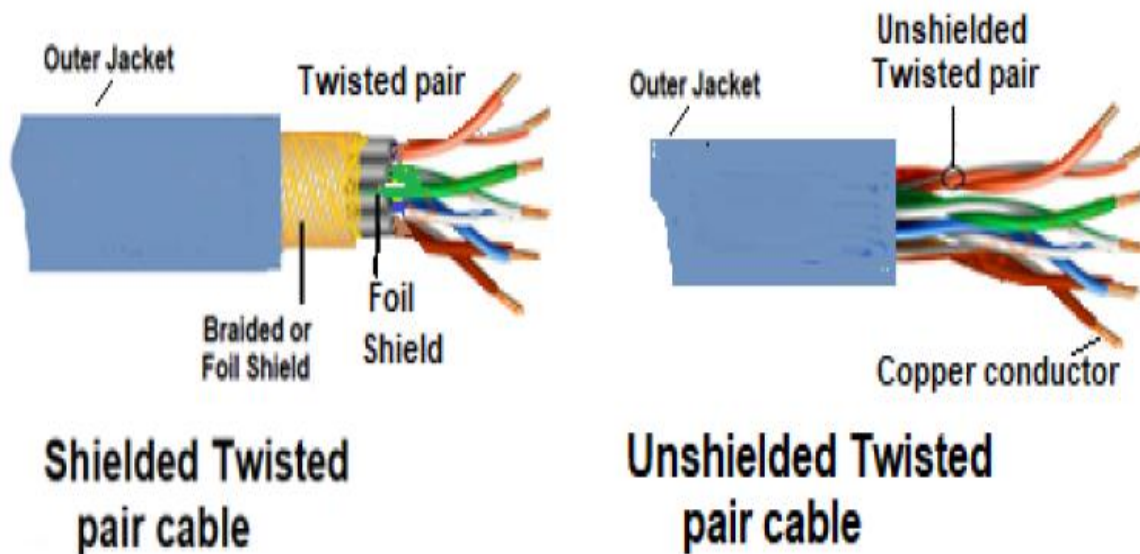


What is the difference between UTP and STP When would you use STP?

Both UTP and STP are widely used in transmitting information across distance. UTP is a cable with wires that are twisted together to reduce noise generated by an external source. On the other hand, STP is a twisted pair cable with an additional mesh shield that guards the cable against electromagnetic interference.

Visit Our Channel for CS601 Short Lectures

Learning With Abid Ali



<https://www.youtube.com/watch?v=-0kr2sG8JUQ&list=PLAUocDaOe9K6nDHAXKa-7fHsIFAKBPE8q&index=9>

Distinguish between STP and UTP:


Shielded Twisted Pair	Un-shielded Twisted Pair
1. STP has a metal foil covering.	1. UTP does not have a metal foil Covering.
2. STP gives better resistance to electromagnetic interference as compared to UTP.	2. UTP does not provide better resistance to electromagnetic interference as compared to STP.
3. STP is little expensive then UTP.	3. UTP is less expensive than STP.
4. Grounding is possible.	4. Grounding is not possible.
5. Possibility of crosstalk is less as it resist to EMI.	5. Possibility of crosstalk is more as it provide less resistance to EMI.
6. Distance travelled is large and can be used in MAN.	6. Distance travelled is less and used in LAN.

Visit Our Channel for CS601 Short Lectures

Learning With Abid Ali



<https://www.youtube.com/watch?v=-0kr2sG8JUQ&list=PLAUocDaOe9K6nDHAXKa-7fHsIFAKBPE8q&index=9>

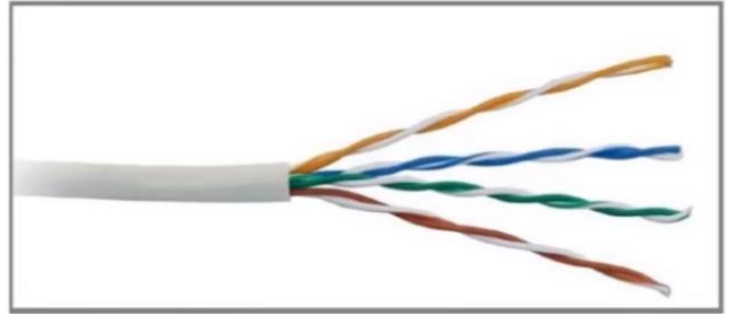

- **Unshielded twisted pair (UTP):-**

- UTP is more common.
- UTP cost less than STP and easily available due to its many use.
- Due to its low cost, UTP cabling is used extensively for local-area networks (LANs) and telephone connections.
- UTP cables consist of 2 or 4 pairs of twisted cable.
- Cable with 2 pair use **RJ-11** connector and 4 pair cable use **RJ-45** connector.

Visit Our Channel for CS601 Short Lectures

Learning With Abid Ali




<https://www.youtube.com/watch?v=-0kr2sG8JUQ&list=PLAUocDaOe9K6nDHAXKa-7fHsIFAKBPE8q&index=9>



- RJ-45 connectors is used with Ethernet cables in computer networking.
- RJ-11 connectors is used in connecting telephone units.

Visit Our Channel for CS601 Short Lectures

Learning With Abid Ali



<https://www.youtube.com/watch?v=-0kr2sG8JUQ&list=PLAUocDaOe9K6nDHAXKa-7fHsIFAKBPE8q&index=9>



- **Shielded twisted pair (STP):-**


- This type of cable has a **metal foil covering** which encases each pair of insulator conductors.
- Electromagnetic noise penetration is prevented by metal casing. Shielding also eliminates crosstalk.
- It is similar to UTP but has a mesh shielding that's protects it from EMI which allows for higher transmission rate.
- It is more expensive than coaxial and unshielded twisted pair.

Coaxial Cable

The **coaxial cable** has a central core conductor (usually copper) enclosed in an insulating sheath, which is further encased in an outer metallic braid, it serves as both protection against noise and as a second conductor which completes the circuit. Now, the outer metallic covering is also covered by an insulating sheath. The coaxial cable carries signals of *higher frequency* than the twisted pair cable.

Visit Our Channel for CS601 Short Lectures

Learning With Abid Ali



<https://www.youtube.com/watch?v=-0kr2sG8JUQ&list=PLAUocDaOe9K6nDHAXKa-7fHsIFAKBPE8q&index=9>




Coaxial Cable



- **Coaxial cables** are copper cables with better shielding than twisted pair cables, so that transmitted signals may travel longer distances at higher speeds.
- The shield minimizes electrical and radio frequency interference.
- Coaxial cabling is the primary type of cabling used by the **cable television industry** and is also widely used for **computer networks** such as Ethernet.


Visit Our Channel for CS601 Short Lectures

Learning With Abid Ali



<https://www.youtube.com/watch?v=-0kr2sG8JUQ&list=PLAUocDaOe9K6nDHAXKa-7fHsIFAKBPE8q&index=9>

Coaxial Cable

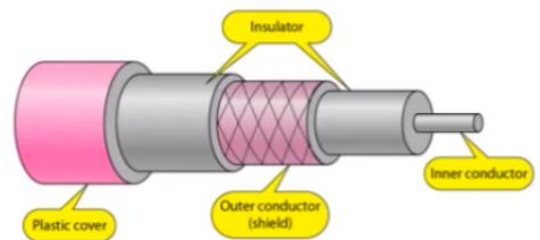

- Coaxial cable has two wires of copper.
- The core/inner copper wire in centre and is made of solid conductor. It is enclosed in an insulating sheath.
- The second/outer copper wire is wrapped around, and is used to protect from external electromagnetic interference(Noise).
- This all is covered by plastic cover used to protect the inner layers from physical damage such as fire or water.


Coaxial Cable Standards

- Coaxial cables are categorized by their Radio Government (RG) ratings. Each RG number denotes a unique set of physical specifications

- | | | |
|----------|---------------|------------------------------|
| • 50-Ohm | RG-7 or RG-11 | : used with thick Ethernet. |
| • 50-Ohm | RG-58 | : used with thin Ethernet |
| • 75-Ohm | RG-59 | : used with cable television |

Visit Our Channel for CS601 Short Lectures

Learning With Abid Ali



<https://www.youtube.com/watch?v=-0kr2sG8JUQ&list=PLAUocDaOe9K6nDHAXKa-7fHsIFAKBPE8q&index=9>



50 Ohm



75 Ohm



RG CABLE




Optical Fiber


The third category is the **optical fiber** which is made of glass or plastic, and it transmits signals in the form of light. The optical fiber is *noise resistance*, *has less signal attenuation* and *has a higher bandwidth* in comparison to twisted pair cable and coaxial cable. But it also has some drawbacks like; it is very expensive; it requires a lot of installation and maintenance charge as any defect in the cable can diffuse light and alter the signals. As the optical fiber is made of glass, it is very fragile.

Visit Our Channel for CS601 Short Lectures



Learning With Abid Ali



<https://www.youtube.com/watch?v=-0kr2sG8JUQ&list=PLAUocDaOe9K6nDHAXKa-7fHsIFAKBPE8q&index=9>

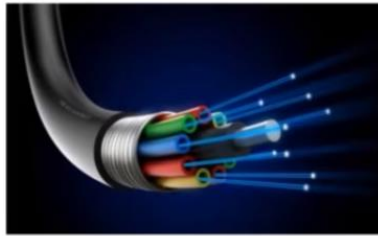


Optical Fiber

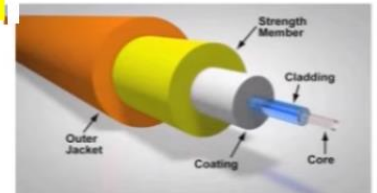

- A fibre optic cable is made of high quality of **thin glass or plastic** and is used to transfer digital data signals in the form of **light** up to distance of thousand of miles.
 - Fibre optic cables are **not affected** by electromagnetic interference, so noise and distortion is very less.
 - Fibre optic cables carry communication signals using pulses of light generated by **small lasers or light-emitting diodes (LEDs)**.
 - The cable consists of one or more strands of glass, each only slightly thicker than a human hair. The centre of each strand is called the **core**, which provides the **pathway for light to travel**. The core is surrounded by a layer of glass called **cladding** that reflects light inward to avoid loss of signal and allow the light to pass through bends in the cable. No light escapes the glass core because of this reflective **cladding**.
-
- **Advantages of Optical Fibre:-**
 - Fibre optic cables have a much High bandwidth than metal cables. This means that they can carry more data.
 - Smaller Size and Lighter weight.
 - low attenuation
 - Not affected electromagnetic interference (No EMI interference)
 - Signals carrying data can travel long distances without weakening
 - Suitable for industrial and noisy areas
 - **Disadvantages of Optical Fibre:-**
 - Optical fibre cables are expensive
 - Difficult to install
 - Maintenance is expensive and difficult

Visit Our Channel for CS601 Short Lectures

Learning With Abid Ali



<https://www.youtube.com/watch?v=-0kr2sG8JUQ&list=PLAUocDaOe9K6nDHAXKa-7fHsIFAKBPE8q&index=9>

Definition of Unguided Media

The **unguided media** is also called **wireless communication**. It does not require any physical medium to transmit electromagnetic signals. In unguided media, the electromagnetic signals are broadcasted through air to everyone. These signals are available to one who has the device capable of receiving those signals.


The unguided media is also called unbounded media as it does not have any border limitation. The unguided media allows the user to connect all the time, as the communication is wireless the user can connect himself from anywhere to the network.

The unguided media is categorized into **radio waves, microwaves and infrared waves**.

wireless communication Unguided Media

- A **wave** can be described as a disturbance that travels through a medium from one location to another location.
- A **wave** is a **transfer of energy**, usually through a form of matter called a **medium**.
- There are a special type of wave that can travel without a medium, called **electromagnetic waves** (also called **EM waves**), which are waves like radio waves and microwaves.
- Unlike sound waves and water waves, electromagnetic waves don't need a fluid, or a solid, or even air to help them travel from one place to another. EM waves can travel across the great vacuum of space, which is why we see light from distant stars and planets.

Visit Our Channel for CS601 Short Lectures Learning With Abid Ali




<https://www.youtube.com/watch?v=-0kr2sG8JUQ&list=PLAUocDaOe9K6nDHAXKa-7fHsIFAKBPE8q&index=9>

wireless communication **Unguided Media**

- **Electromagnetic waves** are formed when an **electric field** comes in contact with a **magnetic field**. They are hence known as '**electromagnetic**' waves.
- Electromagnetic (EM) radiation is a form of energy that is all around us and takes many forms, such as radio waves, microwaves, X-rays and gamma rays.
- **Sunlight** is also a form of EM energy. Electromagnetic energy from the sun comes to Earth in the form of radiation.
- The **Electromagnetic Spectrum** describes a wide range of different **electromagnetic waves**.
- A little part of **electromagnetic spectrum** can be used for wireless transmission.

THE ELECTROMAGNETIC SPECTRUM

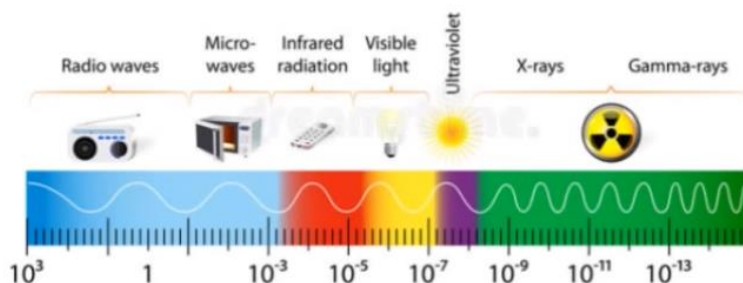


Visit Our Channel for CS601 Short Lectures


Learning With Abid Ali



<https://www.youtube.com/watch?v=-0kr2sG8JUQ&list=PLAUocDaOe9K6nDHAXKa-7fHsIFAKBPE8q&index=9>

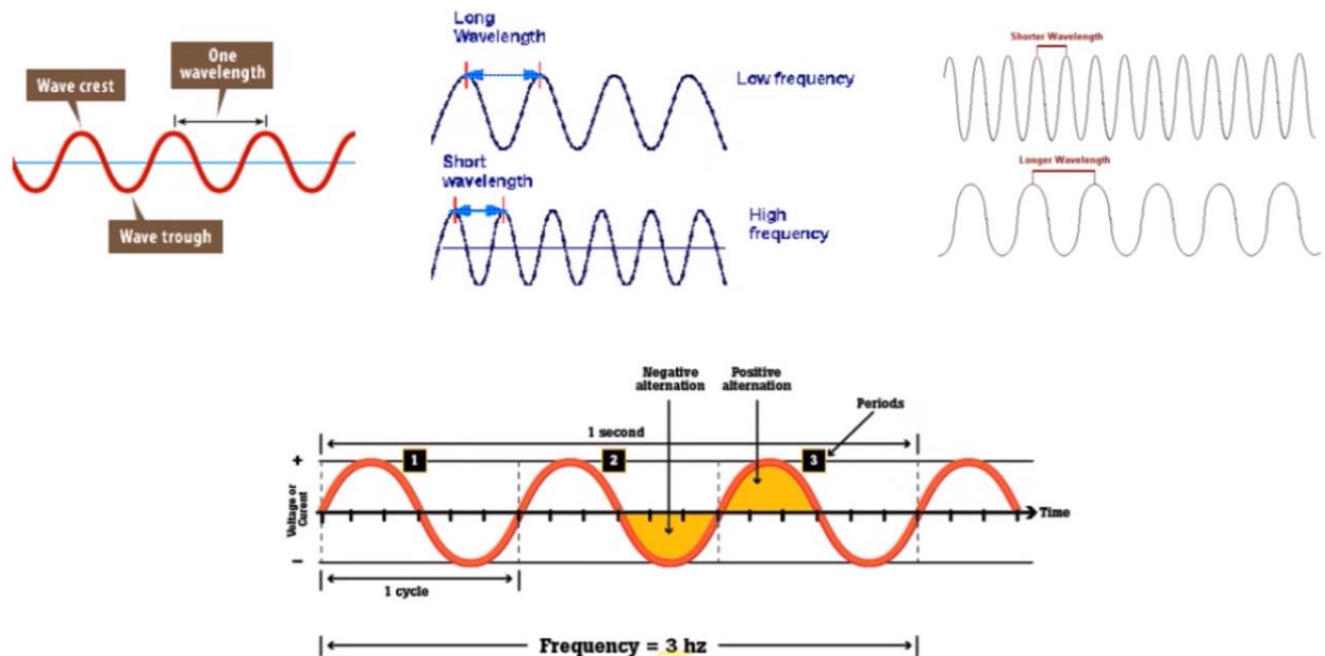


- A little part of **electromagnetic spectrum** can be used for wireless transmission.

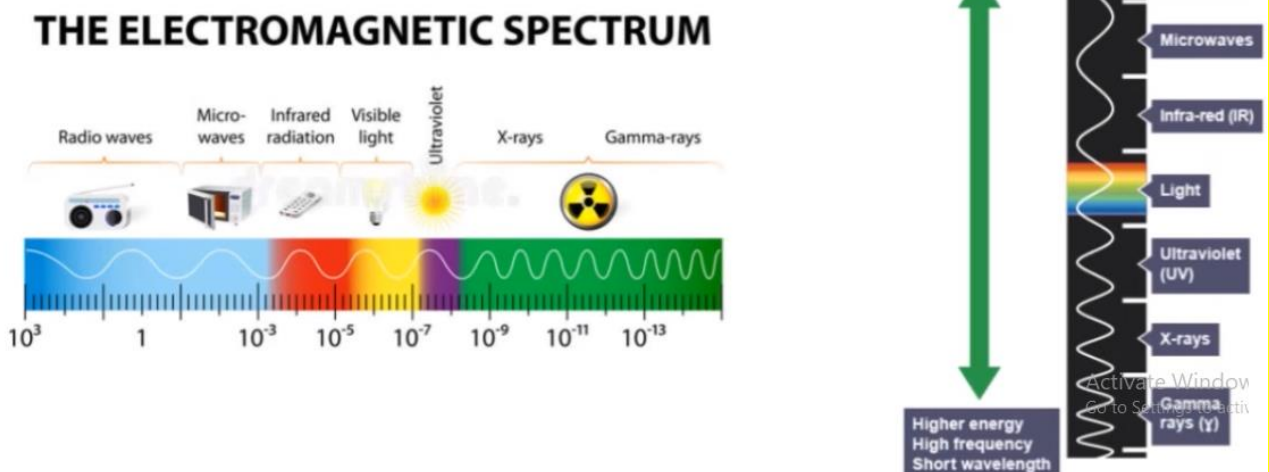

Visit Our Channel for CS601 Short Lectures

Learning With Abid Ali



<https://www.youtube.com/watch?v=-0kr2sG8JUQ&list=PLAUocDaOe9K6nDHAXKa-7fHsIFAKBPE8q&index=9>

Radio Waves

The **radio waves** are generated easily; they are *low-frequency signals* and can travel a *long distance*. The radio waves can penetrate through the buildings.


Radio Waves




- Radio waves are **EM (Electromagnetic) waves** that have wavelengths between 1 millimetre and 100 kilometres (or 300 GHz and 3 kHz in frequency).
- Radio frequency is easy to generate because it has large wavelength and can travel long distance.
- Radio waves are generated by **radio transmitters** and received by **radio receivers**.
- Radio stations transmit radio waves using **transmitters**, which are received by the **receiver** installed in our devices. Both transmitters and receivers use antennas to radiate or capture radio signals.
- It can penetrate walls easily, so these waves are widely used for communication both indoors and outdoors.

Visit Our Channel for CS601 Short Lectures

Learning With Abid Ali



<https://www.youtube.com/watch?v=-0kr2sG8JUQ&list=PLAUocDaOe9K6nDHAXKa-7fHsIFAKBPE8q&index=9>



Radio Waves



- Radio waves are **omnidirectional** means they travel in all the directions from the source.
- When an antenna transmits radio waves, they are propagated in all directions.
- A sending antenna send waves that can be received by **any receiving antenna**. The omnidirectional property has disadvantage, too. The radio waves transmitted by one antenna are susceptible to interference by another antenna that may send signal using the same frequency or band.
- It is Used Mobile, AM/FM radio, television

Visit Our Channel for CS601 Short Lectures

Learning With Abid Ali



<https://www.youtube.com/watch?v=-0kr2sG8JUQ&list=PLAUocDaOe9K6nDHAXKa-7fHsIFAKBPE8q&index=9>

Radio Waves




- Radio waves are **EM (Electromagnetic) waves** that have wavelengths between 1 millimetre and 100 kilometres (or 300 GHz and 3 kHz in frequency).
- Radio frequency is easy to generate because it has large wavelength and can travel long distance.
- Radio waves are generated by **radio transmitters** and received by **radio receivers**.
- Radio stations transmit radio waves using **transmitters**, which are received by the **receiver** installed in our devices. Both transmitters and receivers use antennas to radiate or capture radio signals.
- It can penetrate walls easily, so these waves are widely used for communication both indoors and outdoors.



Visit Our Channel for CS601 Short Lectures

Learning With Abid Ali



<https://www.youtube.com/watch?v=-0kr2sG8JUQ&list=PLAUocDaOe9K6nDHAXKa-7fHsIFAKBPE8q&index=9>

Radio Spectrum

Radio Band	Frequency	Some Applications
Very Low Frequency VLF	3 KHz to 30 KHz	Radio Navigation
Low Frequency LF	30 KHz to 300 KHz	Long Wave Radio
Medium Frequency MF	30 KHz to 3 MHz	AM Radio
High Frequency HF	3 MHz to 30 MHz	CB Radio (HAM) Point to Point Radio Search and Rescue Services
Very High Frequency VHF	30 MHz to 300 MHz	FM radio 88-108 MHz VHF Broadcast TV
Ultra High Frequency UHF	300 MHz to 3 GHz	UHF Broadcast TV Cellular Phones Microwave Links Wi-Fi in 2.4 Band Satellite Communications
Super High Frequency SHF	3 GHz to 30 GHz	Microwave Links Wi-Fi in 5 GHz Band Satellite Communications
Extra High Frequency EHF	30 GHz to 300 GHz	Microwave Links


Activ
Cat

Microwaves

The **microwaves** are transmitted in a straight line and hence require the **line-of-sight transmission**. The distance covered by the microwave signal depend on the height of the two antennas. More the taller are antennas longer is the distance covered by the signal. The microwave has a *frequency higher* than the radio waves. Microwave are used for telephone communication mobile phones, television distribution, etc.

Visit Our Channel for CS601 Short Lectures



Learning With Abid Ali



<https://www.youtube.com/watch?v=-0kr2sG8JUQ&list=PLAUocDaOe9K6nDHAXKa-7fHsIFAKBPE8q&index=9>


Microwaves

- Microwaves are a type of radio waves with high frequencies. It can be classified as a subclass of radio waves. The frequency of microwaves lies in the 300 MHz to 300 GHz.
- Unlike radio waves, microwaves are unidirectional, in which the sending and receiving antennas need to be aligned.
- Microwaves are widely used for point-to-point communications because their small wavelength, which means that the signal is focused into a narrow beam. Additionally, each antenna must be within line of sight of the next antenna.
- Electromagnetic waves above 100 MHz tend to travel in a straight line and signals over them can be sent by beaming those waves towards one particular station. Because Microwaves travels in straight lines, both sender and receiver must be aligned to be strictly in line-of-sight.

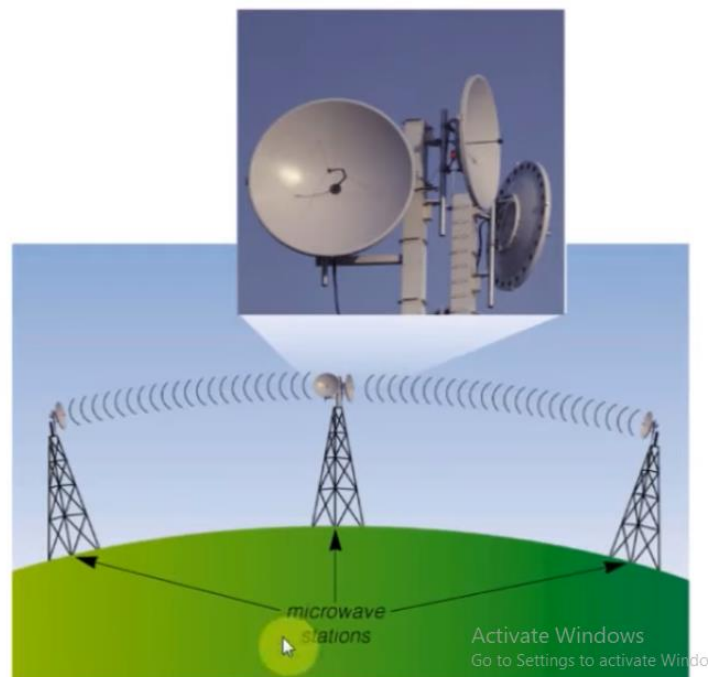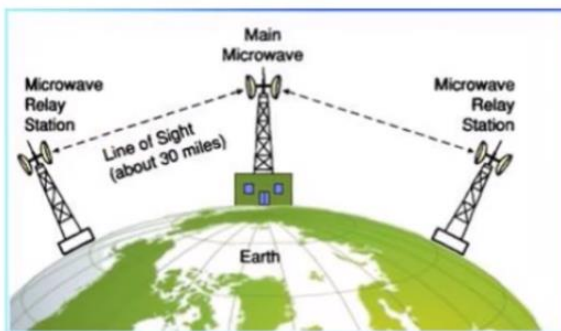

Visit Our Channel for CS601 Short Lectures

Learning With Abid Ali



<https://www.youtube.com/watch?v=-0kr2sG8JUQ&list=PLAUocDaOe9K6nDHAXKa-7fHsIFAKBPE8q&index=9>

Infrared waves are used for short range communication. Like, the remote control for televisions, VCRs, etc. uses infrared waves. It can not penetrate through obstacles. The government license is not required, to operate an infrared system as it is more secure against eavesdropping.

Infrared waves




- Infrared signals have frequencies between 300 GHz to 400 THz. They are used for short-range communication.
- Infrared waves are used for very short distance communication like TV remote, wireless speakers, automatic doors, hand held devices etc.
- Infrared waves having high frequencies prevents interference b/w one system to another.
- Infrared signals have high frequencies and cannot penetrate walls. Due to its short-range communication system, the use of an infrared communication system in one room will not be affected by the use of another system in the next room. This is why using an infrared TV remote control in our home will not interfere with the use of our neighbour's infrared TV remote control.
- **THE DISADVANTAGES OF USING INFRARED**
 - Infrared signals cannot be used for long distance communication. In addition, we cannot use infrared waves outside a building because sun's rays contain infrared waves that can interfere with communication.

Activate Windows
Go to Settings to act



Visit Our Channel for CS601 Short Lectures

Learning With Abid Ali



<https://www.youtube.com/watch?v=-0kr2sG8JUQ&list=PLAUocDaOe9K6nDHAXKa-7fHsIFAKBPE8q&index=9>

Key Differences Between Guided and Unguided Media

1. The key difference between guided and unguided media is that guided media uses a **physical path or conductor** to transmit the signals whereas, the unguided media **broadcast the signal** through the air.
2. The guided media is also called **wired communication** or **bounded transmission media**. However, the unguided media is also called **wireless communication** or **unbounded transmission media**.
3. The guided media provide **direction** to the signal whereas, the unguided media **does not direct** the signal.
4. Categories of guided media are **twisted pair cable, coaxial cable** and **optical fibre**. On the other hands, the categories of unguided media are **radio wave, microwave, and infrared signal**.

Visit Our Channel for CS601 Short Lectures

Learning With Abid Ali



<https://www.youtube.com/watch?v=-0kr2sG8JUQ&list=PLAUocDaOe9K6nDHAXKa-7fHsIFAKBPE8q&index=9>

بِسْمِ اللَّهِ الرَّحْمَنِ الرَّحِيمِ

Data Communication CS601 Lecture No 21

Lecture Prepared By
Muhammad Abid Ali

We are also Provide Online Classes for CS601

Contact Us on WhatsApp for join our online Classes

WhatsApp No 03449767315

CS601 Lecture No 21 Topic 114 to 123

Switching

- A network is a set of connected devices
- Problem of how to connect multiple devices to make one-to-one communication possible


Visit Our Channel for CS601 Short Lectures

Learning With Abid Ali



<https://www.youtube.com/watch?v=-0kr2sG8JUQ&list=PLAUocDaOe9K6nDHAXKa-7fHsIFAKBPE8q&index=9>

- **The solution is Switching**
- **Switched network consists of a series of switches**

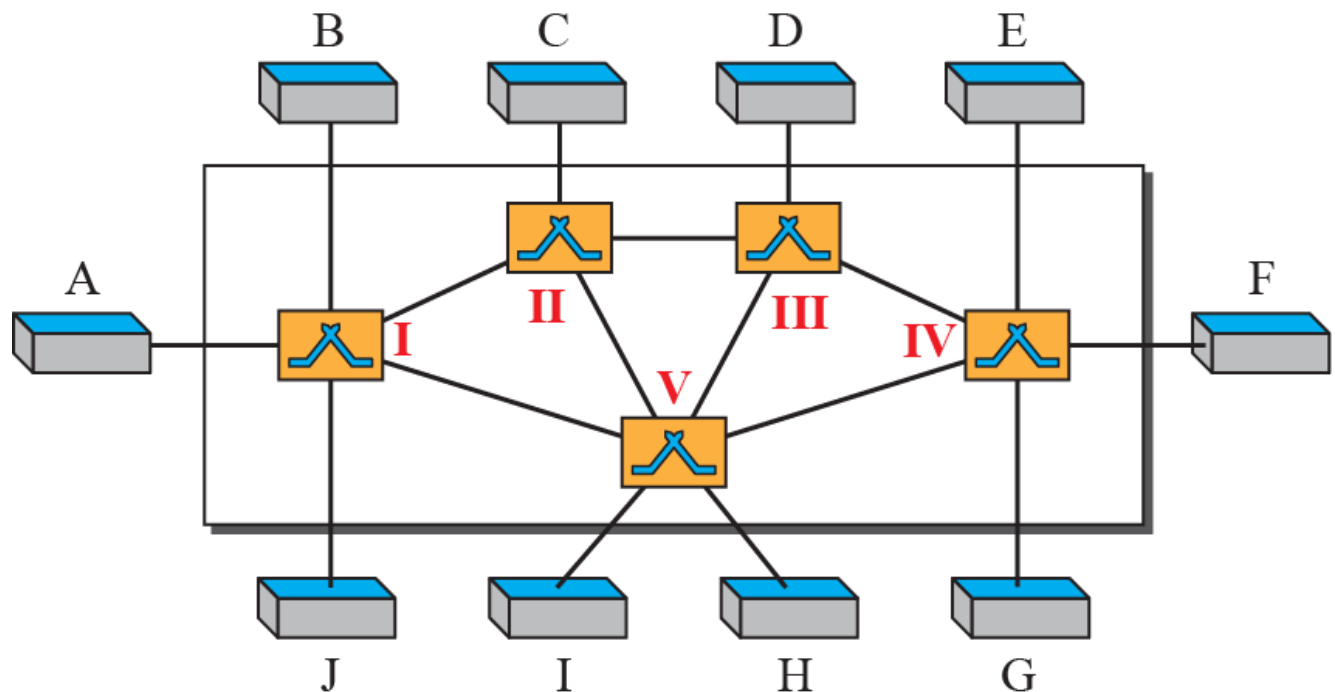

Three Methods of Switching


- **Three Methods:**
 - ✓ **Circuit Switching**
 - ✓ **Packet Switching**
 - ✓ **Message switching**

Visit Our Channel for CS601 Short Lectures

Learning With Abid Ali



<https://www.youtube.com/watch?v=-0kr2sG8JUQ&list=PLAUocDaOe9K6nDHAXKa-7fHsIFAKBPE8q&index=9>

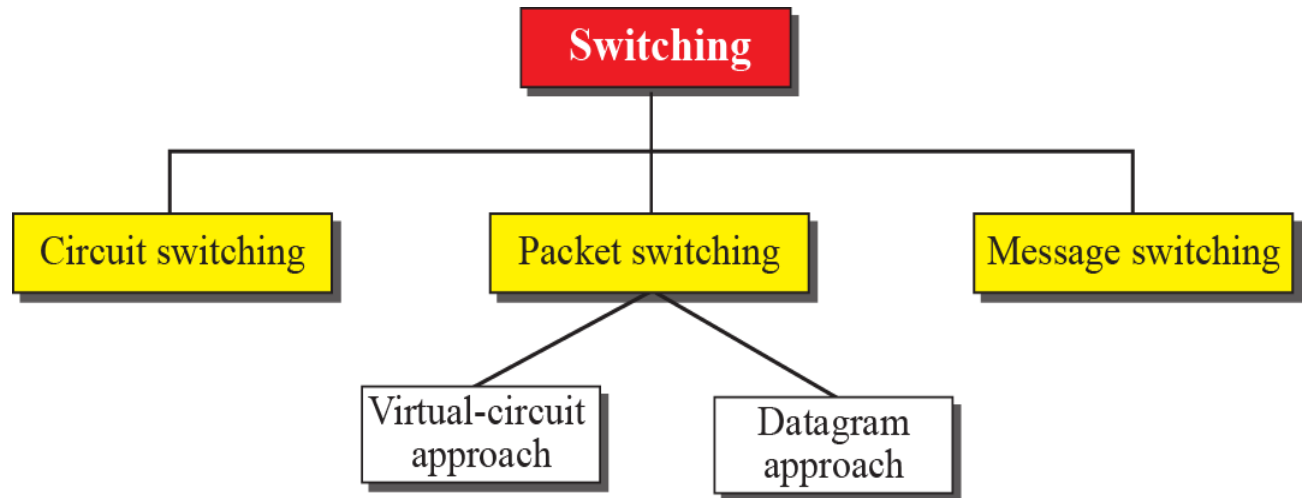


Circuit-switched Networks


- A set of switches connected by physical links
- A connection between two stations is a dedicated path made of one or more links
- Each connection uses only one dedicated channel on each link
- Each link is normally divided into n channels by using FDM or TDM

Visit Our Channel for CS601 Short Lectures

Learning With Abid Ali



<https://www.youtube.com/watch?v=-0kr2sG8JUQ&list=PLAUocDaOe9K6nDHAXKa-7fHsIFAKBPE8q&index=9>

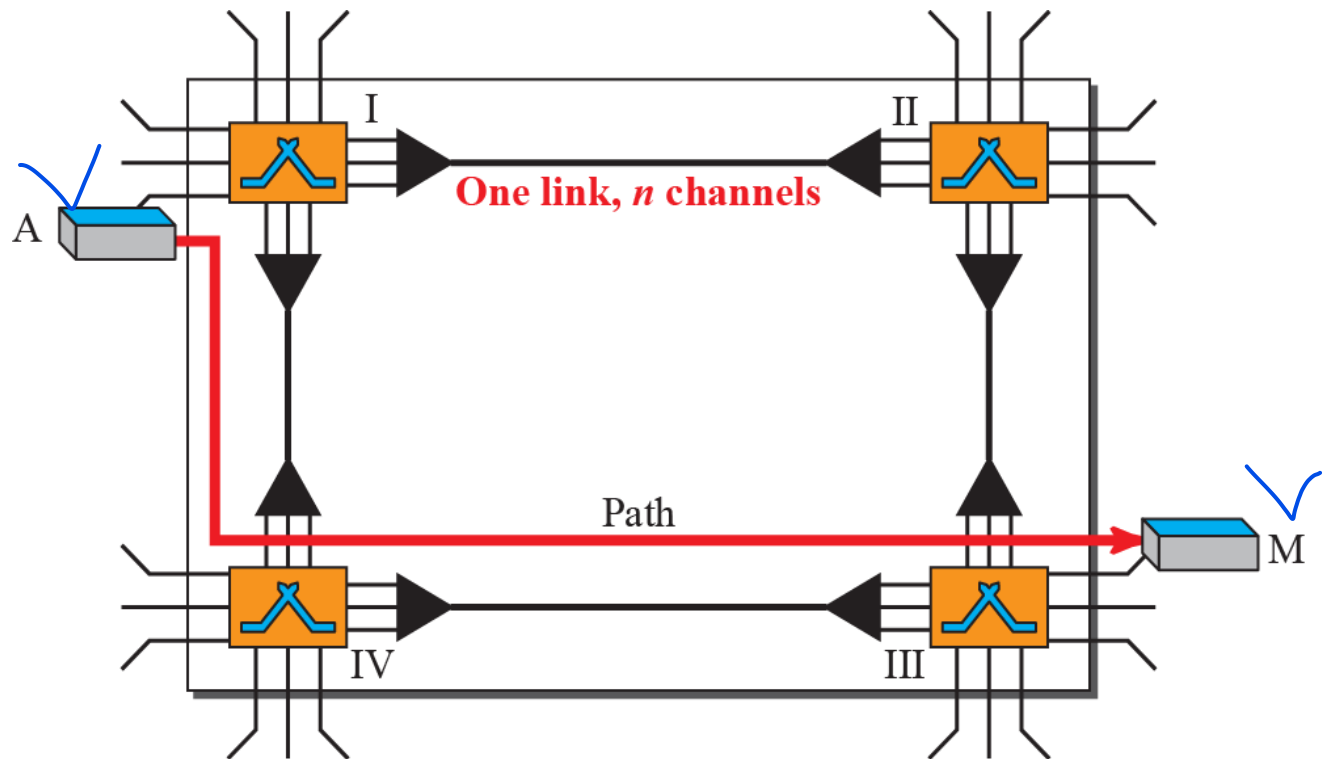

Which is a good example of a circuit-switched network?


Circuit switching is used for connections that must be continuous for long periods of time, such as long-distance communication. **Traditional telephone systems** -- i.e., **landlines** -- are an example of a technology that uses circuit switching. **Dial-up network connections**.

Visit Our Channel for CS601 Short Lectures

Learning With Abid Ali



<https://www.youtube.com/watch?v=-0kr2sG8JUQ&list=PLAUocDaOe9K6nDHAXKa-7fHsIFAKBPE8q&index=9>

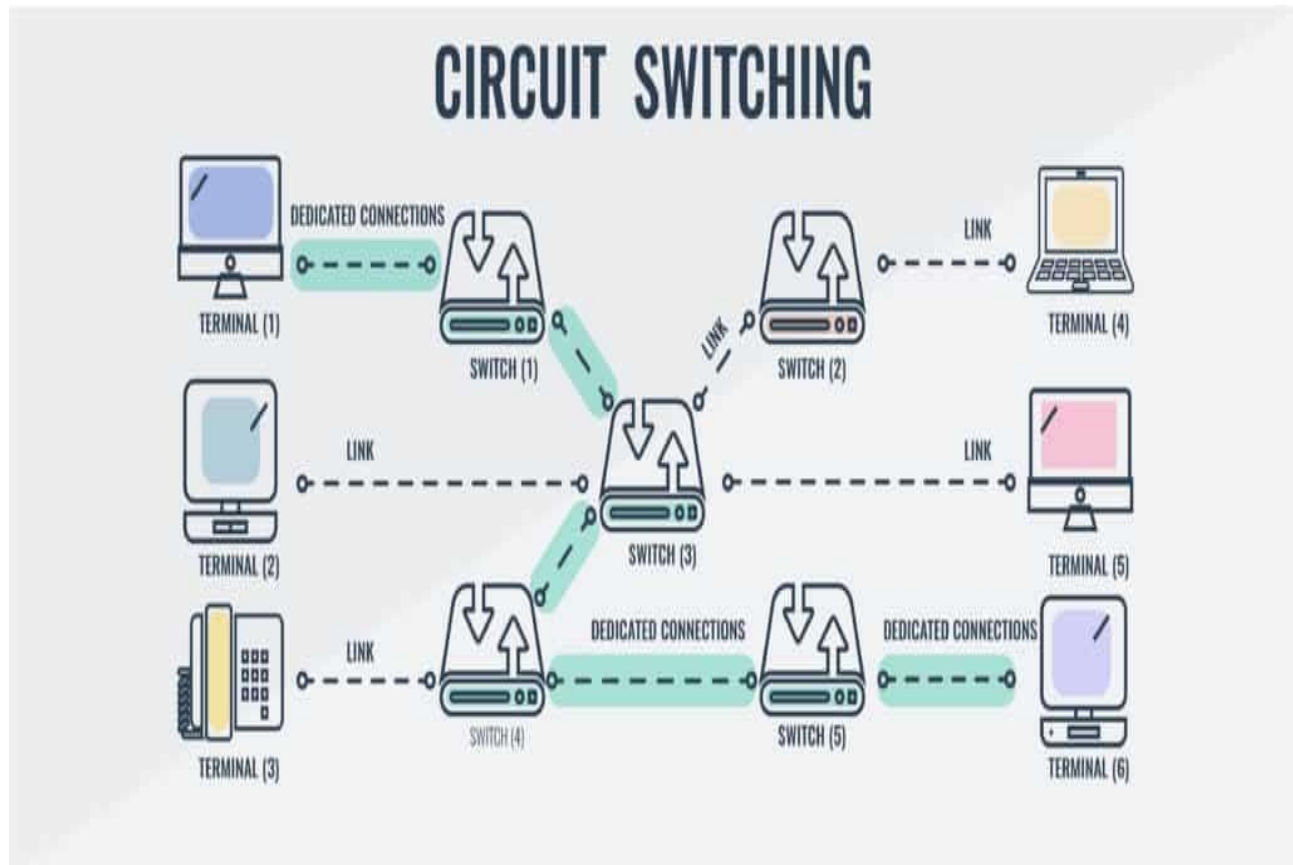

Three Phases in a Circuit Switched Network

- The actual communication in a circuit-switched network requires 3 phases:
 - ✓ Connection Setup
 - ✓ Data Transfer
 - ✓ Connection Teardown

Efficiency of a Circuit-Switched Network

- **Not as efficient as packet switching** because resources are allocated during the entire duration of the connection and these resources are unavailable to other connections

Efficiency of a Circuit-Switched Network

Visit Our Channel for CS601 Short Lectures

Learning With Abid Ali



<https://www.youtube.com/watch?v=-0kr2sG8JUQ&list=PLAUocDaOe9K6nDHAXKa-7fHsIFAKBPE8q&index=9>


- **In a telephone network, people normally terminate the communication** when they have finished their conversation
- **Data Network is an issue**

Delay in a Circuit-Switched Network

- **Circuit switched networks have low efficiency but minimal delay**
- Data is not delayed at each switch; the resources are allocated for the duration of the connection

Packet Switching

- If the message is going to pass through a packet-switched network, it needs to be divided into packets of fixed or variable size
- The size of the packet is determined by the network and the governing protocol

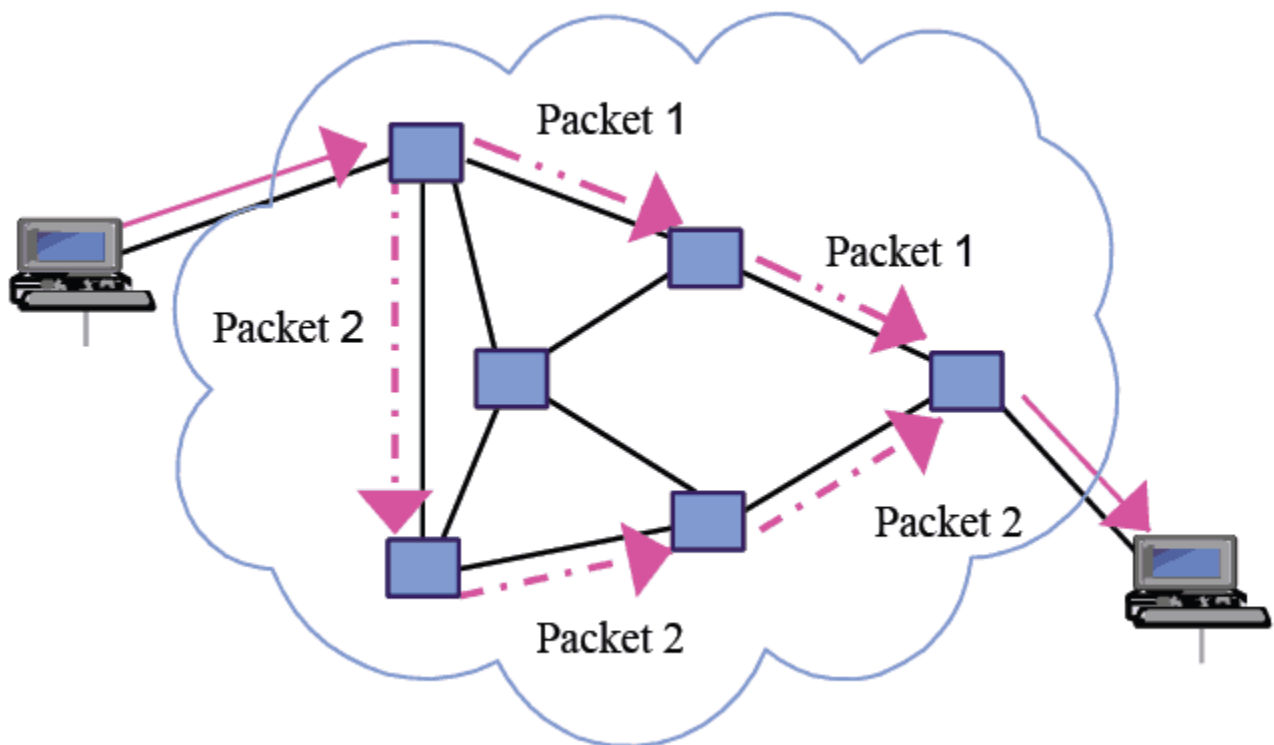

Visit Our Channel for CS601 Short Lectures

Learning With Abid Ali



<https://www.youtube.com/watch?v=-0kr2sG8JUQ&list=PLAUocDaOe9K6nDHAXKa-7fHsIFAKBPE8q&index=9>


Types of Packet Switching

Virtual Circuit Switching

Datagram Switching

Datagram Networks

- Each packet is treated independently of all others.
- Even if a packet is part of a multi-packet transmission, the network treats it as though it existed alone
- Packets are referred to as datagrams

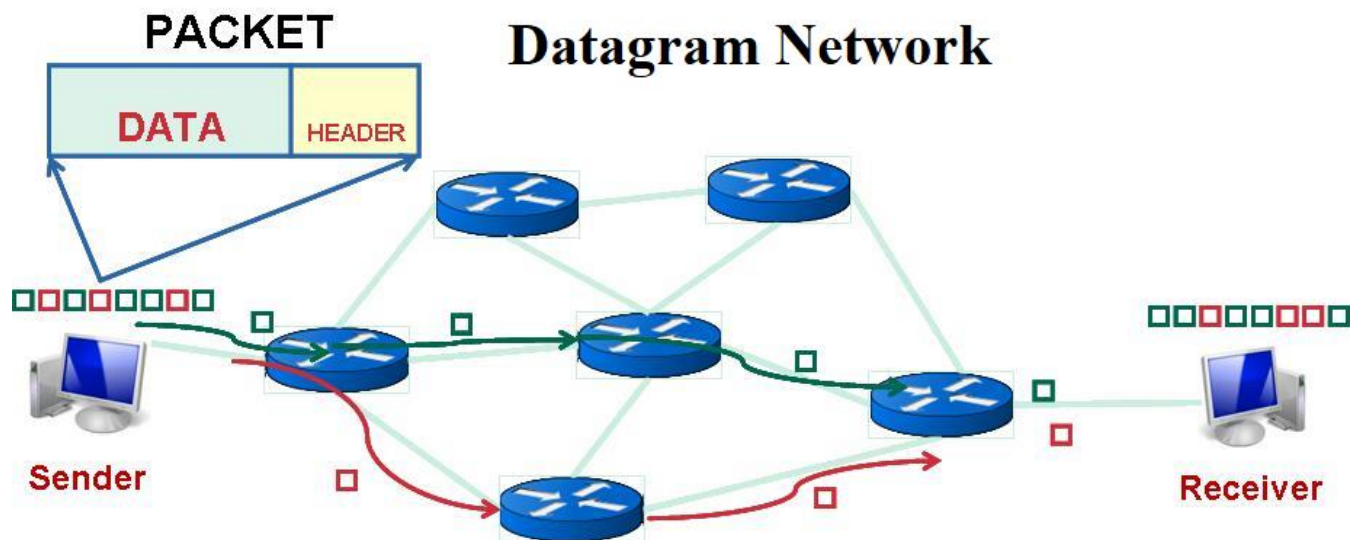

Virtual-Circuit Networks


Visit Our Channel for CS601 Short Lectures

Learning With Abid Ali




<https://www.youtube.com/watch?v=-0kr2sG8JUQ&list=PLAUocDaOe9K6nDHAXKa-7fHsIFAKBPE8q&index=9>

- **A virtual-circuit network is a cross between a circuit-switched network and a datagram network**
- **Virtual circuit switching is a packet switching methodology whereby a path is established between the source and the final destination through which all the packets will be routed during a call.** This path is called a virtual circuit because to the user, the connection appears to be a dedicated physical circuit.

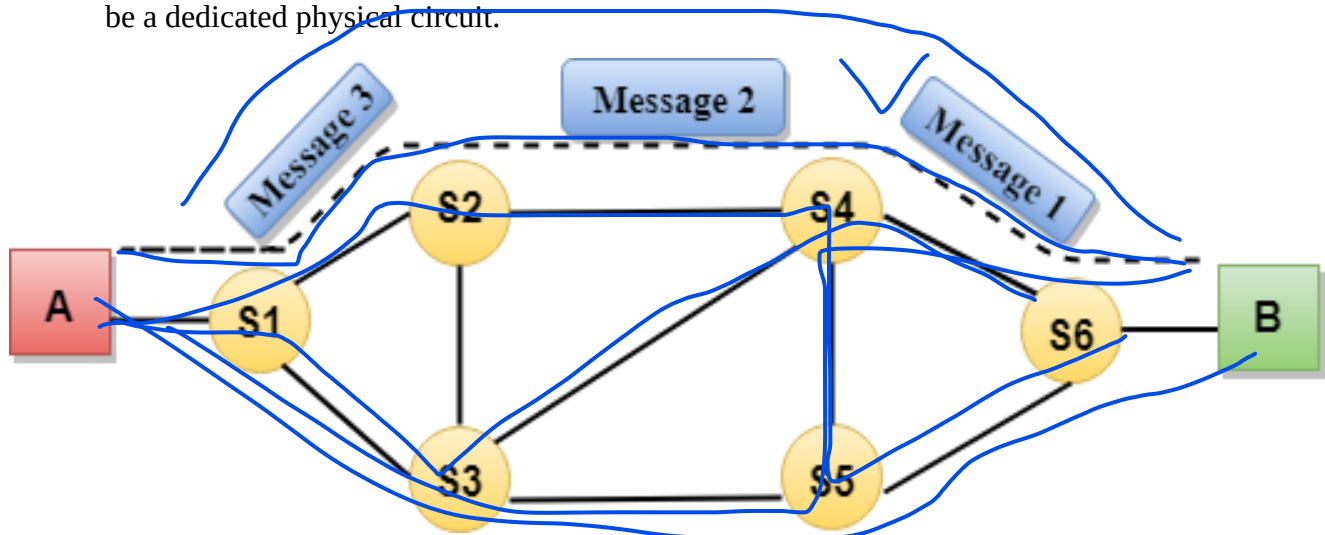


The DLCIs are permanent and assigned by the Frame Relay network provider.

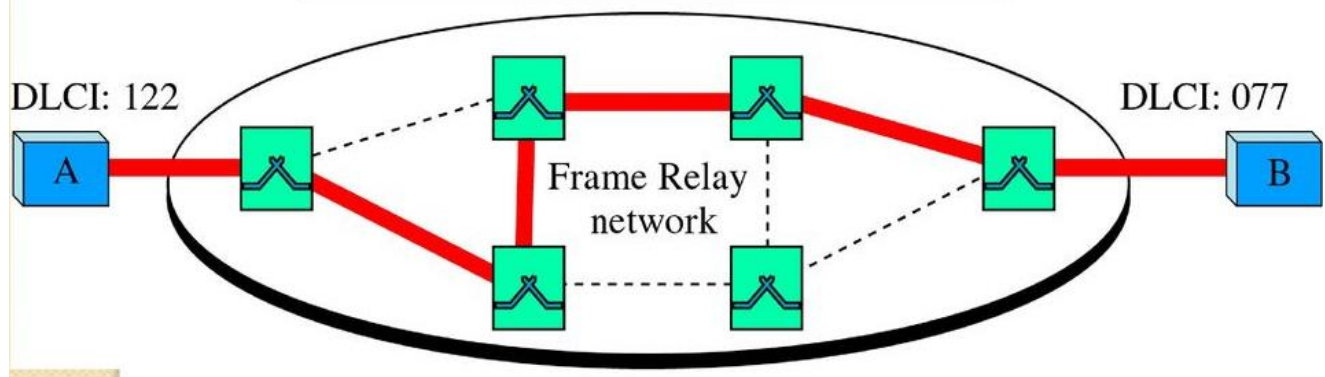

Visit Our Channel for CS601 Short Lectures

Learning With Abid Ali




<https://www.youtube.com/watch?v=-0kr2sG8JUQ&list=PLAUocDaOe9K6nDHAXKa-7fHsIFAKBPE8q&index=9>

Message switching

Message switching is a network switching technique in which data is routed in its entirety from the source node to the destination node, one hop at a time. During message routing, every intermediate switch in the network stores the whole message.

Message switching

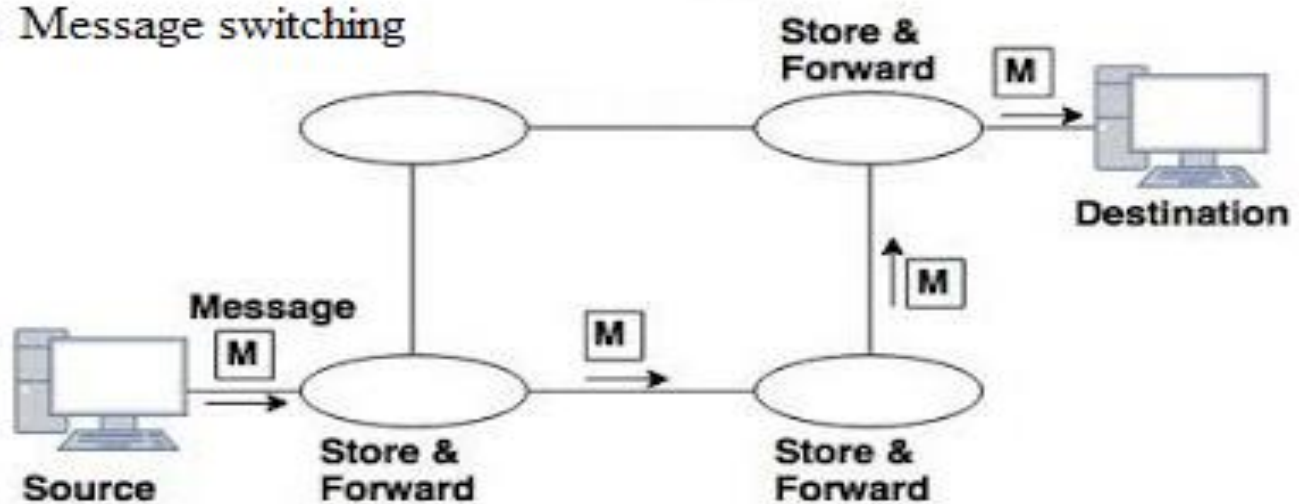

Visit Our Channel for CS601 Short Lectures

Learning With Abid Ali



<https://www.youtube.com/watch?v=-0kr2sG8JUQ&list=PLAUocDaOe9K6nDHAXKa-7fHsIFAKBPE8q&index=9>

بِسْمِ اللَّهِ الرَّحْمَنِ الرَّحِيمِ

Data Communication CS601 Lecture No 22

Lecture Prepared By
Muhammad Abid Ali

We are also Provide Online Classes for CS601

Contact Us on WhatsApp for join our online Classes

WhatsApp No 03449767315

CS601 Lecture No 21 Topic 124 to 128

Data Link Layer (Layer 2)

- The **Internet** is a combination of networks glued together by connecting devices (routers or switches)
- If a packet is to travel from a host to another host, it needs to pass through these **networks**


Visit Our Channel for CS601 Short Lectures

Learning With Abid Ali



<https://www.youtube.com/watch?v=-0kr2sG8JUQ&list=PLAUocDaOe9K6nDHAXKa-7fHsIFAKBPE8q&index=9>

- Data Link layer controls **node-to-node** communication

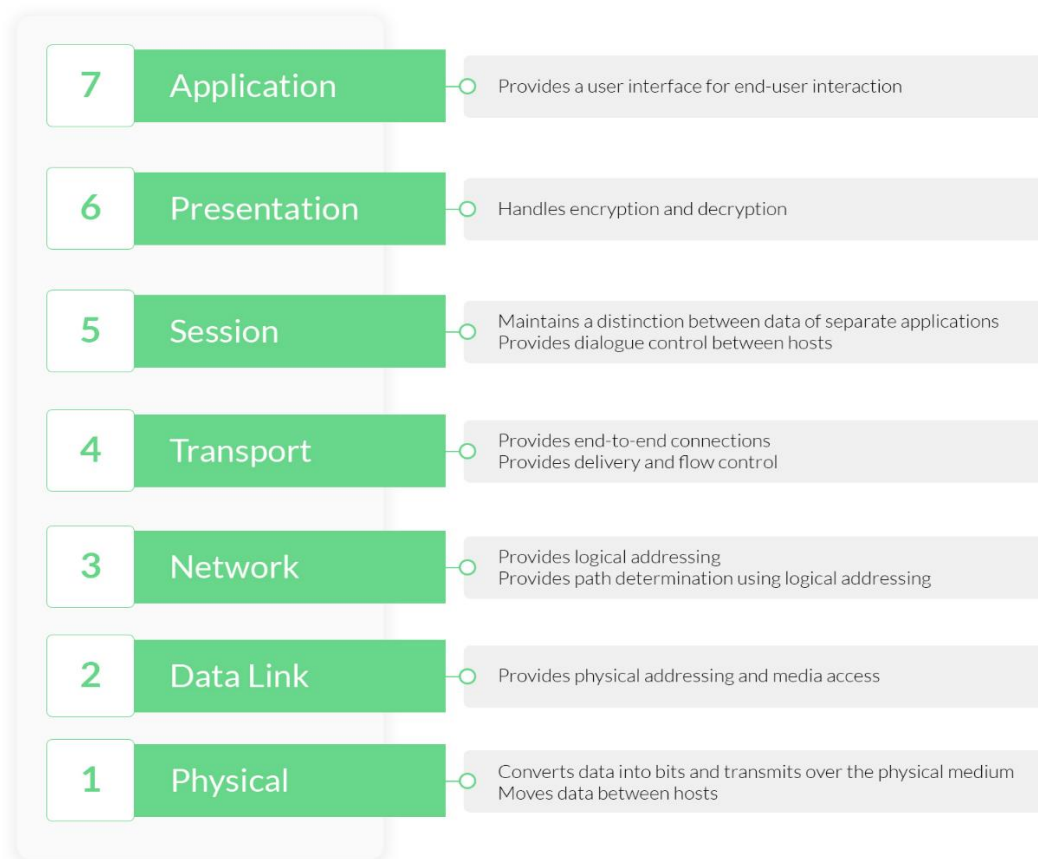


Visit Our Channel for CS601 Short Lectures

Learning With Abid Ali



<https://www.youtube.com/watch?v=-0kr2sG8JUQ&list=PLAUocDaOe9K6nDHAXKa-7fHsIFAKBPE8q&index=9>

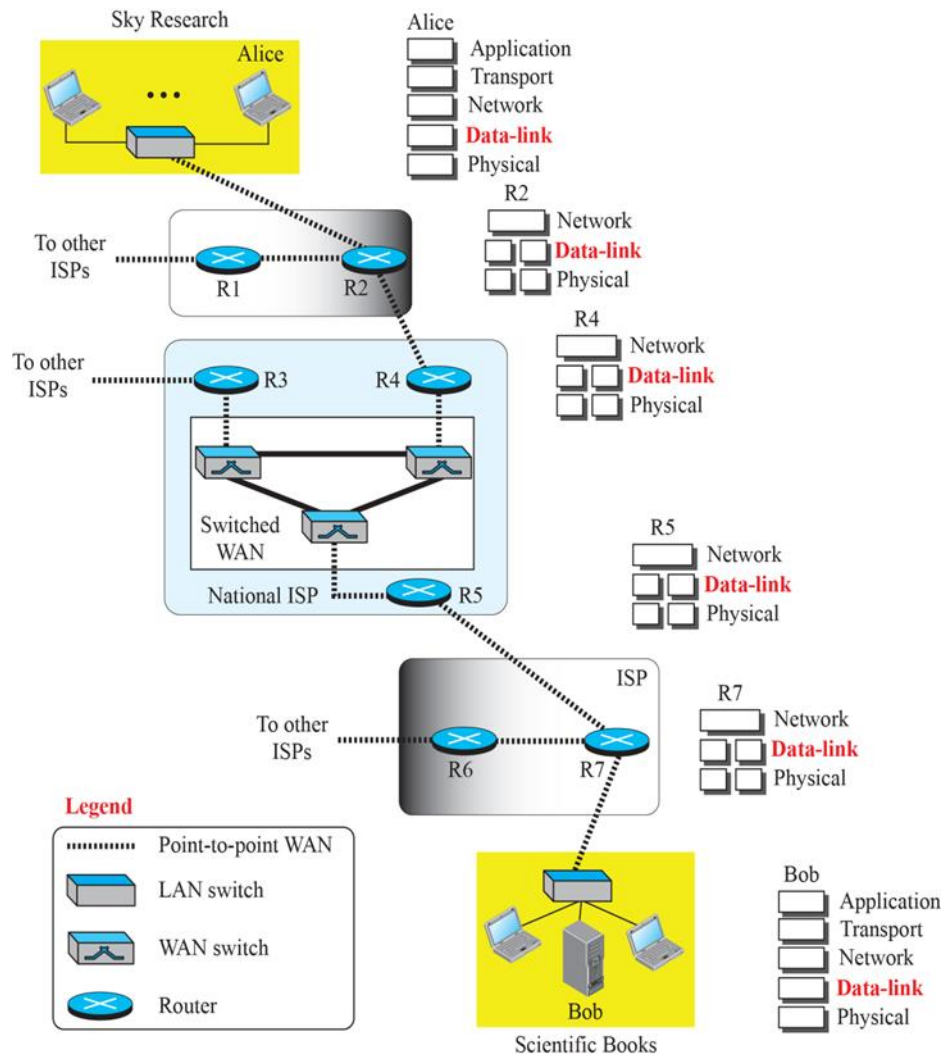

Nodes and Links


- Communication at the **data-link layer** is **node-to-node**
- A **data unit** from one point in the Internet needs to pass through many networks (**LANs and WANs**) to reach another point
- We refer to the **two end hosts** and the **routers as nodes** and the networks in between as **links**

Visit Our Channel for CS601 Short Lectures

Learning With Abid Ali



<https://www.youtube.com/watch?v=-0kr2sG8JUQ&list=PLAUocDaOe9K6nDHAXKa-7fHsIFAKBPE8q&index=9>

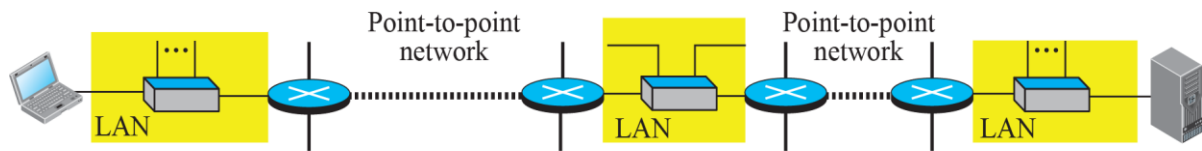


a. A small part of the Internet



b. Nodes and links

Data Link Layer In OSI Model

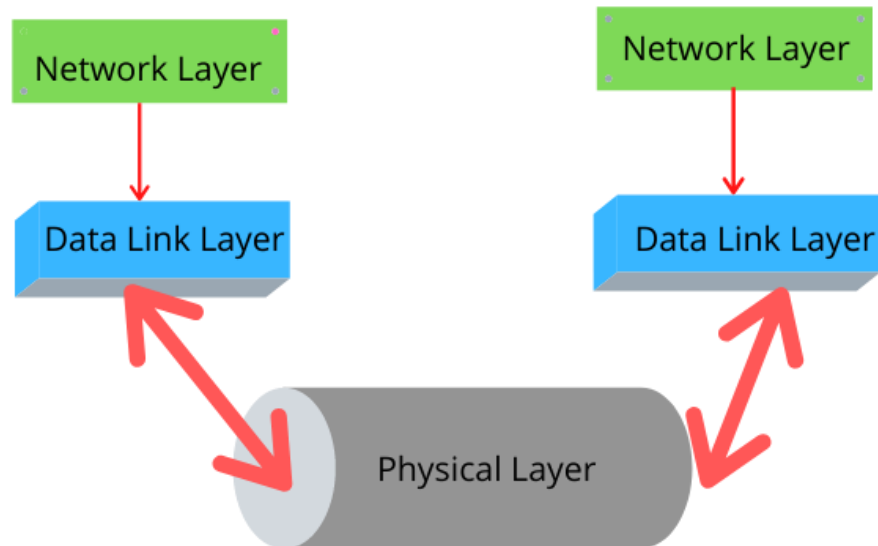

Services provided by Data-Link Layer


Visit Our Channel for CS601 Short Lectures

Learning With Abid Ali



<https://www.youtube.com/watch?v=-0kr2sG8JUQ&list=PLAUocDaOe9K6nDHAXKa-7fHsIFAKBPE8q&index=9>

- Located between the **physical and the network** layers
- Provides services to **Network Layer** and receives services from **Physical layer**
- Framing
- Flow Control
- Error Control
- Congestion Control

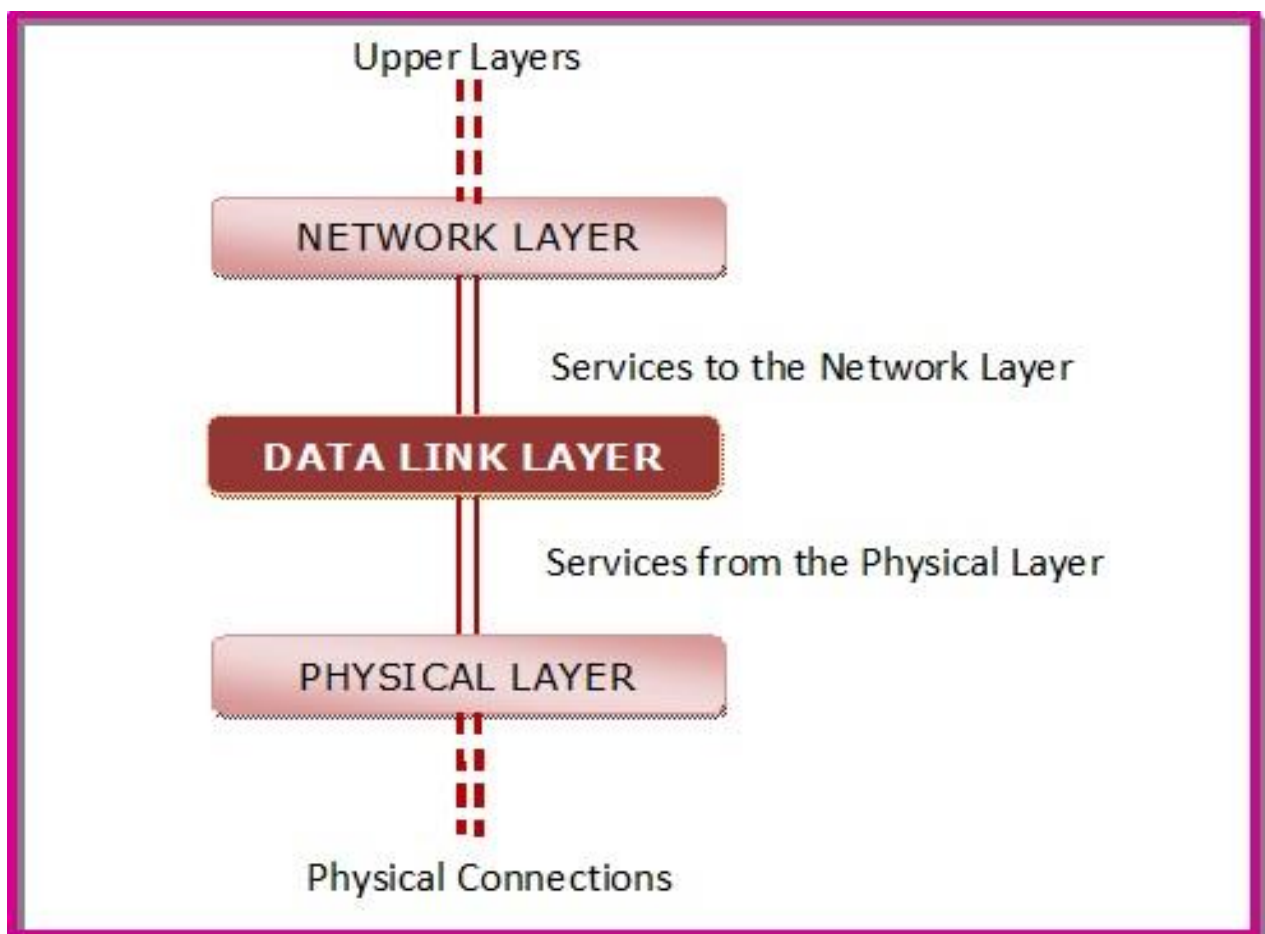

Framing

Visit Our Channel for CS601 Short Lectures

Learning With Abid Ali




<https://www.youtube.com/watch?v=-0kr2sG8JUQ&list=PLAUocDaOe9K6nDHAXKa-7fHsIFAKBPE8q&index=9>

Framing in data link layer is a point-to-point connection between the sender and receiver. The framing is the primary function of the data link layer and it provides a way to transmit data between the connected devices. Framing uses frames to send or receive data.

The data link divides the stream of bits from Network layer into manageable data units called “**FRAMES**”. This process is known as **Framing**.

Datalink Layer Framing

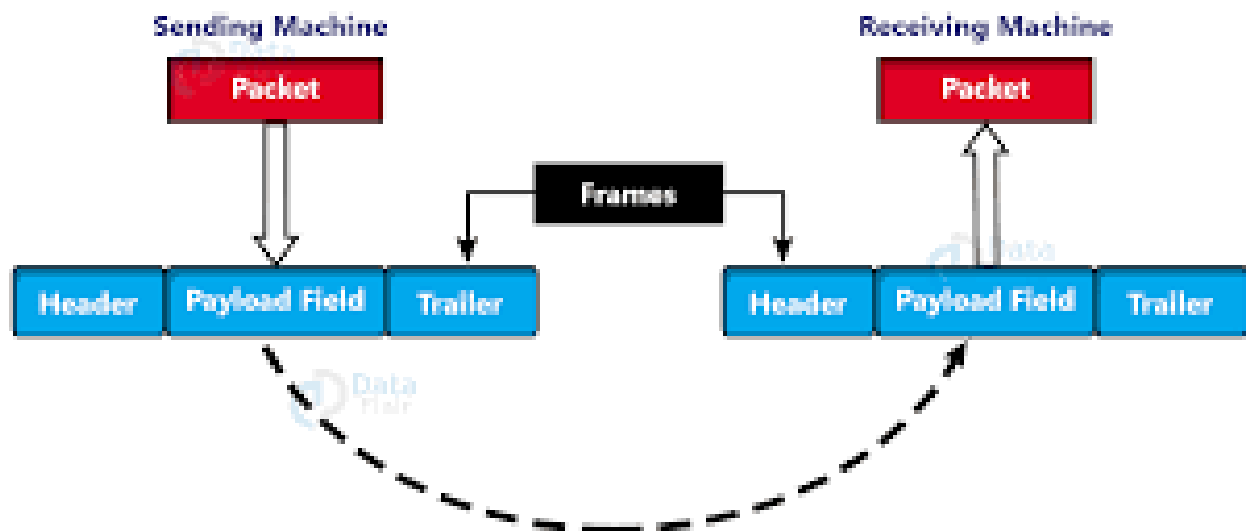

Flow Control


Flow control is a **technique that allows two stations working at different speeds to communicate with each other**. It is a set of measures taken to regulate the amount of data that a sender sends so that a fast sender does not overwhelm a slow receiver.

Visit Our Channel for CS601 Short Lectures

Learning With Abid Ali



<https://www.youtube.com/watch?v=-0kr2sG8JUQ&list=PLAUocDaOe9K6nDHAXKa-7fHsIFAKBPE8q&index=9>

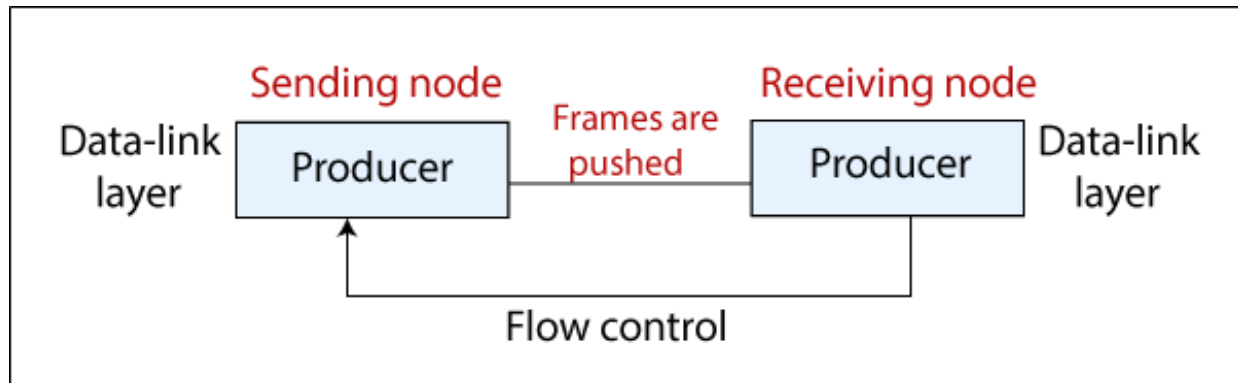

Error Control

Error detection and correction are the services provided by _____ layer.

Error control in data link layer is the process of detecting and correcting data frames that have been corrupted or lost during transmission. In case of lost or corrupted frames, the receiver does not receive the correct data-frame and sender is ignorant about the loss.

There are different techniques for detecting errors in the transmitted data:

(a)Parity Checks: Parity check deploys single parity bit and is considered the simplest form of error detection method. It comprises of even parity and odd parity methods.

(b)Checksum: It is a simple type of redundancy check that is used to detect error.

Through this method, an algorithm calculates the binary values in a packet or other block of data and stores the results with the data.

(c)Cyclic Redundancy Check: In the TCP/IP or OSI reference model, CRC is added to a packet frame at the data link layer. It is a method of checking for errors in data that have been transmitted on a communications link.

(d) Hamming code: It is an error-detecting and error-correcting binary code.

Congestion Control

Visit Our Channel for CS601 Short Lectures

Learning With Abid Ali



<https://www.youtube.com/watch?v=-0kr2sG8JUQ&list=PLAUocDaOe9K6nDHAXKa-7fHsIFAKBPE8q&index=9>

Congestion control in data link layer **occurs when a node or link carries data beyond its limit**. This often leads to the queuing of packets—and in the worst case, loss of packets—as well as a decrease in the network's Quality of Service (QoS).

Two Categories of Links

- We can have the following **two** types of links:
 - ✓ **Point-to-point link or a**
 - ✓ **Broadcast link**

Point-to-point mode of communication

Point to point communication mode is the communication over a link between a single transmitter and a receiver.

Broadcast mode of communication

In broadcast mode large number of receivers are linked to a single transmitter.

Two Sublayers of Data-Link Layer

- We can divide the data-link layer into **two sublayers**:
 - **Data Link Control (DLC) Point-to-point link**
 - ✓ **Media Access Control (MAC) Broadcast link**

Visit Our Channel for CS601 Short Lectures

Learning With Abid Ali



<https://www.youtube.com/watch?v=-0kr2sG8JUQ&list=PLAUocDaOe9K6nDHAXKa-7fHsIFAKBPE8q&index=9>

بِسْمِ اللَّهِ الرَّحْمَنِ الرَّحِيمِ

Data Communication CS601 Lecture No 23

Lecture Prepared By
Muhammad Abid Ali

We are also Provide Online Classes for CS601

Contact Us on WhatsApp for join our online Classes

WhatsApp No 03449767315


CS601 Lecture No 23 Topic 129 to 134

Why LINK-LAYER ADDRESSING?

- IP addresses are the identifiers at the network layer
- In Internet we cannot make a packet reach its destination using only IP addresses

Visit Our Channel for CS601 Short Lectures

Learning With Abid Ali



<https://www.youtube.com/watch?v=-0kr2sG8JUQ&list=PLAUocDaOe9K6nDHAXKa-7fHsIFAKBPE8q&index=9>

- Source and destination IP addresses define **the two ends** but cannot define which links the packet will take

2.2 Link Layer Addressing

- A Link layer address is also called as **Link address or physical address or MAC address**.
- In a connectionless internetwork such as the Internet we cannot make a datagram reach its destination using only IP addresses. The reason is that each datagram in the Internet, from the same source host to the same destination host, may take a different path. **The source and destination IP addresses** define the **two ends** but **cannot define which links the datagram should pass through**.


2.2.1 Working Operation

- When a datagram passes from the **network layer to the data link layer**, then the datagram will be encapsulated in a frame and **two data link addresses are added to the frame header**.
- These addresses are changed every time the frames moves from one link to another.
- Each frame carries the same datagram with the same source and destination IP addresses.. The figure below demonstrates the concepts in a small internet:


What is link layer addressing?

A link-layer address is called a **link address**, called a **physical address**, and sometimes a **MAC address**. Since a link is controlled at the data-link layer, the addresses need to belong to the data-link layer.

Visit Our Channel for CS601 Short Lectures Learning With Abid Ali



<https://www.youtube.com/watch?v=-0kr2sG8JUQ&list=PLAUocDaOe9K6nDHAXKa-7fHsIFAKBPE8q&index=9>

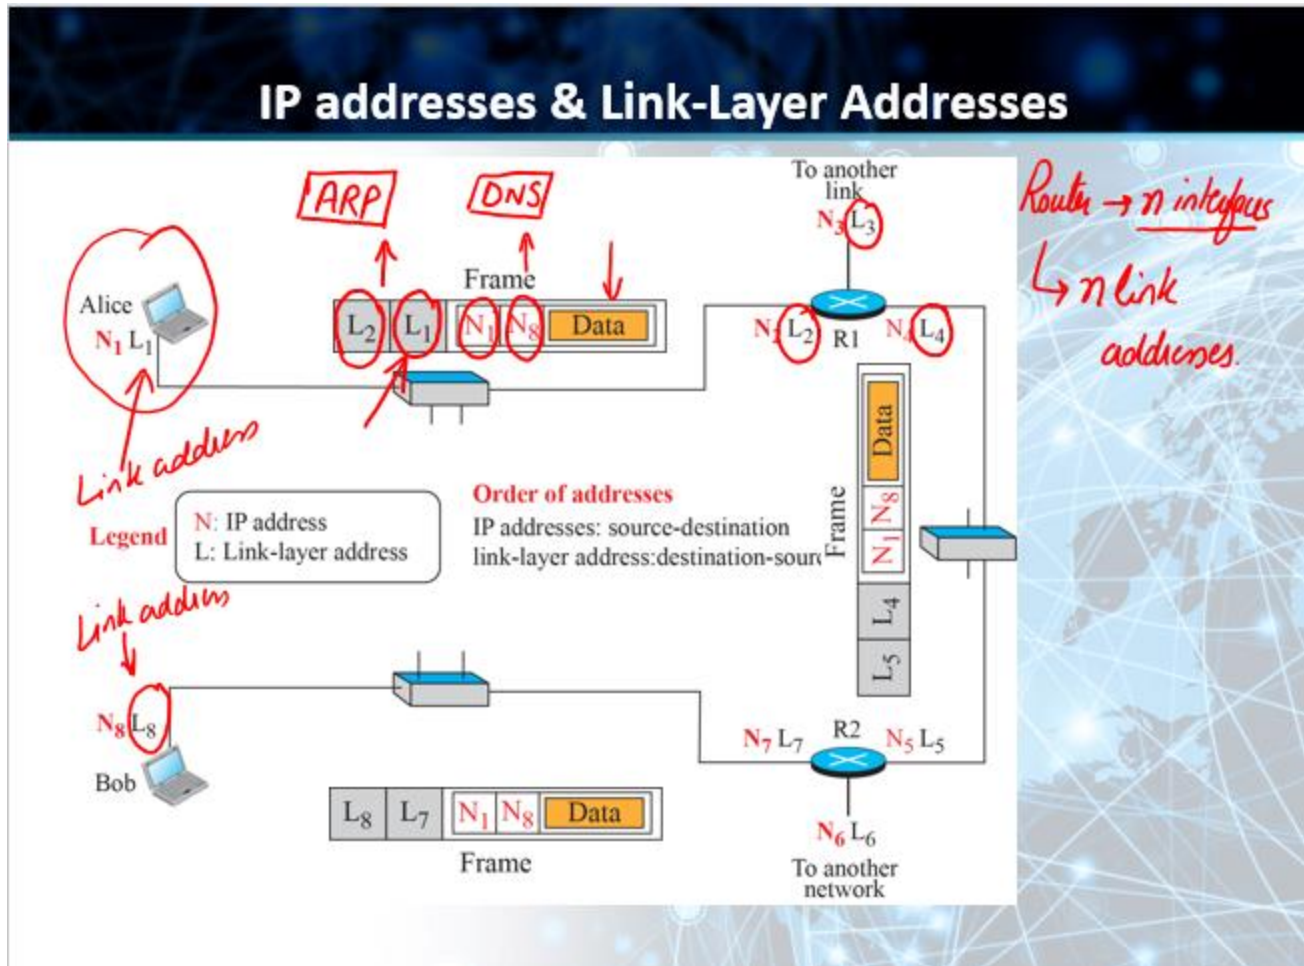


Three Types of addresses

- Some link-layer protocols define three types of addresses:
- Unicast
- Multicast
- Broadcast

Visit Our Channel for CS601 Short Lectures

Learning With Abid Ali



<https://www.youtube.com/watch?v=-0kr2sG8JUQ&list=PLAUocDaOe9K6nDHAXKa-7fHsIFAKBPE8q&index=9>

2.2.2 Types of Link layer Addresses

- Some link-layer protocols define three types of addresses: **unicast**, **multicast**, and **broadcast**.
- **Unicast**: Each host or each interface of a router is assigned a unicast address. Unicasting means **one-to-one communication**. A frame with a unicast address destination is destined only for one entity in the link.
- The unicast link-layer addresses in the most common LAN, Ethernet, are 48 bits (six bytes) that are presented as 12 hexadecimal digits separated by colons; for example, the following is a link-layer address of a computer. The **second digit needs to be an odd number**.
- A**3**:34:45:11:92:F1

Visit Our Channel for CS601 Short Lectures

Learning With Abid Ali



<https://www.youtube.com/watch?v=-0kr2sG8JUQ&list=PLAUocDaOe9K6nDHAXKa-7fHsIFAKBPE8q&index=9>

Example

The unicast link-layer addresses in the most common LAN, Ethernet, are 48 bits (six bytes) that are presented as 12 hexadecimal digits separated by colons; for example, the following is a link-layer address of a computer. The second digit needs to be an odd number.

↓
[A3:34:45:11:92:F1]


48 bits

↳ 6 Bytes

12 Hex digits
separated by
colons

Visit Our Channel for CS601 Short Lectures

Learning With Abid Ali



<https://www.youtube.com/watch?v=-0kr2sG8JUQ&list=PLAUocDaOe9K6nDHAXKa-7fHsIFAKBPE8q&index=9>

- **Multicast:** **one-to-many communication.** However, the jurisdiction is local (inside the link).
- The multicast link-layer addresses in the most common LAN, Ethernet, are 48 bits (six bytes) that are presented as 12 hexadecimal digits separated by colons. The second digit, however, needs to be **an even number in hexadecimal**. The following shows a multicast address:
- A**2**:34:45:11:92:F1
- **Broadcast:** **one-to-all communication.** A frame with a destination broadcast address is sent to all entities in the link.
- The broadcast link-layer addresses in the most common LAN, Ethernet, are 48 bits, If all digits are Fs, then the address is broadcast all 1s, that are presented as 12 hexadecimal digits separated by colons. The following shows a broadcast address:
- FF:FF:FF:FF:FF:FF

Visit Our Channel for CS601 Short Lectures

Learning With Abid Ali



<https://www.youtube.com/watch?v=-0kr2sG8JUQ&list=PLAUocDaOe9K6nDHAXKa-7fHsIFAKBPE8q&index=9>

Example

The multicast link-layer addresses in the most common LAN, Ethernet, are 48 bits (six bytes) that are presented as 12 hexadecimal digits separated by colons. The second digit, however, needs to be an even number in hexadecimal. The following shows a multicast address:

even → multicast address
↓
A2:34:45:11:92:F1

Visit Our Channel for CS601 Short Lectures

Learning With Abid Ali



<https://www.youtube.com/watch?v=-0kr2sG8JUQ&list=PLAUocDaOe9K6nDHAXKa-7fHsIFAKBPE8q&index=9>

Example

The broadcast link-layer addresses in the most common LAN, Ethernet, are 48 bits, all 1s, that are presented as 12 hexadecimal digits separated by colons. The following shows a broadcast address:


FF:FF:FF:FF:FF:FF

Address Resolution Protocol (ARP)

- Anytime a node has an IP packet to send to another node in a link, it has the IP address of the receiving node
- IP address of the next node is not helpful in moving a frame through a link; we need the link-layer address of the next node

Visit Our Channel for CS601 Short Lectures

Learning With Abid Ali




<https://www.youtube.com/watch?v=-0kr2sG8JUQ&list=PLAUocDaOe9K6nDHAXKa-7fHsIFAKBPE8q&index=9>

ARP operation

- When a host or a router needs to find the link-layer address of another host or router in its network, A host or a router **sends an ARP request** packet that includes the link-layer and IP addresses of the sender and the IP address of the receiver. Because the sender does not know the link-layer address of the receiver, the query is broadcast over the link using the link-layer broadcast address.
- Every host or router on the network receives and **processes the ARP request packet**, but only the intended recipient recognizes its IP address and sends back an ARP response packet. **The response packet contains the recipient's IP and link-layer addresses.** The packet is **unicast** directly to the node that sent the request packet.

Visit Our Channel for CS601 Short Lectures

Learning With Abid Ali




<https://www.youtube.com/watch?v=-0kr2sG8JUQ&list=PLAUocDaOe9K6nDHAXKa-7fHsIFAKBPE8q&index=9>

Address Resolution Protocol (ARP)

IP Address —————> Logical
Mac Address —————> Physical

H —————> H
H —————> R
R —————> H
R —————> R

IP	MAC	FFFF
----	-----	------

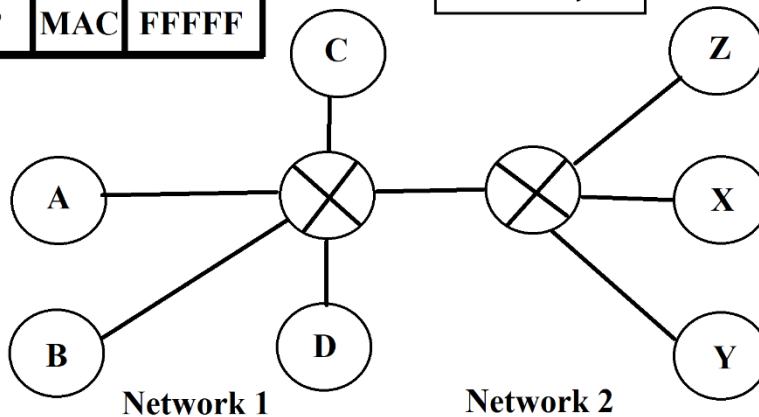

6	48	FFFF OR 00000000
---	----	------------------------

Hardware: LAN or WAN protocol			
Protocol: Network-layer protocol			
0	8	16	31
Hardware Type		Protocol Type	
Hardware length	Protocol length	Operation	
		Request:1, Reply:2	
Source hardware address		6	
Source protocol address		48	
Destination hardware address (Empty in request)		empty ←	
Destination protocol address			

Visit Our Channel for CS601 Short Lectures

Learning With Abid Ali




<https://www.youtube.com/watch?v=-0kr2sG8JUQ&list=PLAUocDaOe9K6nDHAXKa-7fHsIFAKBPE8q&index=9>

• ARP packet

- The **hardware type field** defines the type of the link-layer protocol; Ethernet is given the type 1.
- The **protocol type field** defines the network-layer protocol: IPv4 protocol is $(0800)_{16}$.
- **Hardware Length** defines the physical address length in bytes
- **Protocol Length** defines the logical address length in bytes
- The **source hardware** and **source protocol addresses** are variable-length fields defining the link-layer and network-layer addresses of the sender.
- The **destination hardware address** and **destination protocol address** fields define the receiver link-layer and network-layer addresses.
- An ARP packet is encapsulated directly into a data-link frame

Activate Windows
Go to Settings to activate Windows

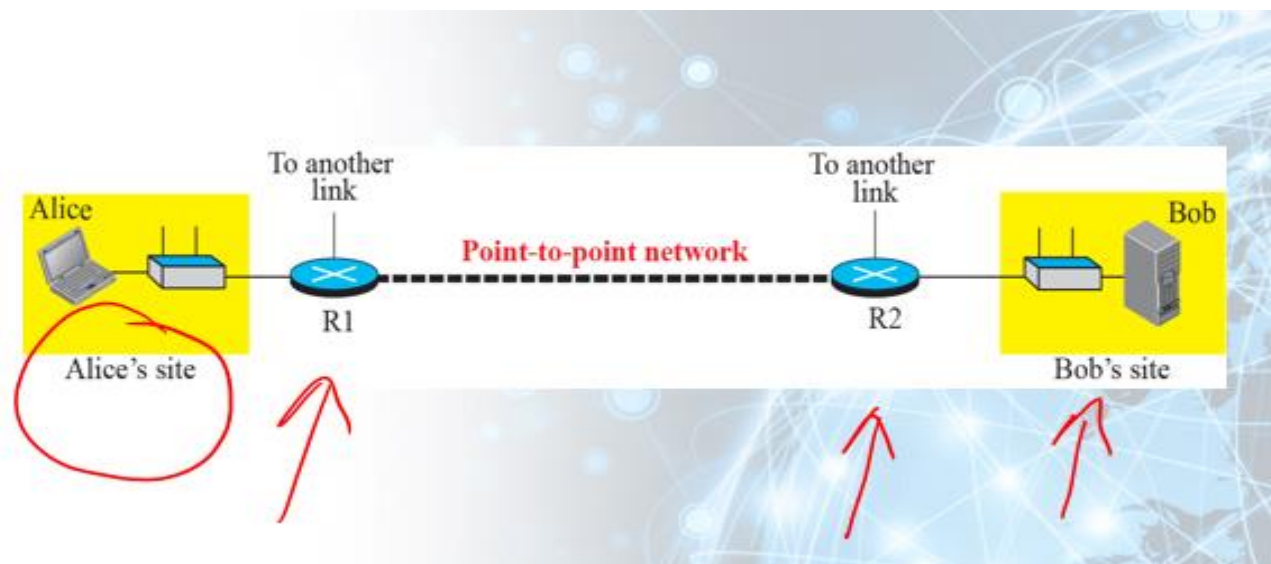


Visit Our Channel for CS601 Short Lectures

Learning With Abid Ali




<https://www.youtube.com/watch?v=-0kr2sG8JUQ&list=PLAUocDaOe9K6nDHAXKa-7fHsIFAKBPE8q&index=9>

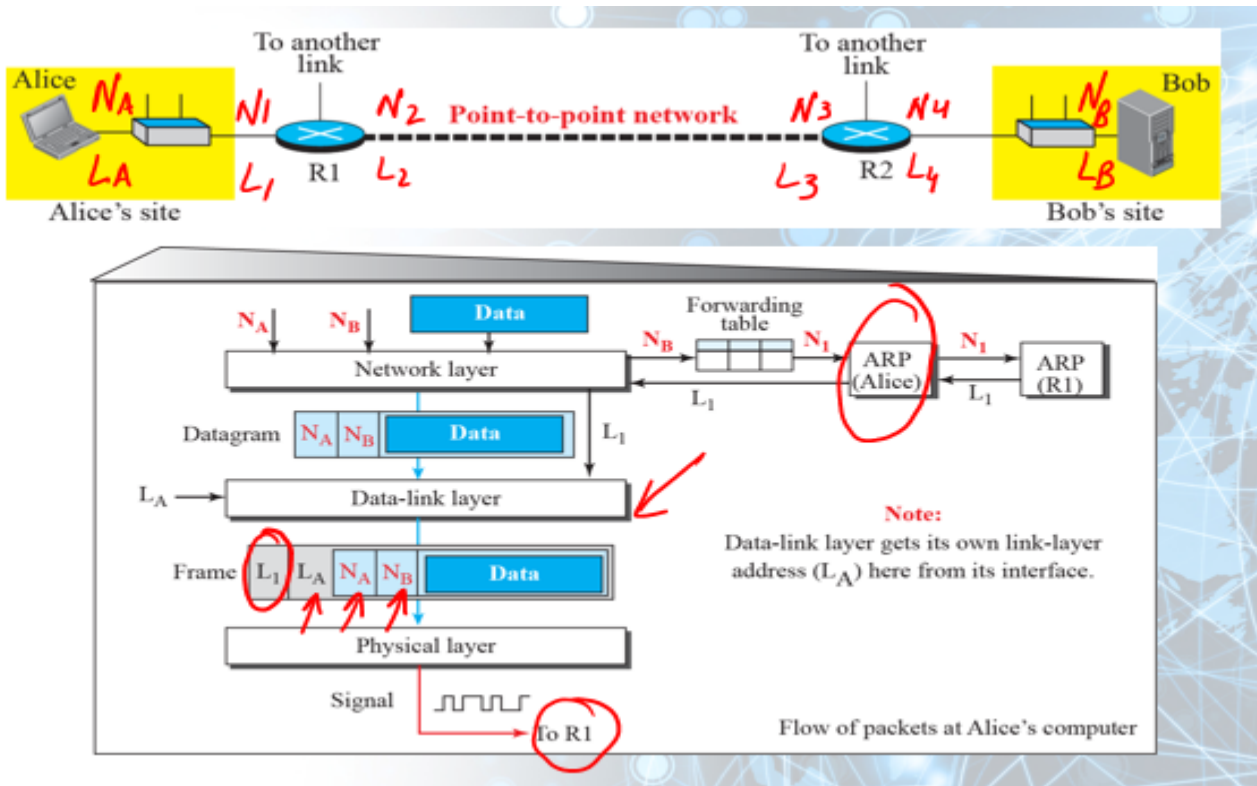

Visit Our Channel for CS601 Short Lectures

Learning With Abid Ali



<https://www.youtube.com/watch?v=-0kr2sG8JUQ&list=PLAUocDaOe9K6nDHAXKa-7fHsIFAKBPE8q&index=9>



Data Communication CS601 Lecture No 24

Lecture Prepared By
Muhammad Abid Ali

We are also Provide Online Classes for CS601

Contact Us on WhatsApp for join our online Classes


WhatsApp No 03449767315

CS601 Lecture No 24 Topic 135 to 142

Types of Errors

Visit Our Channel for CS601 Short Lectures


Learning With Abid Ali



<https://www.youtube.com/watch?v=-0kr2sG8JUQ&list=PLAUocDaOe9K6nDHAXKa-7fHsIFAKBPE8q&index=9>

Type of Errors

- An electromagnetic signal is subject to interference from heat, magnetism, and other forms of electricity
- Single-bit error: $0 \rightarrow 1$ or $1 \rightarrow 0$
- Burst error: 2 or more bits have changed

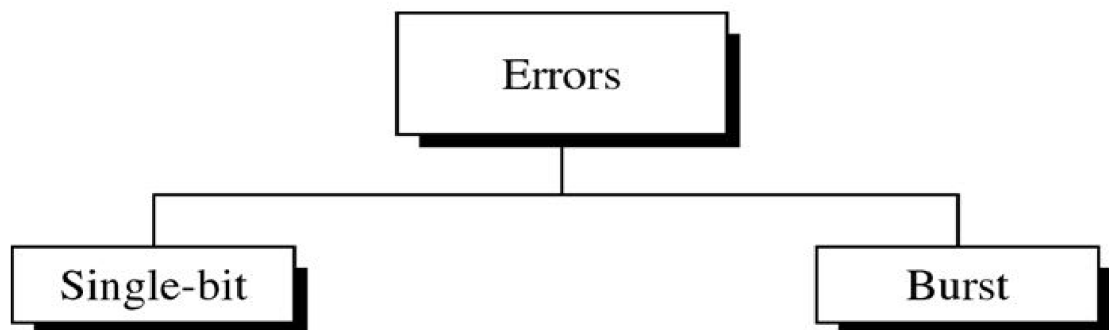


- Data transmission suffers **unpredictable** changes because of **interference**
- The interference can change the shape of **the signal**

Single-bit error


Single-bit error means that only 1 bit of a given data unit (such as a byte, character, or packet) is changed from 1 to 0 or from 0 to 1

Visit Our Channel for CS601 Short Lectures

Learning With Abid Ali




<https://www.youtube.com/watch?v=-0kr2sG8JUQ&list=PLAUocDaOe9K6nDHAXKa-7fHsIFAKBPE8q&index=9>

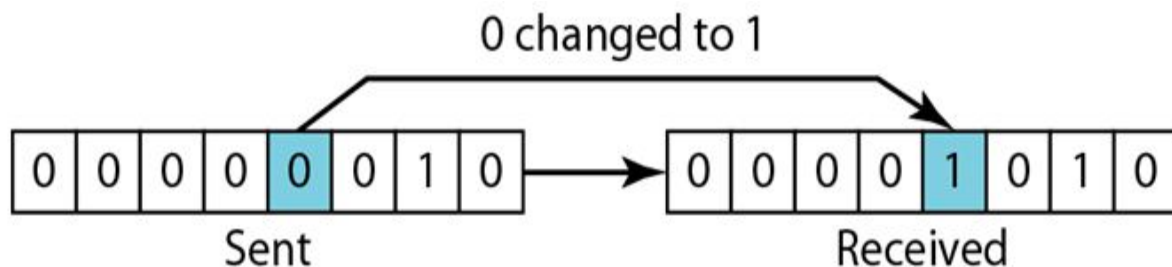

Burst Error

Burst Error means that 2 or more bits in the data unit have changed from 1 to 0 or from 0 to 1

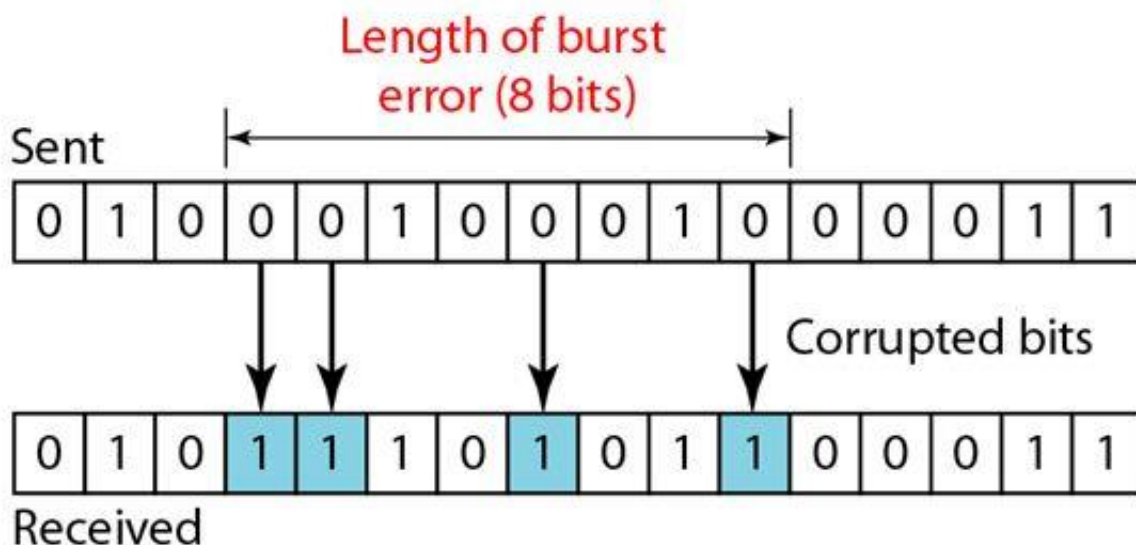

Number Of Impacted Bits Depend on Two Things


Data rate

Duration of rate

If duration of noise is decreased during a transmission over noisy channel, fixed data rate of the channel will cause _____ number of bits being impacted by the noise.

Visit Our Channel for CS601 Short Lectures

Learning With Abid Ali




<https://www.youtube.com/watch?v=-0kr2sG8JUQ&list=PLAUocDaOe9K6nDHAXKa-7fHsIFAKBPE8q&index=9>

Redundancy

- Central concept in detecting or correcting errors is **Redundancy**
- To be able to detect or correct errors, we send some **extra bits** with our data
- The presence of these **redundant bits** allows the receiver to detect or correct **corrupted bits**

Redundancy

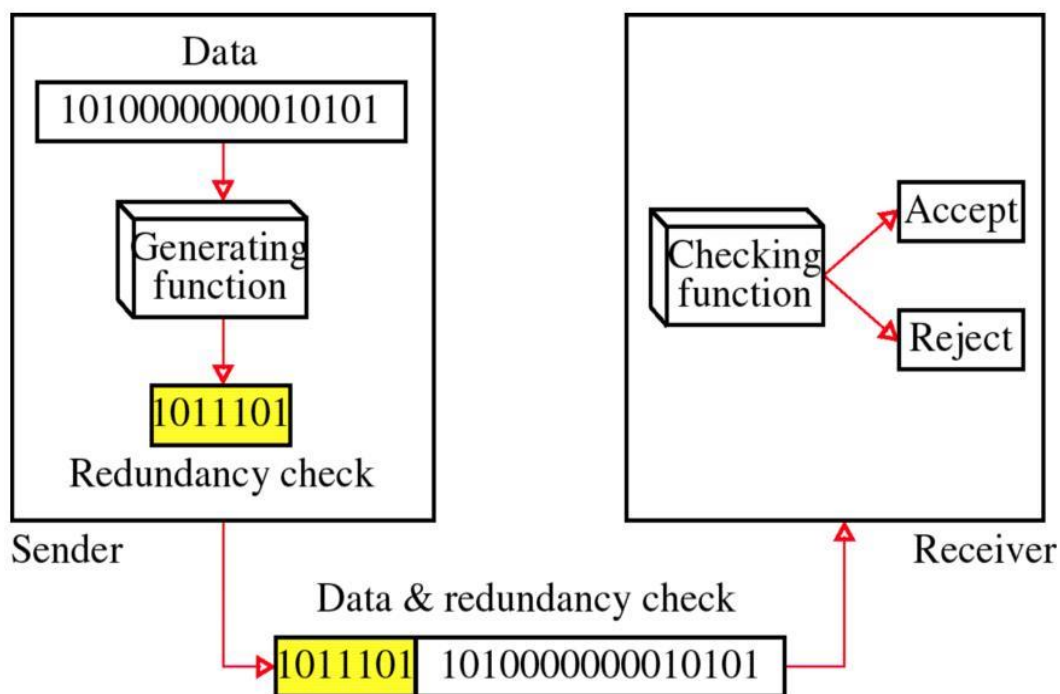


Detection versus Correction

- **Correction** is more **difficult** than the **detection**
- **In error detection**, we are only looking to see if any error has occurred (Yes or No)

Visit Our Channel for CS601 Short Lectures

Learning With Abid Ali



<https://www.youtube.com/watch?v=-0kr2sG8JUQ&list=PLAUocDaOe9K6nDHAXKa-7fHsIFAKBPE8q&index=9>

- We are not interested in the number of corrupted bits in **Detection**
- **Single-bit** error is same as a **Burst error**
- In Error Correction, we need to know:
 - The exact number of bits that are corrupted and,
 - Their location in the message

Types of Coding Schemes

- Coding schemes can be divided into **2 broad categories**:
 - ✓ Block Coding
 - ✓ Convolution Coding

Block Coding

In Block coding we divide our message into blocks of k bits called as


- We divide our message into **blocks**, each of ' k ' bits, called **datawords**
- We add ' r ' **redundant** bits to each block to make the length ' $n = k + r$ '
- The resulting ' **n -bit**' blocks are called **codewords**

Visit Our Channel for CS601 Short Lectures

Learning With Abid Ali



<https://www.youtube.com/watch?v=-0kr2sG8JUQ&list=PLAUocDaOe9K6nDHAXKa-7fHsIFAKBPE8q&index=9>

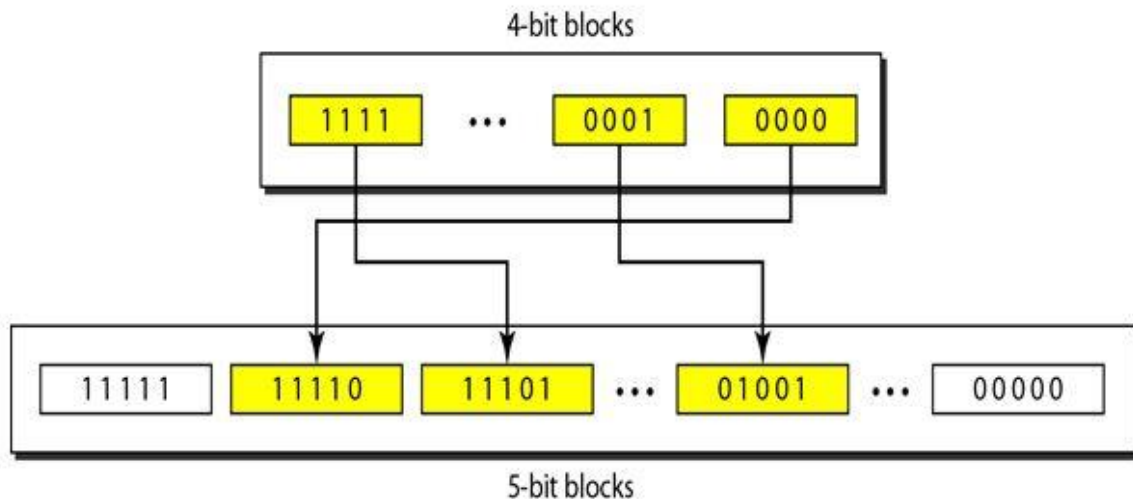

BLOCK CODING in Error Detection

- If the following two conditions are met, the receiver can detect a change in the original codeword:
 - ✓ The receiver has (or can find) a list of valid **codewords**
 - ✓ The original codeword has changed to an **invalid one**

The sender creates code words out of data words by using a generator that applies the rules and procedures of encoding (discussed later). Each code word sent to the receiver may change during transmission. If the received code word is the same as one of the valid code words, the word is accepted; the corresponding data word is extracted for use.

If the received code word is not valid, it is discarded. However, if the code word is corrupted during transmission but the received word still matches a valid code word, the error remains undetected. This type of coding can detect only single errors. Two or more errors may remain undetected.

For example, consider the following table of data words and Code words:

Visit Our Channel for CS601 Short Lectures

Learning With Abid Ali



<https://www.youtube.com/watch?v=-0kr2sG8JUQ&list=PLAUocDaOe9K6nDHAXKa-7fHsIFAKBPE8q&index=9>

<i>Datawords</i>	<i>Codewords</i>
00	000
01	011
10	101
11	110

Assume the sender encodes the data word 01 as 011 and sends it to the receiver. Consider the following cases:


1. The receiver receives 011. It is a valid code word. The receiver extracts the data word 01 from it.
2. The code word is corrupted during transmission, and 111 is received (the leftmost bit is corrupted). This is not a valid code word and is discarded.
3. The code word is corrupted during transmission, and 000 is received (the right two bits are corrupted). This is a valid code word. The receiver incorrectly extracts the data word 00. Two corrupted bits have made the error undetectable.

Hamming Distance

- **Hamming Distance** between two words of the same size is the number of differences between the corresponding bits
- Hamming Distance between two words x and y is $d(x, y)$
- **Hamming distance** between received codeword and sent codeword is number of **bits corrupted**

Visit Our Channel for CS601 Short Lectures

Learning With Abid Ali



<https://www.youtube.com/watch?v=-0kr2sG8JUQ&list=PLAUocDaOe9K6nDHAXKa-7fHsIFAKBPE8q&index=9>

Example

Let us find the Hamming distance between two pairs of words.

1. $d(000, 011)$ $\rightarrow d(x, y) = d(000, 011) = 2$
2. $d(10101, 11110)$

$$\hookrightarrow d(10101, 11110) = 3$$

$d(x, y) \neq 0 \rightarrow$ corrupted (error)

XOR $\oplus$ $000 \oplus 011 \rightarrow$ Count no. of 1's in result
 $\hookrightarrow 2$


Minimum Hamming Distance

- Minimum Hamming Distance is smallest hamming distance between all possible pairs of codewords
- $d_{\min} = s + 1$

where, $s \rightarrow$ no. of detectable errors $d_{\min} \rightarrow$ minimum hamming distance

Visit Our Channel for CS601 Short Lectures

Learning With Abid Ali



<https://www.youtube.com/watch?v=-0kr2sG8JUQ&list=PLAUocDaOe9K6nDHAXKa-7fHsIFAKBPE8q&index=9>

Example

A code scheme has a Hamming distance $d_{\min} = 4$. This code guarantees the detection of up to how many errors?

$$d_{\min} = 4$$

$$d_{\min} = S + 1$$

$$S = d_{\min} - 1$$


$$= 4 - 1$$

$$\boxed{S = 3} \rightarrow$$

Block code guarantees
error detection for up to
3 bits in a codeword

Visit Our Channel for CS601 Short Lectures

Learning With Abid Ali



<https://www.youtube.com/watch?v=-0kr2sG8JUQ&list=PLAUocDaOe9K6nDHAXKa-7fHsIFAKBPE8q&index=9>

بِسْمِ اللَّهِ الرَّحْمَنِ الرَّحِيمِ

Data Communication CS601 Lecture No 25

Lecture Prepared By
Muhammad Abid Ali

We are also Provide Online Classes for CS601

Contact Us on WhatsApp for join our online Classes

WhatsApp No 03449767315

CS601 Lecture No 25 Topic 143 to 148

Parity-Check Code

- Most common error-detecting code
- Linear block code ($n=k+1$)

Visit Our Channel for CS601 Short Lectures

Learning With Abid Ali



<https://www.youtube.com/watch?v=-0kr2sG8JUQ&list=PLAUocDaOe9K6nDHAXKa-7fHsIFAKBPE8q&index=9>

- The extra parity bit is selected to make total number of 1s in codeword **even**

The simple parity-check code is the most familiar error-detecting code. In this code, a **k-bit data word** is changed to an **n-bit code word** where $n = k + 1$. The extra bit, called the parity bit, is selected to make the total number of 1s in the code word even.

Simple parity-check code C(5, 4)

$2^4 = 16$ $2^5 = 32$ $k = 4, n = 5$

Datawords	Codewords	Datawords	Codewords
0000	00000	1000	10001
0001	00010	1001	10010
0010	00100	1010	10100
0011	00110	1011	10111
0100	01000	1100	11000
0101	01010	1101	11011
0110	01100	1110	11101
0111	01111	1111	11110

$n > k \rightarrow \text{no. of codewords} > \text{no. of datawords}$
 $2^n - 2^k \rightarrow (\text{codewords}) \rightarrow \underline{\underline{\text{invalid}}}$

CYCLIC CODES

- Special linear block codes with one **extra property**
- If a codeword is cyclically shifted (rotated), the result is another **codeword**
- If 1011000 is a codeword and we cyclically left-shift, then **0110001** is also a **codeword**


Visit Our Channel for CS601 Short Lectures

Learning With Abid Ali



<https://www.youtube.com/watch?v=-0kr2sG8JUQ&list=PLAUocDaOe9K6nDHAXKa-7fHsIFAKBPE8q&index=9>

In coding theory, a cyclic code is a **block code**, where the **circular shifts of each codeword gives another word that belongs to the code.**

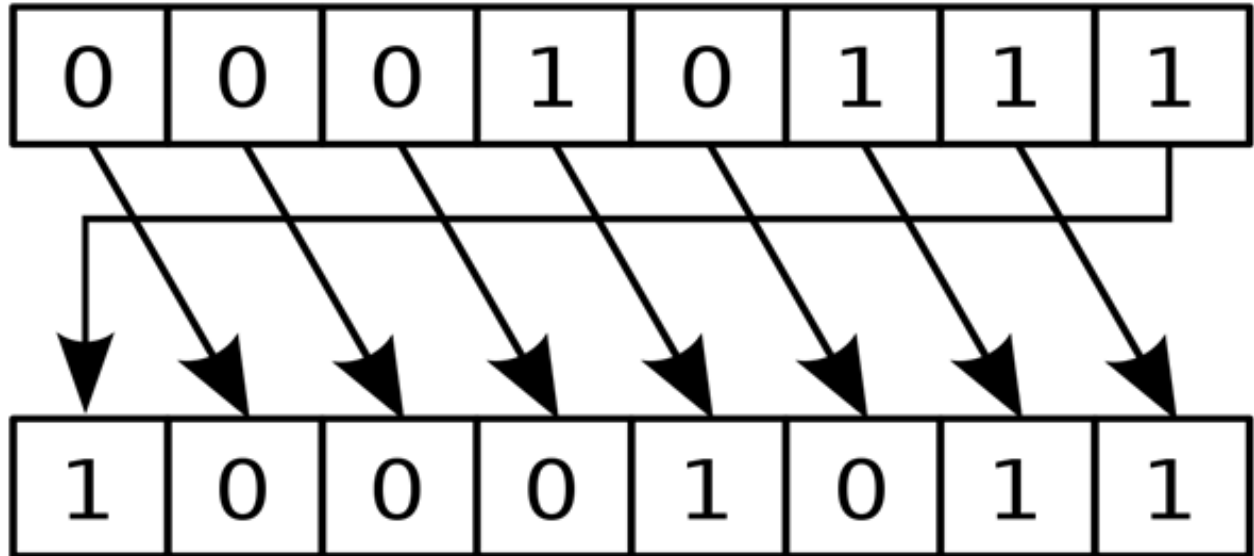


Cyclic Redundancy Check (CRC)

- Subset of **Cyclic Codes**
- **Cyclic redundancy check** (CRC) is used in networks such as **LANs and WANs**

Visit Our Channel for CS601 Short Lectures


Learning With Abid Ali



<https://www.youtube.com/watch?v=-0kr2sG8JUQ&list=PLAUocDaOe9K6nDHAXKa-7fHsIFAKBPE8q&index=9>

A CRC code with C(7, 4)

Dataword	Codeword	Dataword	Codeword
0000	0000000	1000	1000101
0001	0001011	1001	1001110
0010	0010110	1010	1010011
0011	0011101	1011	1011000
0100	0100111	1100	1100010
0101	0101100	1101	1101001
0110	0110001	1110	1110100
0111	0111010	1111	1111111

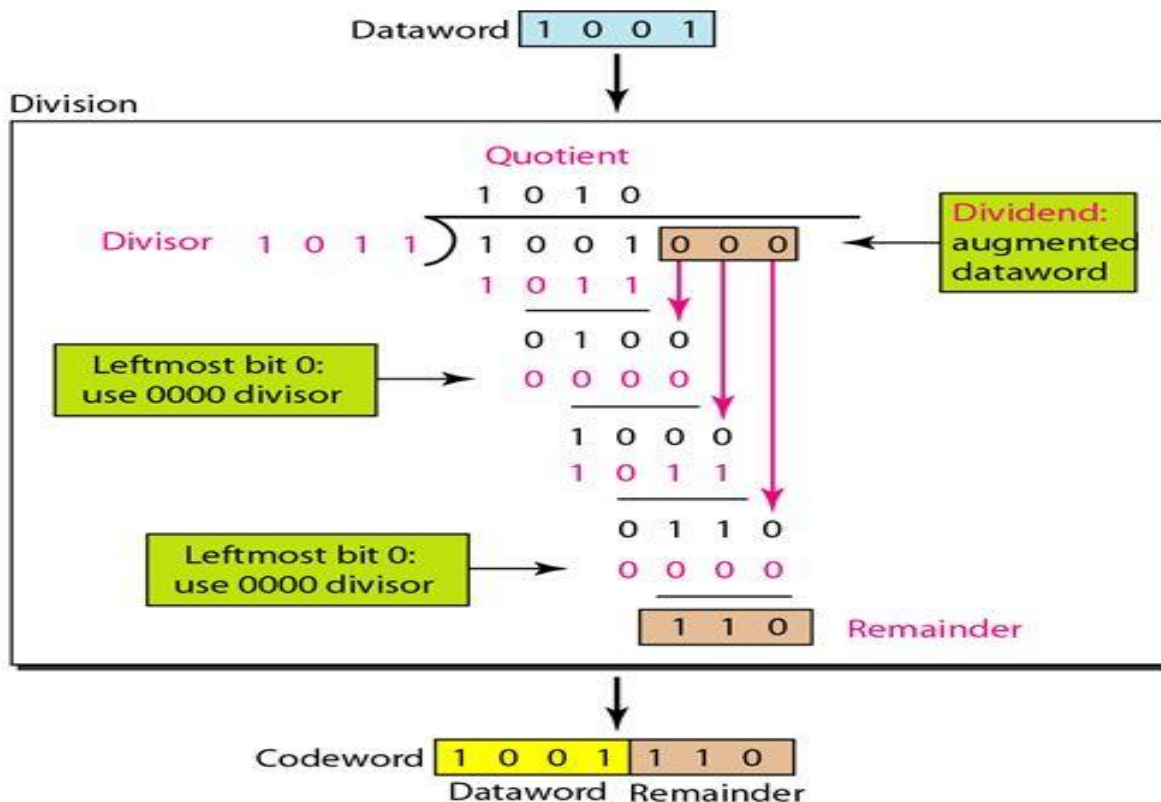


Visit Our Channel for CS601 Short Lectures

Learning With Abid Ali



<https://www.youtube.com/watch?v=-0kr2sG8JUQ&list=PLAUocDaOe9K6nDHAXKa-7fHsIFAKBPE8q&index=9>

Decoder:

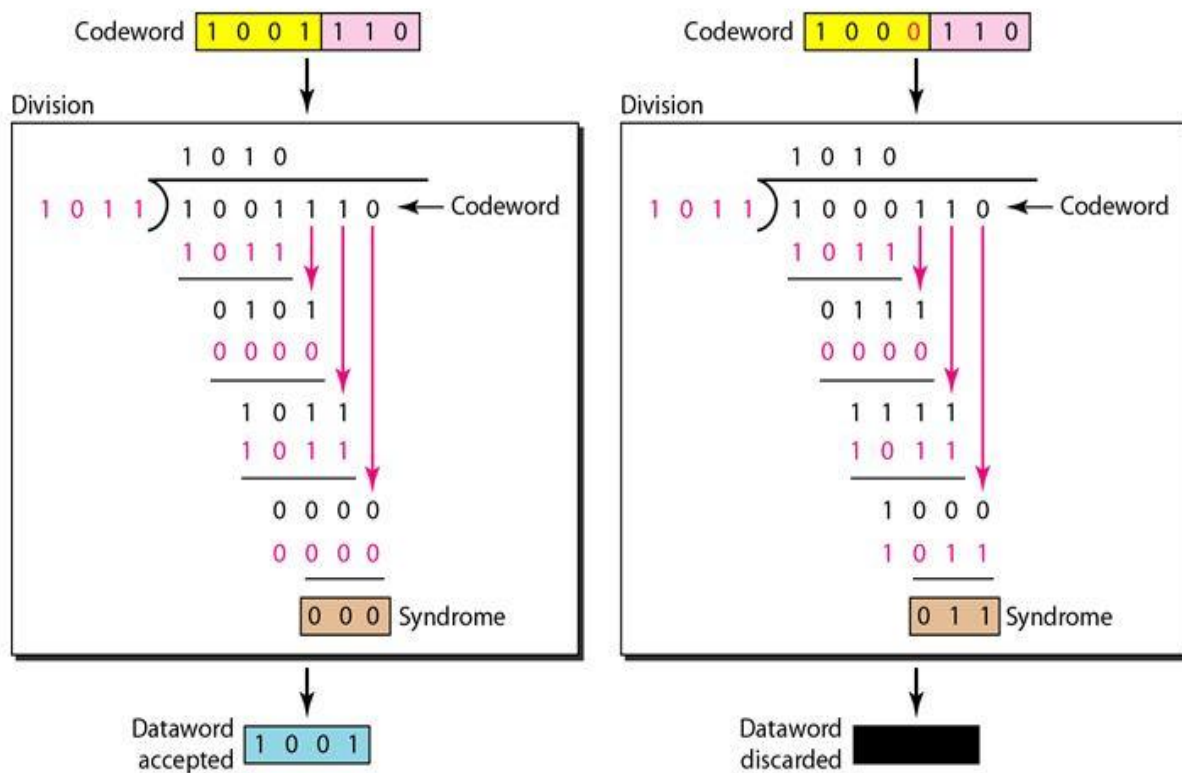

Advantages of Cyclic Codes

- **Good performance in detection:**
 - Single-bit errors
 - Double errors
 - Odd number of errors
 - Burst errors
- **Easy Implementation**
- **Fast Implementation**

Visit Our Channel for CS601 Short Lectures

Learning With Abid Ali



<https://www.youtube.com/watch?v=-0kr2sG8JUQ&list=PLAUocDaOe9K6nDHAXKa-7fHsIFAKBPE8q&index=9>

CHECKSUM

- Error-detection technique that can be applied to a message of any length
- Checksum mostly used at the network and transport layer rather than the data-link layer

Example

Suppose the message is a list of five 4-bit numbers that we want to send to a destination. In addition to sending these numbers, we send the sum of the numbers.

Set of numbers is (7, 11, 12, 0, 6)

$$7 + 11 + 12 + 0 + 6 = 36$$

(7, 11, 12, 0, 6, 36)
=====

4-bit word (each < 15)

(36)

Visit Our Channel for CS601 Short Lectures

Learning With Abid Ali



<https://www.youtube.com/watch?v=-0kr2sG8JUQ&list=PLAUocDaOe9K6nDHAXKa-7fHsIFAKBPE8q&index=9>

Example

In the previous example, the decimal number 36 in binary is $(100100)_2$. To change it to a 4-bit number we add the extra leftmost bit to the right four bits as shown below

$$\overline{(10)}_2 + \overline{(0100)}_2 = \overline{(0110)}_2$$

→ $(6)_{10}$

*one's complement
arithmetic*

$(7, 11, 12, 0, 6, 36)$
→ $(7, 11, 12, 0, 6, 6)$

Forward Error Correction

- Retransmission of corrupted and lost packets is not useful for **real-time multimedia** transmission
- We need to correct the error or reproduce the packet **immediately**
- Several techniques developed and are commonly called Forward Error Correction techniques

Using Hamming Distance

- For error detection, we definitely need more distance
- It can be shown that to correct 't' errors, we need to have:

Visit Our Channel for CS601 Short Lectures

Learning With Abid Ali



<https://www.youtube.com/watch?v=-0kr2sG8JUQ&list=PLAUocDaOe9K6nDHAXKa-7fHsIFAKBPE8q&index=9>

$$d_{\min} = 2t + 1$$

- If we want to correct **10 bits** in a packet, we need to make the minimum hamming distance **21 bits**
- A lot of **redundant bits** need to be sent with the data

Using Hamming Distance

If we want to correct 10 bits in a packet, we need to make the minimum hamming distance 21 bits

$$d_{\min} = 2t + 1$$

$$d_{\min} = 2(10) + 1$$

$$d_{\min} = \underline{\underline{21}} \rightarrow \text{no. of bits (red) that you will send with dataword}$$

BCH

$$99 \text{ bits} \rightarrow \underline{\underline{255 \text{ bits}}}$$

$$\hookrightarrow \underline{\underline{156}}$$

$$\textcircled{\underline{\underline{(23)}}}$$

Visit Our Channel for CS601 Short Lectures

Learning With Abid Ali



<https://www.youtube.com/watch?v=-0kr2sG8JUQ&list=PLAUocDaOe9K6nDHAXKa-7fHsIFAKBPE8q&index=9>

Using XOR

Another recommendation
is to use the property of
the exclusive OR operation
as shown below.

$$R = P_1 \oplus P_2 \oplus \dots \oplus P_i \oplus \dots \oplus P_N$$

This means:

$$P_i = P_1 \oplus P_2 \oplus \dots \oplus R \oplus \dots \oplus P_N$$

Visit Our Channel for CS601 Short Lectures

Learning With Abid Ali



<https://www.youtube.com/watch?v=-0kr2sG8JUQ&list=PLAUocDaOe9K6nDHAXKa-7fHsIFAKBPE8q&index=9>

Using XOR

Another recommendation is to use the property of the exclusive OR operation as shown below.

$$R = P_1 \oplus P_2 \oplus \dots \oplus P_i \oplus \dots \oplus P_N$$

$$\text{Data} \rightarrow P_1 \rightarrow P_N$$

$$P_i = P_1 \oplus P_2 \oplus \dots \oplus R \oplus \dots \oplus P_N$$

N chunks

$\rightarrow N+1$ chunks are sent.


$$\underline{N=4}$$

$\rightarrow 25\%$ extra data

XOR (one out of 4 chunks)

Visit Our Channel for CS601 Short Lectures

Learning With Abid Ali



<https://www.youtube.com/watch?v=-0kr2sG8JUQ&list=PLAUocDaOe9K6nDHAXKa-7fHsIFAKBPE8q&index=9>

Chunk Interleaving


- Another way to achieve FEC in multimedia is to allow some small chunks to be missing at the receiver
- We cannot afford to let all the chunks belonging to the same packet be missing; however, we can afford to let one chunk be missing in each packet

Visit Our Channel for CS601 Short Lectures

Learning With Abid Ali



<https://www.youtube.com/watch?v=-0kr2sG8JUQ&list=PLAUocDaOe9K6nDHAXKa-7fHsIFAKBPE8q&index=9>

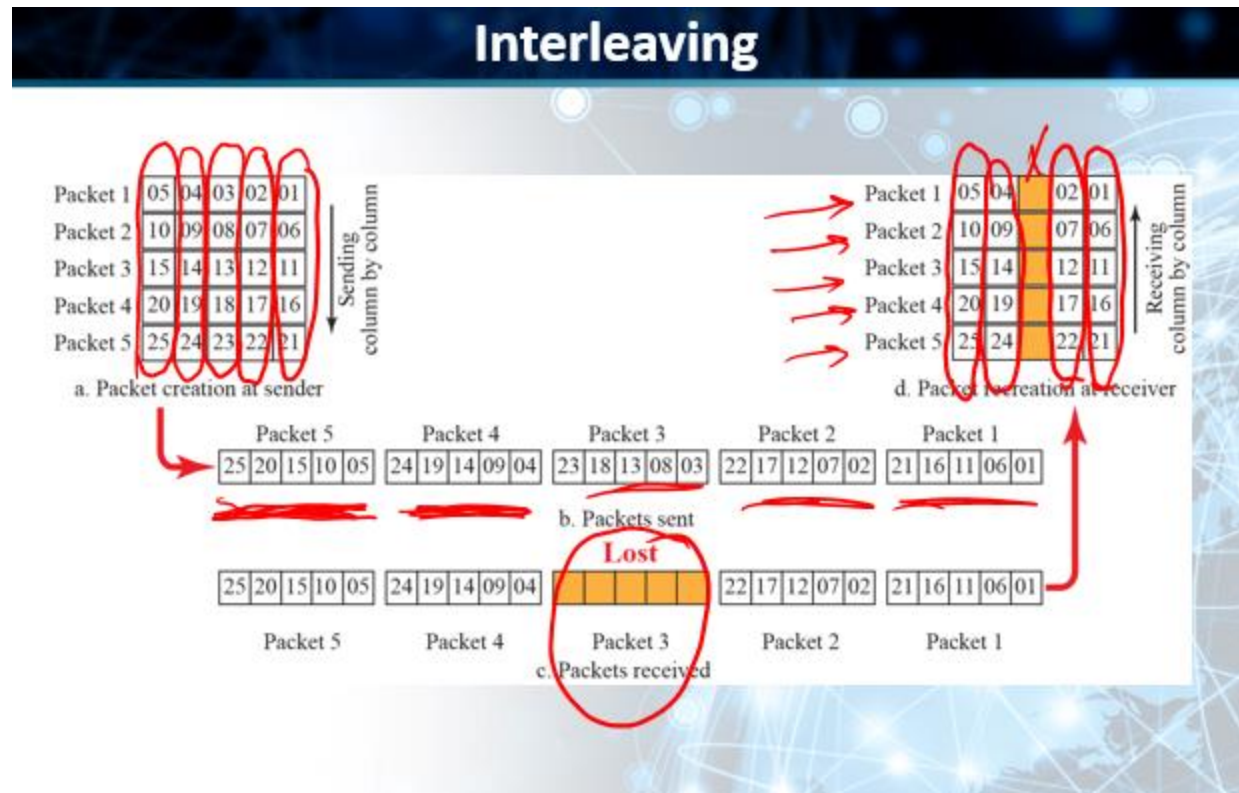

Visit Our Channel for CS601 Short Lectures

Learning With Abid Ali



<https://www.youtube.com/watch?v=-0kr2sG8JUQ&list=PLAUocDaOe9K6nDHAXKa-7fHsIFAKBPE8q&index=9>

بِسْمِ اللَّهِ الرَّحْمَنِ الرَّحِيمِ

Data Communication CS601 Lecture No 26

Lecture Prepared By
Muhammad Abid Ali

We are also Provide Online Classes for CS601

Contact Us on WhatsApp for join our online Classes

WhatsApp No 03449767315

CS601 Lecture No 26 Topic 149 to 155

No matter whether the link is dedicated or broadcast, data link control (DLC) layer provides services between

Data Link Control (DLC) Services

- The data link control (DLC) deals with procedures for communication between two adjacent nodes no matter whether the link is dedicated or broadcast
- Data link control functions include framing, flow control and error control


Routing is not a function of Data Link Control (DLC).

Visit Our Channel for CS601 Short Lectures

Learning With Abid Ali



<https://www.youtube.com/watch?v=-0kr2sG8JUQ&list=PLAUocDaOe9K6nDHAXKa-7fHsIFAKBPE8q&index=9>

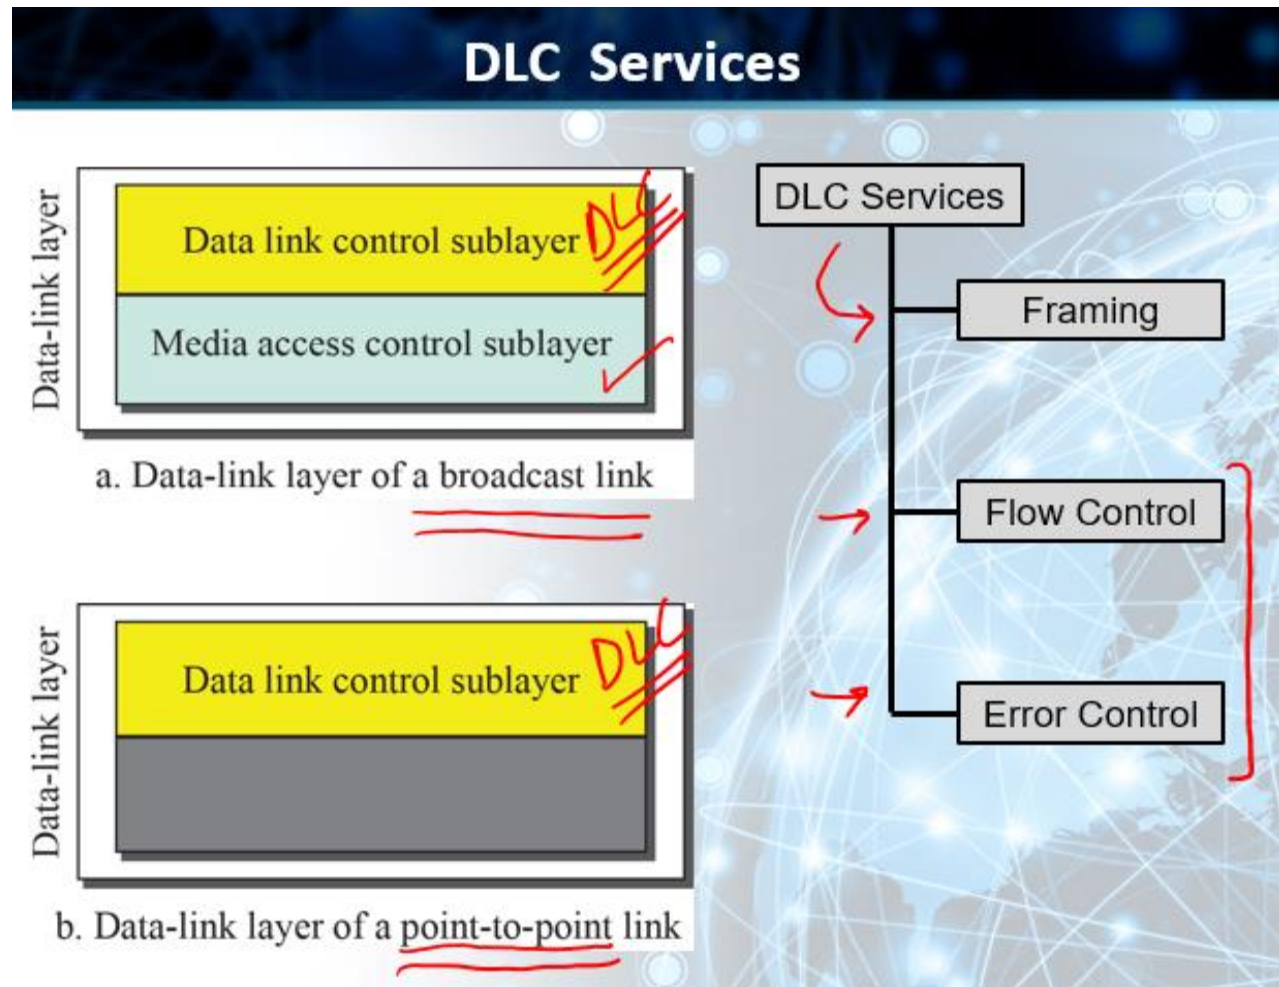

Framing

- **Data-Link layer** needs to pack bits into **frames**, so that each frame is **distinguishable** from another
- Our postal system practices a type of **framing**
- **Framing** separates a message by adding a sender address and a destination address
- The **destination address** defines where the packet is to go; the sender address helps the recipient acknowledge the receipt

Visit Our Channel for CS601 Short Lectures

Learning With Abid Ali



<https://www.youtube.com/watch?v=-0kr2sG8JUQ&list=PLAUocDaOe9K6nDHAXKa-7fHsIFAKBPE8q&index=9>

Parts of a Frame


A frame has the following parts –

- Frame Header – It contains the source and the destination addresses of the frame.
- Payload field – It contains the message to be delivered.
- Trailer – It contains the error detection and error correction bits.
- Flag – It marks the beginning and end of the frame.

Delimiter

In computer programming, a delimiter is **a character that identifies the beginning or the end of a character string** (a contiguous sequence of characters). The delimiting character is not part of the character string.

Data Link Layer Services

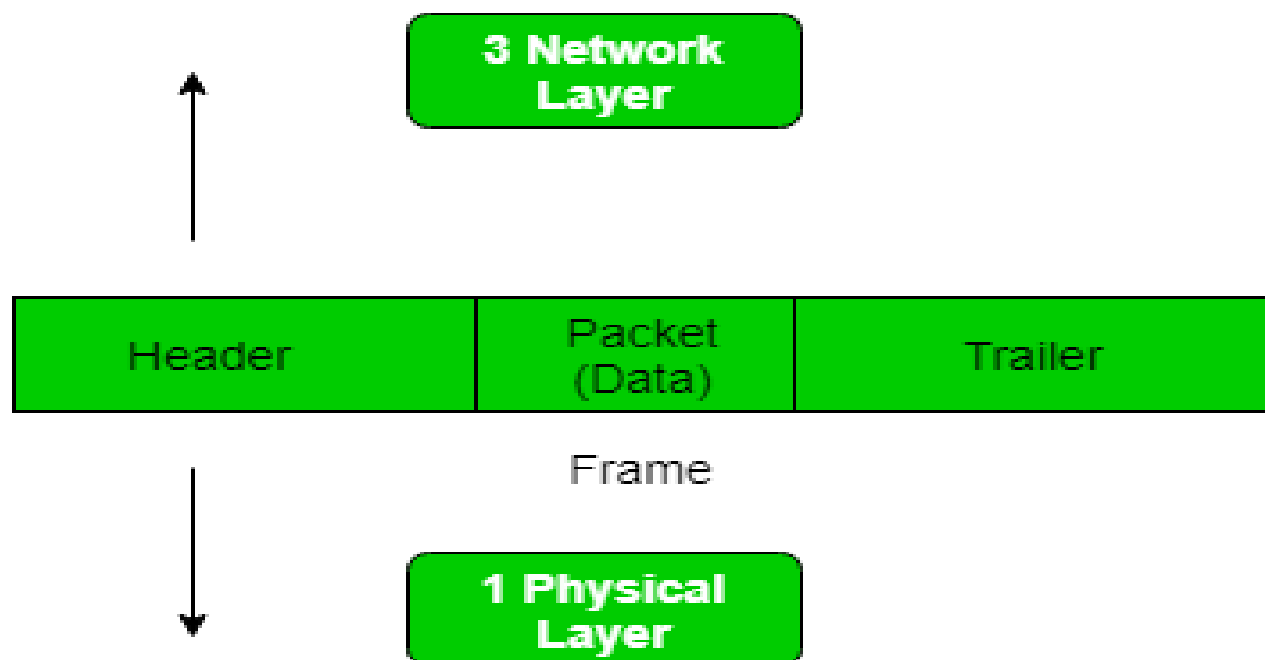

Visit Our Channel for CS601 Short Lectures


Learning With Abid Ali



<https://www.youtube.com/watch?v=-0kr2sG8JUQ&list=PLAUocDaOe9K6nDHAXKa-7fHsIFAKBPE8q&index=9>

Framing

- Process of wrapping data with certain info before sending out

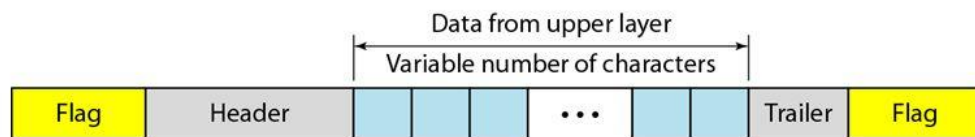

- A frame typically consists of
 - Flag: indication for start and end of a frame
 - Header: source/destination addresses, as well as other control information
 - Data from the upper layer
 - Trailer: error detection/correction code

3

Why not one BIG Frame?

Data-link layer takes the packets from the Network Layer and encapsulates them into frames. If the frame size becomes too large, then the packet may be divided into small sized frames. Smaller sized frames make flow control and error control more efficient.

Types of Framing

Framing can be of **two types**, fixed sized framing and variable sized framing.

Fixed-sized Framing

Visit Our Channel for CS601 Short Lectures

Learning With Abid Ali



<https://www.youtube.com/watch?v=-0kr2sG8JUQ&list=PLAUocDaOe9K6nDHAXKa-7fHsIFAKBPE8q&index=9>

Here the size of the frame is fixed and so the frame length **acts as delimiter** of the frame. Consequently, it does not require additional boundary bits to identify the start and end of the frame.

Example – **ATM cells.**

Variable – Sized Framing

Here, the size of each frame to be transmitted may be different. So additional mechanisms are kept to mark the **end of one frame and the beginning** of the next frame.

It is used in **local area networks.**

Two ways to define frame delimiters in variable sized framing are –

- **Length Field** – Here, a length field is used that determines the size of the frame. It is used in Ethernet (IEEE 802.3).
- **End Delimiter** – Here, a pattern is used as a delimiter to determine the size of frame. It is used in Token Rings. If the pattern occurs in the message, then two approaches are used to avoid the situation –


Visit Our Channel for CS601 Short Lectures

Learning With Abid Ali



<https://www.youtube.com/watch?v=-0kr2sG8JUQ&list=PLAUocDaOe9K6nDHAXKa-7fHsIFAKBPE8q&index=9>

Variable Framing Techniques

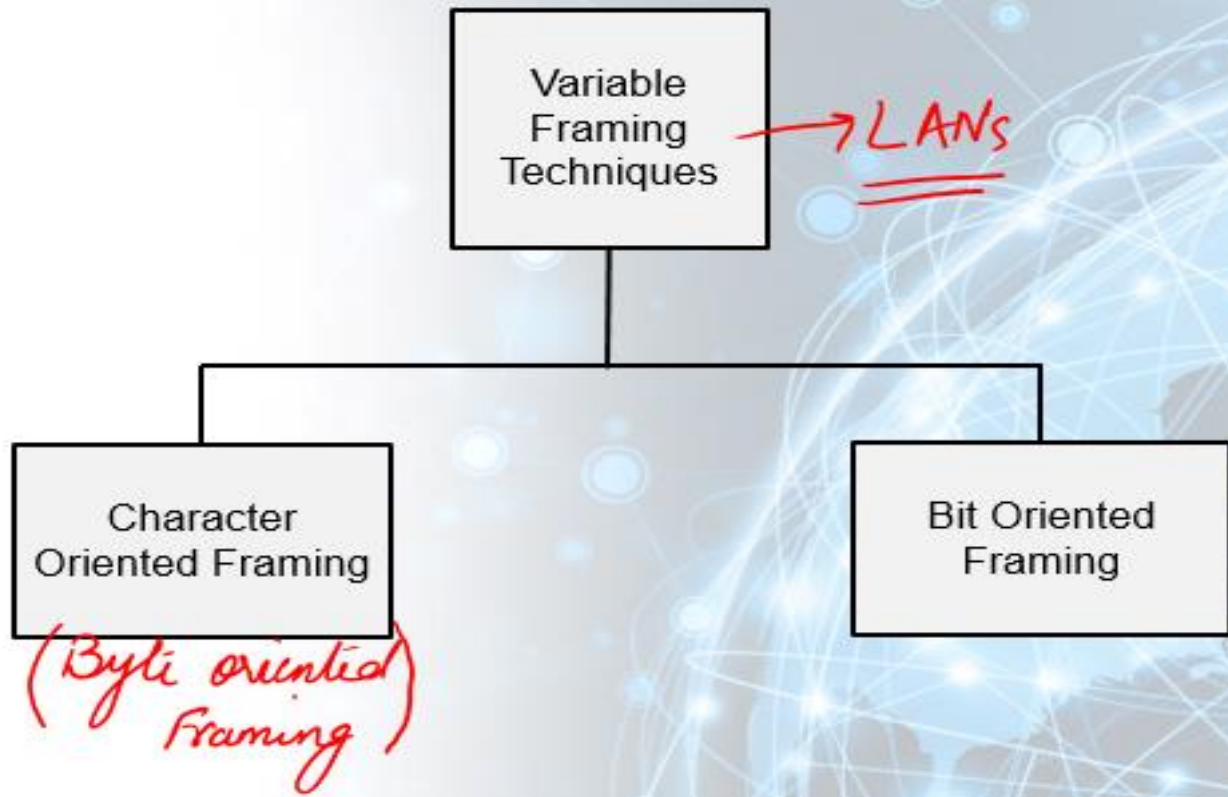


Visit Our Channel for CS601 Short Lectures

Learning With Abid Ali



<https://www.youtube.com/watch?v=-0kr2sG8JUQ&list=PLAUocDaOe9K6nDHAXKa-7fHsIFAKBPE8q&index=9>

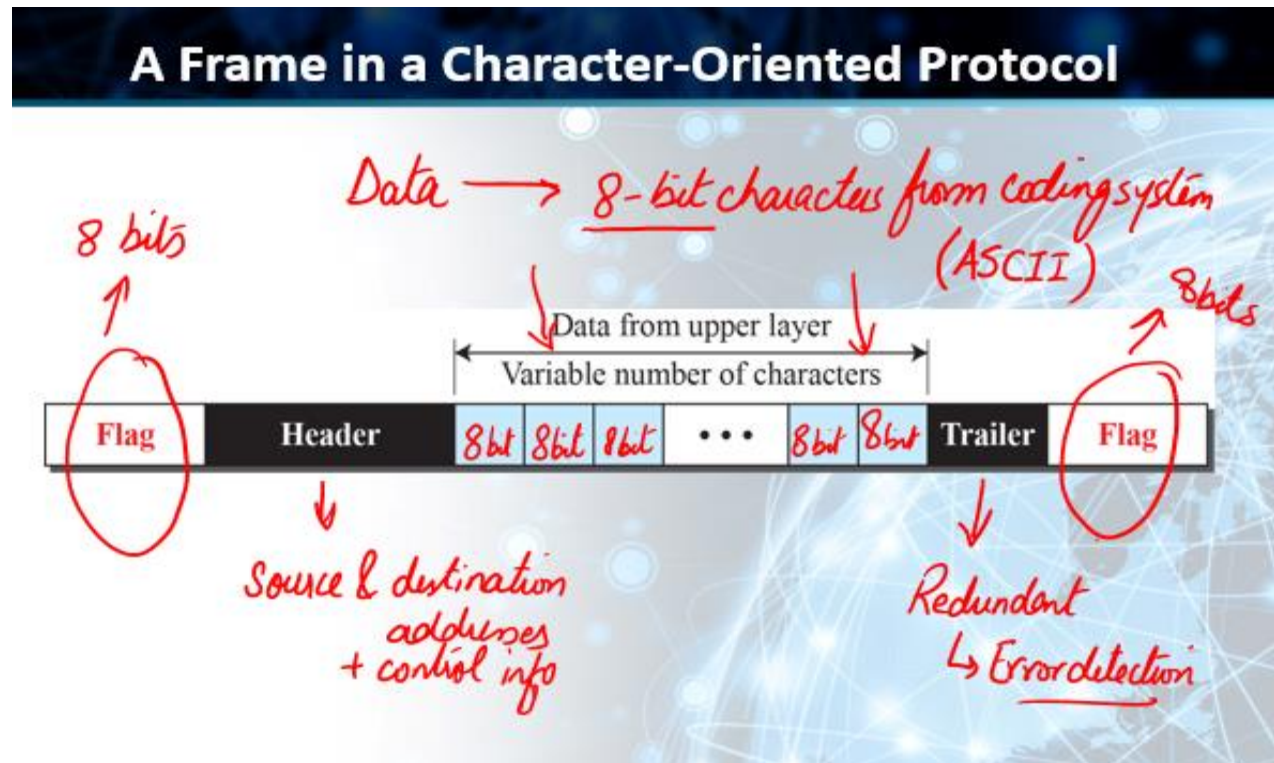

Connection Oriented Framing


- Data to be carried are **8-bit** characters
- **Byte – Stuffing** – A byte is stuffed in the message to differentiate from the delimiter. This is also called character-oriented framing.
- **Bit – Stuffing** – A pattern of bits of arbitrary length is stuffed in the message to differentiate from the delimiter. This is also called bit – oriented framing.

Byte Stuffing in Connection-Oriented Framing

- **Connection-oriented** Framing used **text** characters as **flags**
- Nowadays any character used for flag can also be a part of the **data**
- In order to avoid confusing the receiver, we use **Byte Stuffing**

Visit Our Channel for CS601 Short Lectures

Learning With Abid Ali



<https://www.youtube.com/watch?v=-0kr2sG8JUQ&list=PLAUocDaOe9K6nDHAXKa-7fHsIFAKBPE8q&index=9>

What are escape characters?

An escape sequence contains a backslash (\) symbol followed by one of the escape sequence characters or an octal or hexadecimal number.

...
Escape character syntax.


Escape sequence	Character represented
\r	Carriage return
\t	Horizontal tab
\v	Vertical tab
\'	Single quotation mark

Visit Our Channel for CS601 Short Lectures

Learning With Abid Ali



<https://www.youtube.com/watch?v=-0kr2sG8JUQ&list=PLAUocDaOe9K6nDHAXKa-7fHsIFAKBPE8q&index=9>

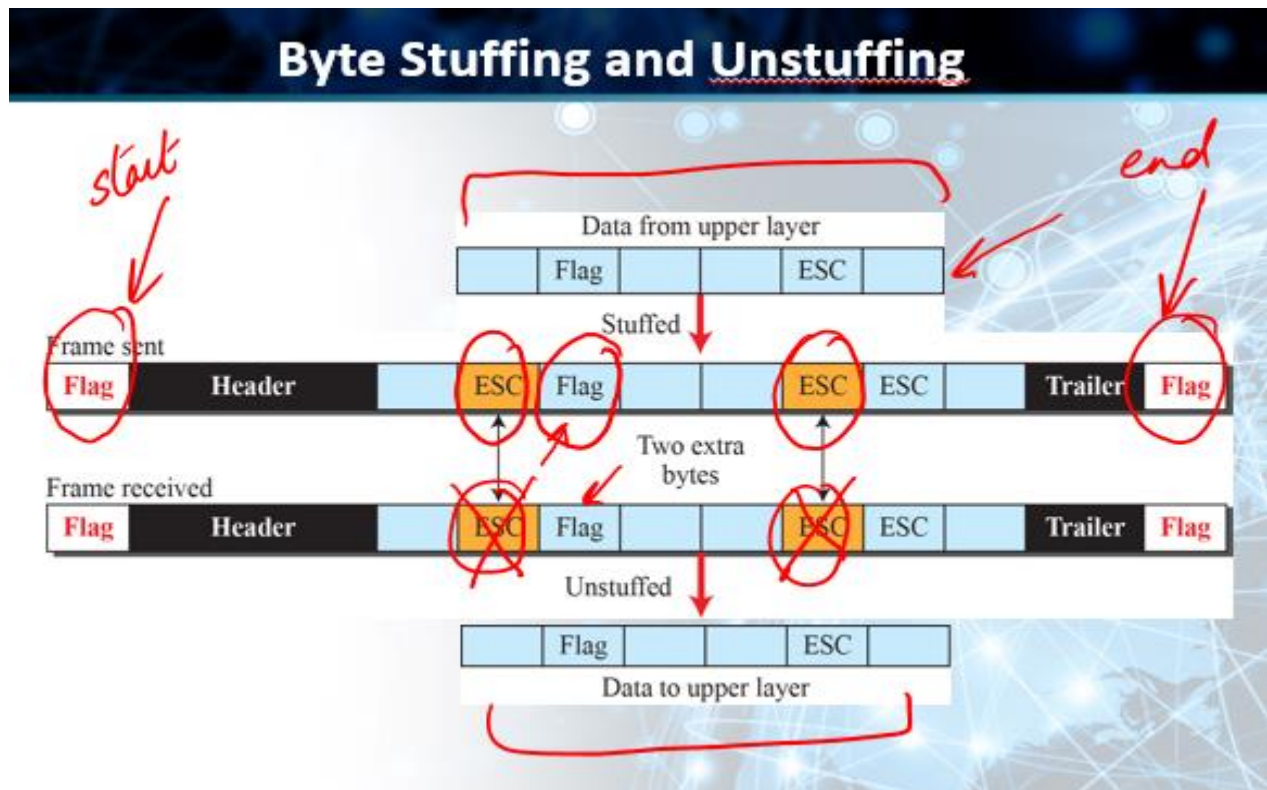

Bit-Oriented Framing

- Data section of frame is a **sequence** of bits
- We need a **delimiter** to separate one frame from the other
- A special **8-bit** pattern (01111110) to define beginning and end of a frame
- Same issue as Connection-oriented Framing


Visit Our Channel for CS601 Short Lectures

Learning With Abid Ali



<https://www.youtube.com/watch?v=-0kr2sG8JUQ&list=PLAUocDaOe9K6nDHAXKa-7fHsIFAKBPE8q&index=9>

A Frame in a Bit-Oriented Protocol

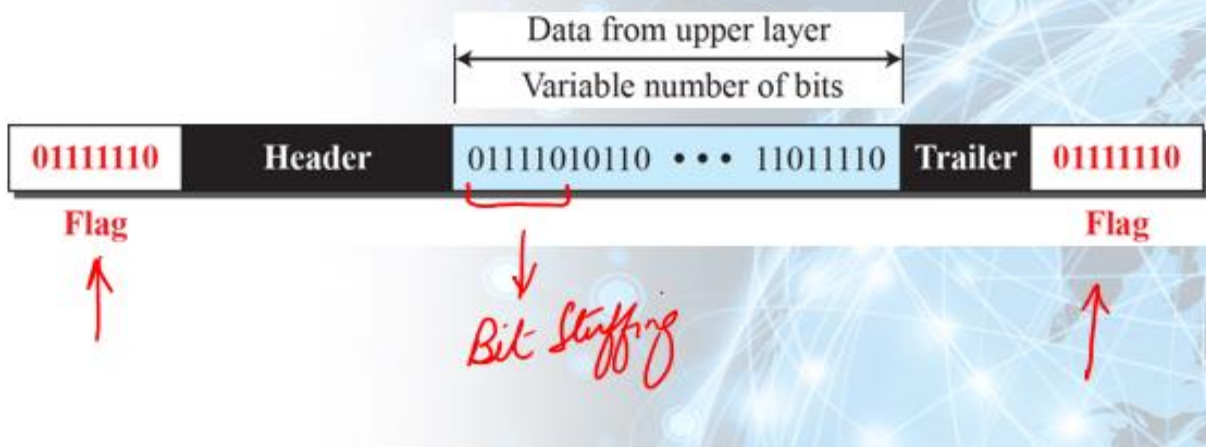


Visit Our Channel for CS601 Short Lectures

Learning With Abid Ali



<https://www.youtube.com/watch?v=-0kr2sG8JUQ&list=PLAUocDaOe9K6nDHAXKa-7fHsIFAKBPE8q&index=9>

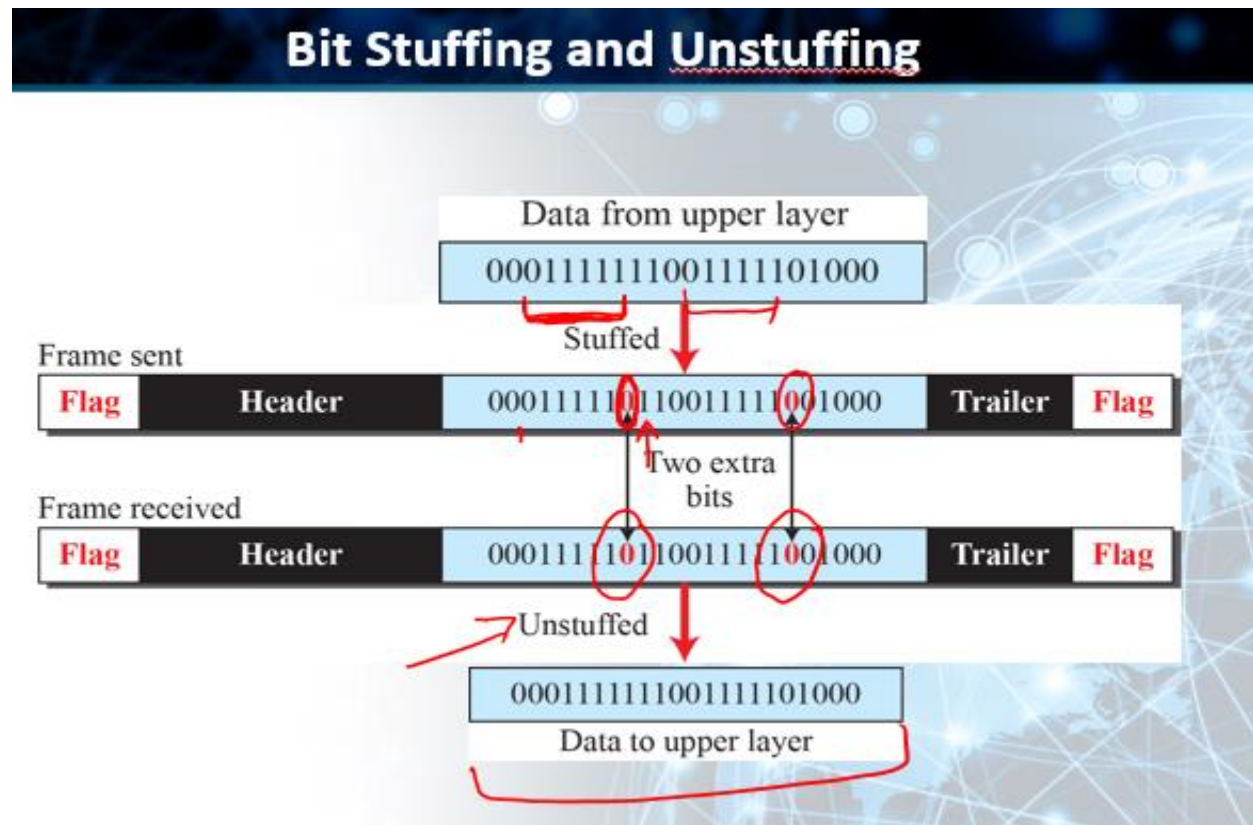

Flow and Error Control

One of the responsibilities of the data-link control sublayer is flow and error control at the data-link layer

Flow Control

- **Balance** between production and consumption rates
- If frames are produced faster than they are consumed at the receiving data link layer, the frames will be **discarded**
- Use of **buffers**; one at sending end and other at receiving end


Visit Our Channel for CS601 Short Lectures

Learning With Abid Ali



<https://www.youtube.com/watch?v=-0kr2sG8JUQ&list=PLAUocDaOe9K6nDHAXKa-7fHsIFAKBPE8q&index=9>

Flow Control at the Data Link Layer

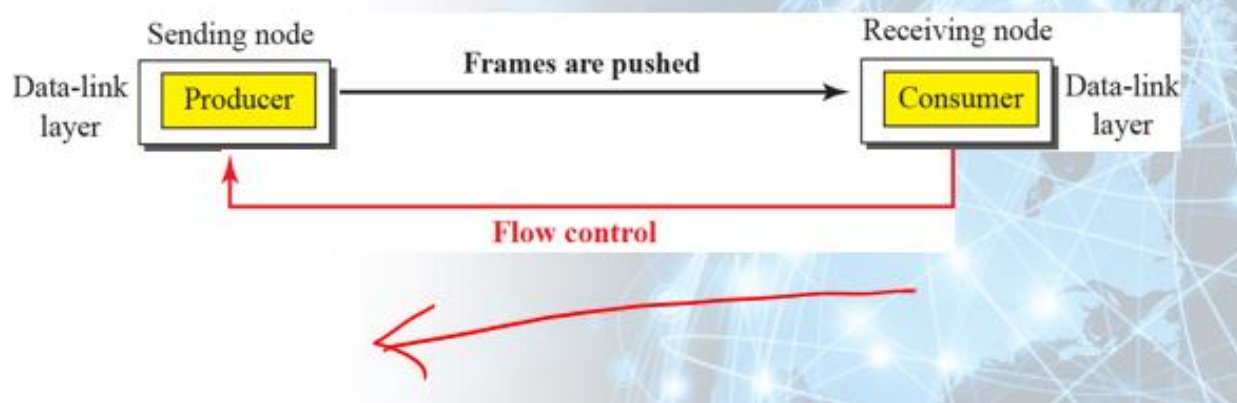

Example

- Consumers need to communicate with the producers on two occasions:
 - ✓ When the buffer is full; &
 - ✓ When there are vacancies
 - ✓ If the two parties use a buffer with only one slot, the communication can be easier

Error Control

- Error Control at Data Link layer uses **CRC** in one of the two ways:
 - ✓ If a frame is **corrupted**, it is silently **discarded** and if it is good, it is delivered to network layer

Visit Our Channel for CS601 Short Lectures

Learning With Abid Ali



<https://www.youtube.com/watch?v=-0kr2sG8JUQ&list=PLAUocDaOe9K6nDHAXKa-7fHsIFAKBPE8q&index=9>

- ✓ If frame is corrupted, it is silently discarded and if it is good, an **acknowledgement** is sent to sender

Connectionless and Connection-Oriented

- A **DLC** protocol can be either connectionless or connection-oriented
- Connectionless: **No relationship** between the frames
- Connection-Oriented: Frames are **numbered and sent in order**

Visit Our Channel for CS601 Short Lectures

Learning With Abid Ali



<https://www.youtube.com/watch?v=-0kr2sG8JUQ&list=PLAUocDaOe9K6nDHAXKa-7fHsIFAKBPE8q&index=9>

بِسْمِ اللَّهِ الرَّحْمَنِ الرَّحِيمِ

Data Communication CS601 Lecture No 27

Lecture Prepared By
Muhammad Abid Ali

We are also Provide Online Classes for CS601

Contact Us on WhatsApp for join our online Classes

WhatsApp No 03449767315

CS601 Lecture No 27 Topic 156 to 160

DATA-LINK LAYER PROTOCOLS

- Traditionally **four protocols** have been defined for the **data-link layer** to deal with flow and error control:

Visit Our Channel for CS601 Short Lectures

Learning With Abid Ali



<https://www.youtube.com/watch?v=-0kr2sG8JUQ&list=PLAUocDaOe9K6nDHAXKa-7fHsIFAKBPE8q&index=9>

- ✓ Simple Protocol
- ✓ Stop-and-Wait Protocol
- ✓ Go-Back-N Protocol
- ✓ Selective-Repeat Protocol
- ✓ Last two protocols have almost disappeared completely

Finite State Machine (FSM)

- A machine with a **finite** number of states
- Machines stays in one of the states until an **event occurs**
- Each event is associated with 2 reactions:
 - ✓ List of actions to be performed
 - ✓ Determining the next state

Visit Our Channel for CS601 Short Lectures

Learning With Abid Ali




<https://www.youtube.com/watch?v=-0kr2sG8JUQ&list=PLAUocDaOe9K6nDHAXKa-7fHsIFAKBPE8q&index=9>

Finite State Machine (FSM)

Note:

The colored arrow shows the starting state.

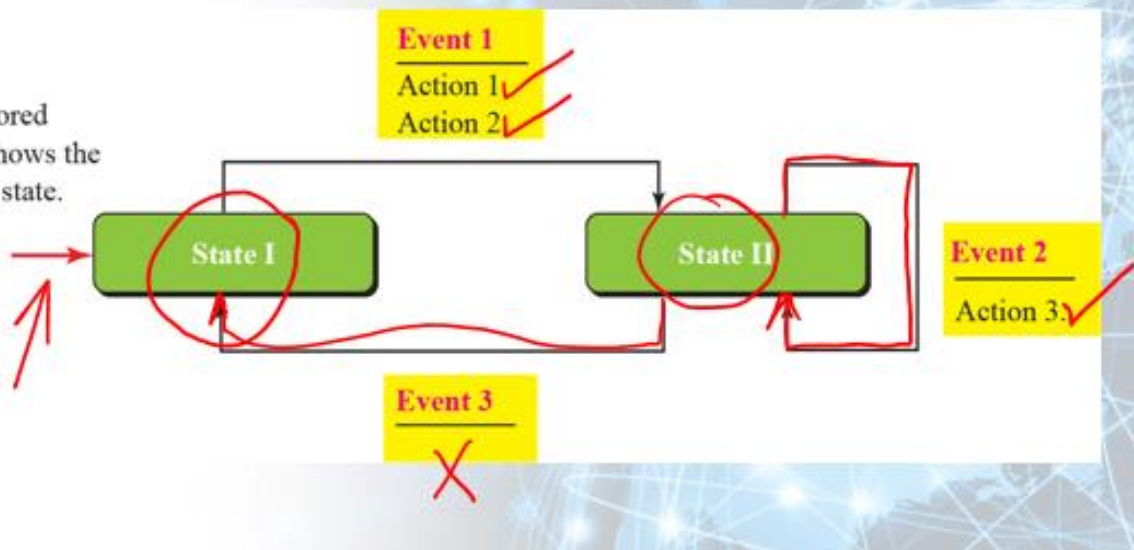

Simple Protocol


- **Simple protocol** has neither flow nor error control
- **Assumption:** The receiver can immediately handle any frame it receives
- The receiver can never be **overwhelmed** with incoming frames

Visit Our Channel for CS601 Short Lectures

Learning With Abid Ali



<https://www.youtube.com/watch?v=-0kr2sG8JUQ&list=PLAUocDaOe9K6nDHAXKa-7fHsIFAKBPE8q&index=9>

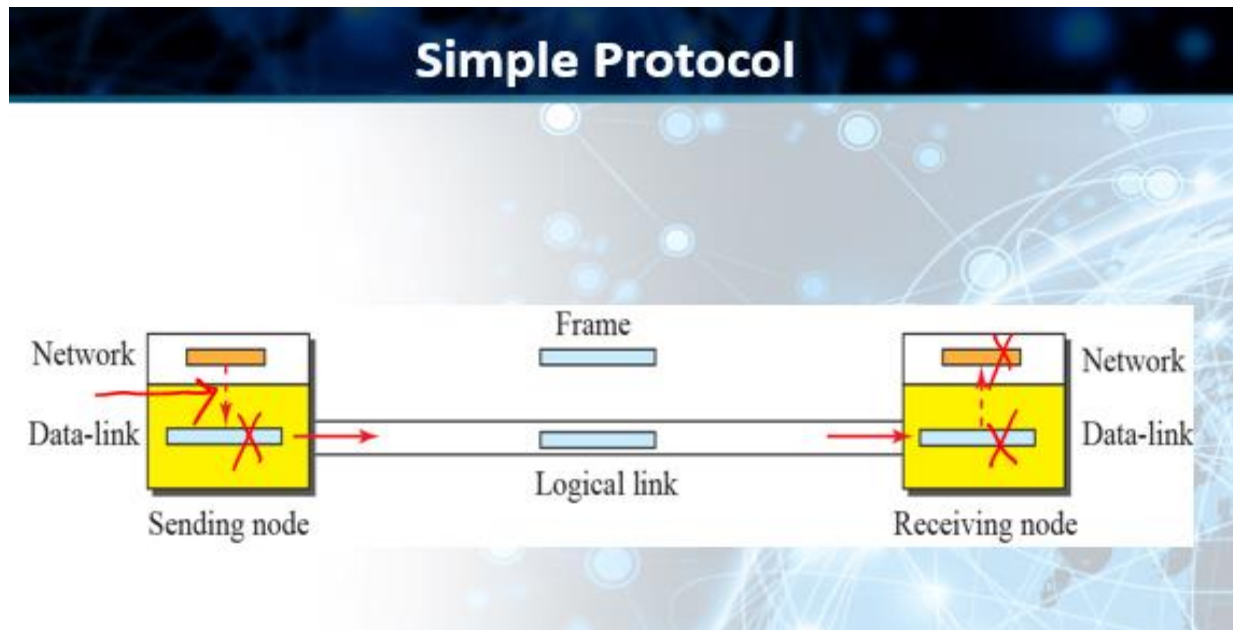


Visit Our Channel for CS601 Short Lectures

Learning With Abid Ali



<https://www.youtube.com/watch?v=-0kr2sG8JUQ&list=PLAUocDaOe9K6nDHAXKa-7fHsIFAKBPE8q&index=9>

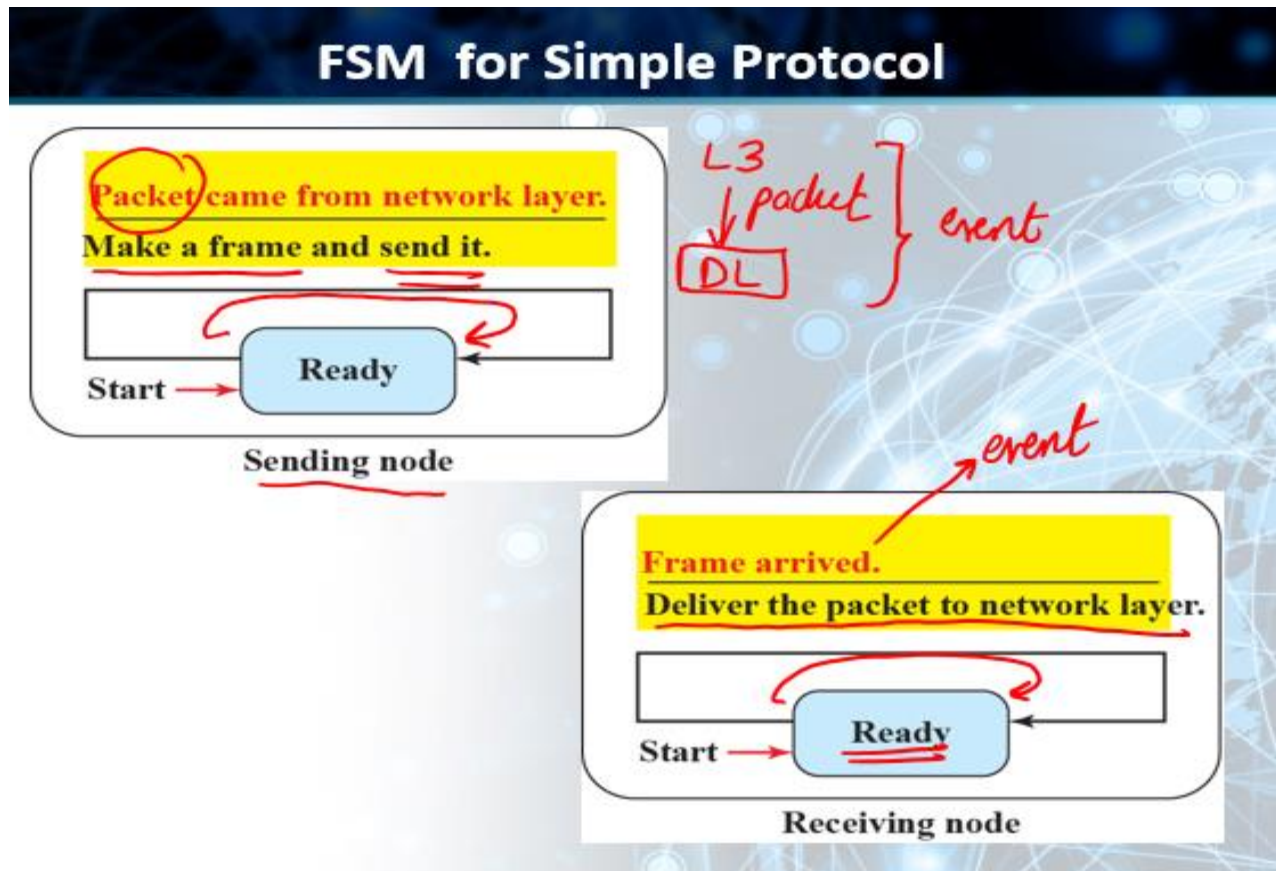


Visit Our Channel for CS601 Short Lectures

Learning With Abid Ali



<https://www.youtube.com/watch?v=-0kr2sG8JUQ&list=PLAUocDaOe9K6nDHAXKa-7fHsIFAKBPE8q&index=9>

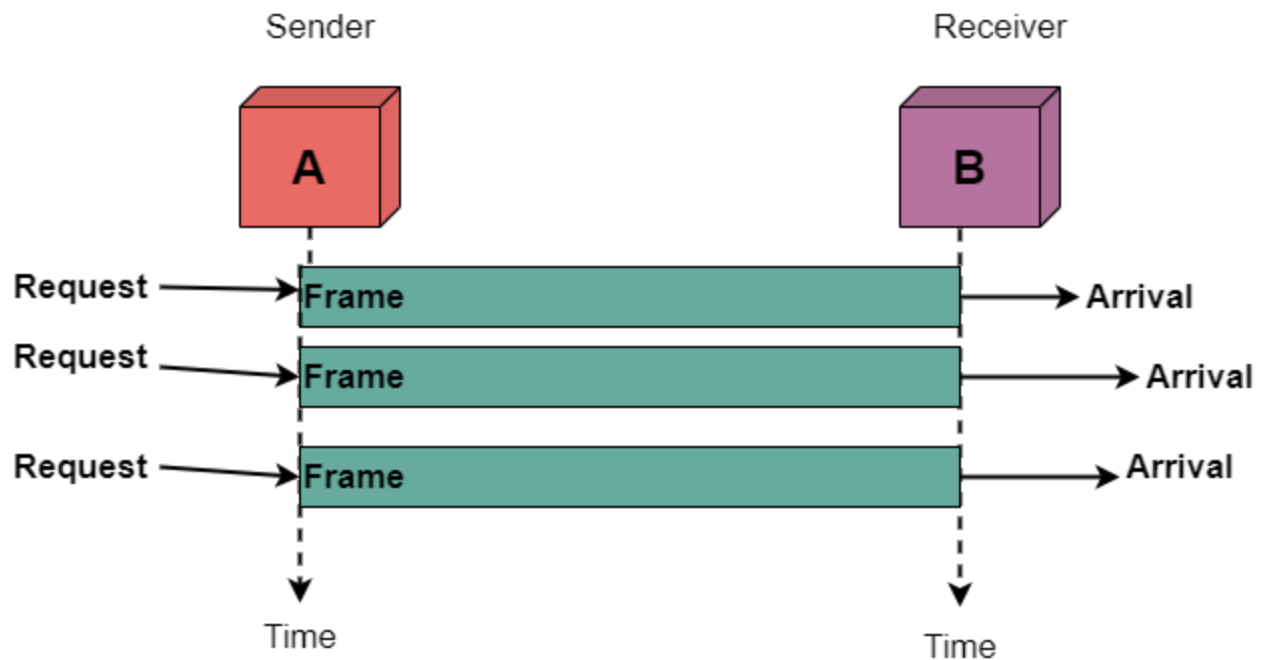

Visit Our Channel for CS601 Short Lectures


Learning With Abid Ali



<https://www.youtube.com/watch?v=-0kr2sG8JUQ&list=PLAUocDaOe9K6nDHAXKa-7fHsIFAKBPE8q&index=9>

Example

Here is an example of communication using this protocol. It is very simple. The sender sends frames one after another without even thinking about the receiver.

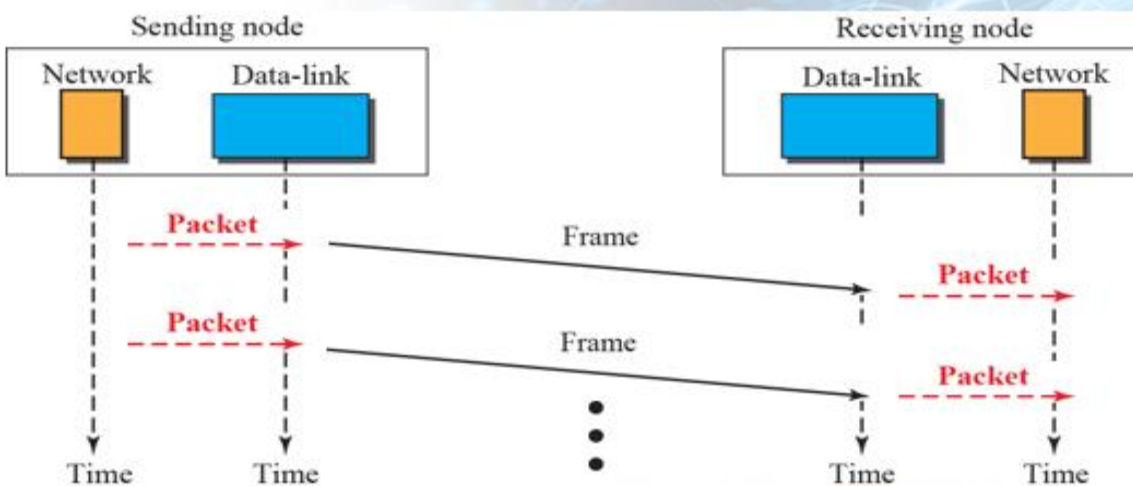

Stop-and-Wait Protocol

- Stop-and-Wait protocol uses both flow and error control
- The sender sends one frame at a time and waits for an acknowledgment before sending the next one
- To detect corrupted frames, we add a CRC code


Visit Our Channel for CS601 Short Lectures

Learning With Abid Ali



<https://www.youtube.com/watch?v=-0kr2sG8JUQ&list=PLAUocDaOe9K6nDHAXKa-7fHsIFAKBPE8q&index=9>

Stop-and-Wait Protocol

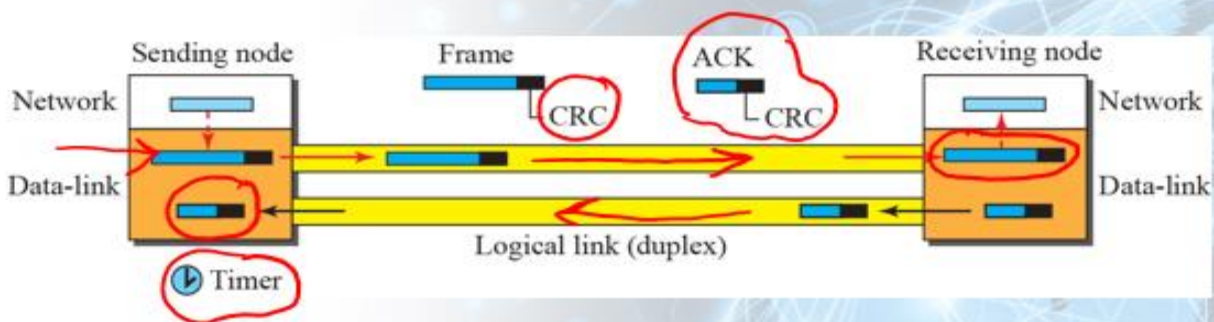


Stop-and-Wait Protocol

At any time, there is either one *data frame* on the forward channel or one *ACK frame* on the reverse channel.


We therefore need a **half-duplex link**.

Communication (Flow Diagram) using Stop-and-Wait Protocol

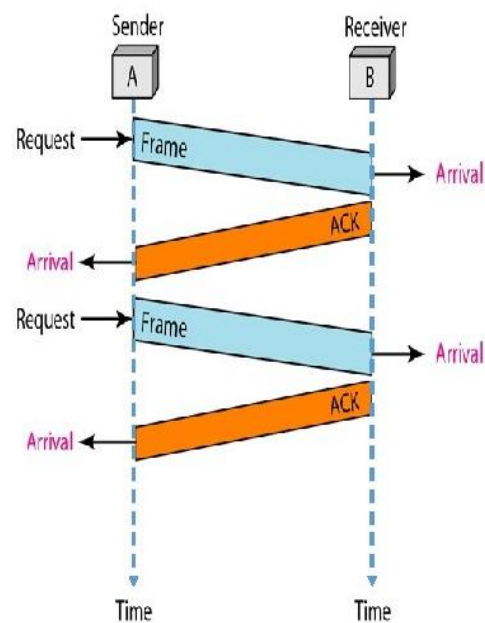



<https://www.youtube.com/watch?v=-0kr2sG8JUQ&list=PLAUocDaOe9K6nDHAXKa-7fHsIFAKBPE8q&index=9>

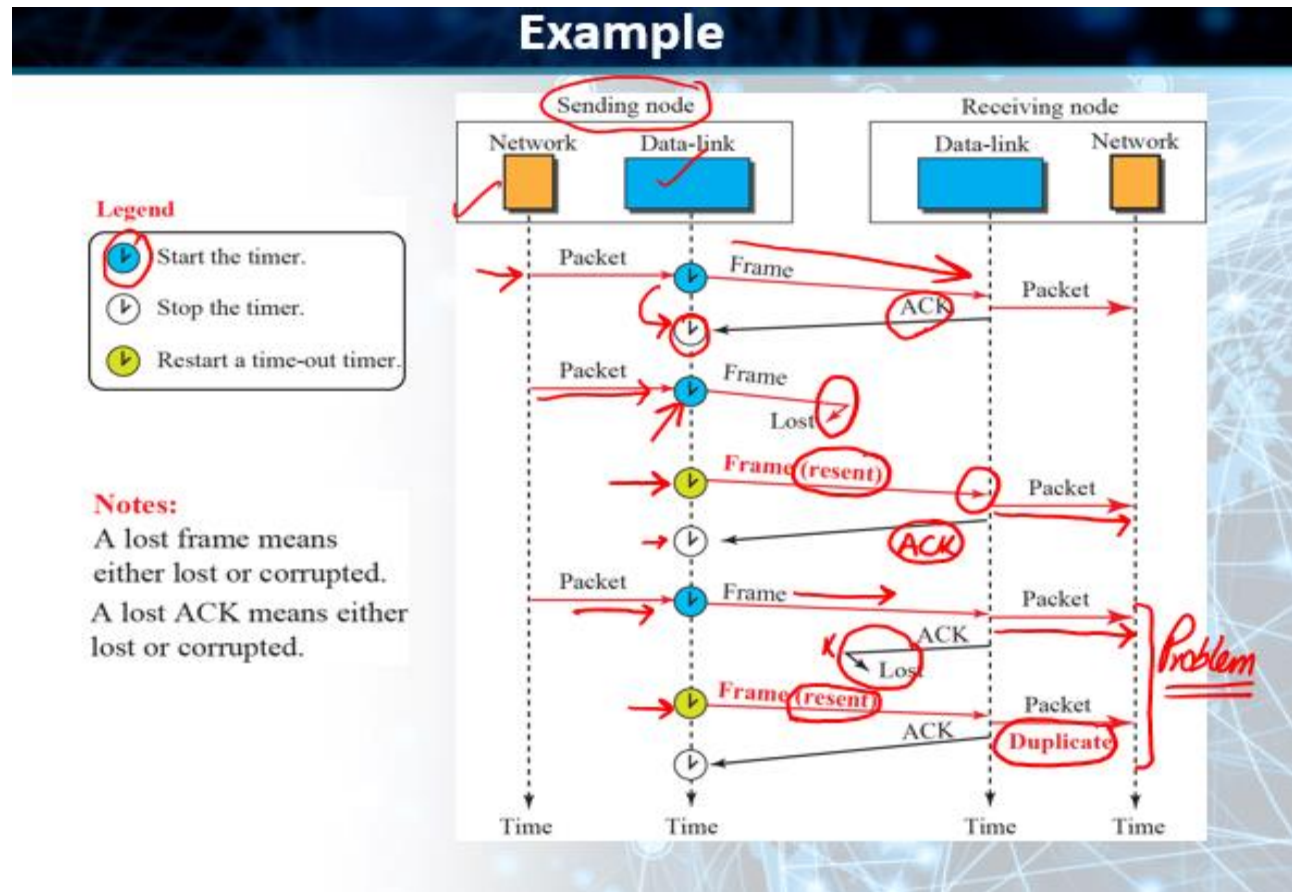

Piggybacking

- Both Simple and Stop-and-wait protocols are designed for **unidirectional** communication
- Data flows in one direction and **ACK** travels in the other
- To make the system efficient, the data in one direction is **piggybacked** with the **acknowledgment** in the other direction


Visit Our Channel for CS601 Short Lectures

Learning With Abid Ali



<https://www.youtube.com/watch?v=-0kr2sG8JUQ&list=PLAUocDaOe9K6nDHAXKa-7fHsIFAKBPE8q&index=9>

Piggybacking

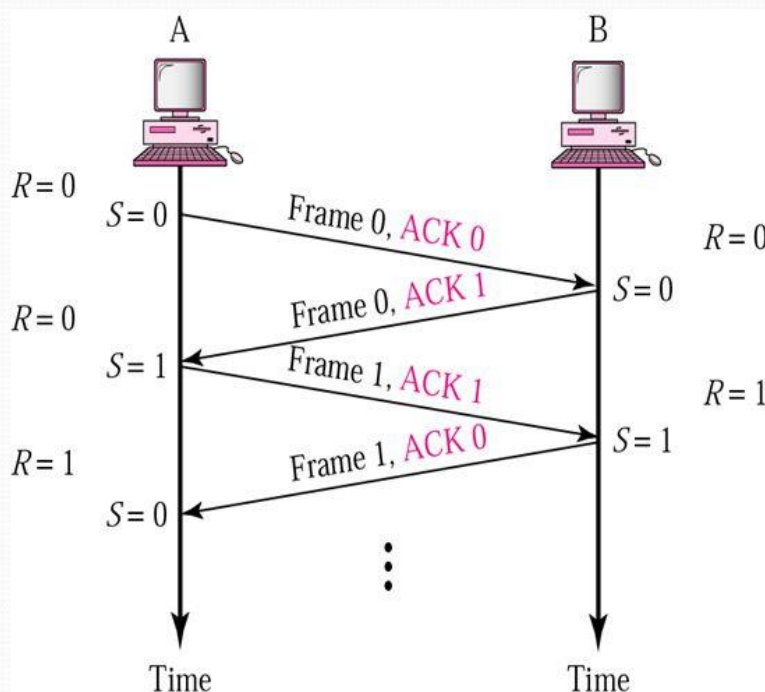


- A method to combine a data frame with ACK.
- Station A and B both have data to send.
- Instead of sending separately, station A sends a data frame that includes an ACK.
- Station B does the same thing.
- Piggybacking saves bandwidth.

Visit Our Channel for CS601 Short Lectures

Learning With Abid Ali



<https://www.youtube.com/watch?v=-0kr2sG8JUQ&list=PLAUocDaOe9K6nDHAXKa-7fHsIFAKBPE8q&index=9>

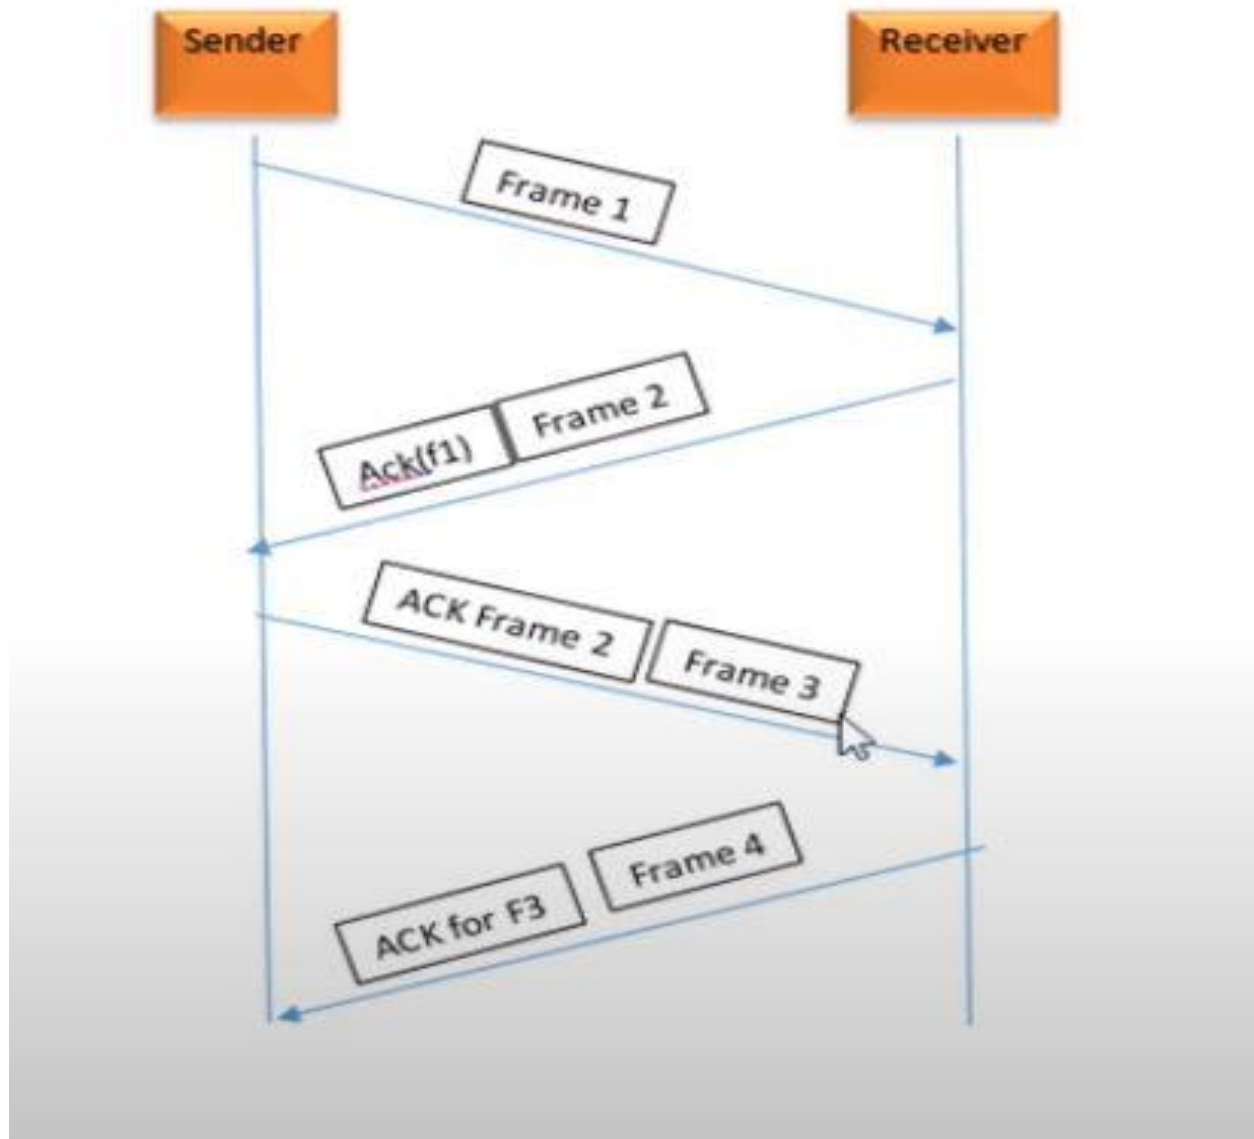

High-level Data Link Control (HDLC)

- **Bit-oriented** protocol for communication over point-to-point and multipoint links
- It implements Stop-and-Wait protocol
- Most of the concepts defined in this protocol is the basis for other protocols such as **PPP**, Ethernet, or wireless LANs

Visit Our Channel for CS601 Short Lectures

Learning With Abid Ali



<https://www.youtube.com/watch?v=-0kr2sG8JUQ&list=PLAUocDaOe9K6nDHAXKa-7fHsIFAKBPE8q&index=9>

Configurations & Transfer Modes in HDLC


HDLC provides **two** common transfer modes that can be used in different configurations:

Normal Response Mode (NRM) &

Asynchronous Balanced Mode (ABM)

Normal Response Mode (NRM) &

Normal Response Mode (NRM) is **an unbalanced configuration in which only the primary terminal may initiate data transfer**. The secondary terminals transmit data only in response to commands from the primary terminal. The primary terminal polls each secondary terminal to give it an opportunity to transmit any data it has.

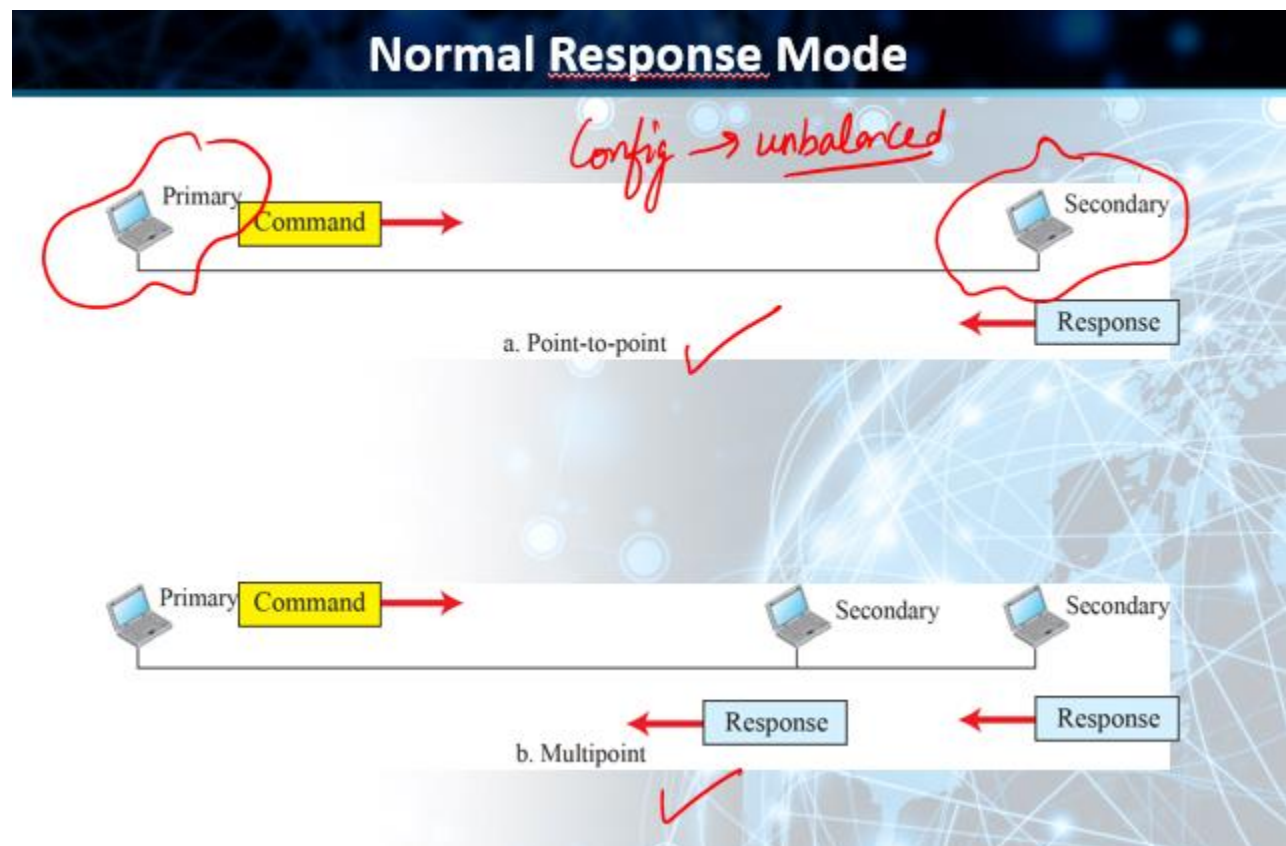

Visit Our Channel for CS601 Short Lectures


Learning With Abid Ali



<https://www.youtube.com/watch?v=-0kr2sG8JUQ&list=PLAUocDaOe9K6nDHAXKa-7fHsIFAKBPE8q&index=9>


Asynchronous Balanced Mode (ABM)

Asynchronous Balanced Mode (ABM) is a balanced configuration in which either station may initialize, supervise, recover from errors, and send frames at any time. There is no master/slave relationship.

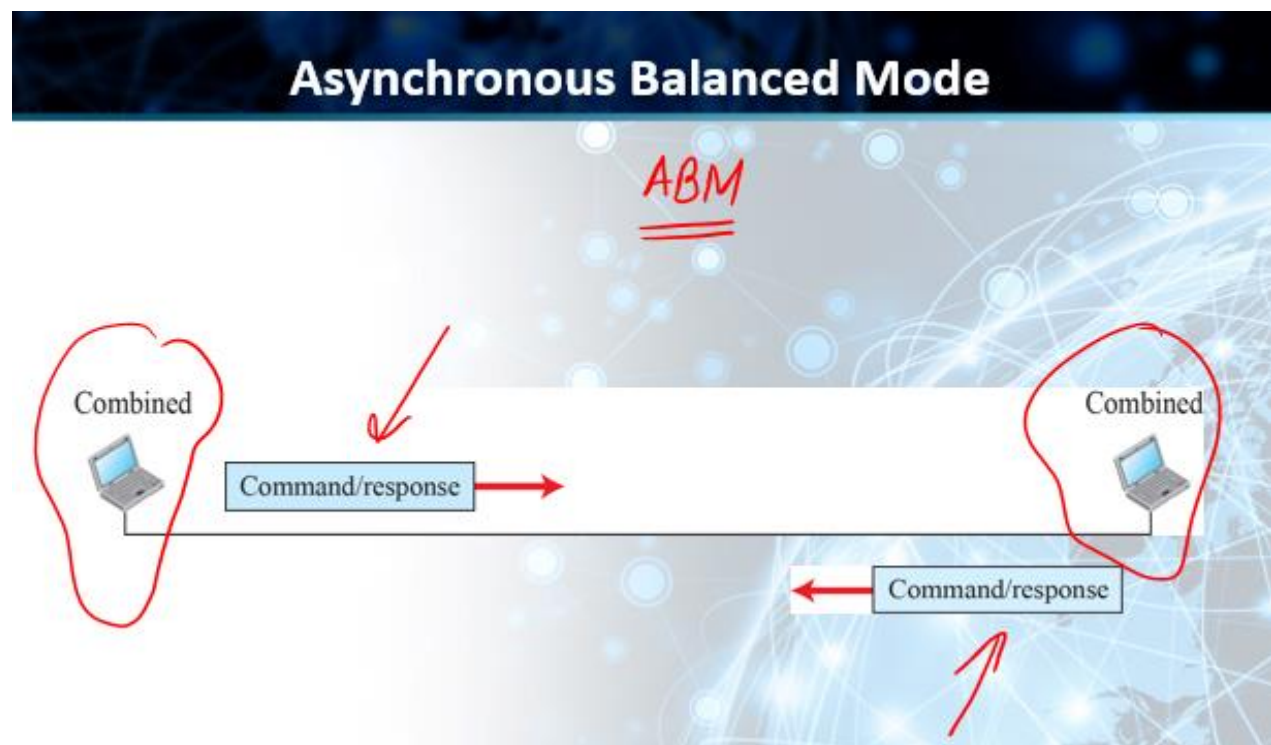

Visit Our Channel for CS601 Short Lectures

Learning With Abid Ali



<https://www.youtube.com/watch?v=-0kr2sG8JUQ&list=PLAUocDaOe9K6nDHAXKa-7fHsIFAKBPE8q&index=9>

بِسْمِ اللَّهِ الرَّحْمَنِ الرَّحِيمِ

Data Communication CS601 Lecture No 28

Lecture Prepared By
Muhammad Abid Ali

We are also Provide Online Classes for CS601

Contact Us on WhatsApp for join our online Classes

WhatsApp No 03449767315

CS601 Lecture No 28 Topic 161 to 165


HDLC frames

HDLC defines three (VIP mcqs) types of frames

- ✓ information frames (I-frames)


Visit Our Channel for CS601 Short Lectures

Learning With Abid Ali




<https://www.youtube.com/watch?v=-0kr2sG8JUQ&list=PLAUocDaOe9K6nDHAXKa-7fHsIFAKBPE8q&index=9>

- ✓ **Supervisory frames (S-frames)**
- ✓ **Unnumbered frames (U-frames)**
- ✓ **I-frame** – I-frames or Information frames carry user data from the network layer. They also include flow and error control information that is piggybacked on user data. The first bit of control field of I-frame is 0.
- ✓ **S-frame** – S-frames or Supervisory frames do not contain information field. They are used for flow and error control when piggybacking is not required. The first two bits of control field of S-frame is 10.
- ✓ **U-frame** – U-frames or Un-numbered frames are used for myriad miscellaneous functions, like link management. It may contain an information field, if required. The first two bits of control field of U-frame is 11.

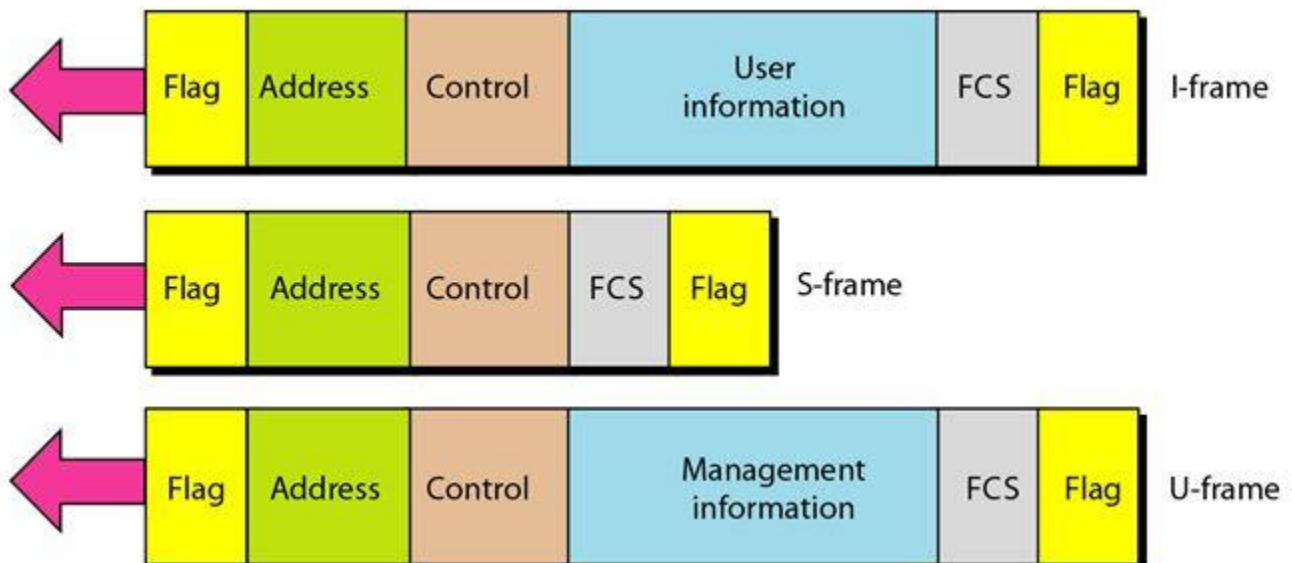


Visit Our Channel for CS601 Short Lectures

Learning With Abid Ali



<https://www.youtube.com/watch?v=-0kr2sG8JUQ&list=PLAUocDaOe9K6nDHAXKa-7fHsIFAKBPE8q&index=9>

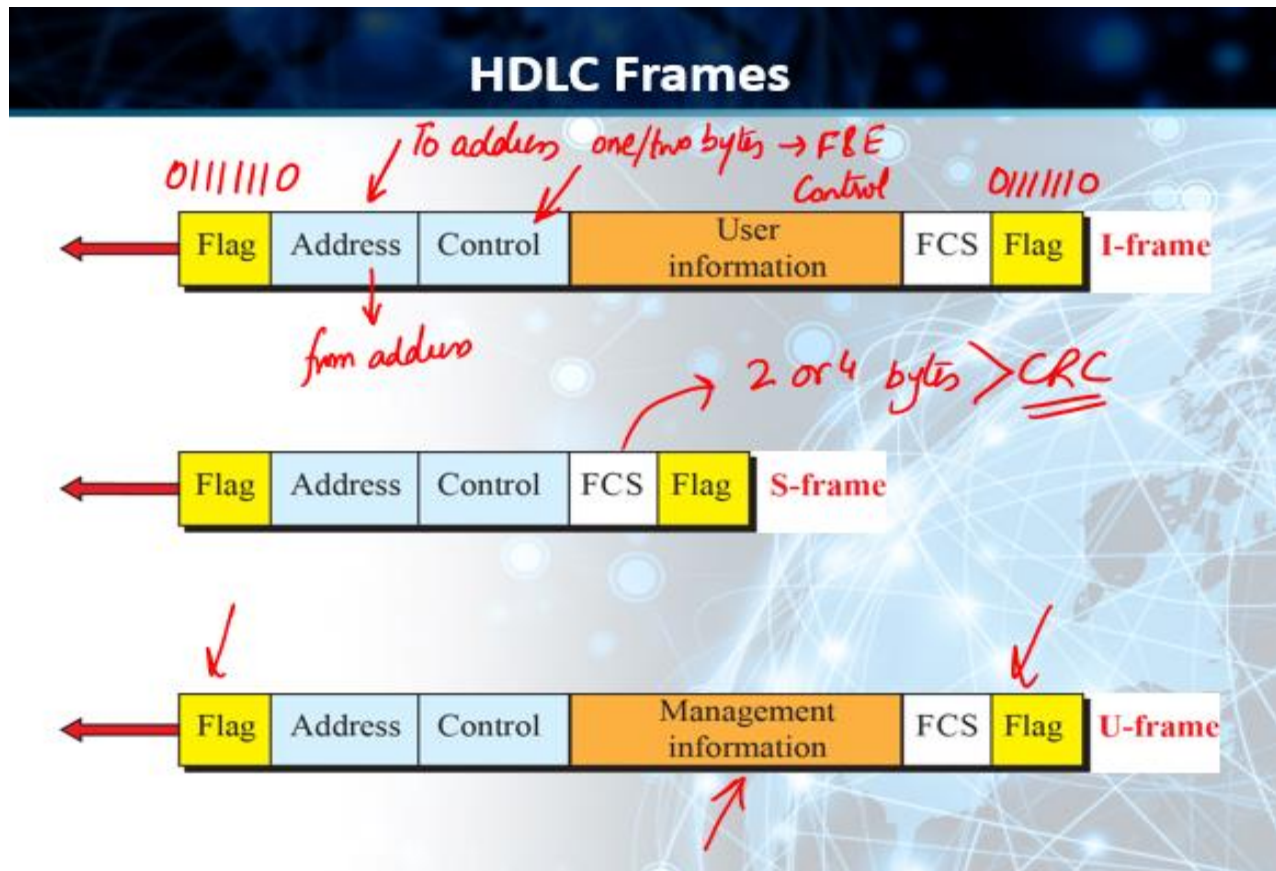


Point-to-Point Protocol (PPP)

- Most common protocol for **point-to-point** access
- Millions of Internet users who need to connect their home computers to the server of an Internet service provider use **PPP (VIP mcqs)**
- To control and manage the transfer of data, there is a need for a **PPP (VIP mcqs)** at the data-link layer

Services provided by PPP

Visit Our Channel for CS601 Short Lectures

Learning With Abid Ali



<https://www.youtube.com/watch?v=-0kr2sG8JUQ&list=PLAUocDaOe9K6nDHAXKa-7fHsIFAKBPE8q&index=9>


The designers of **PPP** have included several services to make it suitable for a point-to-point protocol, but have ignored some traditional services to make it simple

Services Included	Services Not Included
Framing	Flow Control
Link Establishment and Data Exchange	Error Correction (PPP has CRC detection only)
Authentication	No Sequence Numbering
Multilink PPP Address configuration	Absence of sophisticated Addressing Mechanism
Network Address configuration	


PPP Frame Format

Visit Our Channel for CS601 Short Lectures

Learning With Abid Ali



<https://www.youtube.com/watch?v=-0kr2sG8JUQ&list=PLAUocDaOe9K6nDHAXKa-7fHsIFAKBPE8q&index=9>

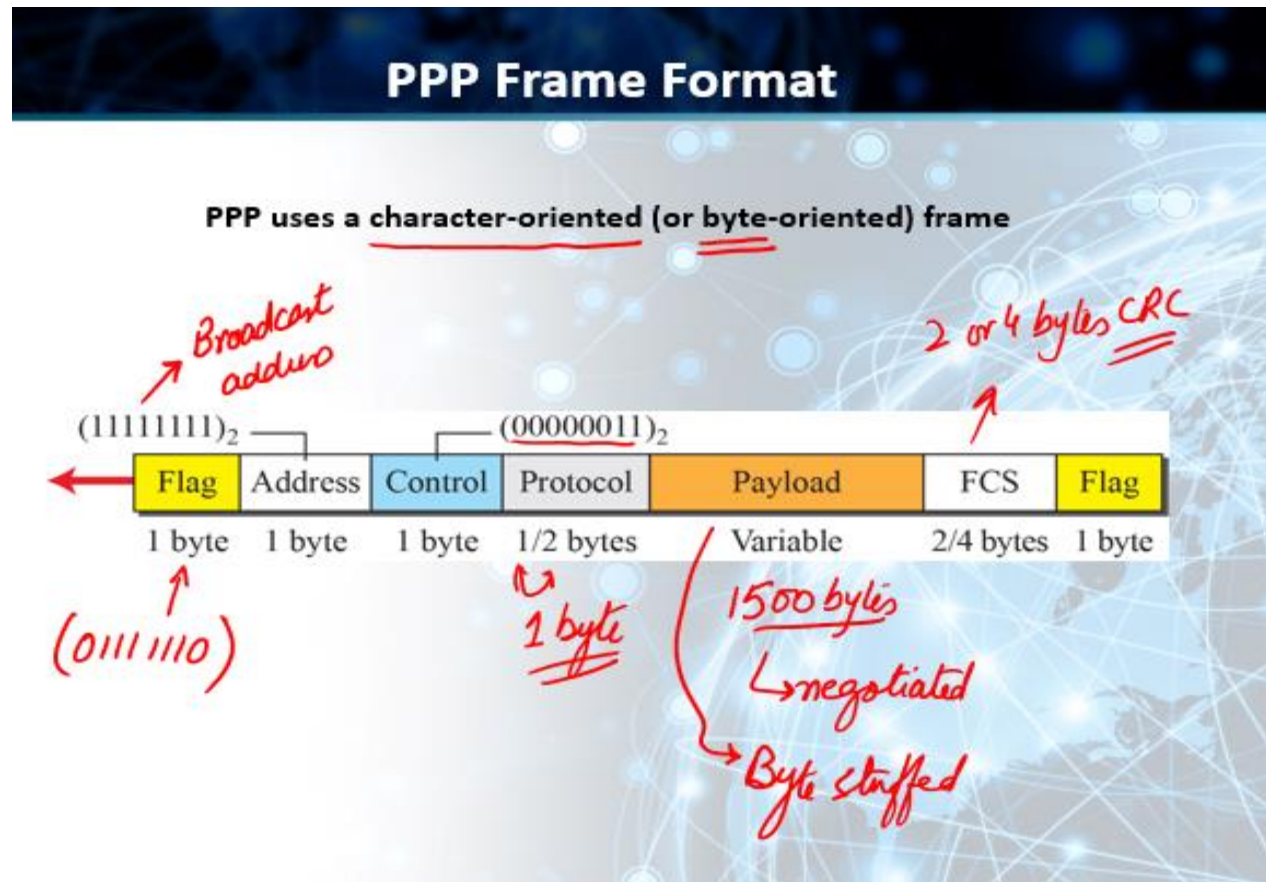


Multiplexing in PPP

- Although **PPP** is a **link-layer** protocol, it uses another set of protocols to establish the link, authenticate and carry the network-layer data
- Three sets of protocols are:
 - Link Control Protocol (LCP)
 - Two Authentication Protocols (APs)
 - Several Network Control Protocols (NCPs)

Visit Our Channel for CS601 Short Lectures

Learning With Abid Ali



<https://www.youtube.com/watch?v=-0kr2sG8JUQ&list=PLAUocDaOe9K6nDHAXKa-7fHsIFAKBPE8q&index=9>

Legend

LCP : Link control protocol

AP : Authentication protocol

NCP: Network control protocol

Protocol values:

LCP : 0xC021


AP : 0xC023 and 0xC223

NCP: 0x8021 and

Data: 0x0021 and


Visit Our Channel for CS601 Short Lectures

Learning With Abid Ali




<https://www.youtube.com/watch?v=-0kr2sG8JUQ&list=PLAUocDaOe9K6nDHAXKa-7fHsIFAKBPE8q&index=9>

LCP Packet encapsulated in a Frame

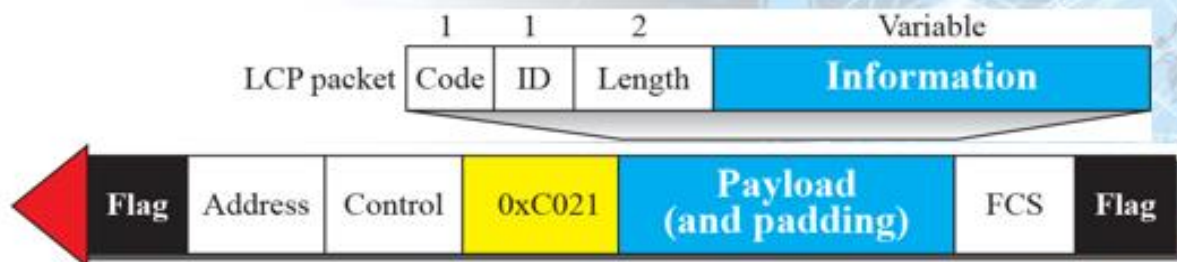

Visit Our Channel for CS601 Short Lectures

Learning With Abid Ali



<https://www.youtube.com/watch?v=-0kr2sG8JUQ&list=PLAUocDaOe9K6nDHAXKa-7fHsIFAKBPE8q&index=9>

LCP Packets


Code	Packet Type	Description
0x01	Configure-request	Contains the list of proposed options and their values
0x02	Configure-ack	Accepts all options proposed
0x03	Configure-nak	Announces that some options are not acceptable
0x04	Configure-reject	Announces that some options are not recognized
0x05	Terminate-request	Request to shut down the line
0x06	Terminate-ack	Accept the shutdown request
0x07	Code-reject	Announces an unknown code
0x08	Protocol-reject	Announces an unknown protocol
0x09	Echo-request	A type of hello message to check if the other end is alive
0x0A	Echo-reply	The response to the echo-request message
0x0B	Discard-request	A request to discard the packet

Authentication Protocols in PPP

The PPP authentication protocols are Password Authentication Protocol (PAP) and Challenge-Handshake Authentication Protocol (CHAP). Each protocol uses a secrets database that contains identification information, or security credentials, for each caller that is permitted to link to the local machine.


Visit Our Channel for CS601 Short Lectures

Learning With Abid Ali



<https://www.youtube.com/watch?v=-0kr2sG8JUQ&list=PLAUocDaOe9K6nDHAXKa-7fHsIFAKBPE8q&index=9>

Authentication Protocols in PPP

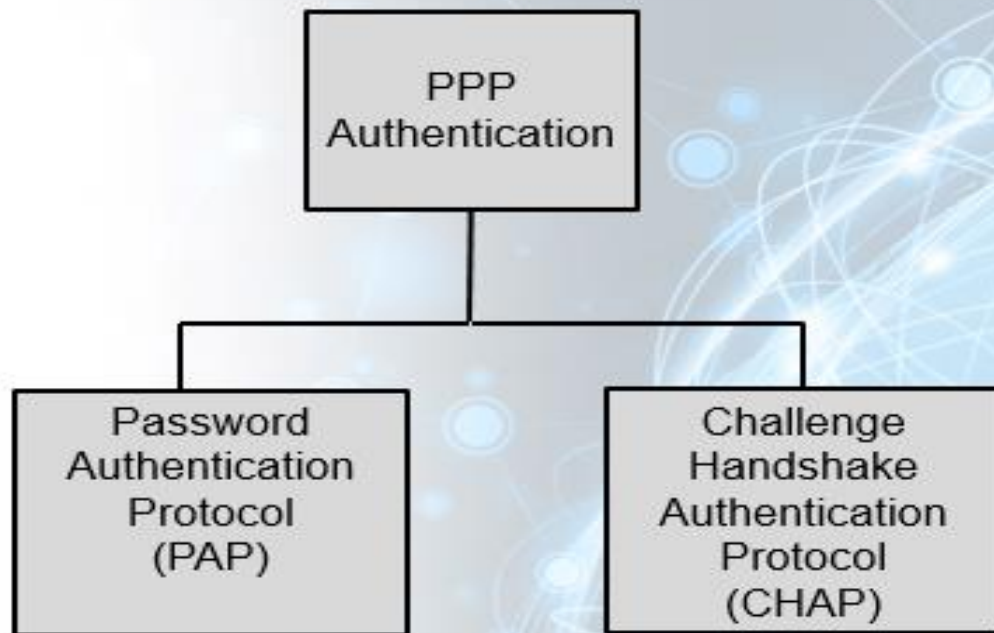


Visit Our Channel for CS601 Short Lectures

Learning With Abid Ali




<https://www.youtube.com/watch?v=-0kr2sG8JUQ&list=PLAUocDaOe9K6nDHAXKa-7fHsIFAKBPE8q&index=9>

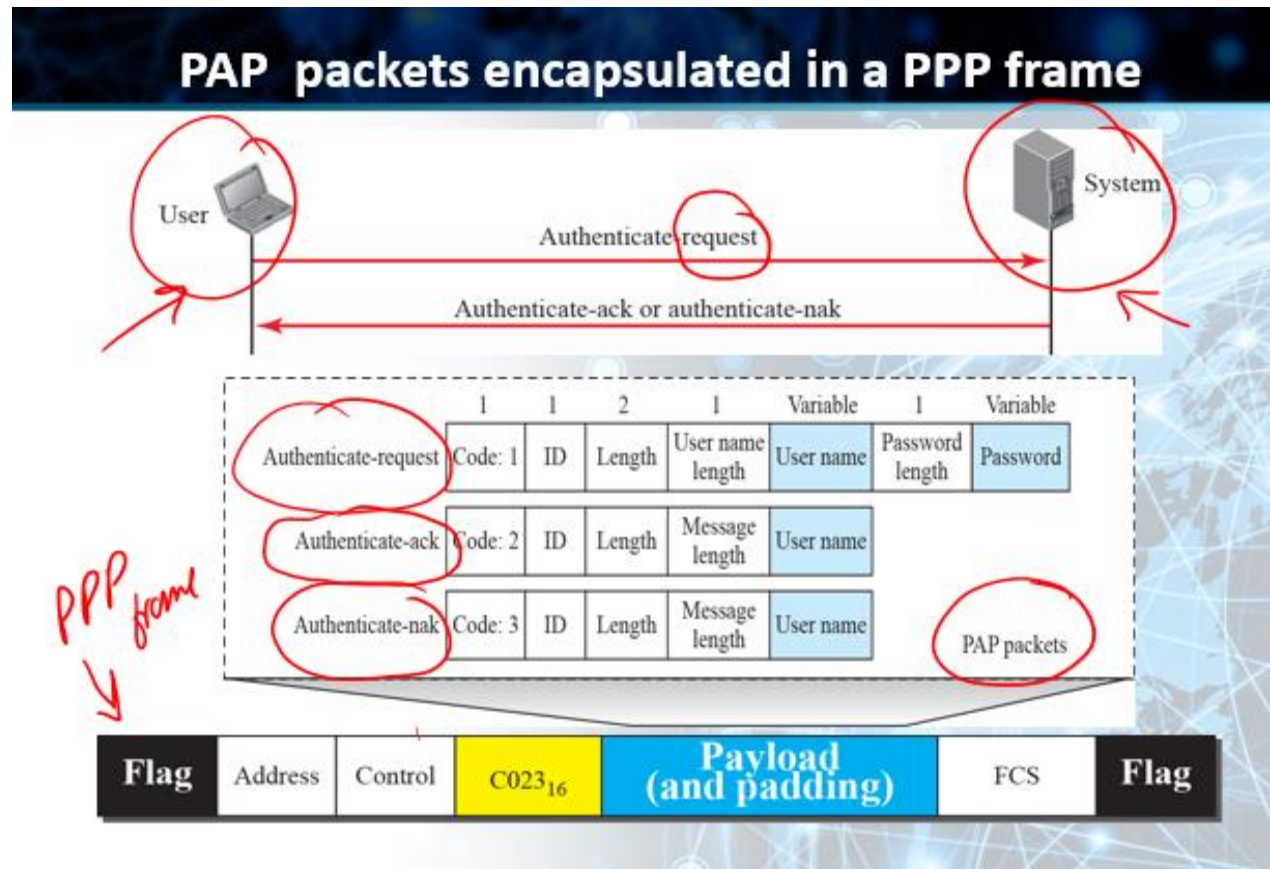



Visit Our Channel for CS601 Short Lectures

Learning With Abid Ali




<https://www.youtube.com/watch?v=-0kr2sG8JUQ&list=PLAUocDaOe9K6nDHAXKa-7fHsIFAKBPE8q&index=9>

CHAP Packets encapsulated in a PPP frame

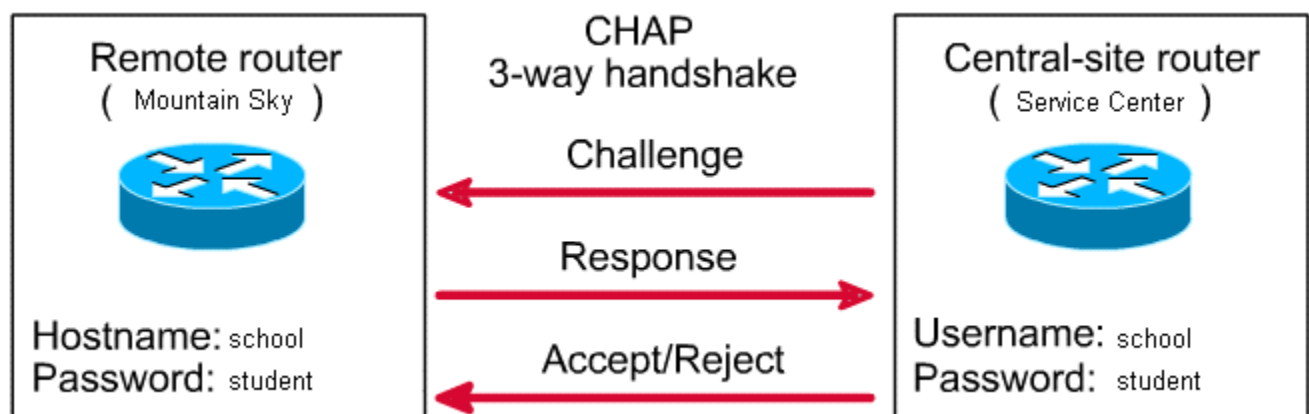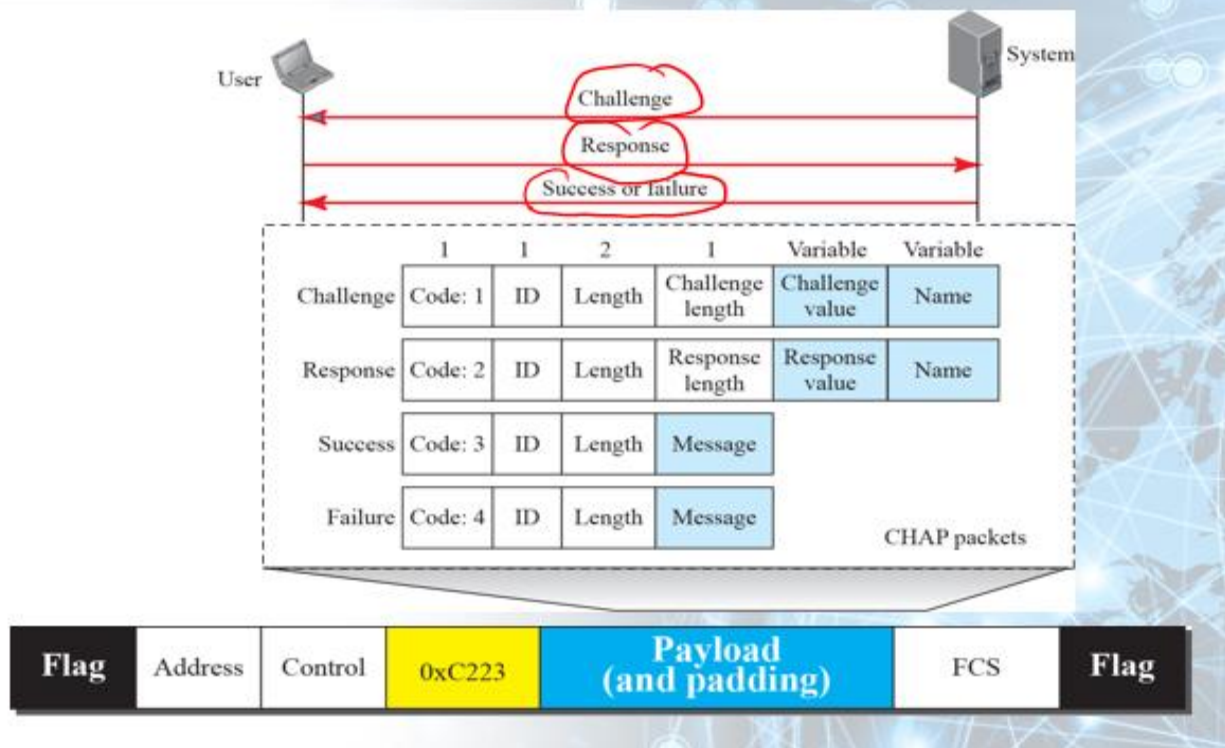


Visit Our Channel for CS601 Short Lectures

Learning With Abid Ali




<https://www.youtube.com/watch?v=-0kr2sG8JUQ&list=PLAUocDaOe9K6nDHAXKa-7fHsIFAKBPE8q&index=9>

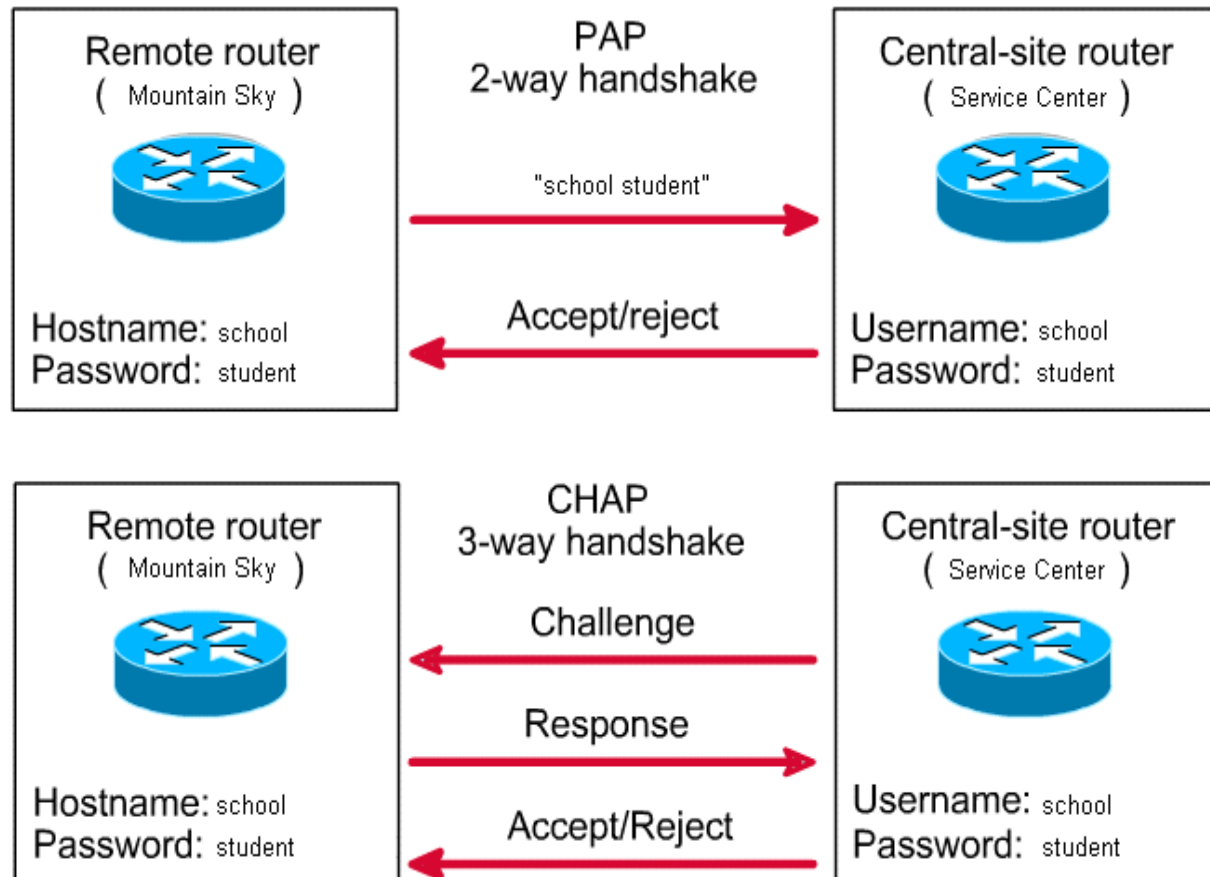


Visit Our Channel for CS601 Short Lectures

Learning With Abid Ali




<https://www.youtube.com/watch?v=-0kr2sG8JUQ&list=PLAUocDaOe9K6nDHAXKa-7fHsIFAKBPE8q&index=9>

Internet Protocol Control Protocol (IPCP)

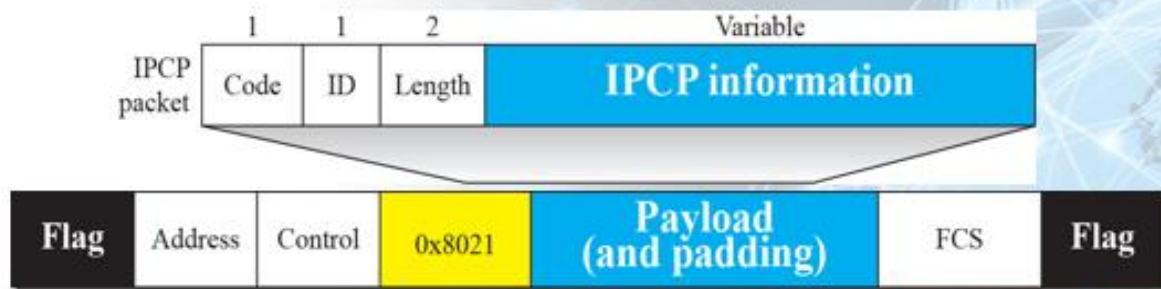


Visit Our Channel for CS601 Short Lectures

Learning With Abid Ali




<https://www.youtube.com/watch?v=-0kr2sG8JUQ&list=PLAUocDaOe9K6nDHAXKa-7fHsIFAKBPE8q&index=9>

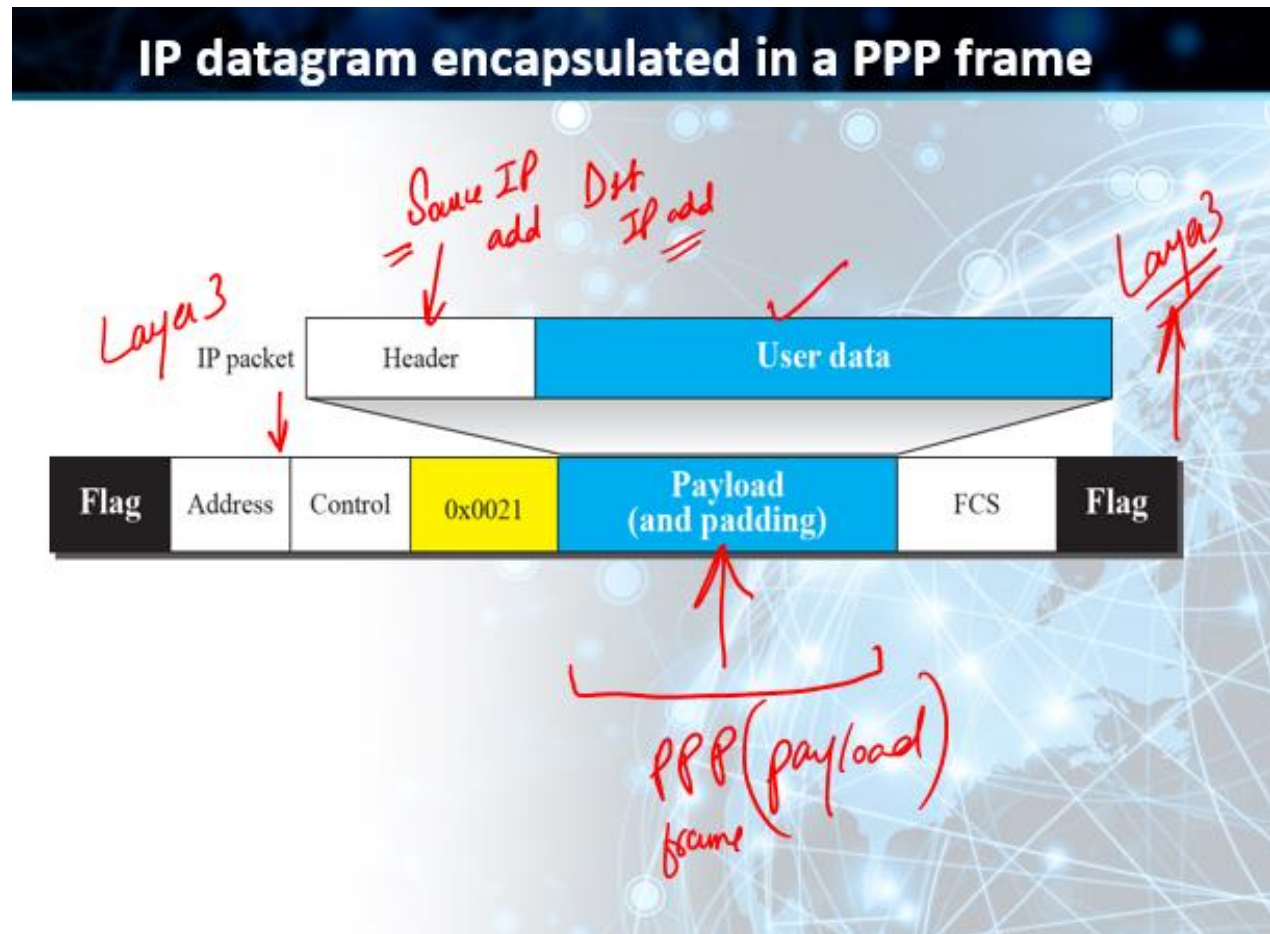

Visit Our Channel for CS601 Short Lectures

Learning With Abid Ali




<https://www.youtube.com/watch?v=-0kr2sG8JUQ&list=PLAUocDaOe9K6nDHAXKa-7fHsIFAKBPE8q&index=9>

Code values for IPCP Packets

<i>Code</i>	<i>IPCP Packet</i>
0x01	Configure-request ✓
0x02	Configure-ack ✓
0x03	Configure-nak ✓
0x04	Configure-reject ✓
0x05	Terminate-request ✓
0x06	Terminate-ack ✓
0x07	Code-reject ✓

Visit Our Channel for CS601 Short Lectures

Learning With Abid Ali



<https://www.youtube.com/watch?v=-0kr2sG8JUQ&list=PLAUocDaOe9K6nDHAXKa-7fHsIFAKBPE8q&index=9>

بِسْمِ اللَّهِ الرَّحْمَنِ الرَّحِيمِ

Data Communication CS601 Lecture No 29

Lecture Prepared By
Muhammad Abid Ali

We are also Provide Online Classes for CS601

Contact Us on WhatsApp for join our online Classes

WhatsApp No 03449767315


CS601 Lecture No 29 Topic 166 to 170

Media Access Control (MAC) Sub-Layer

- When nodes use a multipoint or broadcast link, we need a multiple-access protocol to coordinate access to the link

Visit Our Channel for CS601 Short Lectures

Learning With Abid Ali




<https://www.youtube.com/watch?v=-0kr2sG8JUQ&list=PLAUocDaOe9K6nDHAXKa-7fHsIFAKBPE8q&index=9>

- Many protocols have been devised **to handle access** to a shared link
- All of these protocols belong to **Media Access Control (MAC) sub-layer**

What is the function of medium access control MAC sub layer?

The medium access control (MAC) is a sublayer of the data link layer of the open system interconnections (OSI) reference model for data transmission. It is responsible for flow control and multiplexing for transmission medium. It controls the transmission of data packets via remotely shared channels.

Taxonomy of Multiple-Access Protocols

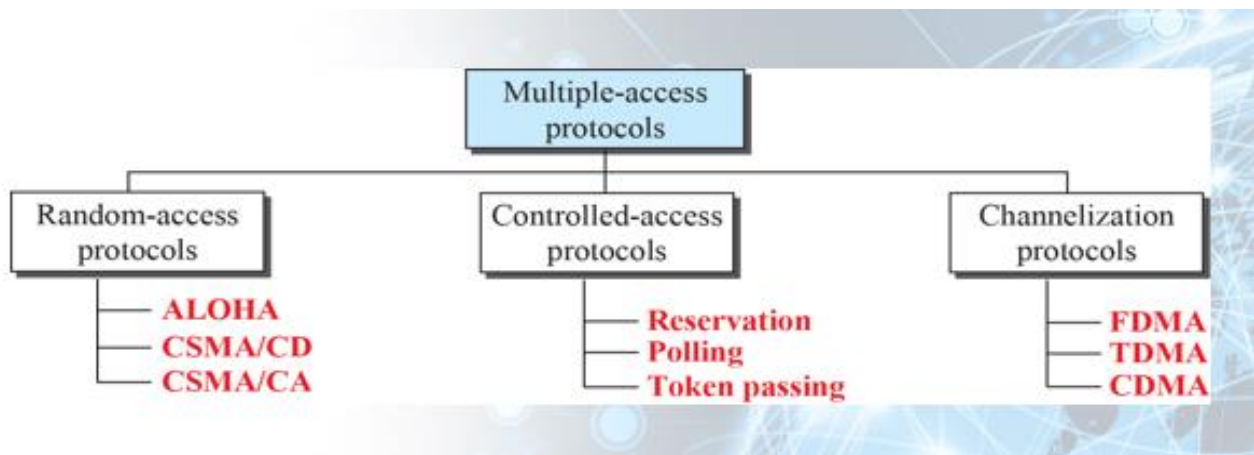

Random Access

- In **random-access** or contention no station is superior to the other and none is assigned control over the other
- Station that has data to send uses a procedure defined by the protocol to make a decision on whether or not to send
- This decision depends on **the state of the medium** (idle or busy)

Visit Our Channel for CS601 Short Lectures

Learning With Abid Ali



<https://www.youtube.com/watch?v=-0kr2sG8JUQ&list=PLAUocDaOe9K6nDHAXKa-7fHsIFAKBPE8q&index=9>

ALOHA

- **ALOHA**, the earliest **random-access** method, was developed in early **1970s**
- Designed for **a radio (wireless) LAN**, but it can be used on **any shared medium**
- **Potential collisions** in this arrangement as the medium is shared between the stations
- When a station sends data, another station may attempt to do so at the same time
- The data from the two stations **collide** and become **garbled**

Difference between Pure Aloha and Slotted Aloha


In Slotted Aloha, any station can transmit data only at the beginning of a time slot. In Pure Aloha, time is continuous and is not globally synchronized. In Slotted Aloha, time is discrete and is globally synchronized.

Visit Our Channel for CS601 Short Lectures

Learning With Abid Ali



<https://www.youtube.com/watch?v=-0kr2sG8JUQ&list=PLAUocDaOe9K6nDHAXKa-7fHsIFAKBPE8q&index=9>

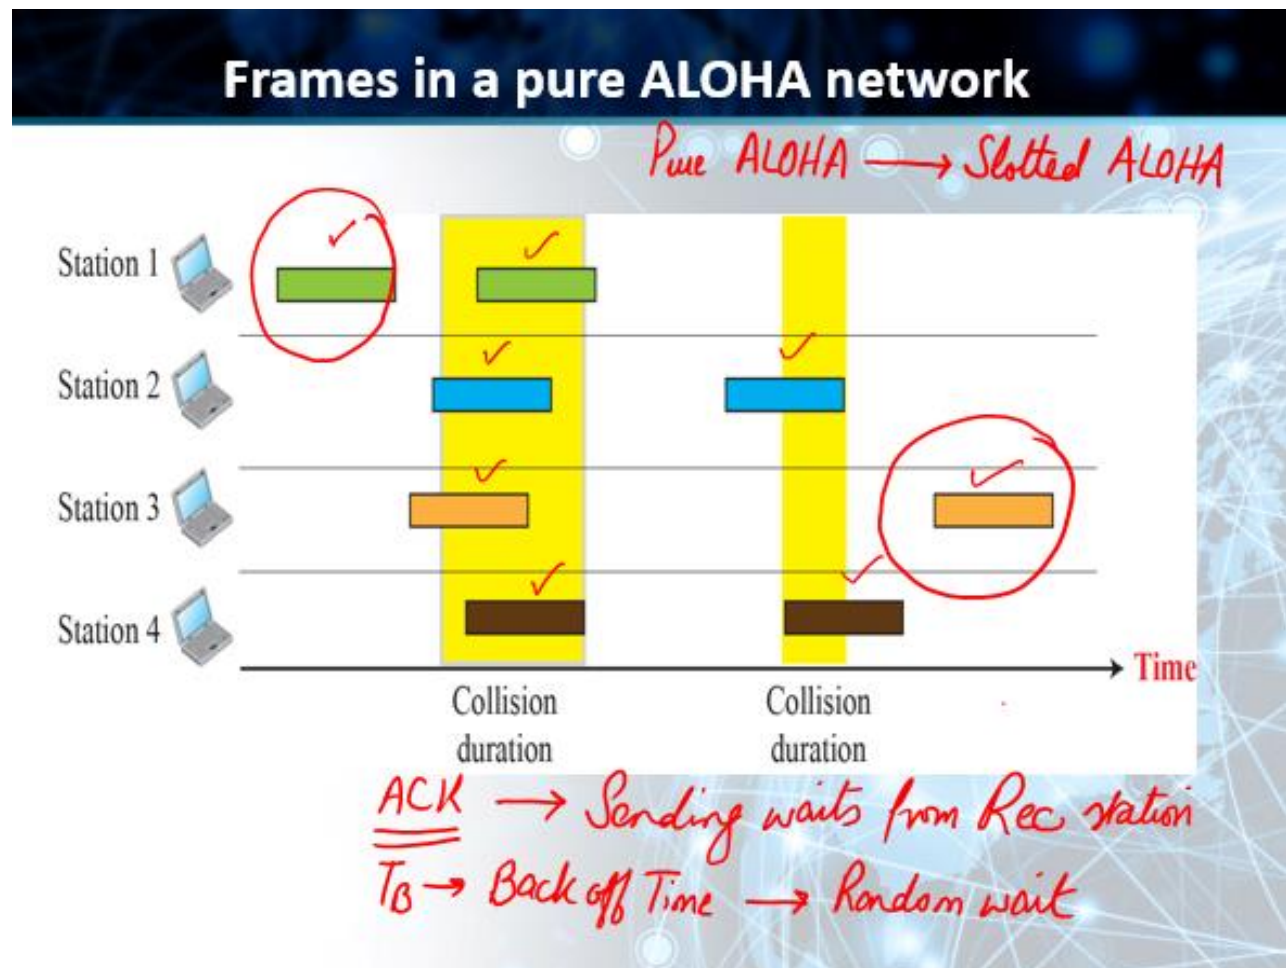


Visit Our Channel for CS601 Short Lectures

Learning With Abid Ali




<https://www.youtube.com/watch?v=-0kr2sG8JUQ&list=PLAUocDaOe9K6nDHAXKa-7fHsIFAKBPE8q&index=9>

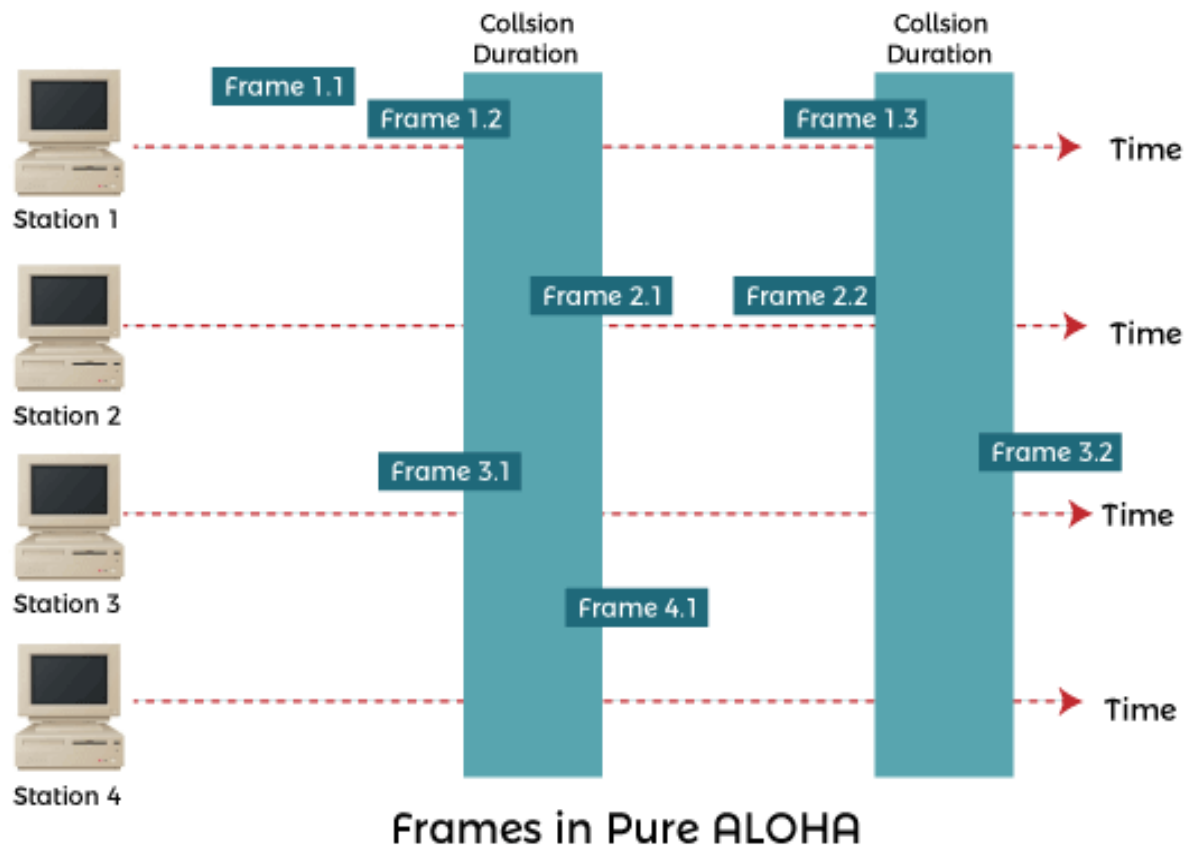


Visit Our Channel for CS601 Short Lectures

Learning With Abid Ali



<https://www.youtube.com/watch?v=-0kr2sG8JUQ&list=PLAUocDaOe9K6nDHAXKa-7fHsIFAKBPE8q&index=9>

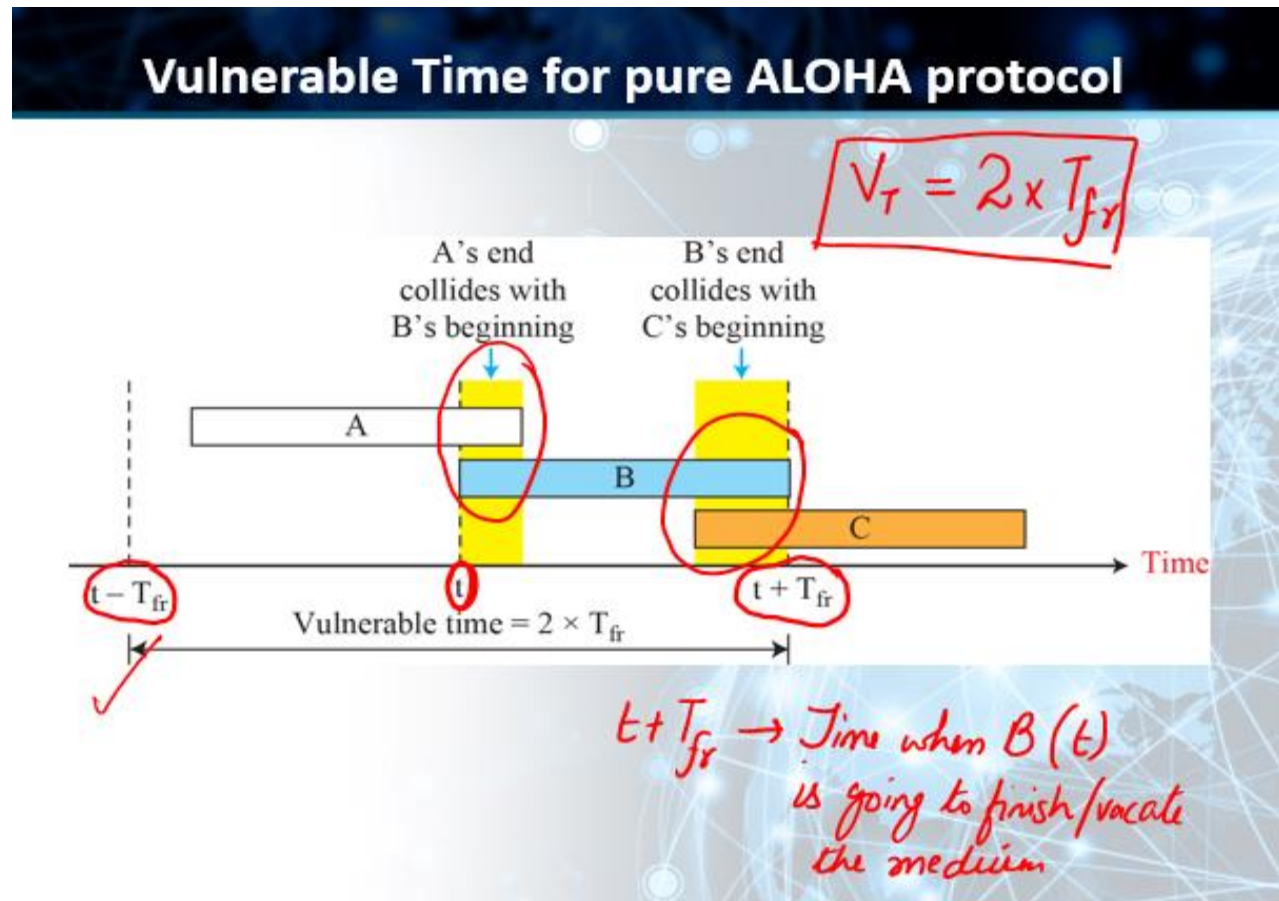

Slotted ALOHA

- We divide time into slots of **T_{fr}** sec and force the station to send only at the **beginning** of the slot
- Invented to improve the efficiency of **pure ALOHA**
- If a station misses the time slot, it must wait until beginning of next time slot reducing vulnerable time to **T_{fr}** (vs. **$2 \times T_{fr}$** for pure ALOHA)


Visit Our Channel for CS601 Short Lectures

Learning With Abid Ali




<https://www.youtube.com/watch?v=-0kr2sG8JUQ&list=PLAUocDaOe9K6nDHAXKa-7fHsIFAKBPE8q&index=9>

Frames in a Slotted ALOHA Network

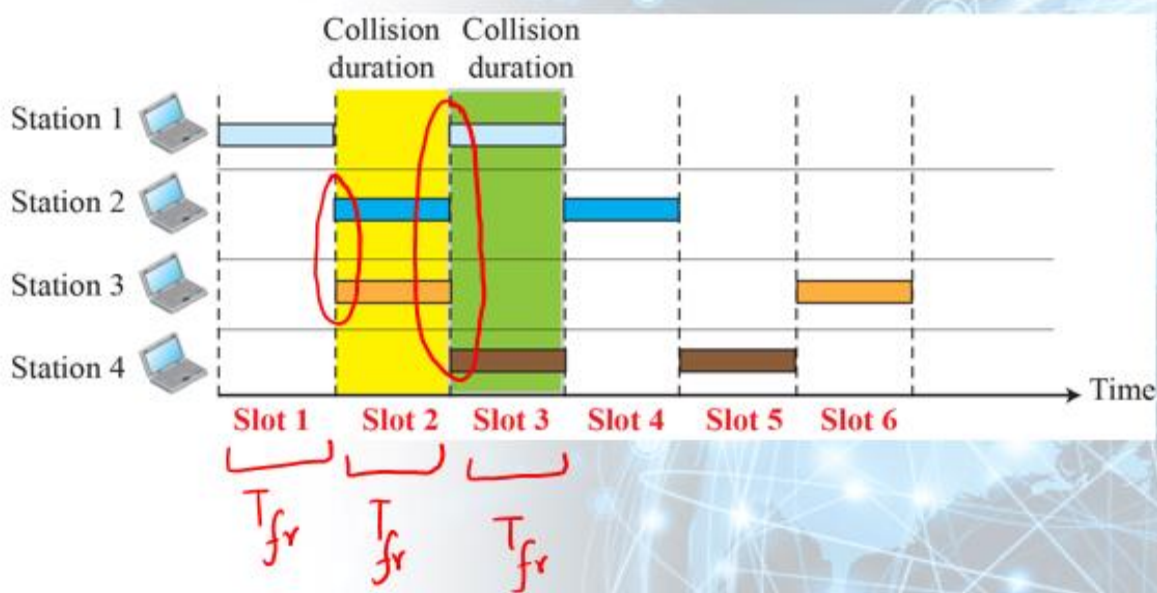


Visit Our Channel for CS601 Short Lectures

Learning With Abid Ali



<https://www.youtube.com/watch?v=-0kr2sG8JUQ&list=PLAUocDaOe9K6nDHAXKa-7fHsIFAKBPE8q&index=9>

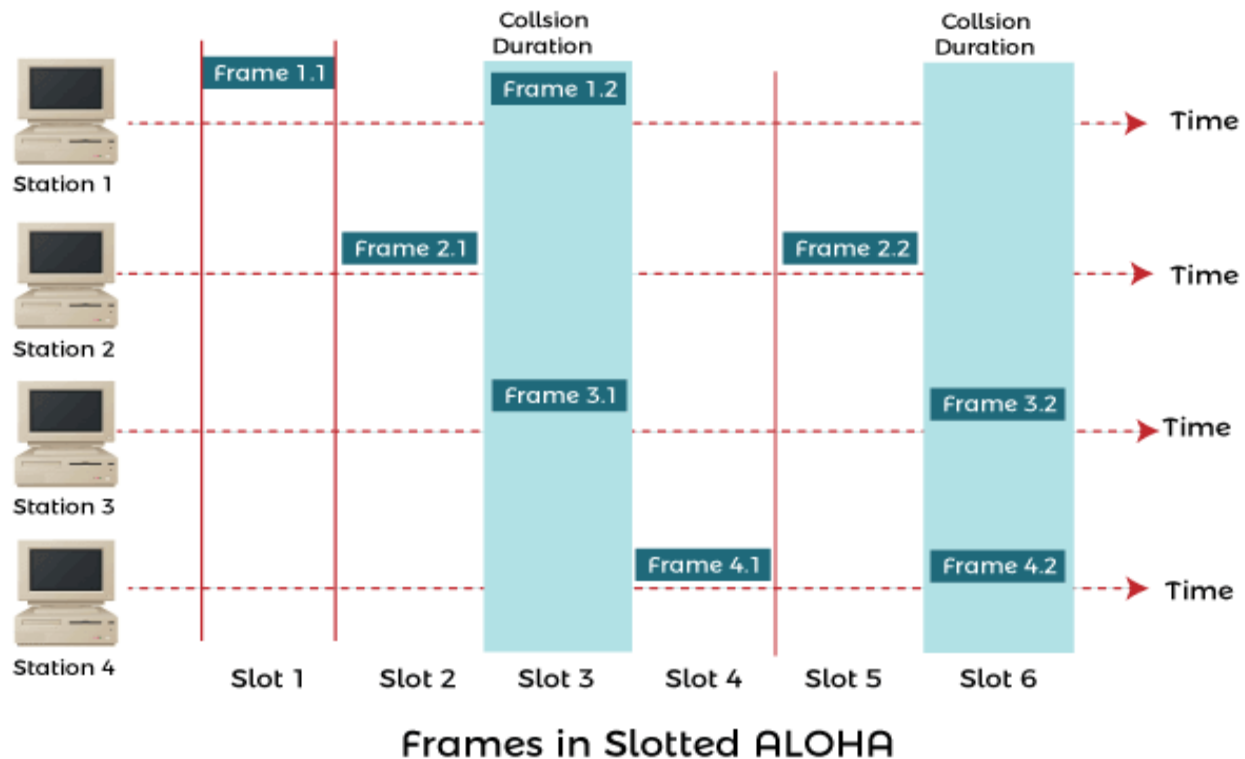

What is aloha?

Aloha is designed for wireless LAN (Local Area Network) but can also be used in a shared medium to transmit data. In aloha, any station can transmit data to a channel at any time. It does not require any carrier sensing.

Pure Aloha

Pure aloha is used when data is available for sending over a channel at stations. In pure Aloha, when each station transmits data to a channel without checking whether the channel is idle or not, the chances of collision may occur, and the data frame can be lost.


Visit Our Channel for CS601 Short Lectures

Learning With Abid Ali



<https://www.youtube.com/watch?v=-0kr2sG8JUQ&list=PLAUocDaOe9K6nDHAXKa-7fHsIFAKBPE8q&index=9>

Vulnerable Time for Slotted ALOHA

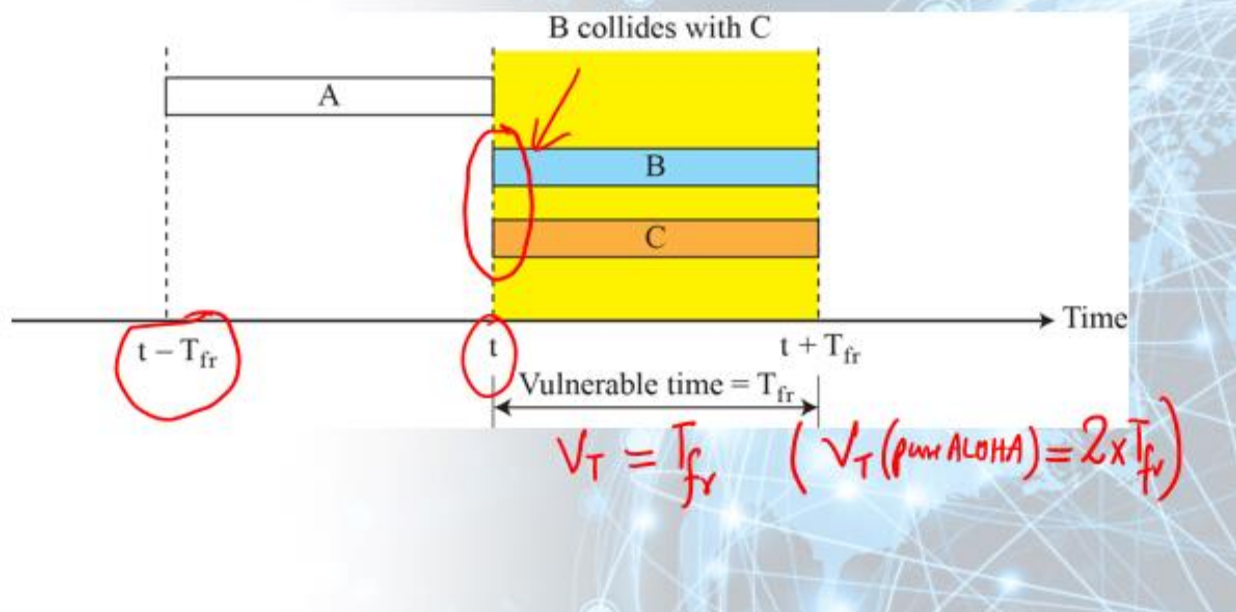

Visit Our Channel for CS601 Short Lectures

Learning With Abid Ali



<https://www.youtube.com/watch?v=-0kr2sG8JUQ&list=PLAUocDaOe9K6nDHAXKa-7fHsIFAKBPE8q&index=9>

بِسْمِ اللَّهِ الرَّحْمَنِ الرَّحِيمِ

Data Communication CS601 Lecture No 30

Lecture Prepared By
Muhammad Abid Ali

We are also Provide Online Classes for CS601


Contact Us on WhatsApp for join our online Classes

WhatsApp No 03449767315

CS601 Lecture No 30 Topic 171 to 179


Visit Our Channel for CS601 Short Lectures

Learning With Abid Ali



<https://www.youtube.com/watch?v=-0kr2sG8JUQ&list=PLAUocDaOe9K6nDHAXKa-7fHsIFAKBPE8q&index=9>

Taxonomy of Multiple-Access Protocols

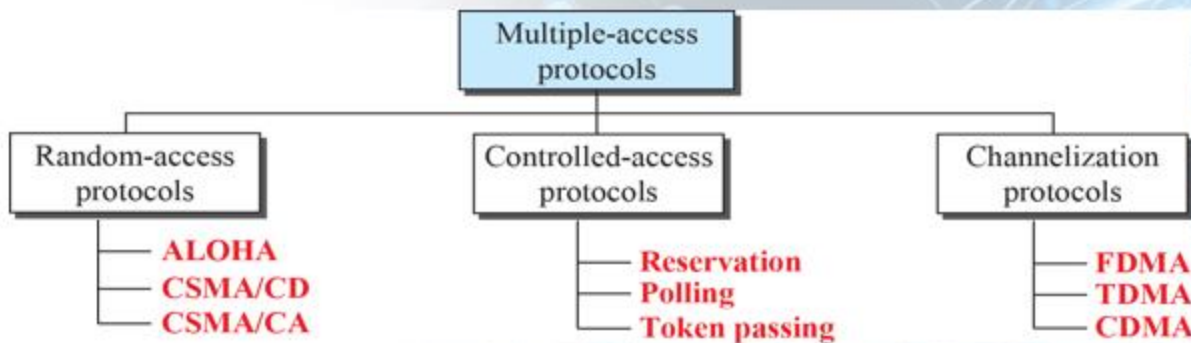

Carrier Sense Multiple Access (CSMA)

- To minimize the chance of collision and, therefore, increase the performance, CSMA was developed
- The chance of collision is reduced as the station is required to sense/listen to the medium before sending data
- ‘Sense before transmit’ or ‘listen before talk’

This method was developed to decrease the chances of collisions when two or more stations start sending their signals over the data link layer. Carrier Sense multiple access requires that each station first check the state of the medium before sending.


Visit Our Channel for CS601 Short Lectures

Learning With Abid Ali



<https://www.youtube.com/watch?v=-0kr2sG8JUQ&list=PLAUocDaOe9K6nDHAXKa-7fHsIFAKBPE8q&index=9>

Behavior of Three Persistence Methods

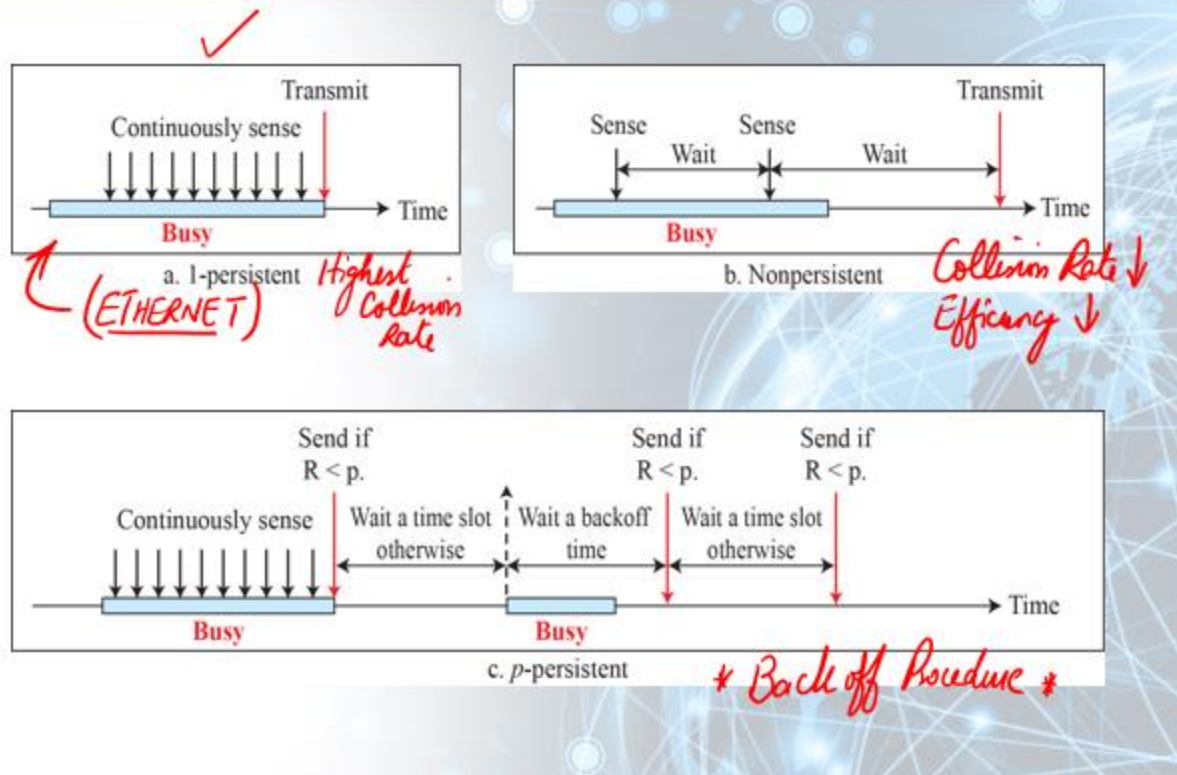


Carrier Sense Multiple Access/Collision Detection

- CSMA method does not specify the procedure following a collision
- CSMA/CD augments the algorithm to handle the collision
- The station monitors the medium after it sends a frame to see if the transmission was successful. If there is a collision, the frame is sent again

In this method, a station monitors the medium after it sends a frame to see if the transmission was successful. If successful, the transmission is finished, if not, the frame is sent again.

Visit Our Channel for CS601 Short Lectures

Learning With Abid Ali



<https://www.youtube.com/watch?v=-0kr2sG8JUQ&list=PLAUocDaOe9K6nDHAXKa-7fHsIFAKBPE8q&index=9>



Throughput and Efficiency: The throughput of CSMA/CD is much greater than pure or slotted ALOHA.

Carrier Sense Multiple Access/Collision Avoidance


- CSMA/CA was invented for Wireless Networks
- Collisions are avoided through the use of three strategies:
 - ✓ The Interframe Space
 - ✓ The Contention Window
 - ✓ Acknowledgements

These are three types of strategies:

1. **InterFrame Space (IFS):** When a station finds the channel busy it senses the channel again, when the station finds a channel to be idle it waits for a period of time called **IFS time**. IFS can also be used to define the priority of a station or a frame. Higher the IFS lower is the priority.
2. **Contention Window:** It is the amount of time divided into slots. A station that is ready to send frames chooses a random number of slots as **wait time**.
3. **Acknowledgments:** The positive acknowledgments and time-out timer can help guarantee a successful transmission of the frame.


Visit Our Channel for CS601 Short Lectures

Learning With Abid Ali



<https://www.youtube.com/watch?v=-0kr2sG8JUQ&list=PLAUocDaOe9K6nDHAXKa-7fHsIFAKBPE8q&index=9>


- **Interframe Space (IFS):** Collisions are avoided by deferring transmission even if the channel is idle
- **Contention Window:** Amount of time divided into slots. Station chooses a random number of slots as its wait time (one slot first time and double each time system cannot detect an idle channel)

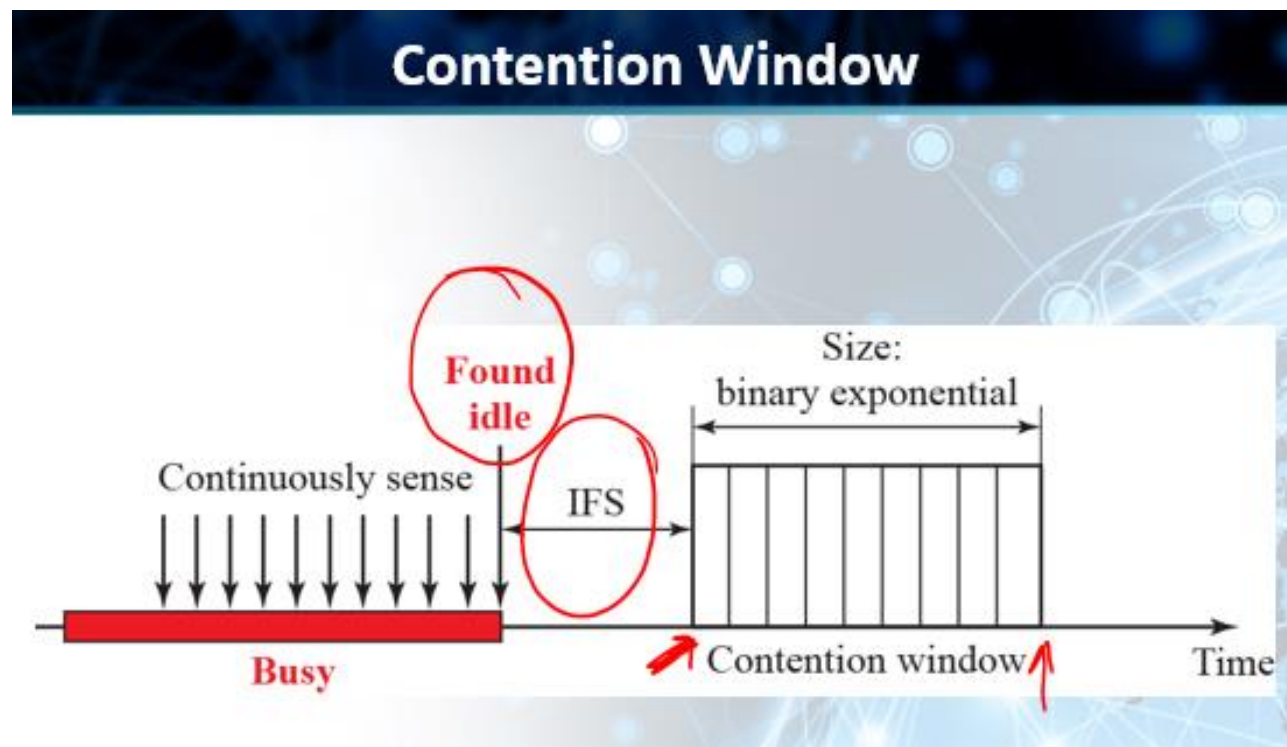

- **Acknowledgement:** Positive acknowledgement and time-out timer can help guarantee that the receiver has received the frame


Visit Our Channel for CS601 Short Lectures

Learning With Abid Ali



<https://www.youtube.com/watch?v=-0kr2sG8JUQ&list=PLAUocDaOe9K6nDHAXKa-7fHsIFAKBPE8q&index=9>

CSMA/CA and Network Allocation Vector (NAV)

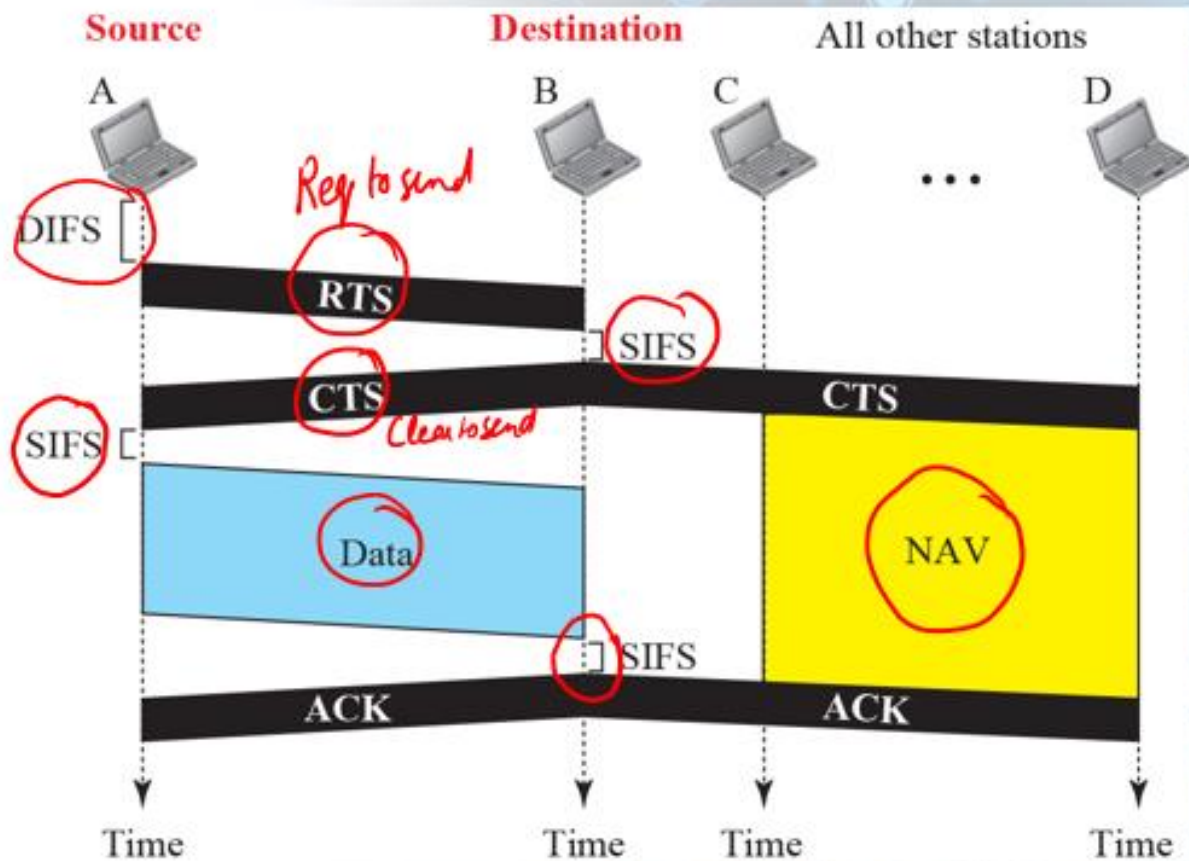


CONTROLLED ACCESS

- The **stations consult** one another to find which station has the right to send
- A station cannot send unless **authorized** by other stations
- We discuss three controlled-access methods:
 - ✓ Reservation

Visit Our Channel for CS601 Short Lectures

Learning With Abid Ali




<https://www.youtube.com/watch?v=-0kr2sG8JUQ&list=PLAUocDaOe9K6nDHAXKa-7fHsIFAKBPE8q&index=9>

- ✓ Polling
- ✓ Token Passing

Reservation

- In the **reservation method**, a station needs to make a reservation before sending data
- Time is divided into **intervals**
- In each **interval**, a reservation frame precedes the data frames sent in that interval

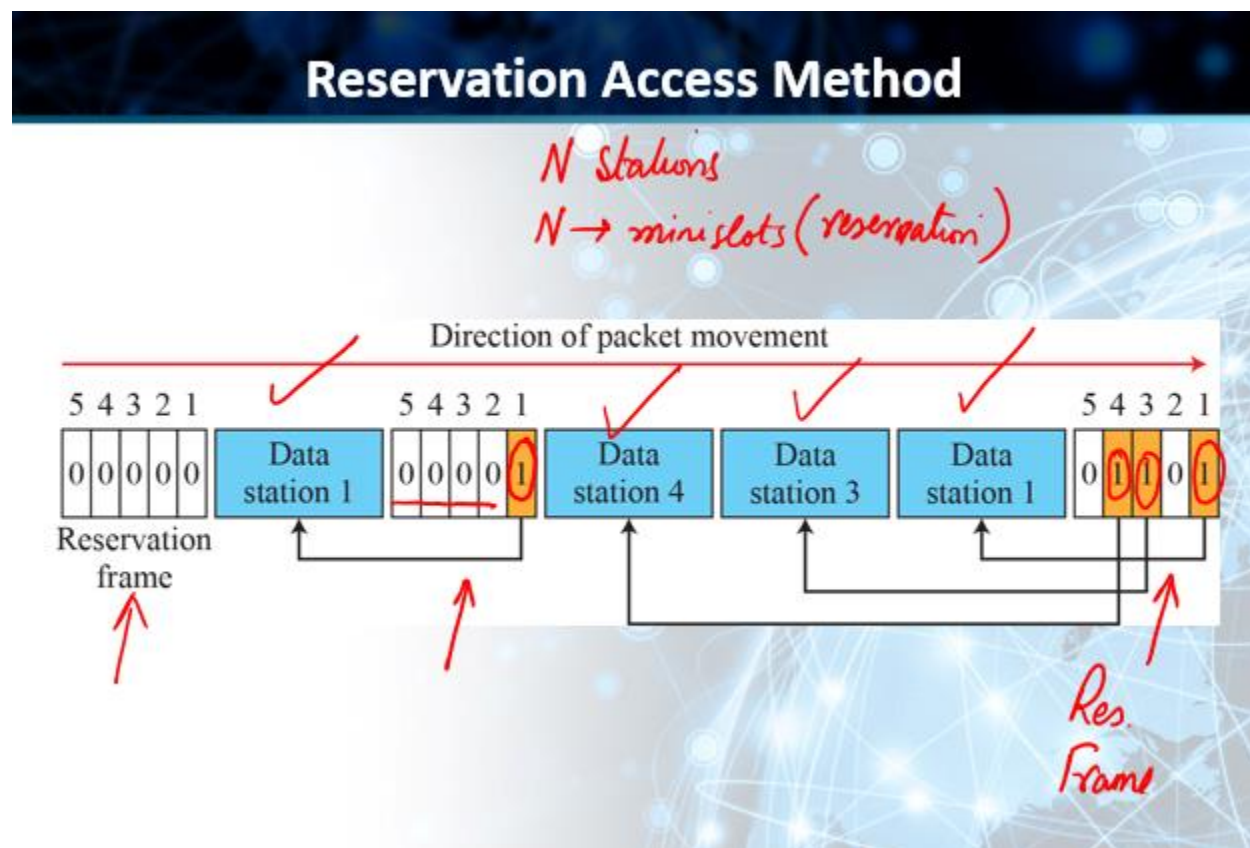


Polling

- **Polling** works with topologies in which one device is designated as a primary station and the other devices are secondary stations


Visit Our Channel for CS601 Short Lectures

Learning With Abid Ali



<https://www.youtube.com/watch?v=-0kr2sG8JUQ&list=PLAUocDaOe9K6nDHAXKa-7fHsIFAKBPE8q&index=9>

- All data exchanges must be made through **primary device** even when the ultimate destination is a **secondary device**
- The **primary device** controls the link; the secondary devices follow its instructions

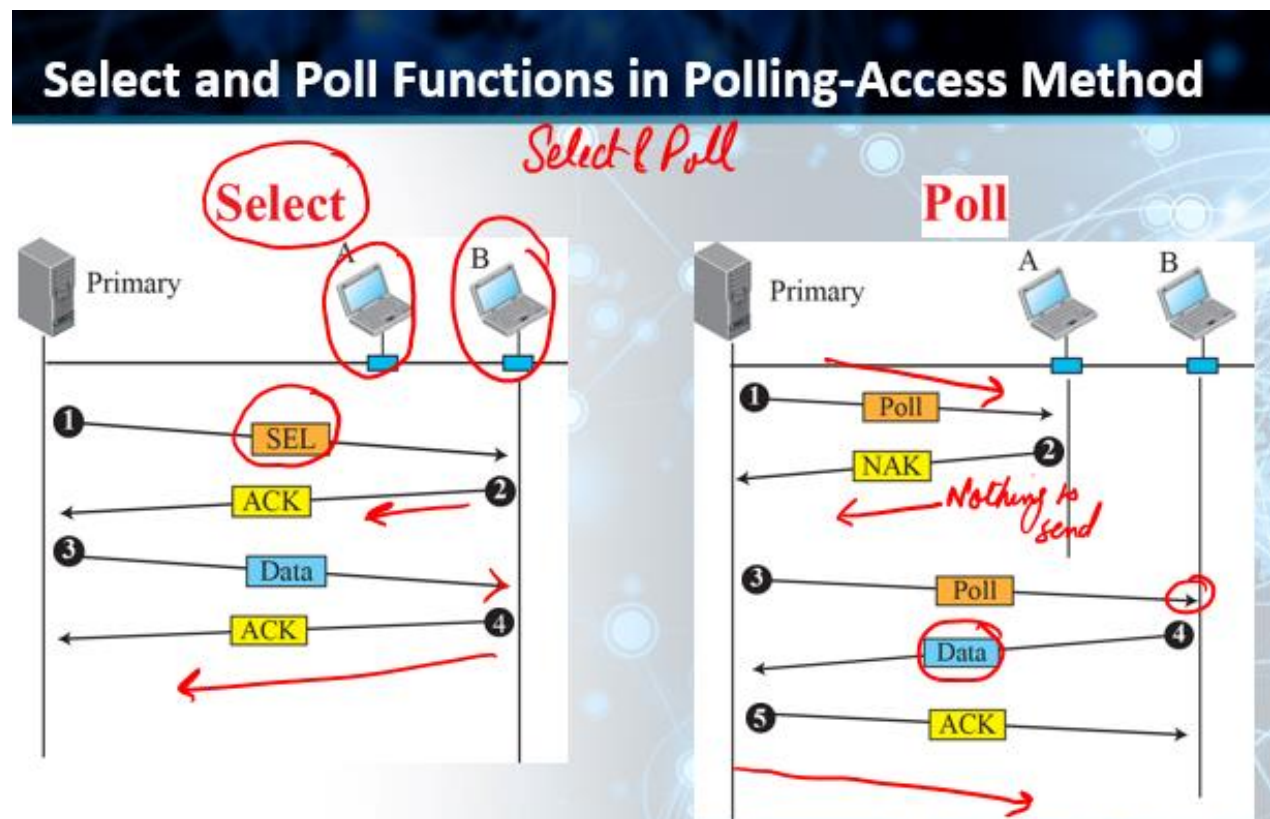


Token Passing

- In the **token-passing** method, the stations in a network are organized in a logical ring
- For each station, there is a predecessor and a **successor**
- The **predecessor** is the station which is logically before the station in the ring; the **successor** is the station which is after the station in the ring
- Special packet called **TOKEN** circulates through the ring
- **Possession** of **TOKEN** gives the station the right to send the data


Visit Our Channel for CS601 Short Lectures

Learning With Abid Ali



<https://www.youtube.com/watch?v=-0kr2sG8JUQ&list=PLAUocDaOe9K6nDHAXKa-7fHsIFAKBPE8q&index=9>

- **TOKEN Management** is required to manage possession time, Token monitoring, priority assignment etc.

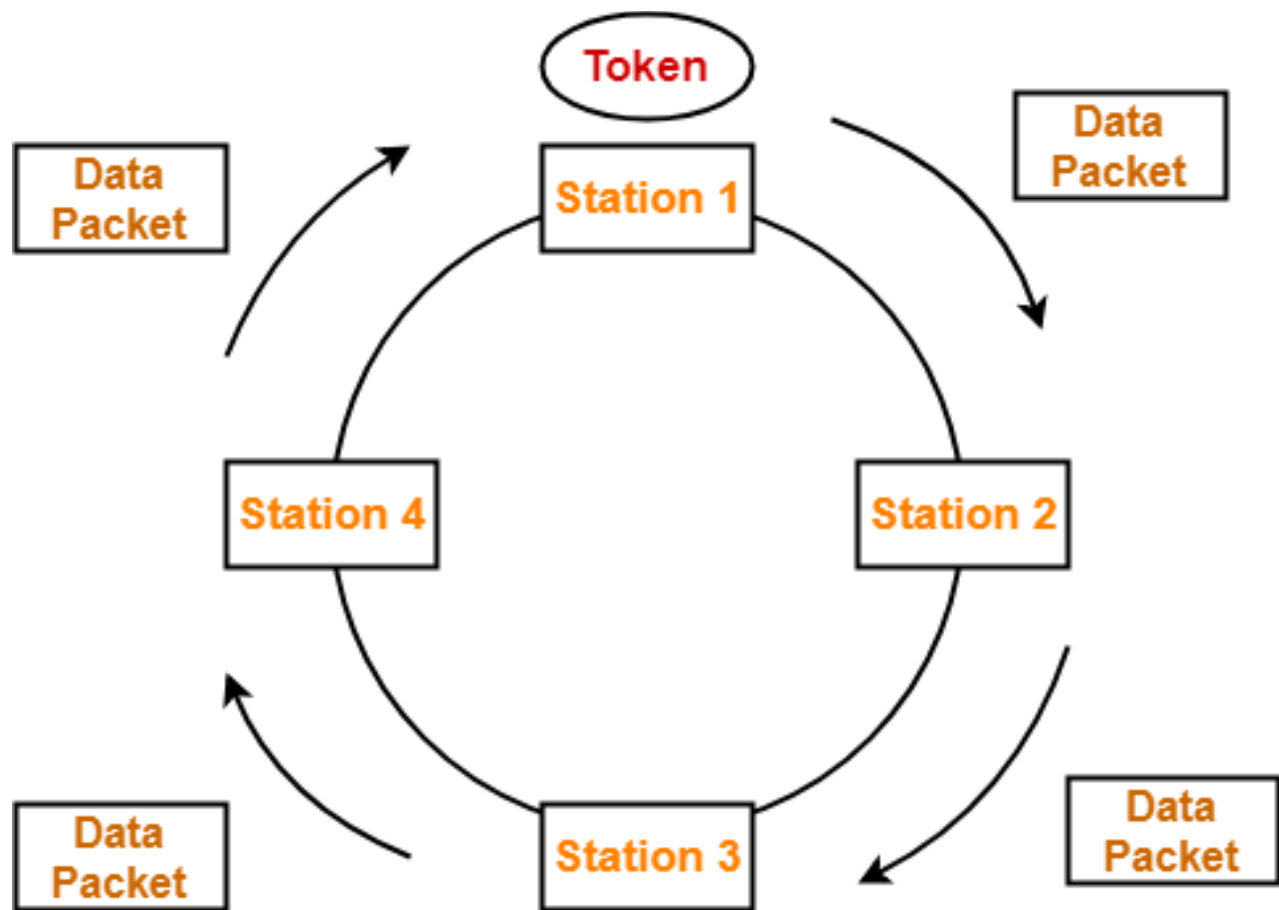

Delayed Token Reinsertion Token Passing

CHANNELIZATION (Channel Partition)

- The available bandwidth of a link is shared in time, frequency, or through code, among different stations

Visit Our Channel for CS601 Short Lectures

Learning With Abid Ali



<https://www.youtube.com/watch?v=-0kr2sG8JUQ&list=PLAUocDaOe9K6nDHAXKa-7fHsIFAKBPE8q&index=9>

- We discuss three protocols:
 - ✓ Frequency Division Multiple Access (FDMA)
 - ✓ Time Division multiple Access (TDMA)
 - ✓ Code Division Multiple Access (CDMA)

Frequency-Division Multiple Access (FDMA)


- In **FDMA**, the available bandwidth is divided into frequency bands
- **Each station** is allocated a band to send its data i.e. each band is reserved for a specific station, and it belongs to the station all the time
- Each station also uses a **bandpass filter** to confine the transmitter frequencies

Visit Our Channel for CS601 Short Lectures

Learning With Abid Ali



<https://www.youtube.com/watch?v=-0kr2sG8JUQ&list=PLAUocDaOe9K6nDHAXKa-7fHsIFAKBPE8q&index=9>

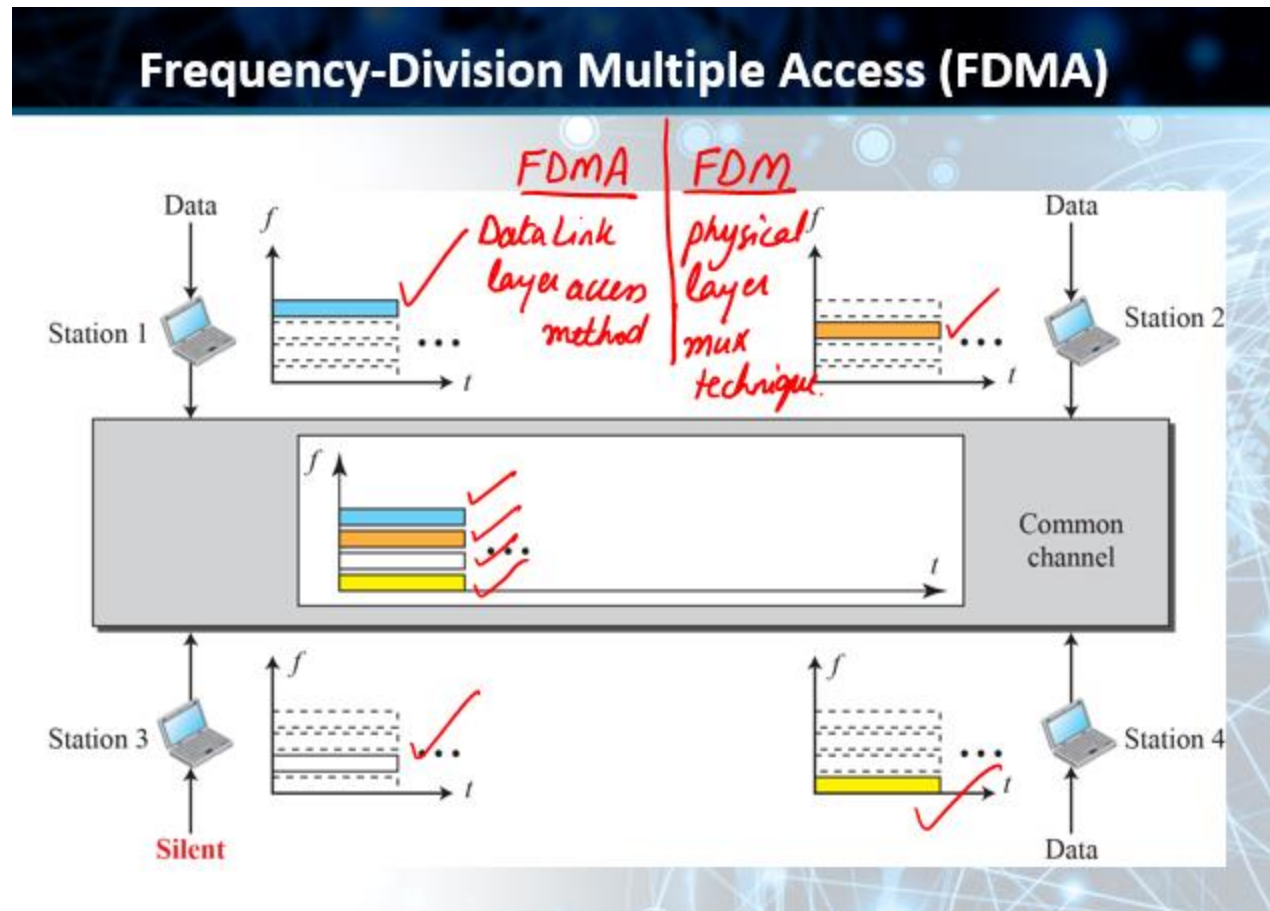

TDMA


- Stations share the bandwidth of the channel in time
- Each station is allocated a **time slot during** which it can send data
- Each station transmits its data in its assigned **time slot**

Visit Our Channel for CS601 Short Lectures

Learning With Abid Ali



<https://www.youtube.com/watch?v=-0kr2sG8JUQ&list=PLAUocDaOe9K6nDHAXKa-7fHsIFAKBPE8q&index=9>

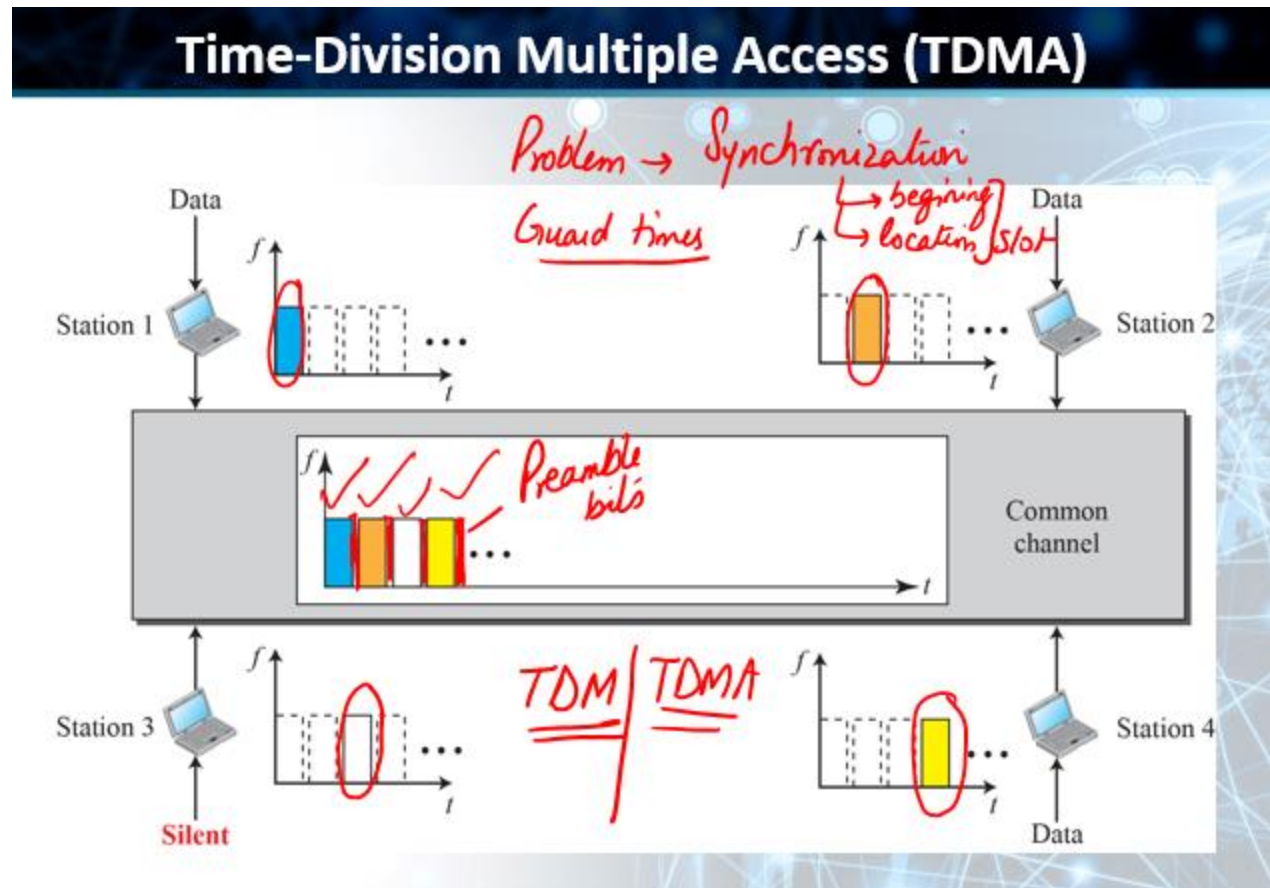


Code Division Multiple Access (CDMA)

- CDMA differs from FDMA in that only one channel occupies the entire bandwidth of the link
- CDMA differs from **TDMA** in that all stations can send data simultaneously; there is no timesharing


Visit Our Channel for CS601 Short Lectures

Learning With Abid Ali



<https://www.youtube.com/watch?v=-0kr2sG8JUQ&list=PLAUocDaOe9K6nDHAXKa-7fHsIFAKBPE8q&index=9>

Simple idea of Communication with Code

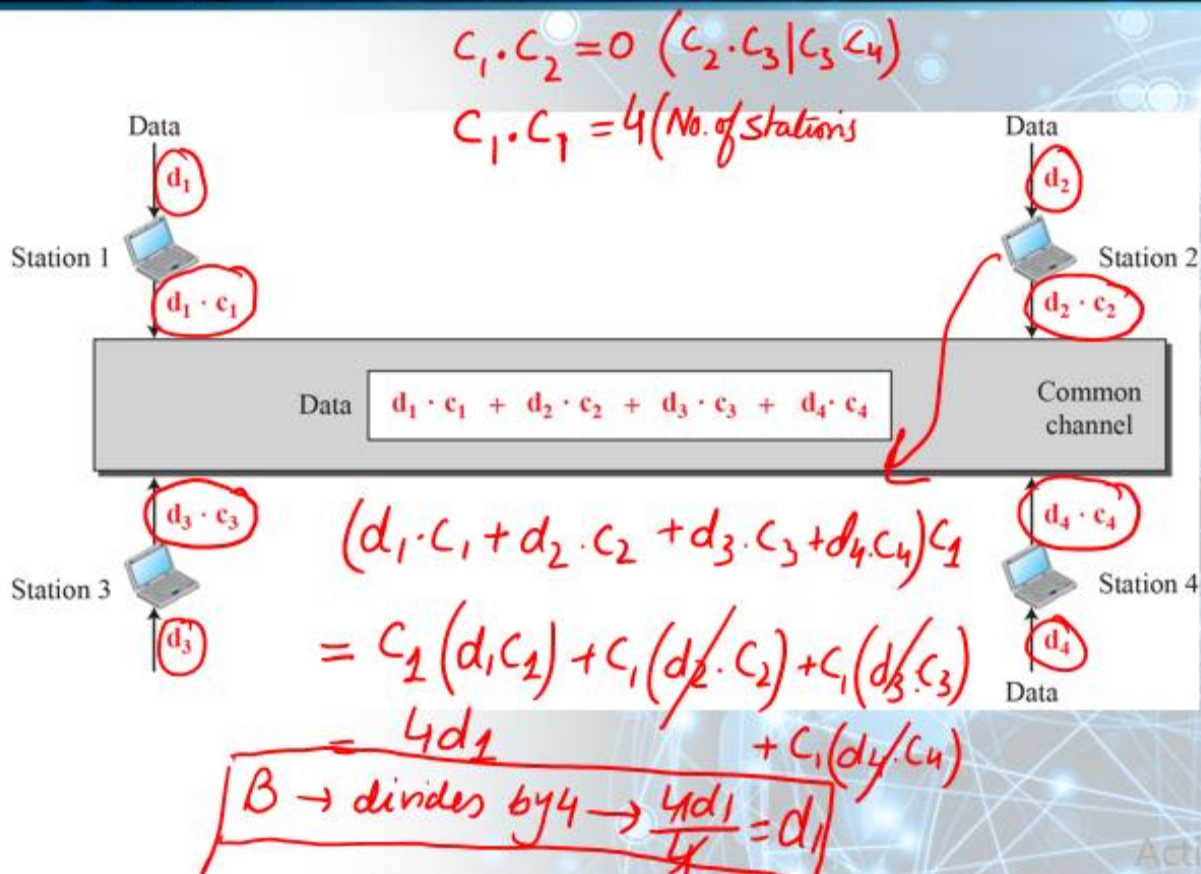

Visit Our Channel for CS601 Short Lectures

Learning With Abid Ali



<https://www.youtube.com/watch?v=-0kr2sG8JUQ&list=PLAUocDaOe9K6nDHAXKa-7fHsIFAKBPE8q&index=9>

بِسْمِ اللَّهِ الرَّحْمَنِ الرَّحِيمِ

Data Communication CS601 Lecture No 31

Lecture Prepared By
Muhammad Abid Ali

We are also Provide Online Classes for CS601

Contact Us on WhatsApp for join our online Classes

WhatsApp No 03449767315

CS601 Lecture No 31 Topic 180 to 185

Ethernet Protocol

- Data-link layer and the physical layer are the territory of the local and wide area networks
- We can have wired or wireless networks

Visit Our Channel for CS601 Short Lectures

Learning With Abid Ali



<https://www.youtube.com/watch?v=-0kr2sG8JUQ&list=PLAUocDaOe9K6nDHAXKa-7fHsIFAKBPE8q&index=9>

Ethernet protocol is a **typical LAN technology**. Standard Ethernet-based local area networks transmit data at speed up to 10 Mbps. New Ethernet cards known as Fast Ethernet represent high-speed LAN technology as it can provide data transfer rates as high as 100 Mbps.

Where is Ethernet protocol used?



local area networks


Ethernet is a family of wired computer networking technologies commonly used in **local area networks (LAN)**, **metropolitan area networks (MAN)** and **wide area networks (WAN)**.

IEEE Project 802 (Institute of Electrical and Electronics Engineers)


- In 1985, the Computer Society of the IEEE started a project, called Project 802, to set standards to enable inter-communication among equipment from a variety of manufacturers
- Project 802 did not seek to replace any part of the OSI model or TCP/IP protocol suite
- A way of specifying functions of the physical layer and the data-link layer of major LAN protocols

Visit Our Channel for CS601 Short Lectures

Learning With Abid Ali



<https://www.youtube.com/watch?v=-0kr2sG8JUQ&list=PLAUocDaOe9K6nDHAXKa-7fHsIFAKBPE8q&index=9>

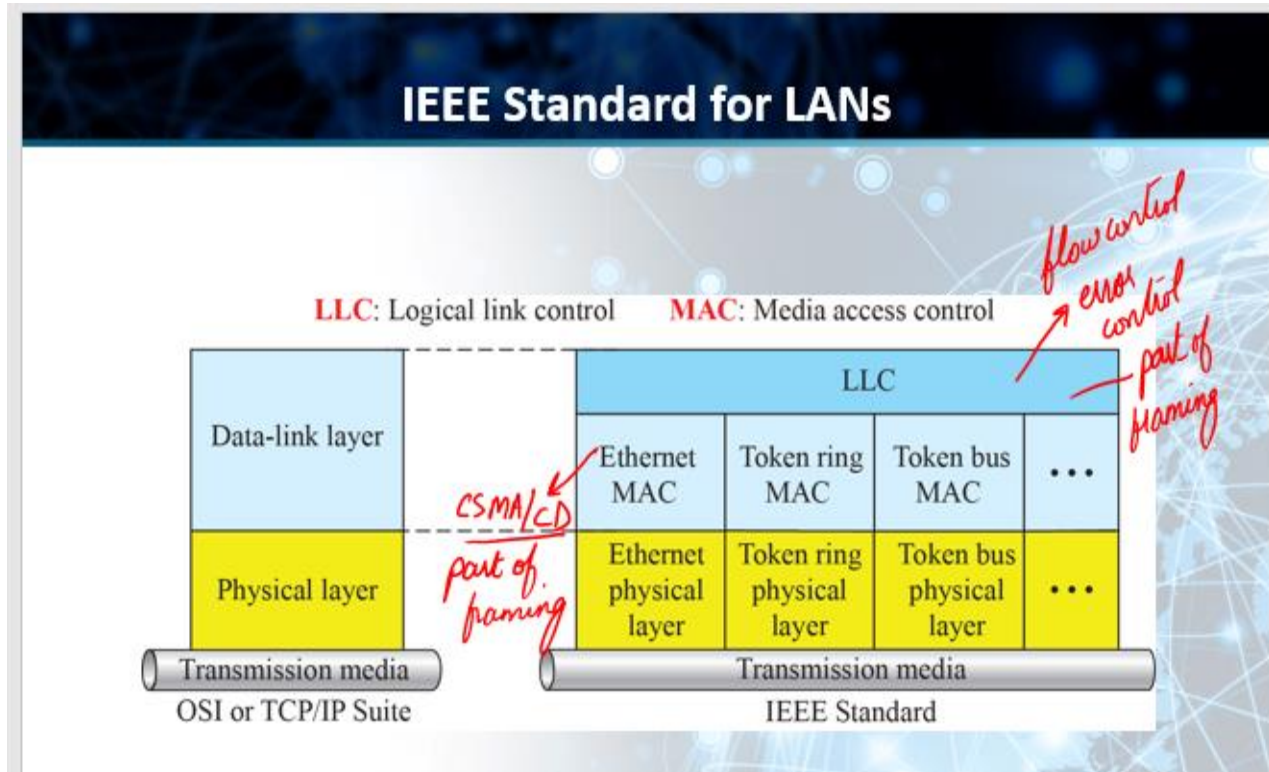

Ethernet Evolution


- The Ethernet LAN was developed in the 1970s
- Since then, it has gone through four generations:
 - ✓ Standard Ethernet (10 Mbps)
 - ✓ Fast Ethernet (100 Mbps)
 - ✓ Gigabit Ethernet (1 Gbps)
 - ✓ 10 Gigabit Ethernet (10 Gbps)

Visit Our Channel for CS601 Short Lectures

Learning With Abid Ali



<https://www.youtube.com/watch?v=-0kr2sG8JUQ&list=PLAUocDaOe9K6nDHAXKa-7fHsIFAKBPE8q&index=9>

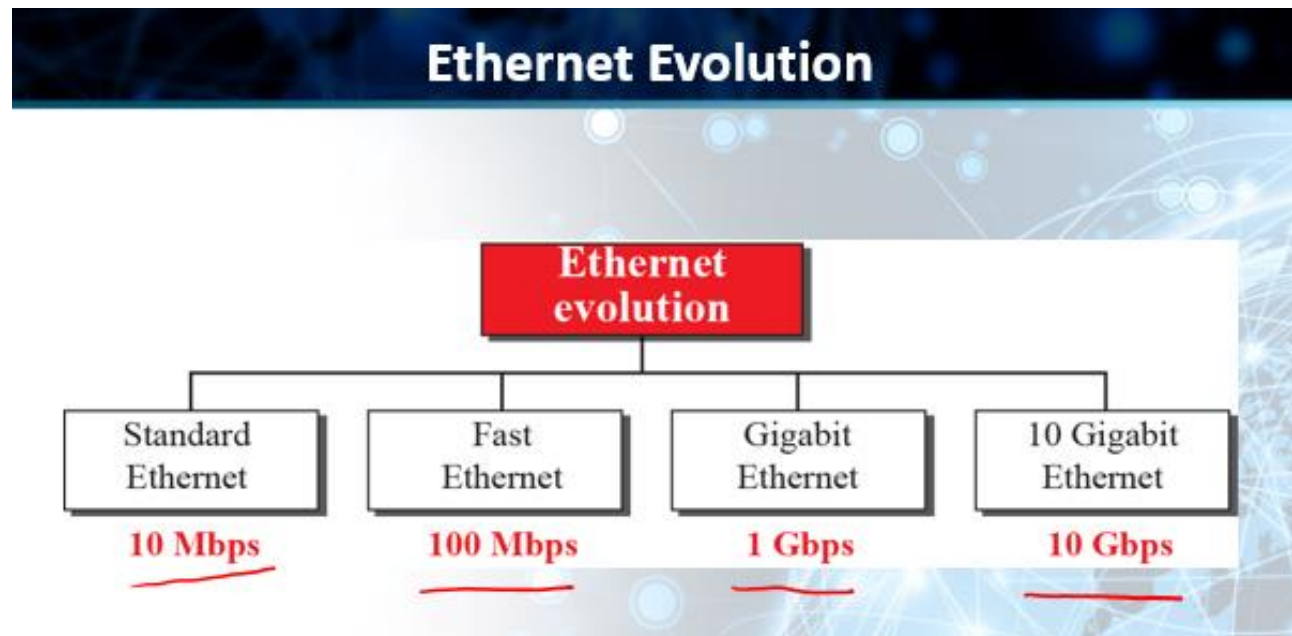

Standard Ethernet

- The original Ethernet technology with the data rate of 10 Mbps is called **Standard Ethernet**
- Most implementations have moved to later evolutions
- Still some features of the **Standard Ethernet** that have not changed during the evolution

Connectionless & Unreliable Service

- Each frame is independent of other
- No connection establishment or tear down process
- The sender may overwhelm receiver with frames and frames are dropped
- If frame drops, sender will not know about it unless we are using TCP (Transport)
- Ethernet is unreliable like IP and UDP


Visit Our Channel for CS601 Short Lectures

Learning With Abid Ali



<https://www.youtube.com/watch?v=-0kr2sG8JUQ&list=PLAUocDaOe9K6nDHAXKa-7fHsIFAKBPE8q&index=9>

- If a frame is corrupted, receiver silently drops it
- Left to high level protocols to find out about it

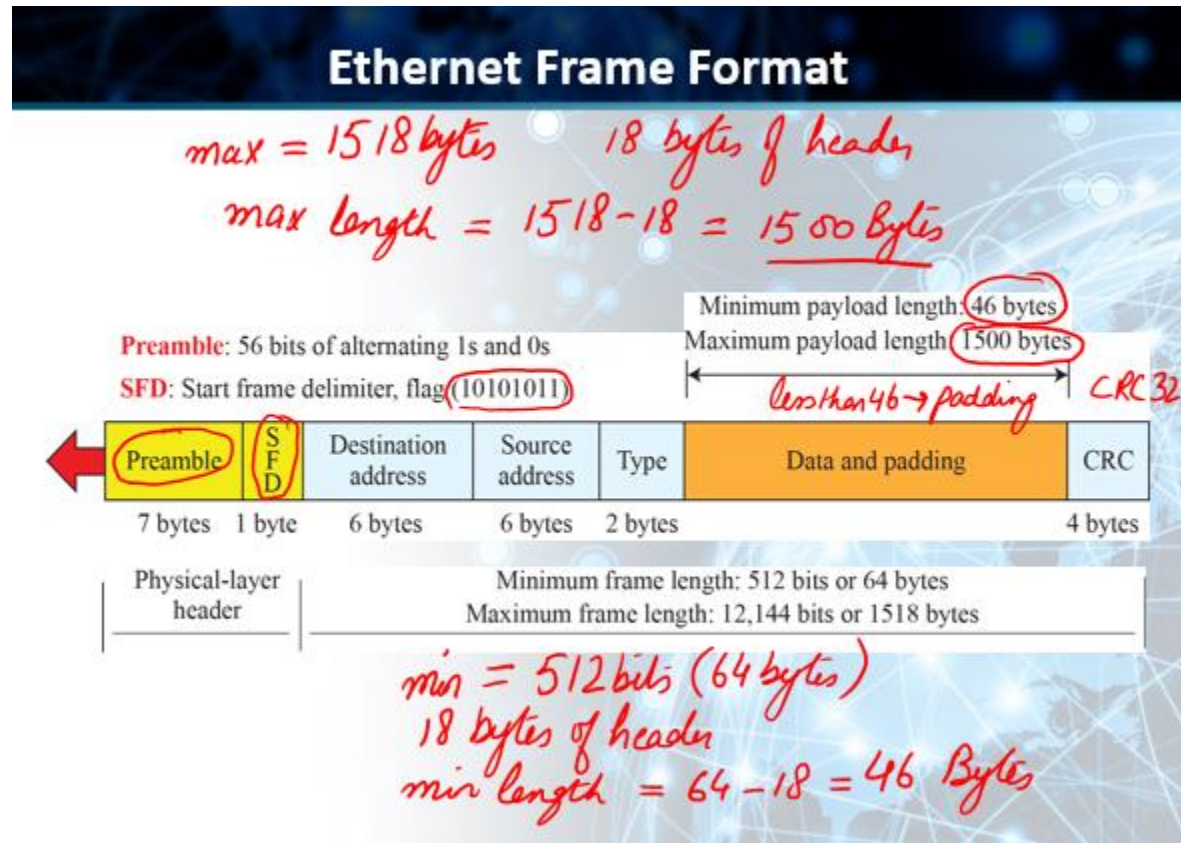

Addressing in Standard Ethernet

- Each station on Ethernet has its own network interface card (NIC)
- The NIC fits inside the station and provides the station with a link-layer/physical address
- The Ethernet address is 6 bytes (48 bits), normally written in hexadecimal notation, with a colon between the bytes

Addressing

- For example, the following shows an Ethernet MAC address:

Visit Our Channel for CS601 Short Lectures

Learning With Abid Ali



<https://www.youtube.com/watch?v=-0kr2sG8JUQ&list=PLAUocDaOe9K6nDHAXKa-7fHsIFAKBPE8q&index=9>

4A:30:10:21:10:1A

Transmission of Address Bits

How the address 47:20:1B:2E:08:EE is sent out online.

The address is sent left to right, byte by byte; for each byte, it is sent right to left, bit by bit, as shown below:

Hexadecimal	47	20	1B	2E	08	EE
Binarys	01000111	00100000	00011011	00101110	00001000	11101110
Transmitted ←	11100010	00000100	11011000	01110100	00010000	01110111

↑
LS

↑
MS

→ unicast
→ multicast
→ broadcast


Visit Our Channel for CS601 Short Lectures

Learning With Abid Ali



<https://www.youtube.com/watch?v=-0kr2sG8JUQ&list=PLAUocDaOe9K6nDHAXKa-7fHsIFAKBPE8q&index=9>

Unicast and Multicast Addresses

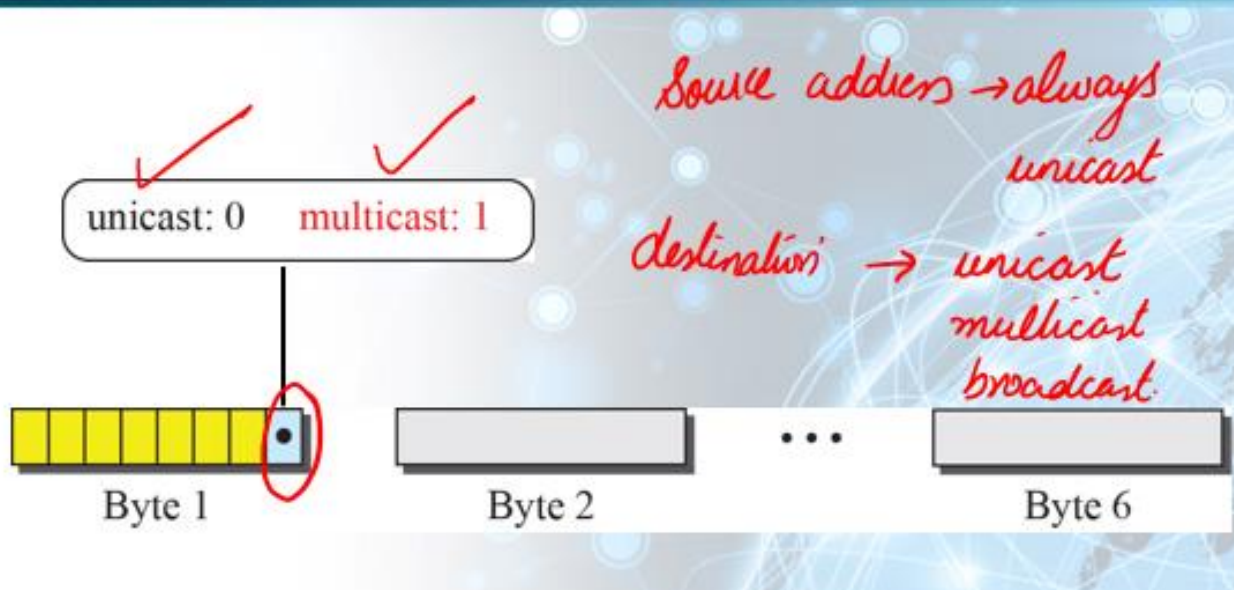

Visit Our Channel for CS601 Short Lectures

Learning With Abid Ali



<https://www.youtube.com/watch?v=-0kr2sG8JUQ&list=PLAUocDaOe9K6nDHAXKa-7fHsIFAKBPE8q&index=9>

Example 13.2

Define the type of the following destination addresses:

- a. 4A:30:10:21:10:1A ✓ 4A A → 1010 (0 → LS)
- b. 47:20:1B:2E:08:EE ✓ 47 7 → 0111 (1 → LS)
- c. FF:FF:FF:FF:FF:FF

To find the type of the address, we need to look at the second hexadecimal digit from the left. If it is even, the address is unicast. If it is odd, the address is multicast. If all digits are Fs, the address is broadcast. Therefore, we have the following:

- a. This is a unicast address because A in binary is 1010 (even).
- b. This is a multicast address because 7 in binary is 0111 (odd).
- c. This is a broadcast address because all digits are Fs in hexadecimal.

Access Method in Standard Ethernet

- Since the network that uses the standard Ethernet protocol is a broadcast network, we need to use an access method to control access to the sharing medium
- The standard Ethernet chose CSMA/CD with 1-Persistent Method

Efficiency of Standard Ethernet

- The ratio of the time used by a station to send data to the time the medium is occupied by this station
- The practical efficiency of standard Ethernet has been measured to be:

Visit Our Channel for CS601 Short Lectures

Learning With Abid Ali



<https://www.youtube.com/watch?v=-0kr2sG8JUQ&list=PLAUocDaOe9K6nDHAXKa-7fHsIFAKBPE8q&index=9>

$$\text{Efficiency} = 1/(1 + 6.4 \times a)$$

where a = number of frames that can fit on a medium

Example

In the Standard Ethernet with the transmission rate of 10 Mbps, we assume that the length of the medium is 2500 m and the size of the frame is 512 bits. The propagation speed of a signal in a cable is normally 2×10^8 m/s.

$$\text{Propagation Delay} = \frac{2500 \text{ m}}{2 \times 10^8 \text{ m/s}} = 12.5 \mu\text{sec}$$

$$\text{Transmission Delay} = \frac{512}{10^7} = 51.2 \mu\text{sec}$$

$$a = \frac{\text{Prop. Delay}}{\text{Trans Delay}} = \frac{12.5}{51.2} = 0.24 \rightarrow 0.24 \text{ of a frame occupies medium}$$

$$\underline{\underline{\epsilon}} = \frac{1}{(1 + 6.4 \times a)} = 39\% \rightarrow \text{moderate only } 61\% \text{ of time}$$

IDEAL
 $a=0$
 $\epsilon=1$

Visit Our Channel for CS601 Short Lectures

Learning With Abid Ali



<https://www.youtube.com/watch?v=-0kr2sG8JUQ&list=PLAUocDaOe9K6nDHAXKa-7fHsIFAKBPE8q&index=9>

Out Of Topic Example

Problem-07:

Consider a 10 Mbps Ethernet LAN that has stations attached to a 2.5 km long coaxial cable. Given that the transmission speed is 2.3×10^8 m/sec, the packet size is 128 bytes out of which 30 bytes are overhead, find the effective transmission rate and maximum rate at which the network can send data.

Solution-

Given-

- Bandwidth = 10 Mbps
- Distance = 2.5 km
- Transmission speed = 2.3×10^8 m/sec
- Total packet size = 128 bytes
- Overhead = 30 bytes

Calculating Transmission Delay-

Transmission delay (T_t)

= Packet size / Bandwidth

= 128 bytes / 10 Mbps

= $(128 \times 8 \text{ bits}) / (10 \times 10^6 \text{ bits per sec})$

= $1024 / 10^7 \text{ sec}$

Visit Our Channel for CS601 Short Lectures

Learning With Abid Ali



<https://www.youtube.com/watch?v=-0kr2sG8JUQ&list=PLAUocDaOe9K6nDHAXKa-7fHsIFAKBPE8q&index=9>

$$= 102.4 \mu\text{sec}$$

Calculating Propagation Delay-

Propagation delay (T_p)

$$= \text{Distance} / \text{Speed}$$

$$= 2.5 \text{ km} / (2.3 \times 10^8 \text{ m/sec})$$

$$= (2.5 \times 10^3 \text{ m}) / (2.3 \times 10^8 \text{ m/sec})$$

$$= 1.08 \times 10^{-5} \text{ sec}$$

$$= 10.8 \mu\text{sec}$$

Calculating Value of 'a'-

a

$$= T_p / T_t$$

$$= 10.8 \mu\text{sec} / 102.4 \mu\text{sec}$$

$$= 0.105$$

Calculating Efficiency-

Efficiency(η)

$$= 1 / (1 + 6.44 \times a)$$

$$= 1 / (1 + 6.44 \times 0.105)$$

$$= 1 / 1.67$$

Visit Our Channel for CS601 Short Lectures

Learning With Abid Ali



<https://www.youtube.com/watch?v=-0kr2sG8JUQ&list=PLAUocDaOe9K6nDHAXKa-7fHsIFAKBPE8q&index=9>

= 0.59

= 59%

Visit Our Channel for CS601 Short Lectures

Learning With Abid Ali



<https://www.youtube.com/watch?v=-0kr2sG8JUQ&list=PLAUocDaOe9K6nDHAXKa-7fHsIFAKBPE8q&index=9>

بِسْمِ اللَّهِ الرَّحْمَنِ الرَّحِيمِ

Data Communication CS601 Lecture No 32

Lecture Prepared By
Muhammad Abid Ali

We are also Provide Online Classes for CS601

Contact Us on WhatsApp for join our online Classes

WhatsApp No 03449767315


CS601 Lecture No 32 Topic 186 to 190

Implementation of Standard Ethernet

- The Standard Ethernet defined several implementations, but only four of them became popular during the 1980s

Visit Our Channel for CS601 Short Lectures

Learning With Abid Ali



<https://www.youtube.com/watch?v=-0kr2sG8JUQ&list=PLAUocDaOe9K6nDHAXKa-7fHsIFAKBPE8q&index=9>


Summary of Standard Ethernet implementations

<i>Implementation</i>	<i>Medium</i>	<i>Medium Length</i>	<i>Encoding</i>
10Base5 ✓	Thick coax ✓	500 m ✓	Manchester ✓
10Base2 ✓	Thin coax ✓	185 m ✓	Manchester ✓
10Base-T ✓	2 UTP ✓	100 m ✓	Manchester ✓
10Base-F ✓	2 Fiber ✓	2000 ✓	Manchester ✓

Encoding in Standard Ethernet


Visit Our Channel for CS601 Short Lectures

Learning With Abid Ali



<https://www.youtube.com/watch?v=-0kr2sG8JUQ&list=PLAUocDaOe9K6nDHAXKa-7fHsIFAKBPE8q&index=9>

Encoding in Standard Ethernet

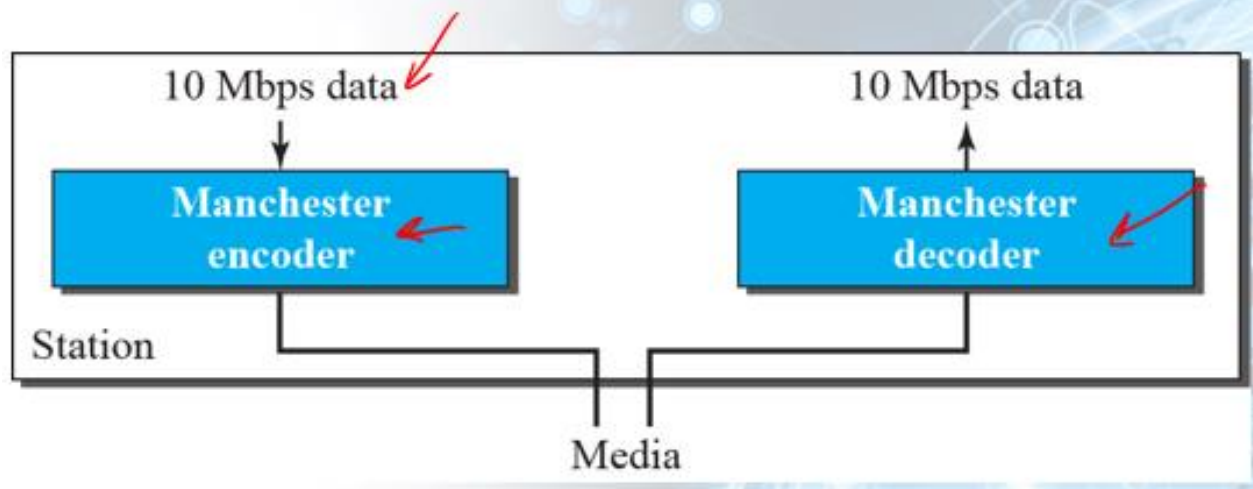


What is meant by Manchester encoding?

In data transmission, Manchester encoding is a form of digital encoding in which data bits are represented by transitions from one logical state to the other. This is different from the more common method of encoding, in which a bit is represented by either a high state such as +5 volts or a low state such as 0 volts.


Visit Our Channel for CS601 Short Lectures

Learning With Abid Ali




<https://www.youtube.com/watch?v=-0kr2sG8JUQ&list=PLAUocDaOe9K6nDHAXKa-7fHsIFAKBPE8q&index=9>

10Base5 implementation

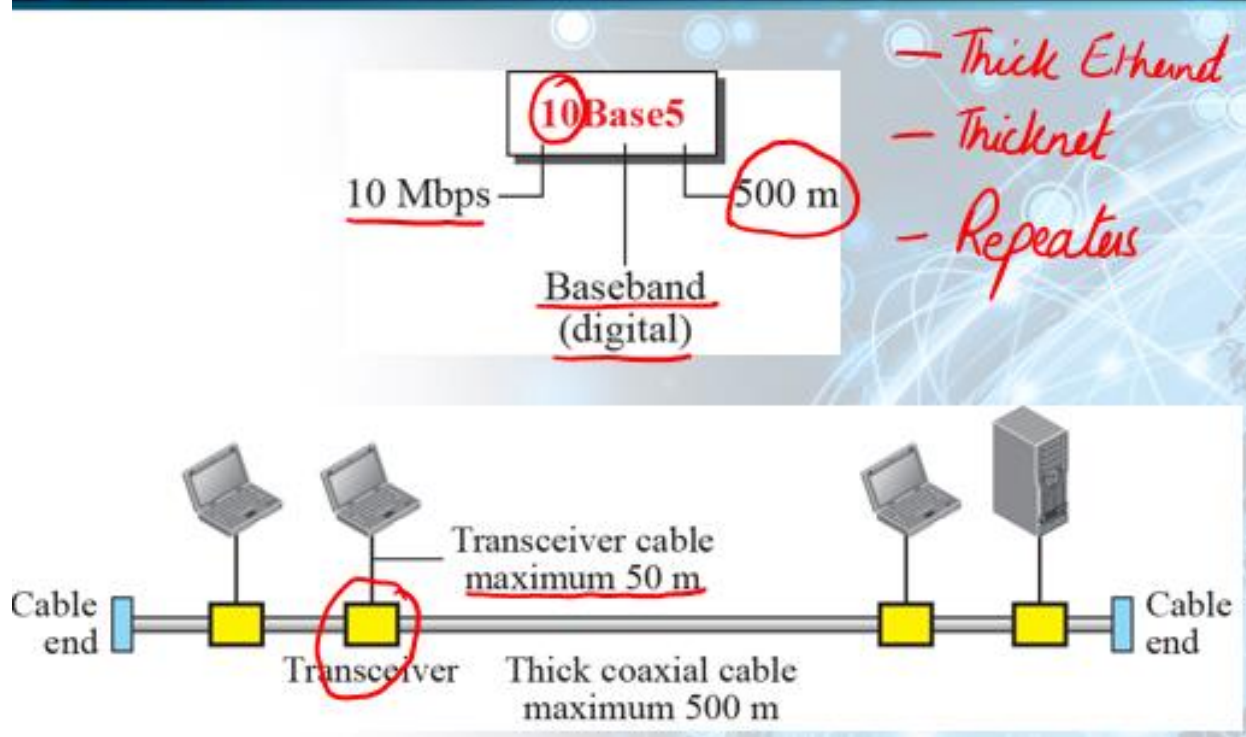


Visit Our Channel for CS601 Short Lectures

Learning With Abid Ali




<https://www.youtube.com/watch?v=-0kr2sG8JUQ&list=PLAUocDaOe9K6nDHAXKa-7fHsIFAKBPE8q&index=9>

10Base2 implementation

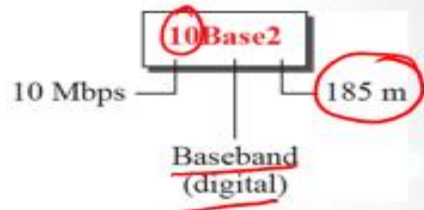


→ Thin Ethernet

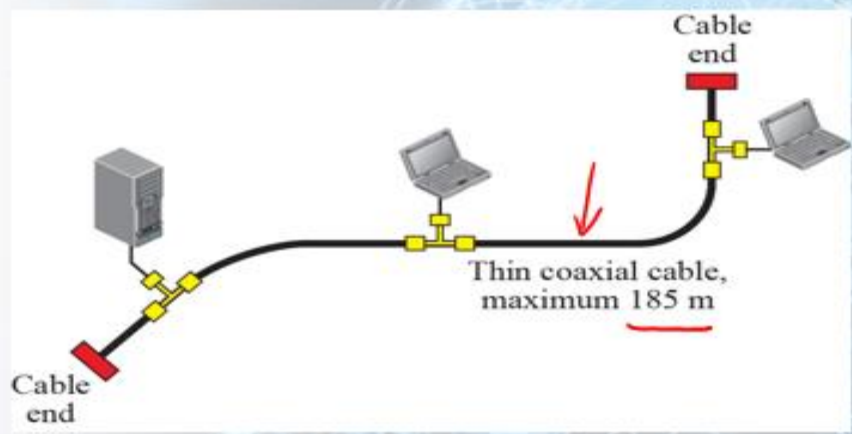


Visit Our Channel for CS601 Short Lectures

Learning With Abid Ali




<https://www.youtube.com/watch?v=-0kr2sG8JUQ&list=PLAUocDaOe9K6nDHAXKa-7fHsIFAKBPE8q&index=9>

10Base-T implementation

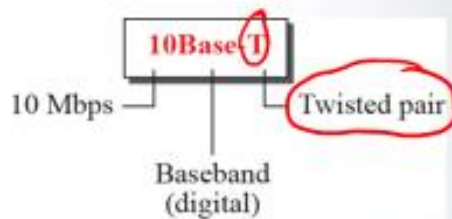


- Twisted Pair
Ethernet

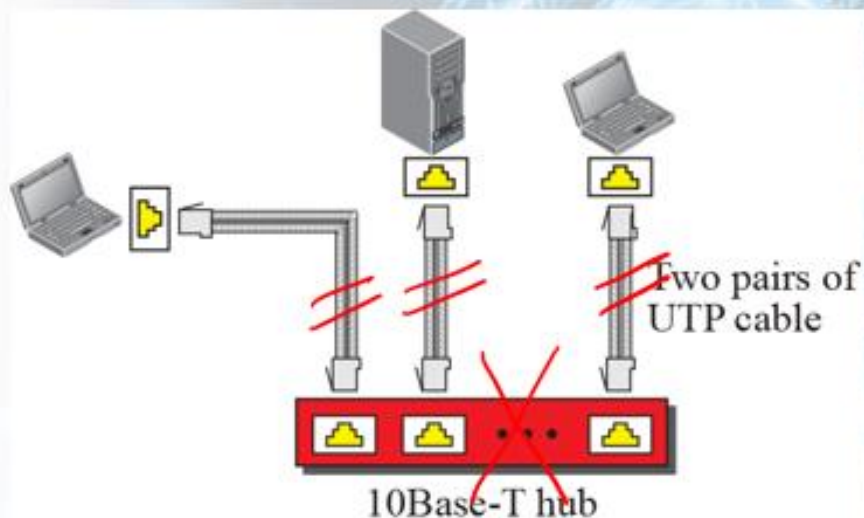


Visit Our Channel for CS601 Short Lectures

Learning With Abid Ali



<https://www.youtube.com/watch?v=-0kr2sG8JUQ&list=PLAUocDaOe9K6nDHAXKa-7fHsIFAKBPE8q&index=9>

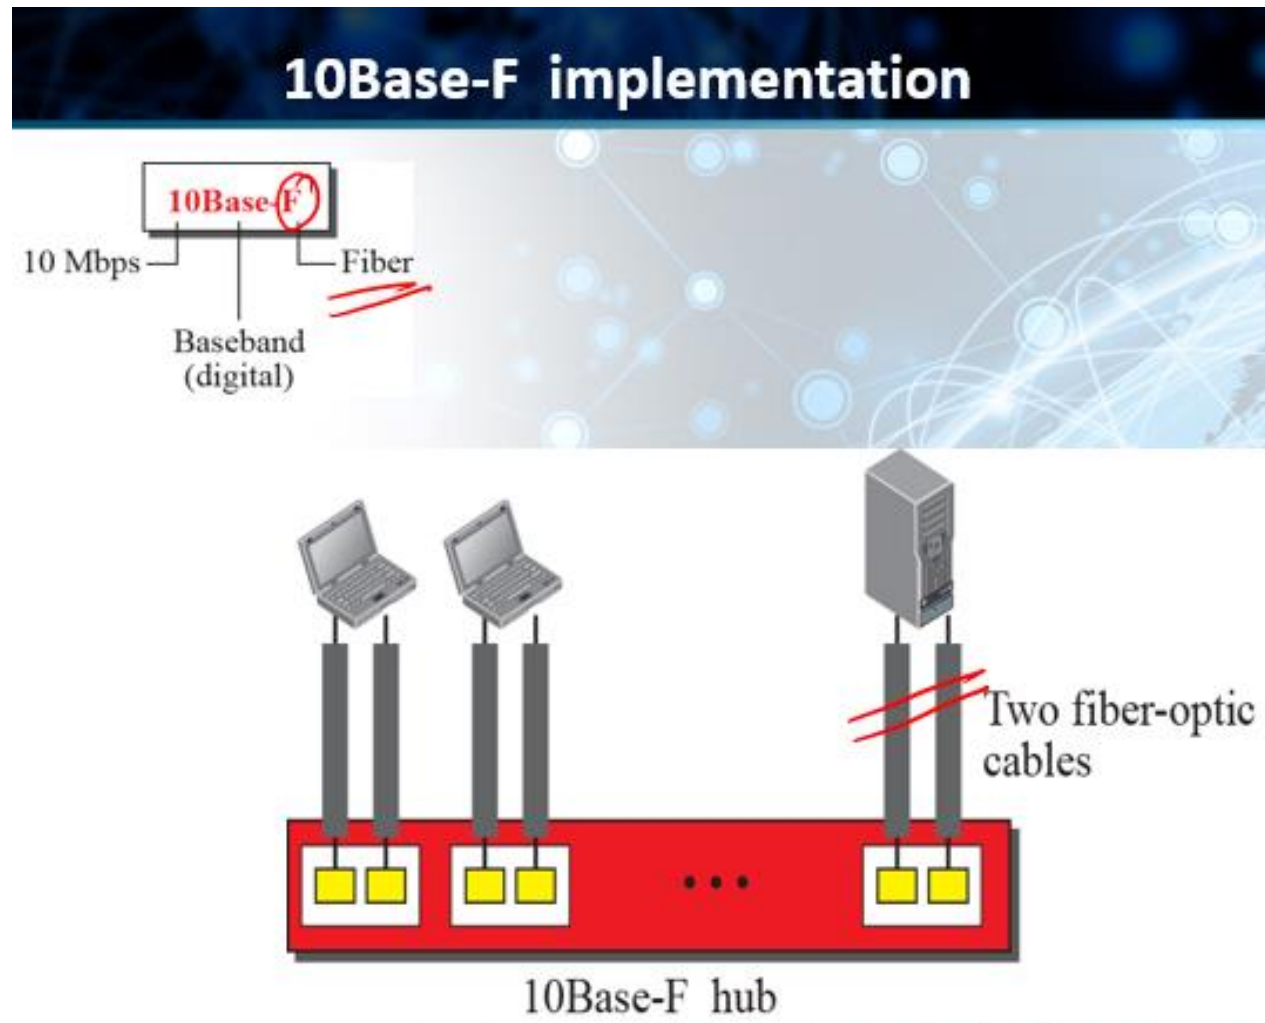


Changes in the Standard

- The changes that occurred to the 10-Mbps Standard Ethernet opened the road to the evolution of the Ethernet to become compatible with other high-data-rate LANs
 - ✓ Bridged Ethernet
 - ✓ Switched Ethernet
 - ✓ Full-Duplex Ethernet


Visit Our Channel for CS601 Short Lectures

Learning With Abid Ali




<https://www.youtube.com/watch?v=-0kr2sG8JUQ&list=PLAUocDaOe9K6nDHAXKa-7fHsIFAKBPE8q&index=9>

Bridged Ethernet- Sharing Bandwidth

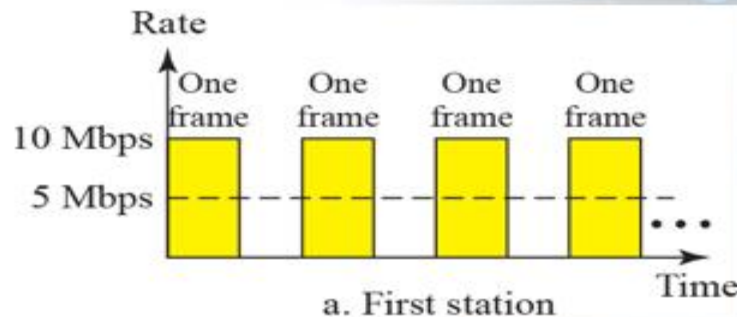


10 Mbps → One station
Two station ⇒ 5 Mbps

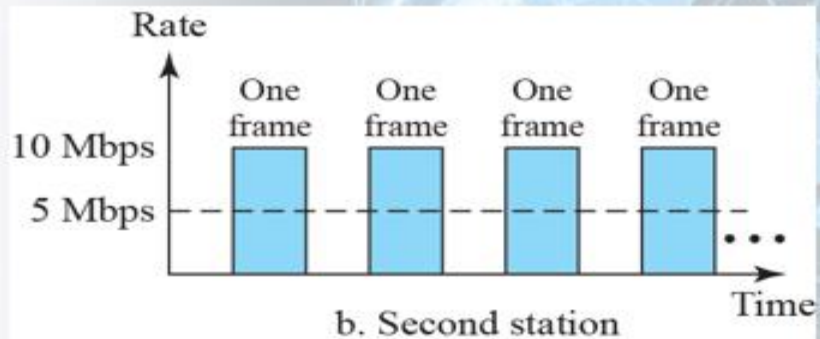

Visit Our Channel for CS601 Short Lectures

Learning With Abid Ali



<https://www.youtube.com/watch?v=-0kr2sG8JUQ&list=PLAUocDaOe9K6nDHAXKa-7fHsIFAKBPE8q&index=9>

A Network with and without Bridging



* Collision Domains


4 port bridge $\rightarrow 10/4 \text{ Mbps} \rightarrow 3 \text{ times more than unbridged}$

Visit Our Channel for CS601 Short Lectures

Learning With Abid Ali




<https://www.youtube.com/watch?v=-0kr2sG8JUQ&list=PLAUocDaOe9K6nDHAXKa-7fHsIFAKBPE8q&index=9>

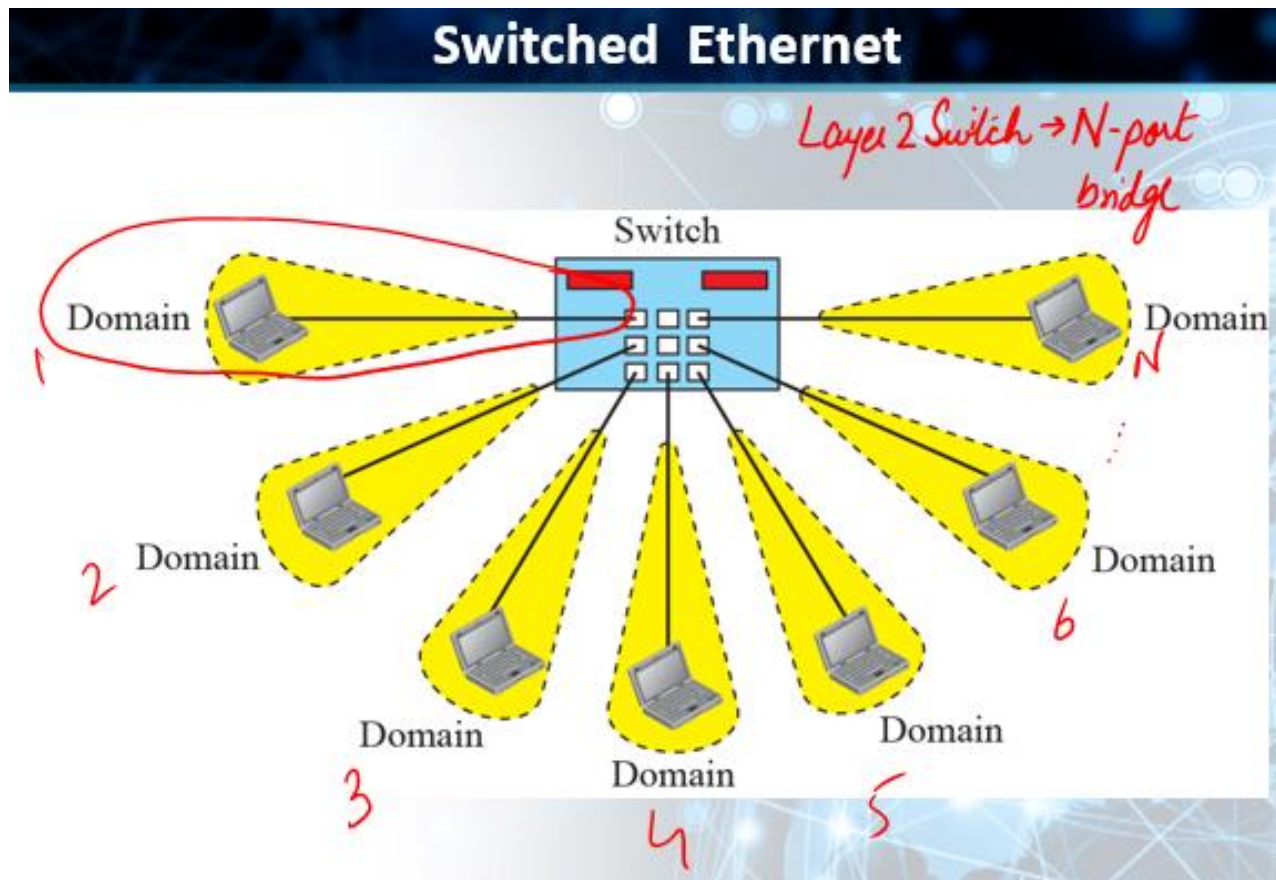


Visit Our Channel for CS601 Short Lectures

Learning With Abid Ali



<https://www.youtube.com/watch?v=-0kr2sG8JUQ&list=PLAUocDaOe9K6nDHAXKa-7fHsIFAKBPE8q&index=9>

Full – Duplex Switched Ethernet

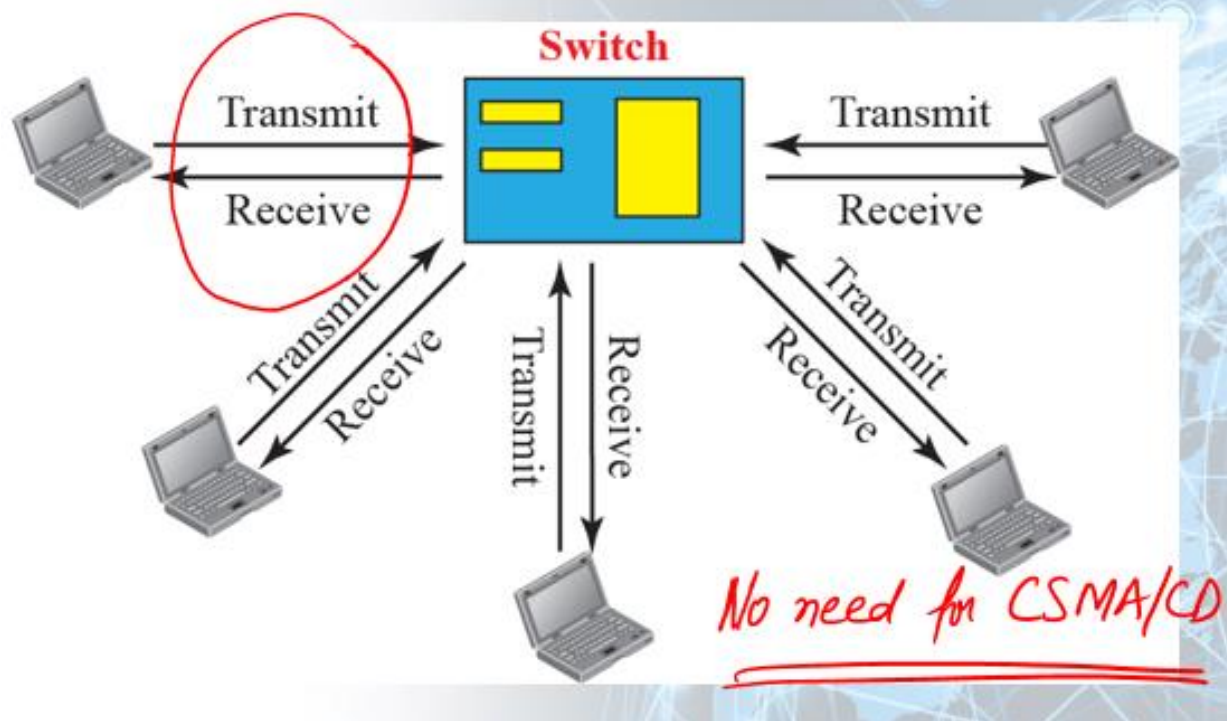


Fast Ethernet

- In the 1990s, Ethernet made a big jump by increasing the transmission rate to 100 Mbps, and the new generation was called the Fast Ethernet
- To make it compatible with the Standard Ethernet, the MAC sublayer was left unchanged
- But the features of the Standard Ethernet that depend on the transmission rate, had to be changed
- Goals of Fast Ethernet:
 - Upgrade data rate to 100Mbps

Visit Our Channel for CS601 Short Lectures

Learning With Abid Ali



<https://www.youtube.com/watch?v=-0kr2sG8JUQ&list=PLAUocDaOe9K6nDHAXKa-7fHsIFAKBPE8q&index=9>

- **Make it compatible with Standard Ethernet**
- **Keep same 48-bit address**
- **Keep same frame format**

Physical Layer

- **To be able to handle a 100 Mbps data rate, several changes need to be made at the physical layer**

Implementation of Fast Ethernet implementations

Implementation of Fast Ethernet implementations

<i>Implementation</i>	<i>Medium</i>	<i>Medium Length</i>	<i>Wires</i>	<i>Encoding</i>
100Base-TX ✓	STP ✓	100 m ✓	2 ✓	4B5B + MLT-3 ✓
100Base-FX ✓	Fiber ✓	185 m ✓	2 ✓	4B5B + NRZ-I ✓
100Base-T4 ✓	UTP ✓	100 m ✓	4 ✓	Two 8B/6T ✓

Gigabit Ethernet

- **Need for an even higher data rate resulted in the design of IEEE Standard 802.3z Gigabit Ethernet Protocol (1000 Mbps)**
- **The goals of the Gigabit Ethernet were:**
 - **Upgrade the data rate to 1 Gbps**

Visit Our Channel for CS601 Short Lectures

Learning With Abid Ali



<https://www.youtube.com/watch?v=-0kr2sG8JUQ&list=PLAUocDaOe9K6nDHAXKa-7fHsIFAKBPE8q&index=9>

- **Make it compatible with standard or Fast Ethernet**
- **Use same 48-bit address**
- **Use the same frame format**
- **Keep same minimum and maximum frame lengths**

MAC Sub-layer

- **A main consideration in the evolution of Ethernet was to keep the MAC sublayer untouched**
- **To achieve a data rate of 1 Gbps, this was no longer possible**
- **Gigabit Ethernet has two distinctive approaches for medium access:**
 - ✓ **Half-duplex**
 - ✓ **Full-duplex**


Physical Layer

- **The physical layer in Gigabit Ethernet is more complicated than that in Standard or Fast Ethernet**
- **We briefly discuss some features of this layer:**

Summary of Gigabit Ethernet Implementations

Visit Our Channel for CS601 Short Lectures

Learning With Abid Ali



<https://www.youtube.com/watch?v=-0kr2sG8JUQ&list=PLAUocDaOe9K6nDHAXKa-7fHsIFAKBPE8q&index=9>

Summary of Gigabit Ethernet Implementations

Implementation	Medium	Medium Length	Wires	Encoding
1000Base-SX ✓	Fiber S-W ✓	550 m ✓	2 ✓	8B/10B + NRZ ✓
1000Base-LX ✓	Fiber L-W ✓	5000 m	2	8B/10B + NRZ ✓
1000Base-CX	STP	25 m	2	8B/10B + NRZ
1000Base-T4	UTP	100 m	4	4D-PAM5

10-gigabit Ethernet


- The idea is to extend the technology, the data rate, and the coverage distance so that the Ethernet can be used in LANs and MANs (metropolitan area network)
- The IEEE committee created 10 Gigabit Ethernet and called it Standard 802.3ae

Implementation

- 10 Gigabit Ethernet operates only in full-duplex mode, which means there is no need for contention; CSMA/CD is not used in 10 Gigabit Ethernet
- Four implementations are most common:

Visit Our Channel for CS601 Short Lectures

Learning With Abid Ali




<https://www.youtube.com/watch?v=-0kr2sG8JUQ&list=PLAUocDaOe9K6nDHAXKa-7fHsIFAKBPE8q&index=9>

Implementation

Implementation	Medium	Medium Length	Number of wires	Encoding
10GBase-SR	Fiber 850 nm ✓	300 m ✓	2 ✓	64B66B ✓
10GBase-LR	Fiber 1310 nm ✓	10 Km ✓	2 ✓	64B66B ✓
10GBase-EW	Fiber 1350 nm ✓	40 Km ✓	2 ✓	SONET ✓
10GBase-X4	Fiber 1310 nm ✓	300 m to 10 Km ✓	2 ✓	8B10B ✓

Visit Our Channel for CS601 Short Lectures

Learning With Abid Ali



<https://www.youtube.com/watch?v=-0kr2sG8JUQ&list=PLAUocDaOe9K6nDHAXKa-7fHsIFAKBPE8q&index=9>

بِسْمِ اللَّهِ الرَّحْمَنِ الرَّحِيمِ

Data Communication CS601 Lecture No 33

Lecture Prepared By
Muhammad Abid Ali

We are also Provide Online Classes for CS601

Contact Us on WhatsApp for join our online Classes

WhatsApp No 03449767315

CS601 Lecture No 33 Topic 191 to 196


Other Wired Networks

- Access Networks

- ✓ Networks that connect a small LAN to an ISP (ISP is Internet Service Provider. LAN is Local Area Network)

Visit Our Channel for CS601 Short Lectures

Learning With Abid Ali



<https://www.youtube.com/watch?v=-0kr2sG8JUQ&list=PLAUocDaOe9K6nDHAXKa-7fHsIFAKBPE8q&index=9>

- **Wide Area Networks**
 - ✓ **Wired networks used to transfer data over long distances**

Telephone Network

- **The telephone network had its beginnings in the late 1800s**
- **Plain Old Telephone System (POTS) was originally an analog system using analog signals to transmit voice**
- **With the advent of the computer era, the network, in the 1980s, began to carry data in addition to voice**
- **During the last decade, the telephone network has undergone many technical changes and the network is now Digital as well as Analog**

Major Components

The telephone network is made of three major components:

- ✓ **Local Loops**
- ✓ **Trunks**
- ✓ **Switching offices**

The telephone network has several levels of switching offices:


- ✓ **End offices**
- ✓ **Tandem offices**
- ✓ **Regional offices**

Visit Our Channel for CS601 Short Lectures

Learning With Abid Ali



<https://www.youtube.com/watch?v=-0kr2sG8JUQ&list=PLAUocDaOe9K6nDHAXKa-7fHsIFAKBPE8q&index=9>

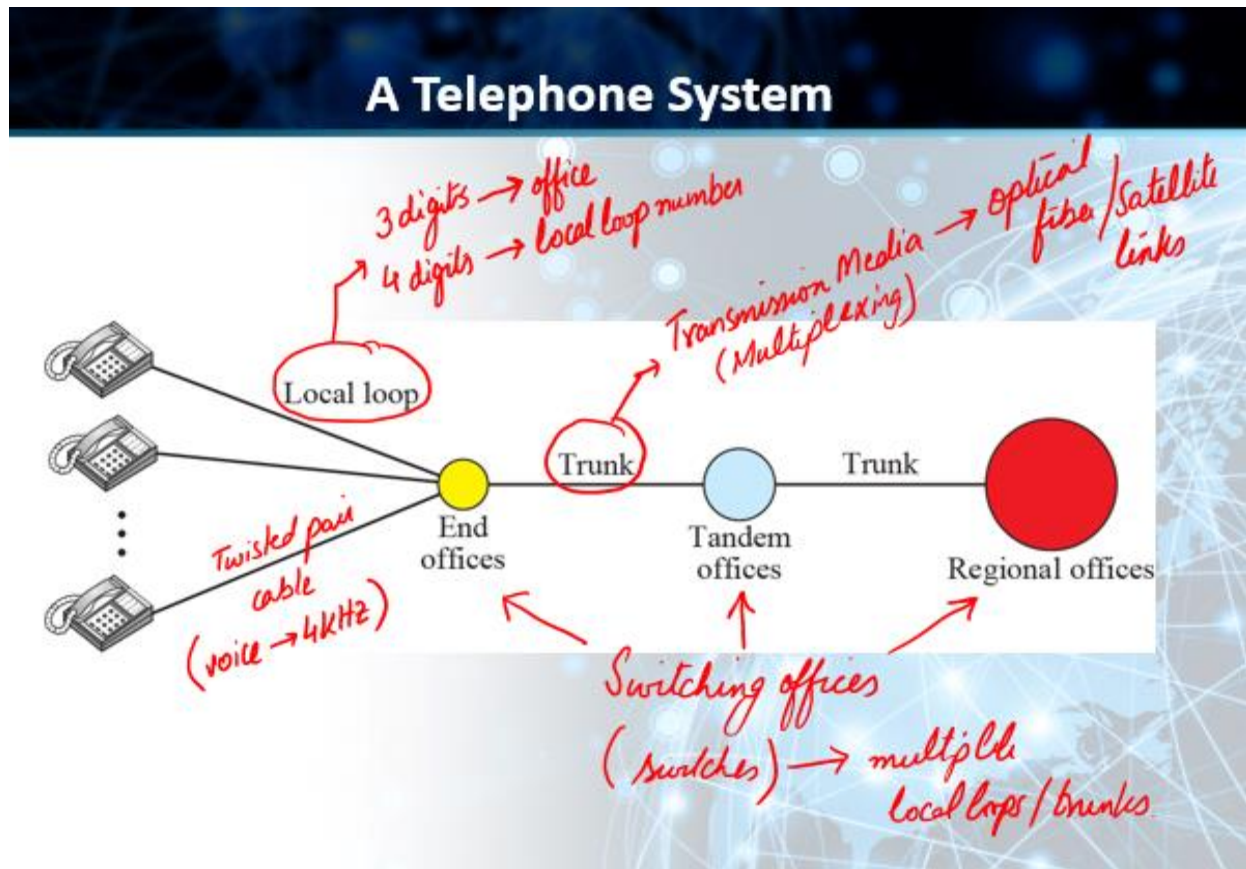


Local-Access Transport Areas (LATAs)

- A LATA can be a small or large metropolitan area
- A small state may have a single LATA; a large state may have several LATAs
- A LATA boundary may overlap with state boundary; part of a LATA can be in one state, part in another state
- Services offered by Telephone companies inside a LATA are called Intra-LATA services and between LATAs are called Inter-LATA services
- Carrier that handles Intra-LATA are called a Local Exchange Carrier (LEC) and the ones that handle Inter-LATA are called Interexchange Carriers (IXCs)

Visit Our Channel for CS601 Short Lectures


Learning With Abid Ali



<https://www.youtube.com/watch?v=-0kr2sG8JUQ&list=PLAUocDaOe9K6nDHAXKa-7fHsIFAKBPE8q&index=9>


What is the difference between intra Lata and inter LATA services?

A telephone call within the same LATA (same region). IntraLATA is local telephone service. InterLATA refers to a call from one LATA to another, which can be within a state or from state to state (interstate).

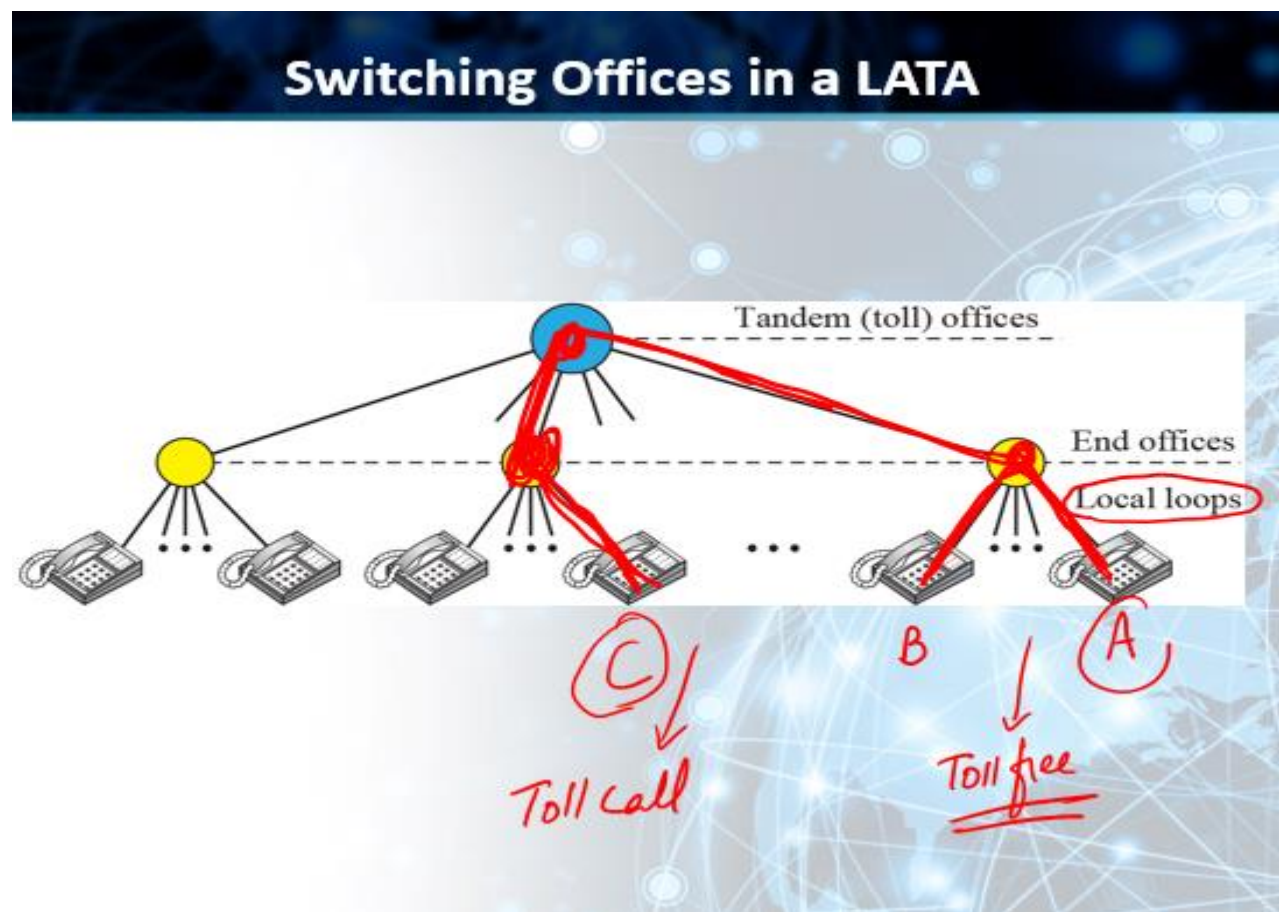


Visit Our Channel for CS601 Short Lectures

Learning With Abid Ali



<https://www.youtube.com/watch?v=-0kr2sG8JUQ&list=PLAUocDaOe9K6nDHAXKa-7fHsIFAKBPE8q&index=9>

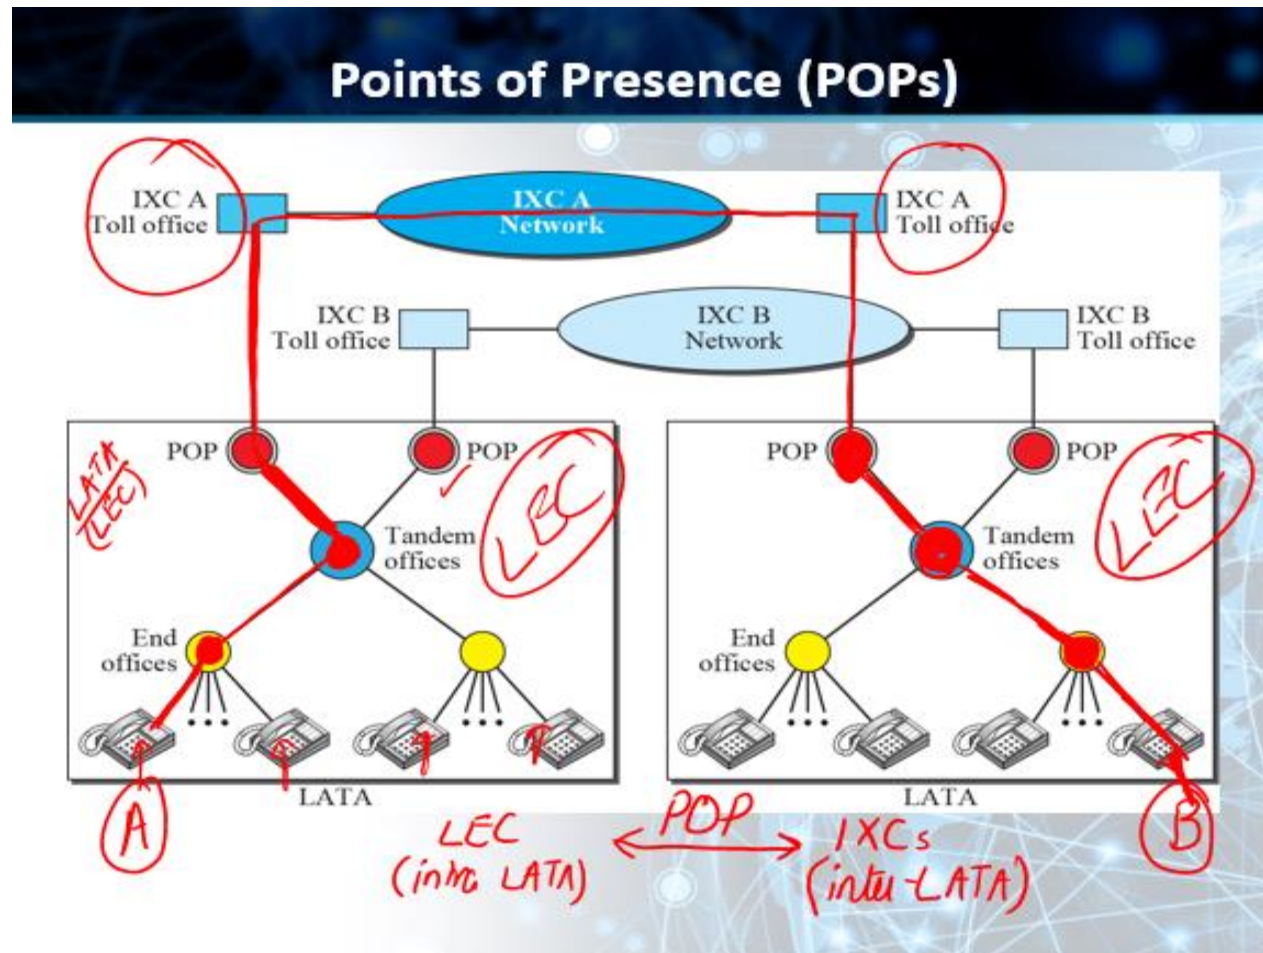


Signaling

- The telephone network in the beginning, used a circuit-switched network with dedicated links to transfer voice communication
- The operator connected the two parties by using a wire with two plugs inserted into the corresponding two jacks
- Later, the signaling system became automatic
- Rotary telephones were invented that sent a digital signal defining each digit in a multi-digit telephone number


Visit Our Channel for CS601 Short Lectures

Learning With Abid Ali



<https://www.youtube.com/watch?v=-0kr2sG8JUQ&list=PLAUocDaOe9K6nDHAXKa-7fHsIFAKBPE8q&index=9>


- As telephone networks evolved into a complex network, the functionality of the signaling system increased

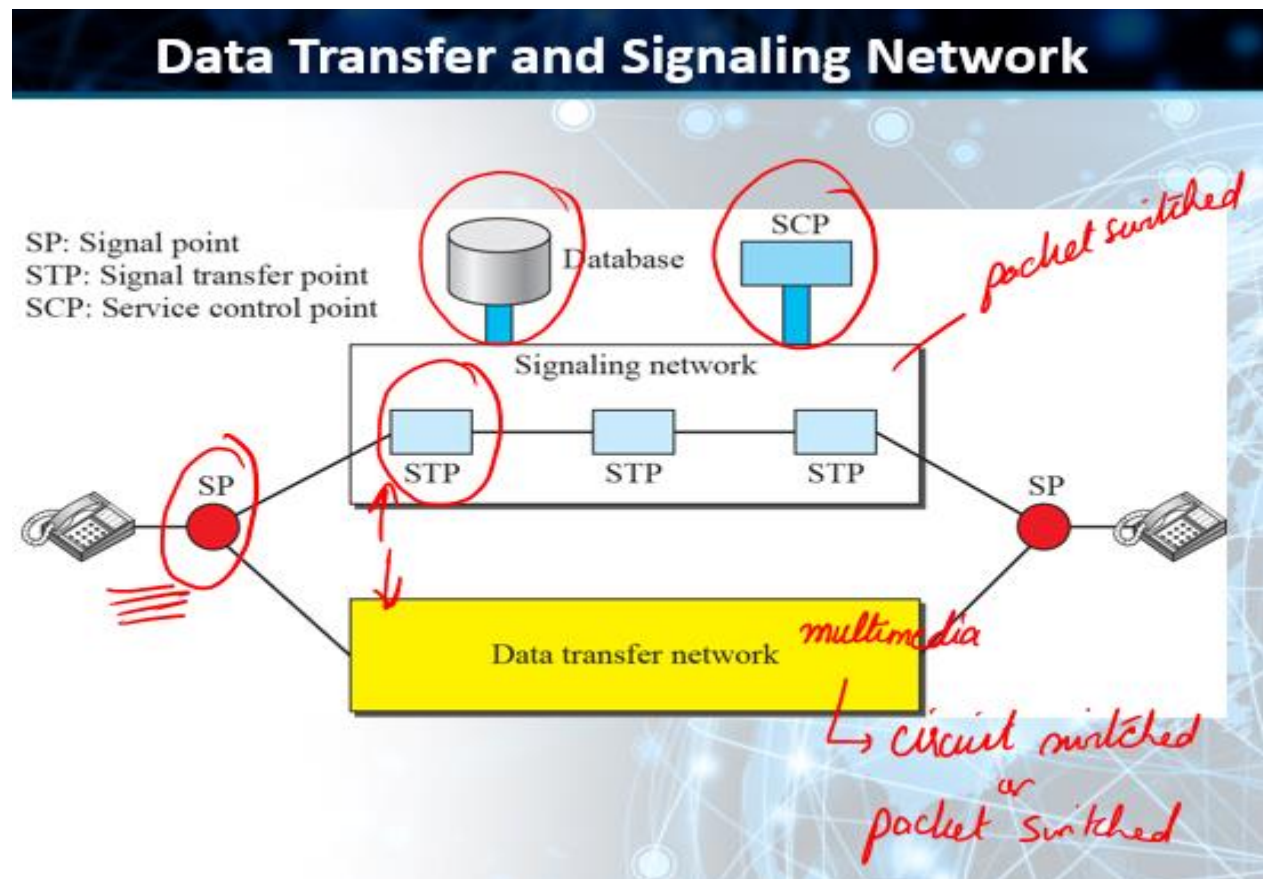


Layers in SS7

Visit Our Channel for CS601 Short Lectures

Learning With Abid Ali



<https://www.youtube.com/watch?v=-0kr2sG8JUQ&list=PLAUocDaOe9K6nDHAXKa-7fHsIFAKBPE8q&index=9>

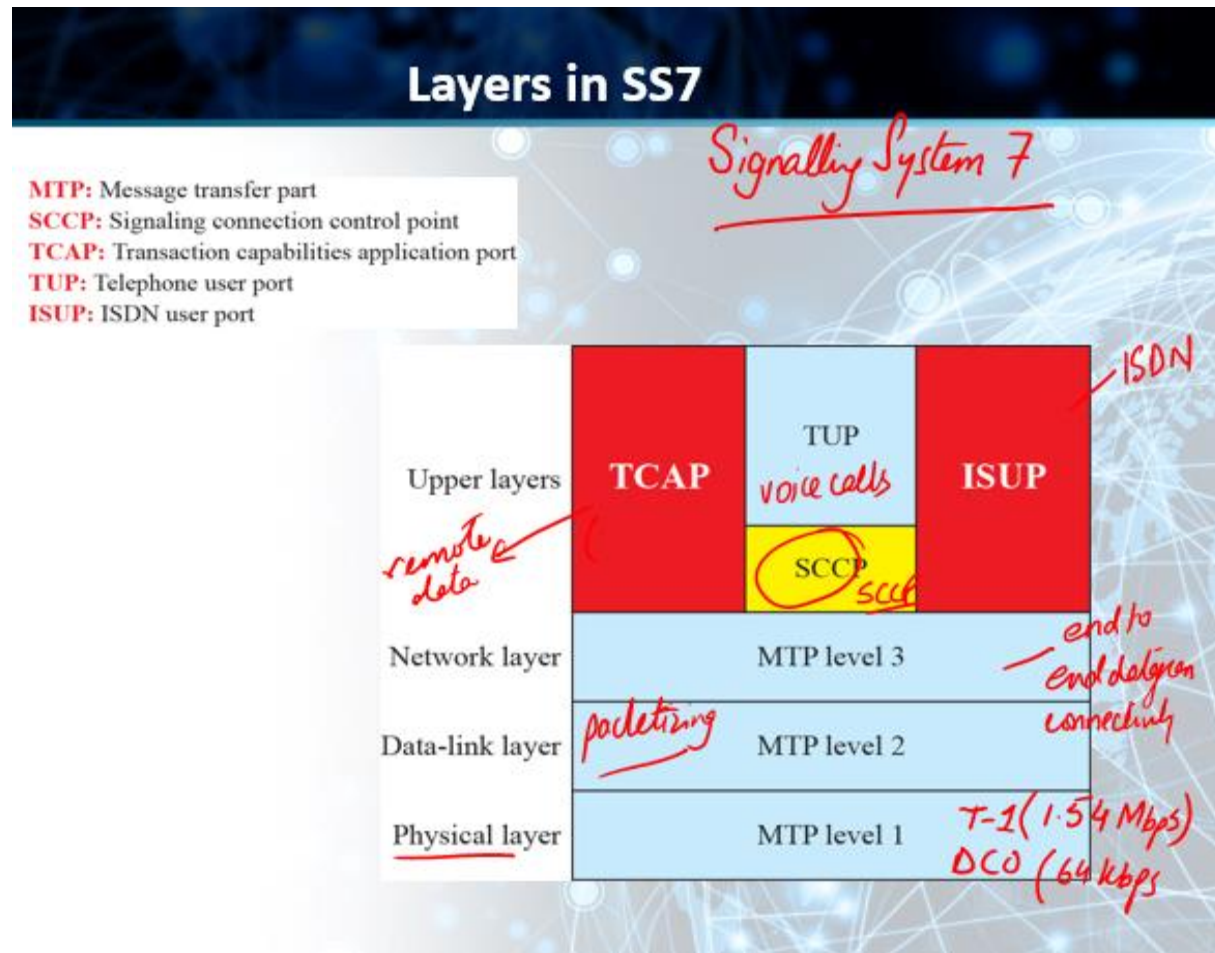

(MTP) Message Transfer Part

Services

- Telephone companies provide two types of services:
 - ✓ Analog Services
 - Analog Switched Services
 - Analog Leased Services
 - ✓ Digital Services

Visit Our Channel for CS601 Short Lectures

Learning With Abid Ali



<https://www.youtube.com/watch?v=-0kr2sG8JUQ&list=PLAUocDaOe9K6nDHAXKa-7fHsIFAKBPE8q&index=9>

- Switched /56 Service
- Digital Data Service

Digital Subscriber Line (DSL)


- After traditional dial-up modems reached their peak data rate, telephone companies developed another technology, DSL, to provide higher-speed access to the Internet
- DSL supports high-speed digital communication over the existing telephone
- DSL technology is a set of technologies, each differing in the first letter (ADSL, VDSL, HDSL, and SDSL)

What is DSL ADSL SDSL VDSL?


Common types of DSL are Symmetric Digital Subscriber Line (SDSL, with matching upload and download speeds), Asymmetric Digital Subscriber Line (ADSL, featuring faster download speeds than upload), and Very High-Rate Digital Subscriber Line (VDSL, featuring much faster asymmetric speeds).

Visit Our Channel for CS601 Short Lectures

Learning With Abid Ali



<https://www.youtube.com/watch?v=-0kr2sG8JUQ&list=PLAUocDaOe9K6nDHAXKa-7fHsIFAKBPE8q&index=9>

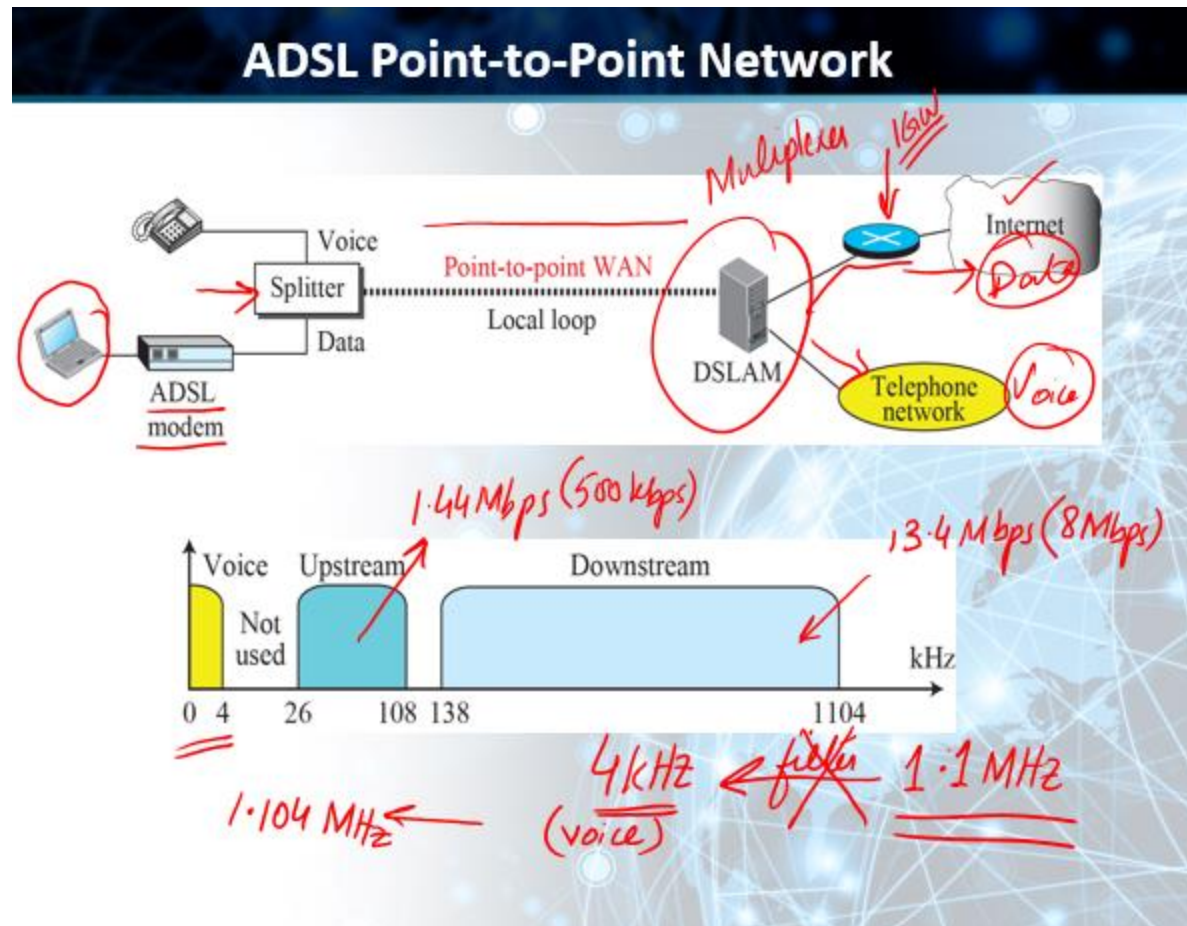


Cable Network

- The Cable TV networks were initially created to provide remote subscribers access to TV programs
- Cable networks enabled access to remote broadcasting stations via microwave connections
- Cable TV also found a good ISP market by using some of the channels originally designed for video

Traditional Cable Networks


Visit Our Channel for CS601 Short Lectures

Learning With Abid Ali



<https://www.youtube.com/watch?v=-0kr2sG8JUQ&list=PLAUocDaOe9K6nDHAXKa-7fHsIFAKBPE8q&index=9>

- Cable TV started to distribute broadcast video signals to locations with poor or no reception in the late 1940s
- It was called community antenna television (CATV) because an antenna at the top of a tall hill or building received the signals from the TV stations

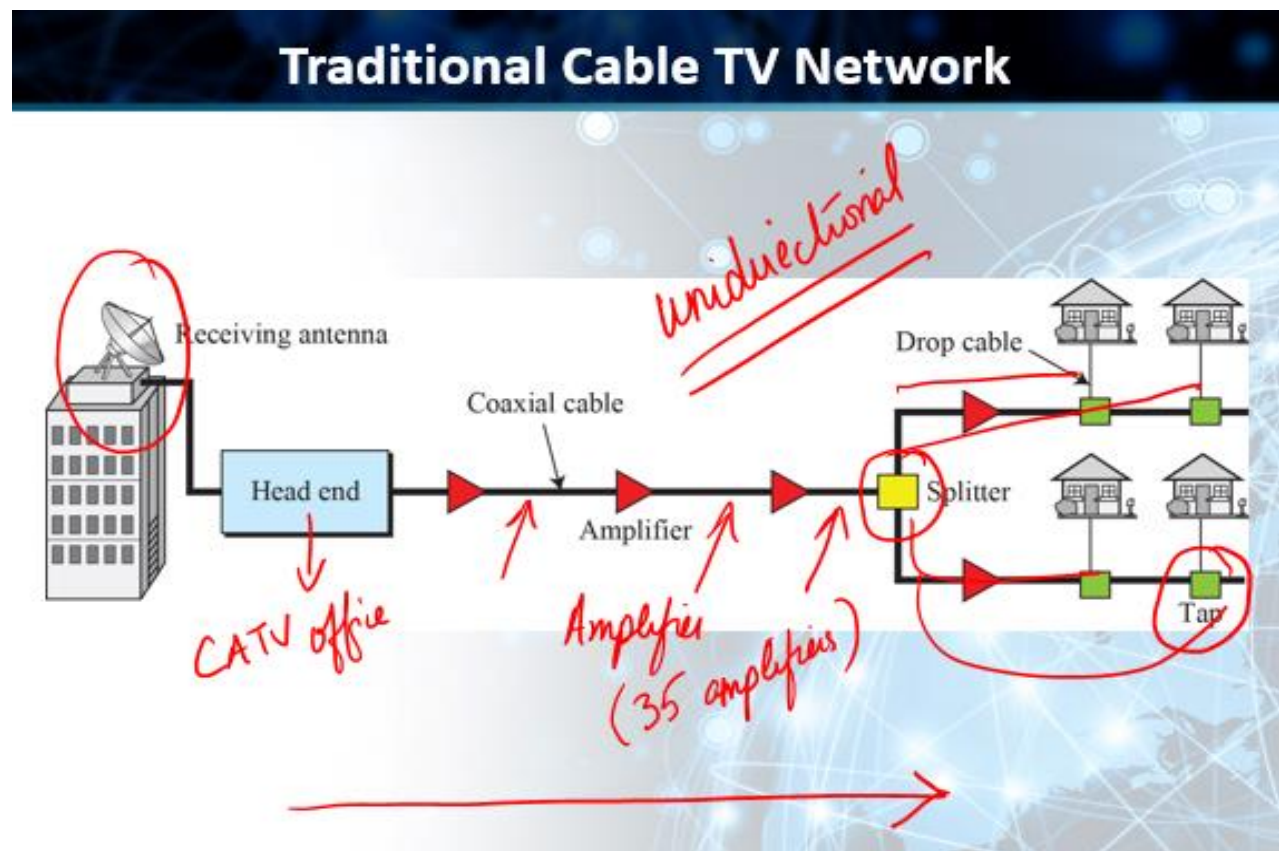


Hybrid Fiber Coaxial (HFC) Network


- Second generation of cable network is called a Hybrid Fiber-Coaxial (HFC) network
- The network uses a combination of fiber-optic and coaxial cable

Visit Our Channel for CS601 Short Lectures

Learning With Abid Ali



<https://www.youtube.com/watch?v=-0kr2sG8JUQ&list=PLAUocDaOe9K6nDHAXKa-7fHsIFAKBPE8q&index=9>

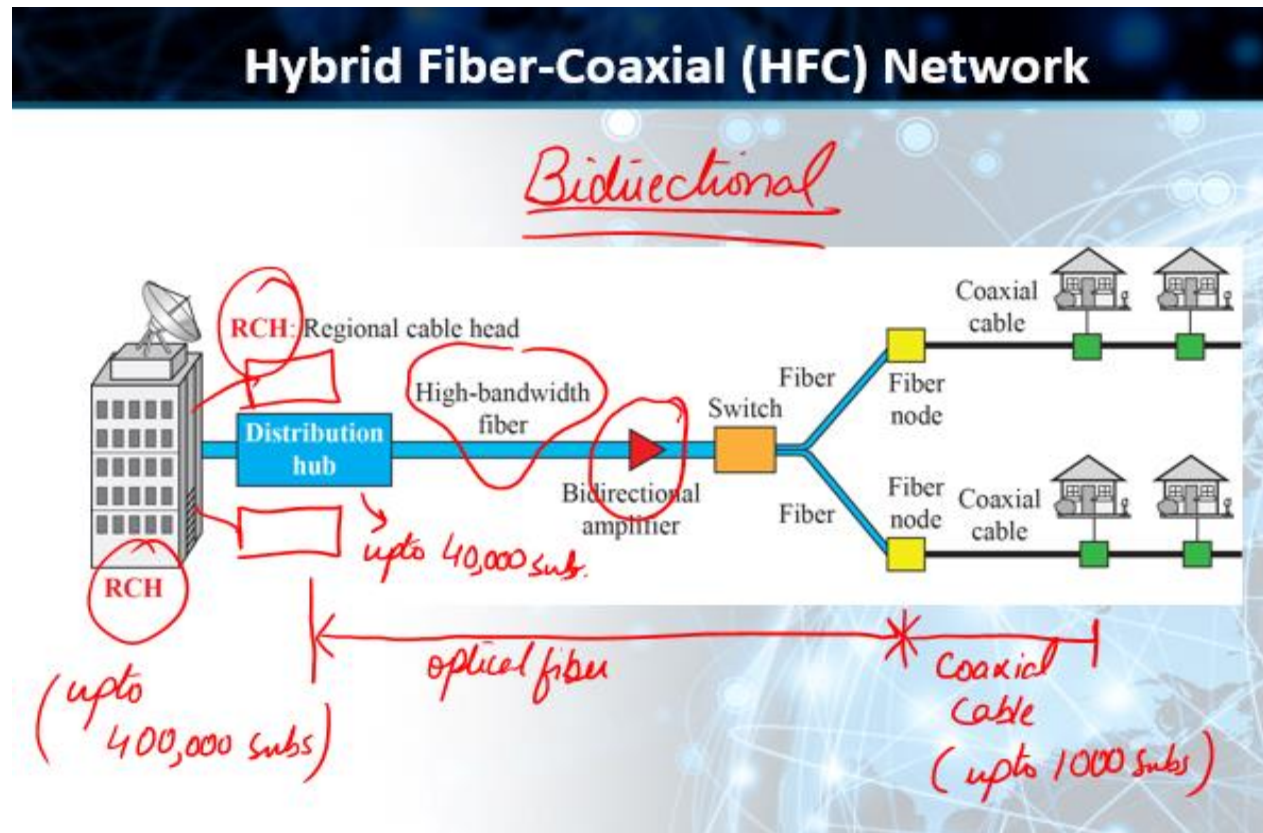


Cable TV for Data Transfer


- Cable companies are now competing with telephone companies for the residential customer who wants high-speed data transfer
- DSL technology provides high-data-rate connections for residential subscribers over the local loop BUT UTP is susceptible to Interference
- This imposes an upper limit on the data rate. A solution is the use of the cable TV network

Visit Our Channel for CS601 Short Lectures

Learning With Abid Ali



<https://www.youtube.com/watch?v=-0kr2sG8JUQ&list=PLAUocDaOe9K6nDHAXKa-7fHsIFAKBPE8q&index=9>

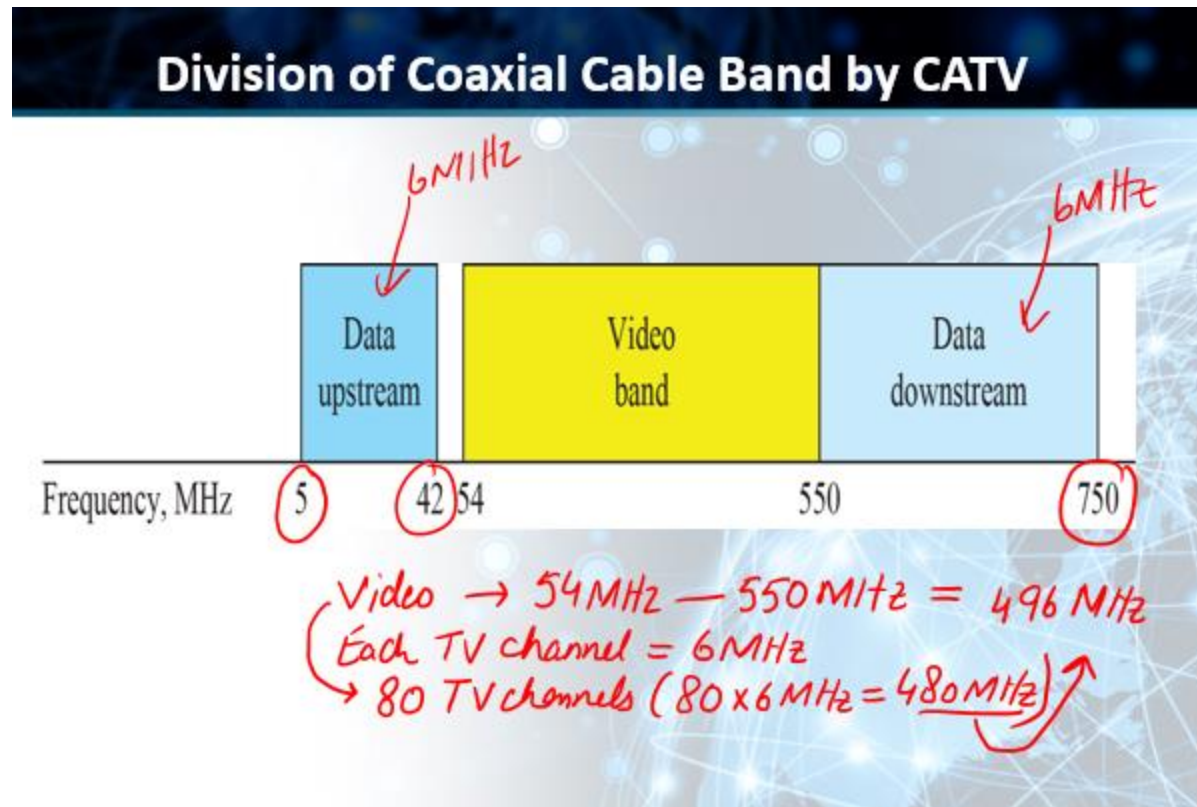


Visit Our Channel for CS601 Short Lectures

Learning With Abid Ali



<https://www.youtube.com/watch?v=-0kr2sG8JUQ&list=PLAUocDaOe9K6nDHAXKa-7fHsIFAKBPE8q&index=9>


Cable Modem Transmission System (CMTS)

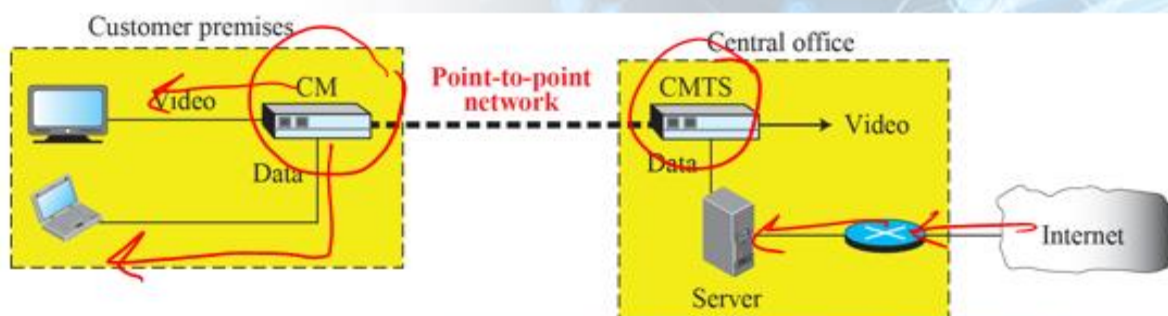

*CM → Cable Modem (Subscriber premise)
CMTS → cable company.*

Visit Our Channel for CS601 Short Lectures

Learning With Abid Ali



<https://www.youtube.com/watch?v=-0kr2sG8JUQ&list=PLAUocDaOe9K6nDHAXKa-7fHsIFAKBPE8q&index=9>

بِسْمِ اللَّهِ الرَّحْمَنِ الرَّحِيمِ

Data Communication CS601 Lecture No 34

Lecture Prepared By
Muhammad Abid Ali

We are also Provide Online Classes for CS601

Contact Us on WhatsApp for join our online Classes

WhatsApp No 03449767315


CS601 Lecture No 34 Topic 197 to 204

Synchronous Optical Network (SONET)

- A **wide area network** (WAN) that is used as a transport network to carry loads from other WANs
- **ITU-T** standard called Synchronous Digital Hierarchy (SDH)

Visit Our Channel for CS601 Short Lectures

Learning With Abid Ali



<https://www.youtube.com/watch?v=-0kr2sG8JUQ&list=PLAUocDaOe9K6nDHAXKa-7fHsIFAKBPE8q&index=9>


- Architecture of a **SONET** system consists of signals, devices, and connections

SONET Architecture


- **Signals**
 - ✓ Synchronous Transport Signals (STS)
 - ✓ Optical Carriers (OCs)
 - ✓ Synchronous Transport Module (STM)
- **SONET Devices**
 - ✓ STS Mux/Demux
 - ✓ Regenerators
 - ✓ Add-Drop Multiplexer and Terminals
- **Connections**
 - ✓ Section
 - ✓ Line
 - ✓ Path

Visit Our Channel for CS601 Short Lectures

Learning With Abid Ali




<https://www.youtube.com/watch?v=-0kr2sG8JUQ&list=PLAUocDaOe9K6nDHAXKa-7fHsIFAKBPE8q&index=9>

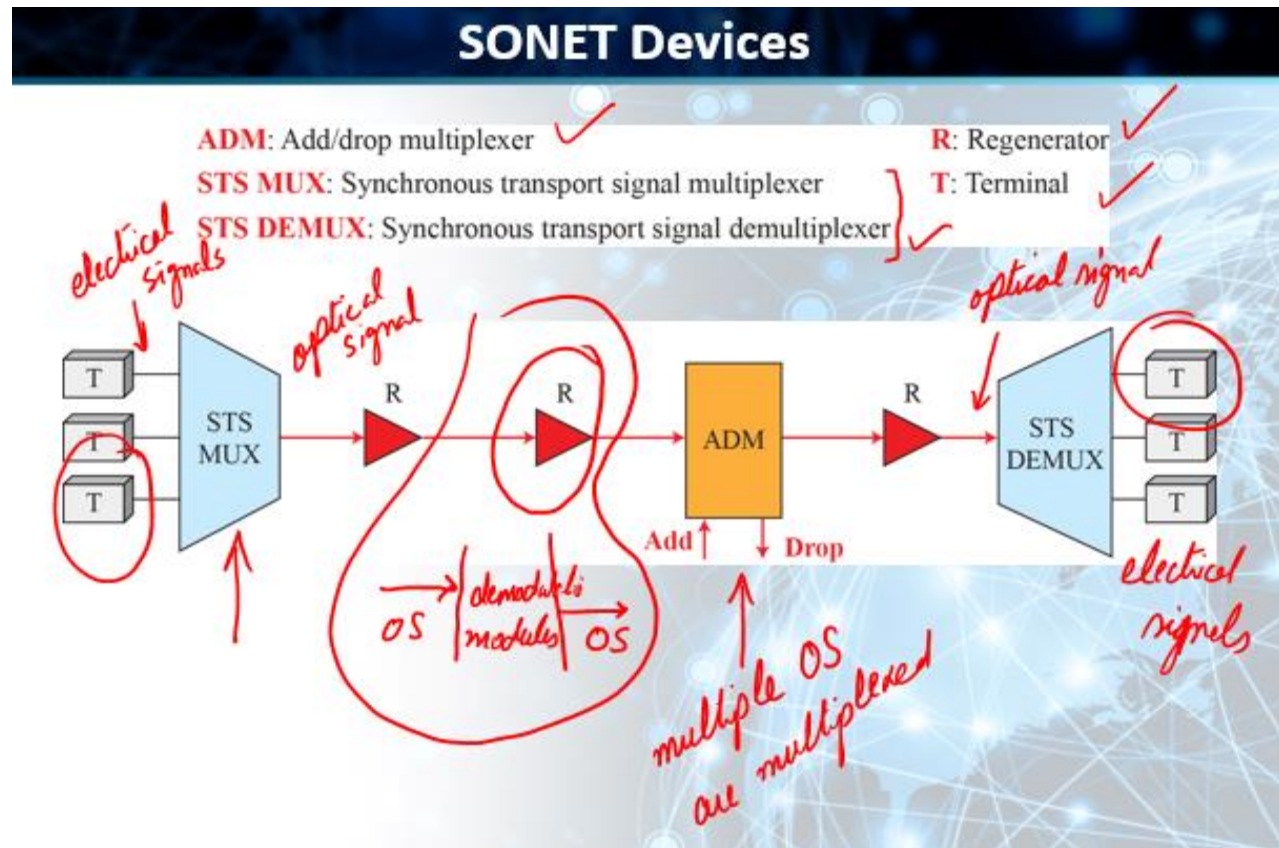

Visit Our Channel for CS601 Short Lectures

Learning With Abid Ali



<https://www.youtube.com/watch?v=-0kr2sG8JUQ&list=PLAUocDaOe9K6nDHAXKa-7fHsIFAKBPE8q&index=9>

SONET Connections


ADM: Add/drop multiplexer

R: Regenerator

STS MUX: Synchronous transport signal multiplexer


T: Terminal

STS DEMUX: Synchronous transport signal demultiplexer

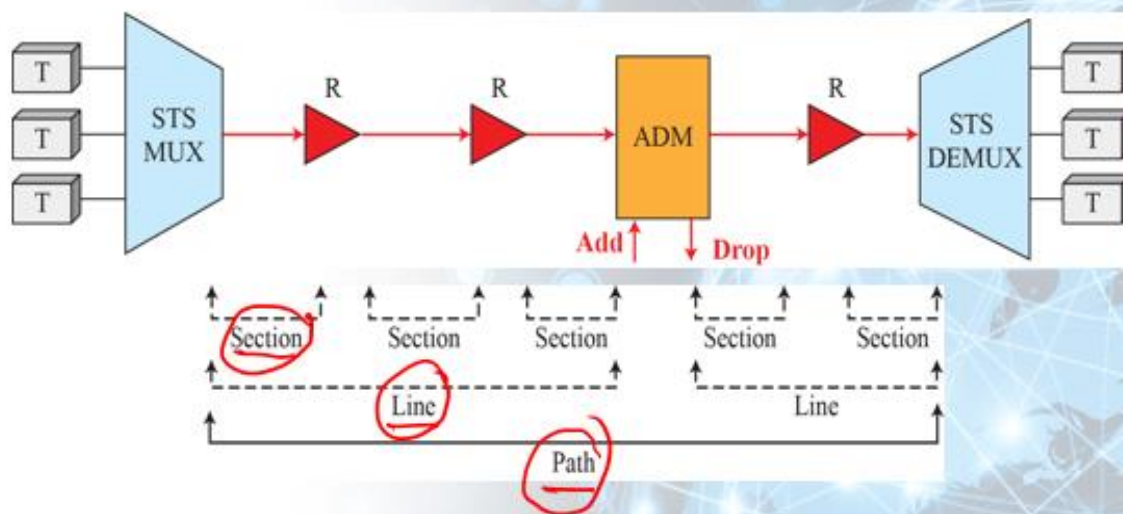

Visit Our Channel for CS601 Short Lectures

Learning With Abid Ali




<https://www.youtube.com/watch?v=-0kr2sG8JUQ&list=PLAUocDaOe9K6nDHAXKa-7fHsIFAKBPE8q&index=9>

Regenerator

A regenerator is needed when, due to the long distance between multiplexers, the signal level in the fiber becomes too low.

The regenerator clocks itself off of the received signal and replaces the section overhead bytes before retransmitting the signal. The line overhead, payload, and POH are not altered (see *Figure 21*).

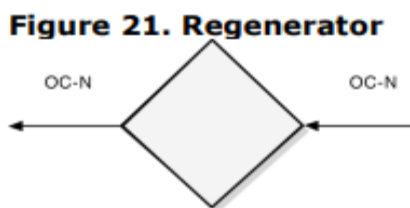

SONET Layers


- The SONET standard includes four functional layers:
 - ✓ The Path Layer
 - ✓ The Line Layer
 - ✓ The Section Layer
 - ✓ The Photonic Layer
- The layers correspond to both the physical and the data-link layers

Visit Our Channel for CS601 Short Lectures

Learning With Abid Ali




<https://www.youtube.com/watch?v=-0kr2sG8JUQ&list=PLAUocDaOe9K6nDHAXKa-7fHsIFAKBPE8q&index=9>

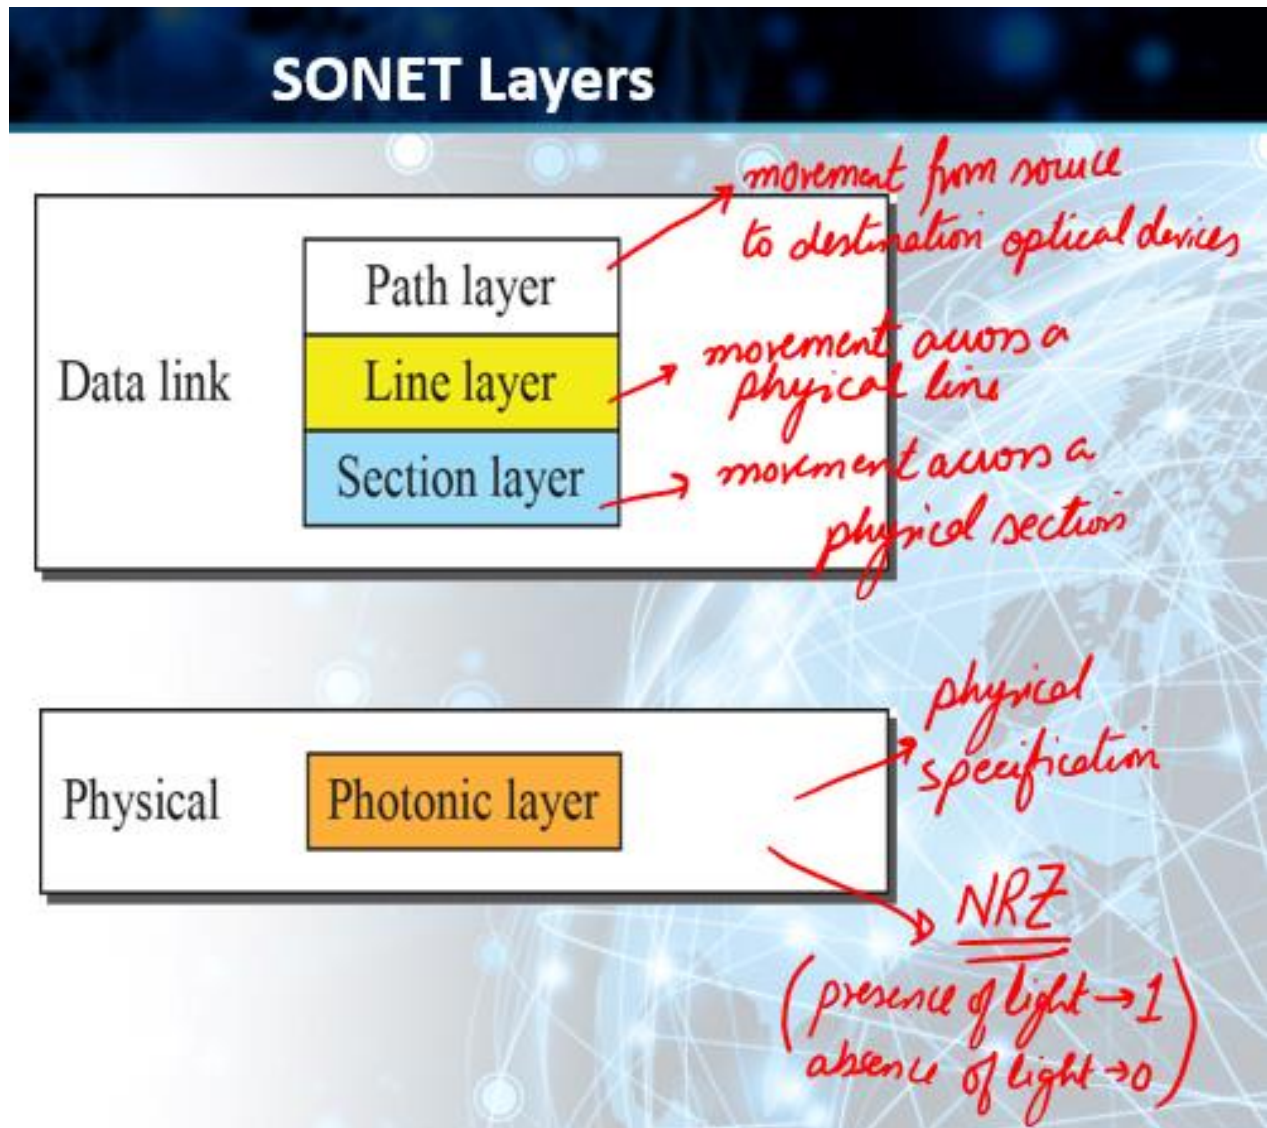


Visit Our Channel for CS601 Short Lectures

Learning With Abid Ali



<https://www.youtube.com/watch?v=-0kr2sG8JUQ&list=PLAUocDaOe9K6nDHAXKa-7fHsIFAKBPE8q&index=9>

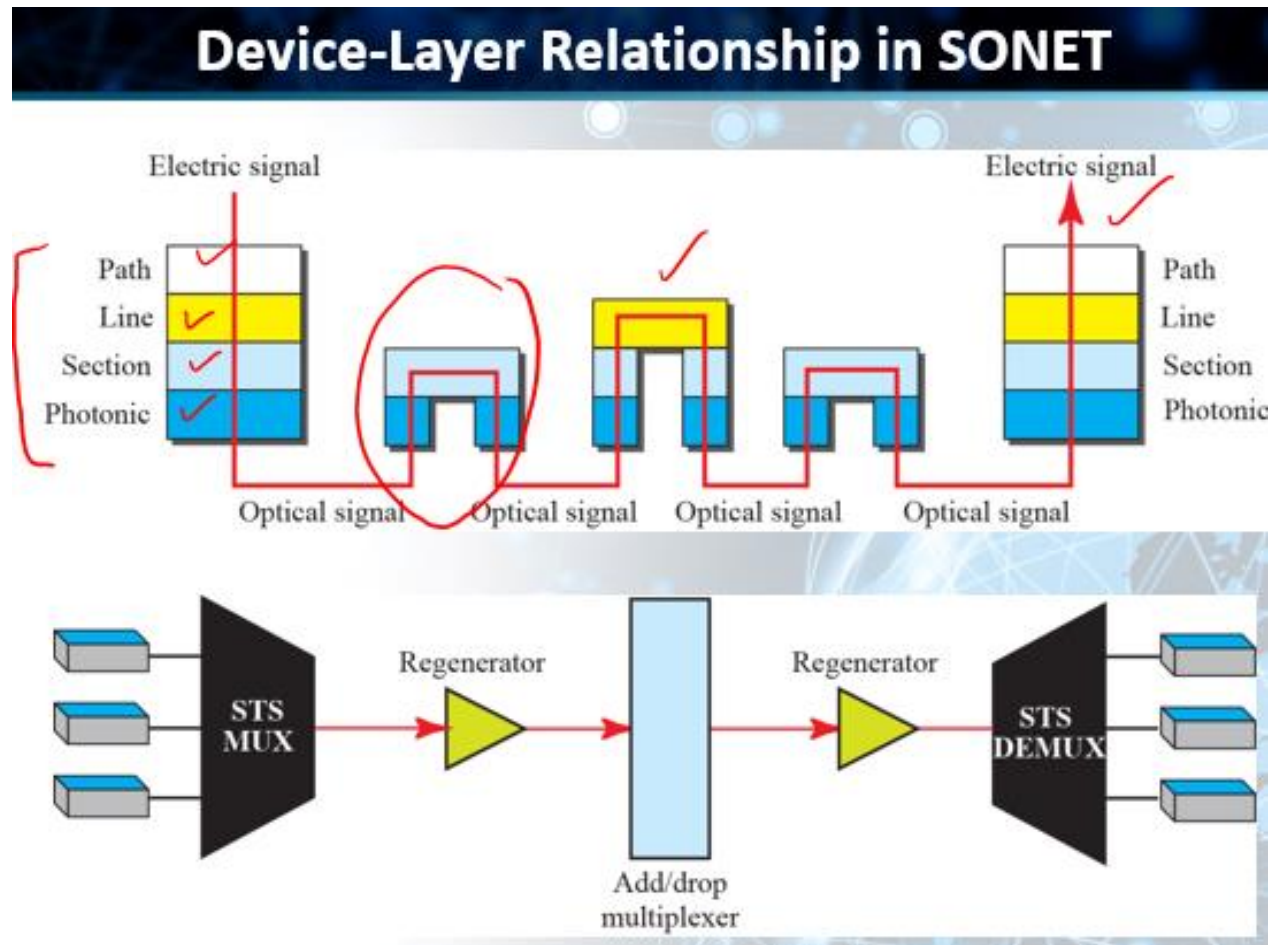


SONET Frames

- Each synchronous transport signal STS-n is composed of 8000 frames
- Each frame is a two-dimensional matrix of bytes with 9 rows by $90 \times n$ columns
- STS-1 frame is 9 rows by 90 columns (810 bytes), and an STS-3 is 9 rows by 270 columns (2430 bytes)

Visit Our Channel for CS601 Short Lectures

Learning With Abid Ali



<https://www.youtube.com/watch?v=-0kr2sG8JUQ&list=PLAUocDaOe9K6nDHAXKa-7fHsIFAKBPE8q&index=9>


An STS-1 and an STS-n Frame



a. STS-1 frame

$$90 \times n = 90 \times 1 \\ = 90 \text{ bytes}$$


810 bytes

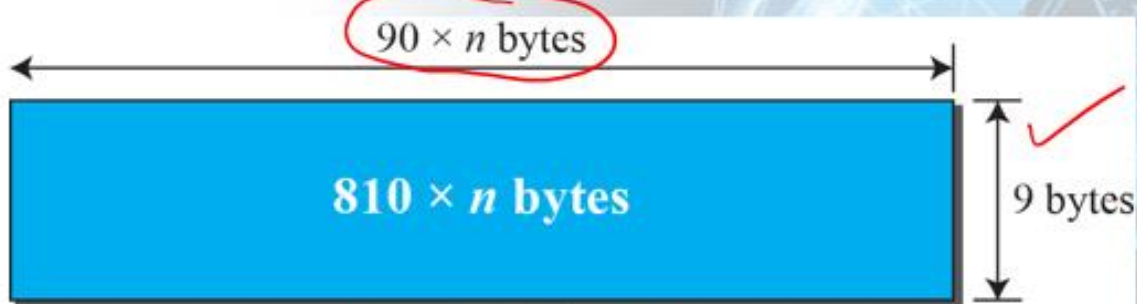

b. STS-*n* frame

Visit Our Channel for CS601 Short Lectures

Learning With Abid Ali



<https://www.youtube.com/watch?v=-0kr2sG8JUQ&list=PLAUocDaOe9K6nDHAXKa-7fHsIFAKBPE8q&index=9>

SONET Signal	Bit Rate (Mbps)
STS-1, OC-1	51.840
STS-3, OC-3	155.520
STS-12, OC-12	622.080
STS-48, OC-48	2,488.320


STS-1 Frames in Transition

Visit Our Channel for CS601 Short Lectures

Learning With Abid Ali




<https://www.youtube.com/watch?v=-0kr2sG8JUQ&list=PLAUocDaOe9K6nDHAXKa-7fHsIFAKBPE8q&index=9>

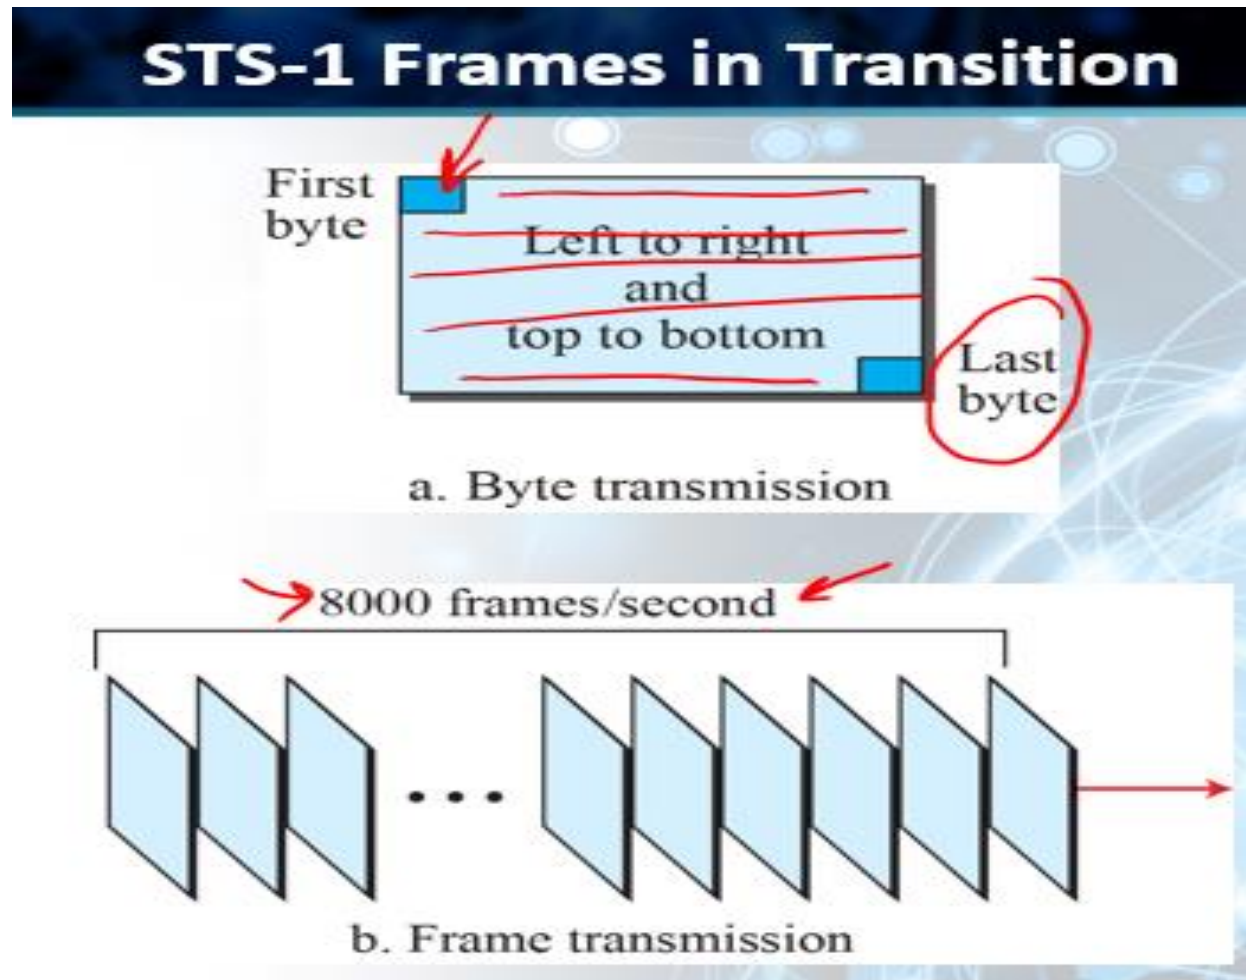

Visit Our Channel for CS601 Short Lectures

Learning With Abid Ali



<https://www.youtube.com/watch?v=-0kr2sG8JUQ&list=PLAUocDaOe9K6nDHAXKa-7fHsIFAKBPE8q&index=9>

Example

Find the data rate of an STS-1 signal


$$\begin{aligned} &8000 \text{ frames per second} \\ &9 \text{ bytes} \times (1 \times 90) \text{ bytes} \\ \text{Data Rate} &= 8000 \times 9(1 \times 90) \\ &= \underline{\underline{51.84 \text{ Mbps}}} \end{aligned}$$

STS-1 is a specific sequence of 810 bytes (6,480 bits), which includes various overhead bytes and an envelope capacity for transporting payloads. It can be depicted as a 90-column by 9-row structure. With a frame length of 125 μ s (8,000 frames per second), STS-1 has a bit rate of **51.840 Mbps**.

$$(9) \times (90 \text{ bytes/frame}) \times (8 \text{ bits/byte}) \times (8,000 \text{ frames/s}) = 51,840,000 \text{ bps} = 51.840 \text{ Mbps}$$

Visit Our Channel for CS601 Short Lectures

Learning With Abid Ali



<https://www.youtube.com/watch?v=-0kr2sG8JUQ&list=PLAUocDaOe9K6nDHAXKa-7fHsIFAKBPE8q&index=9>



Example 17.1

Find the data rate of an STS-1 signal. SONET sends 8000 frames per second.


Solution

STS-1, like other STS signals, sends 8000 frames per second. Each STS-1 frame is made of 9 by (1×90) bytes. Each byte is made of 8 bits. The data rate is

$$\text{STS-1 data rate} = 8000 \times 9 \times (1 \times 90) \times 8 = 51.840 \text{ Mbps}$$

Visit Our Channel for CS601 Short Lectures

Learning With Abid Ali



<https://www.youtube.com/watch?v=-0kr2sG8JUQ&list=PLAUocDaOe9K6nDHAXKa-7fHsIFAKBPE8q&index=9>

Example

Find the data rate of an STS-3 signal


$$n=3$$

$$\begin{aligned}\text{Data Rate} &= 8000 \times 9 (3 \times 90) \\ &= 155.52 \text{ Mbps}\end{aligned}$$

$$\begin{aligned}\text{STS-1 Data Rate} &\times 3 \\ &= \text{STS-3 Data Rate}\end{aligned}$$

Visit Our Channel for CS601 Short Lectures

Learning With Abid Ali



<https://www.youtube.com/watch?v=-0kr2sG8JUQ&list=PLAUocDaOe9K6nDHAXKa-7fHsIFAKBPE8q&index=9>



Example 17.2

Find the data rate of an STS-3 signal.

Solution

STS-3, like other STS signals, sends 8000 frames per second. Each STS-3 frame is made of 9 by (3×90) bytes. Each byte is made of 8 bits. The data rate is

$$\text{STS-3 data rate} = 8000 \times 9 \times (3 \times 90) \times 8 = 155.52 \text{ Mbps}$$

STS Multiplexing


- In SONET, frames of lower rate can be synchronously time-division multiplexed into a higher-rate frame
- For example, three STS-1 signals (channels) can be combined into one STS-3 signal (channel), four STS-3s can be multiplexed into one STS-12, and so on

Visit Our Channel for CS601 Short Lectures

Learning With Abid Ali




<https://www.youtube.com/watch?v=-0kr2sG8JUQ&list=PLAUocDaOe9K6nDHAXKa-7fHsIFAKBPE8q&index=9>

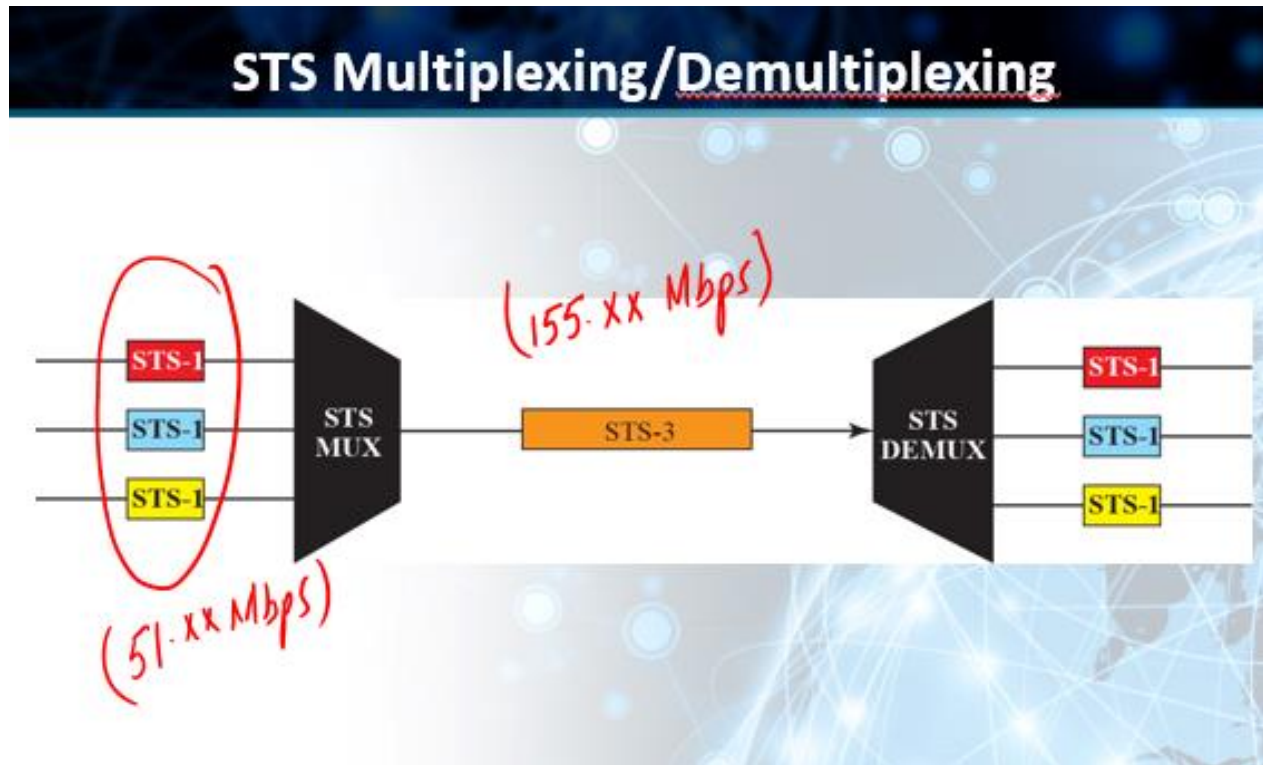


Visit Our Channel for CS601 Short Lectures

Learning With Abid Ali




<https://www.youtube.com/watch?v=-0kr2sG8JUQ&list=PLAUocDaOe9K6nDHAXKa-7fHsIFAKBPE8q&index=9>

Byte Interleaving

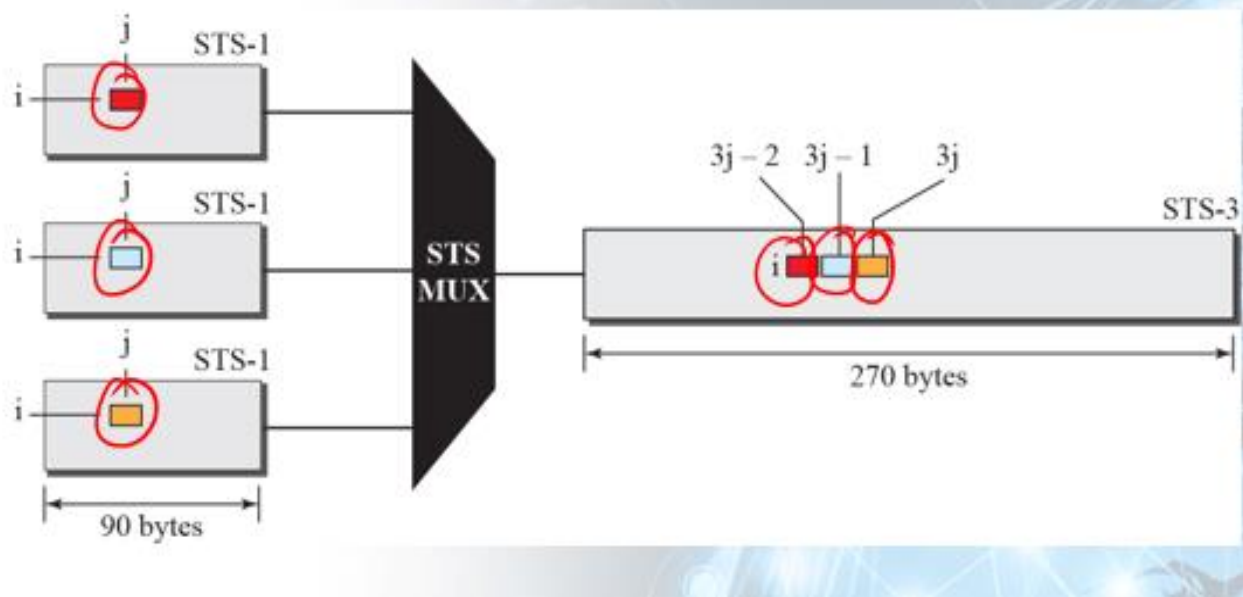


Visit Our Channel for CS601 Short Lectures

Learning With Abid Ali




<https://www.youtube.com/watch?v=-0kr2sG8JUQ&list=PLAUocDaOe9K6nDHAXKa-7fHsIFAKBPE8q&index=9>

Add/Drop Multiplexer

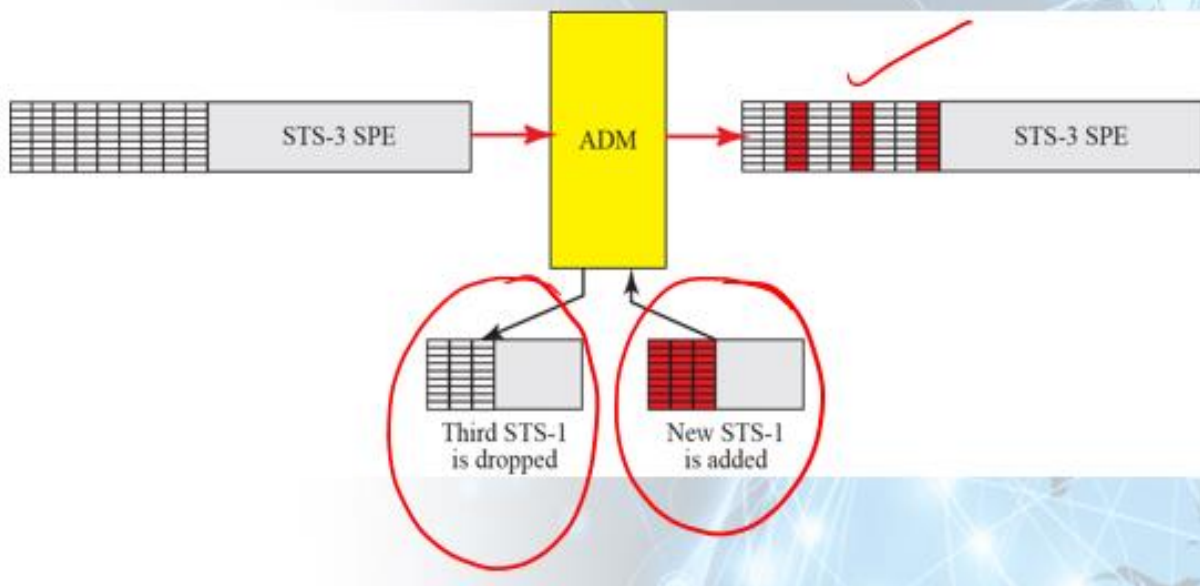


Visit Our Channel for CS601 Short Lectures

Learning With Abid Ali



<https://www.youtube.com/watch?v=-0kr2sG8JUQ&list=PLAUocDaOe9K6nDHAXKa-7fHsIFAKBPE8q&index=9>

Figure 17.16 *Dropping and adding STS-1 frames in an add/drop multiplexer*

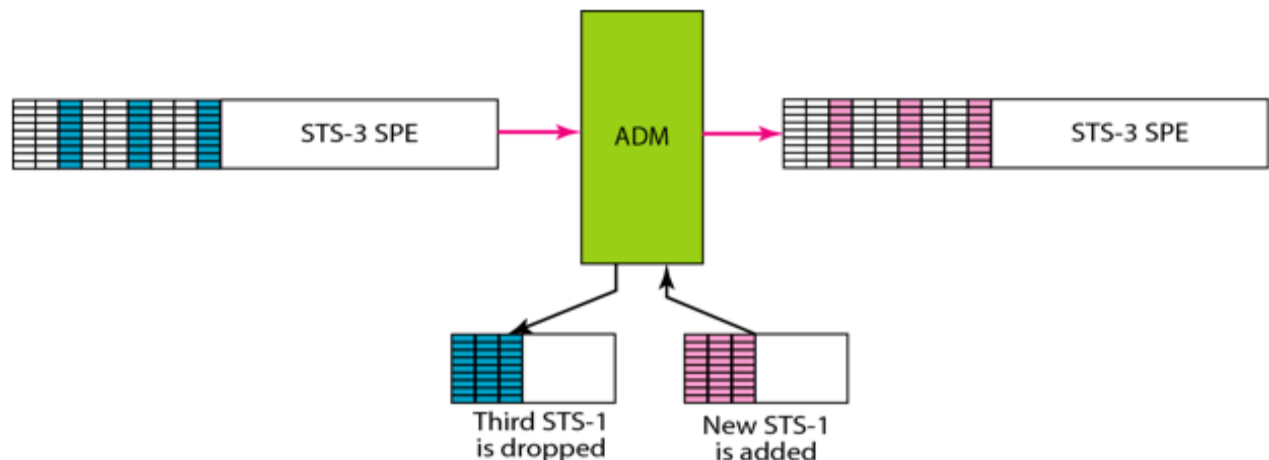


Notice that **ADM** only operates a physical layer – it drops one **STS-1** and adds a new one in its place.

SONET Networks

- SONET network can be used as a high-speed backbone carrying loads from other networks such as ATM or IP
- We can roughly divide SONET networks into three categories:
 - ✓ Linear Networks
 - ✓ Ring Networks
 - ✓ Mesh networks


Visit Our Channel for CS601 Short Lectures

Learning With Abid Ali




<https://www.youtube.com/watch?v=-0kr2sG8JUQ&list=PLAUocDaOe9K6nDHAXKa-7fHsIFAKBPE8q&index=9>

Taxonomy of SONET Networks

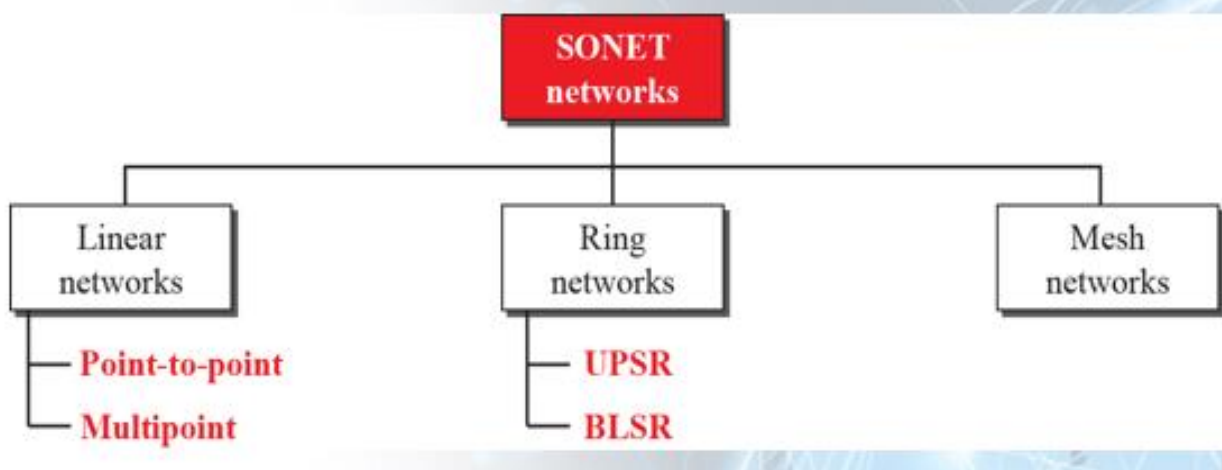



Visit Our Channel for CS601 Short Lectures

Learning With Abid Ali



<https://www.youtube.com/watch?v=-0kr2sG8JUQ&list=PLAUocDaOe9K6nDHAXKa-7fHsIFAKBPE8q&index=9>

SONET Networks – Linear Networks

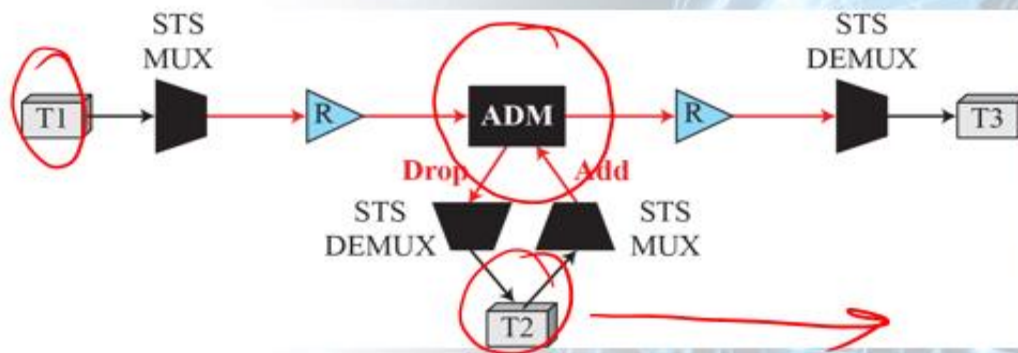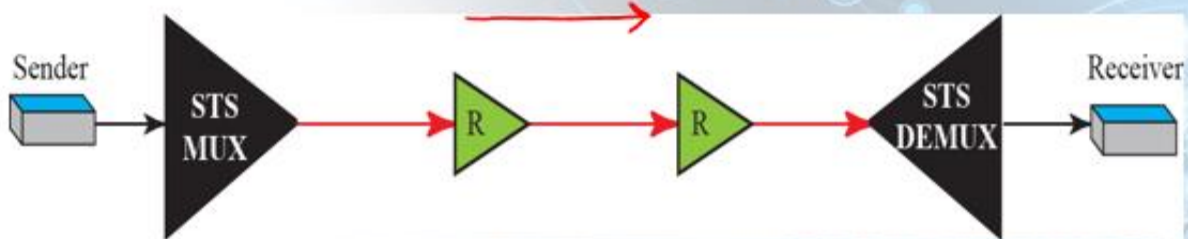


Visit Our Channel for CS601 Short Lectures

Learning With Abid Ali




<https://www.youtube.com/watch?v=-0kr2sG8JUQ&list=PLAUocDaOe9K6nDHAXKa-7fHsIFAKBPE8q&index=9>

SONET Networks – Ring Networks

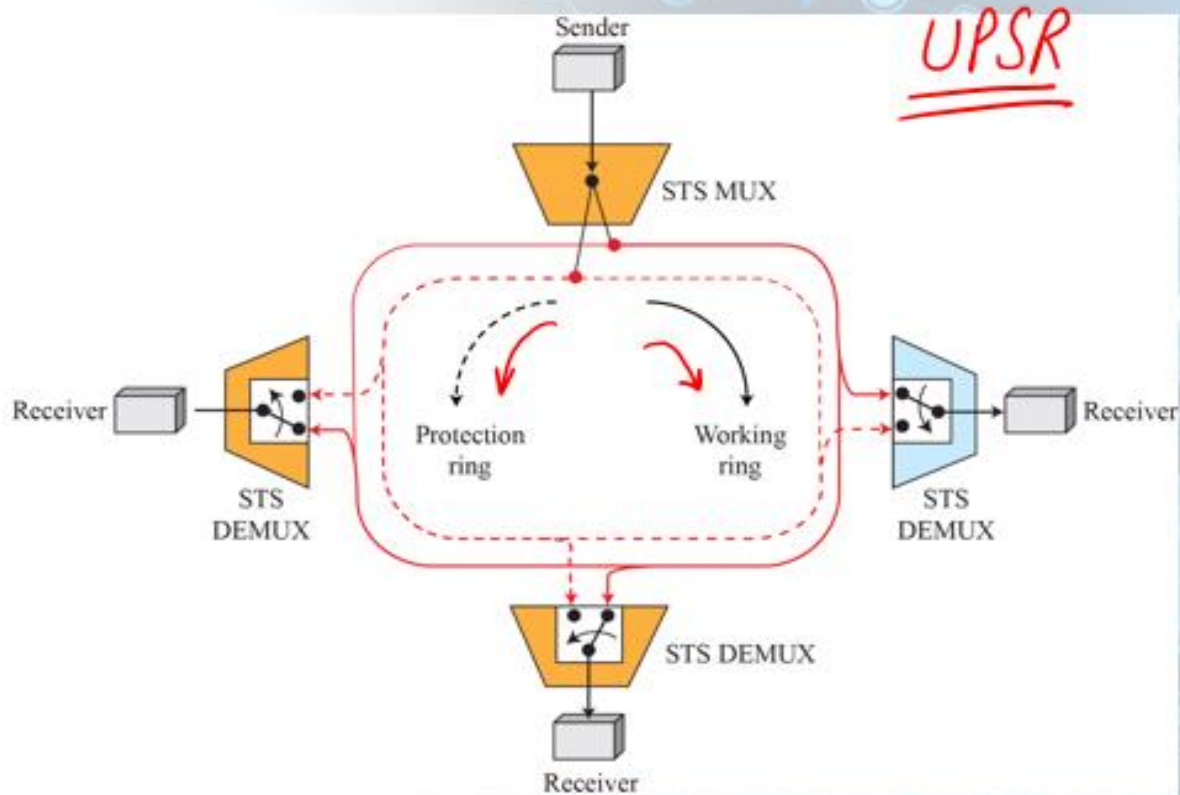


Visit Our Channel for CS601 Short Lectures

Learning With Abid Ali




<https://www.youtube.com/watch?v=-0kr2sG8JUQ&list=PLAUocDaOe9K6nDHAXKa-7fHsIFAKBPE8q&index=9>

SONET Networks – Mesh Networks

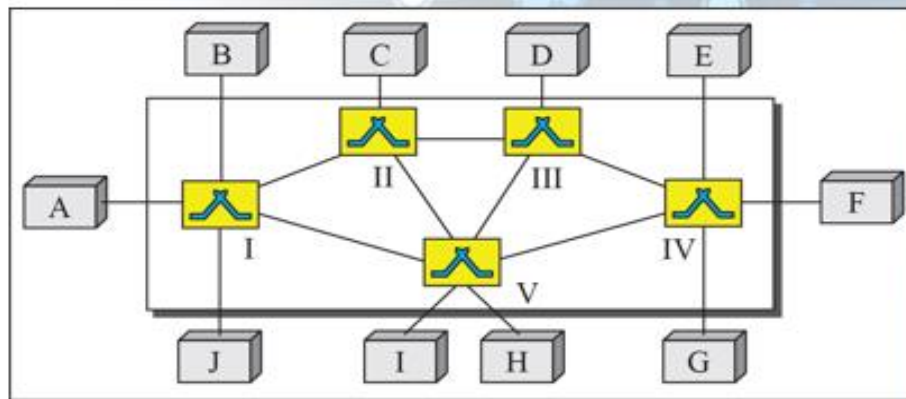

a. SONET mesh network

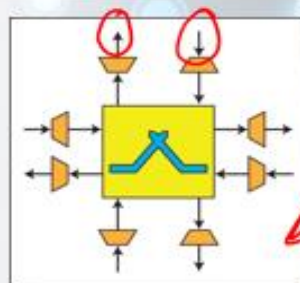

b. Cross-connect switch

Scalability
X

ATM


- Asynchronous Transfer Mode (ATM) is a switched wide area network based on the cell relay protocol designed by the ATM forum
- The combination of ATM and SONET will allow high-speed interconnection of networks

Problems

- Some of the problems associated with existing systems are:
 - ✓ Frame Networks
 - ✓ Mixed Network Traffic
- Solution

Visit Our Channel for CS601 Short Lectures


Learning With Abid Ali



<https://www.youtube.com/watch?v=-0kr2sG8JUQ&list=PLAUocDaOe9K6nDHAXKa-7fHsIFAKBPE8q&index=9>

- ✓ Cell Networks
- ✓ Asynchronous TDM

Multiplexing using Different Frame Size

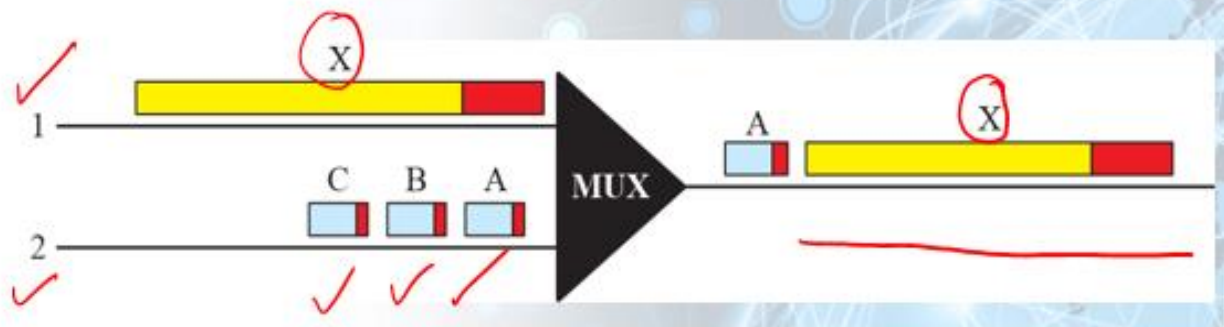


Visit Our Channel for CS601 Short Lectures

Learning With Abid Ali




<https://www.youtube.com/watch?v=-0kr2sG8JUQ&list=PLAUocDaOe9K6nDHAXKa-7fHsIFAKBPE8q&index=9>

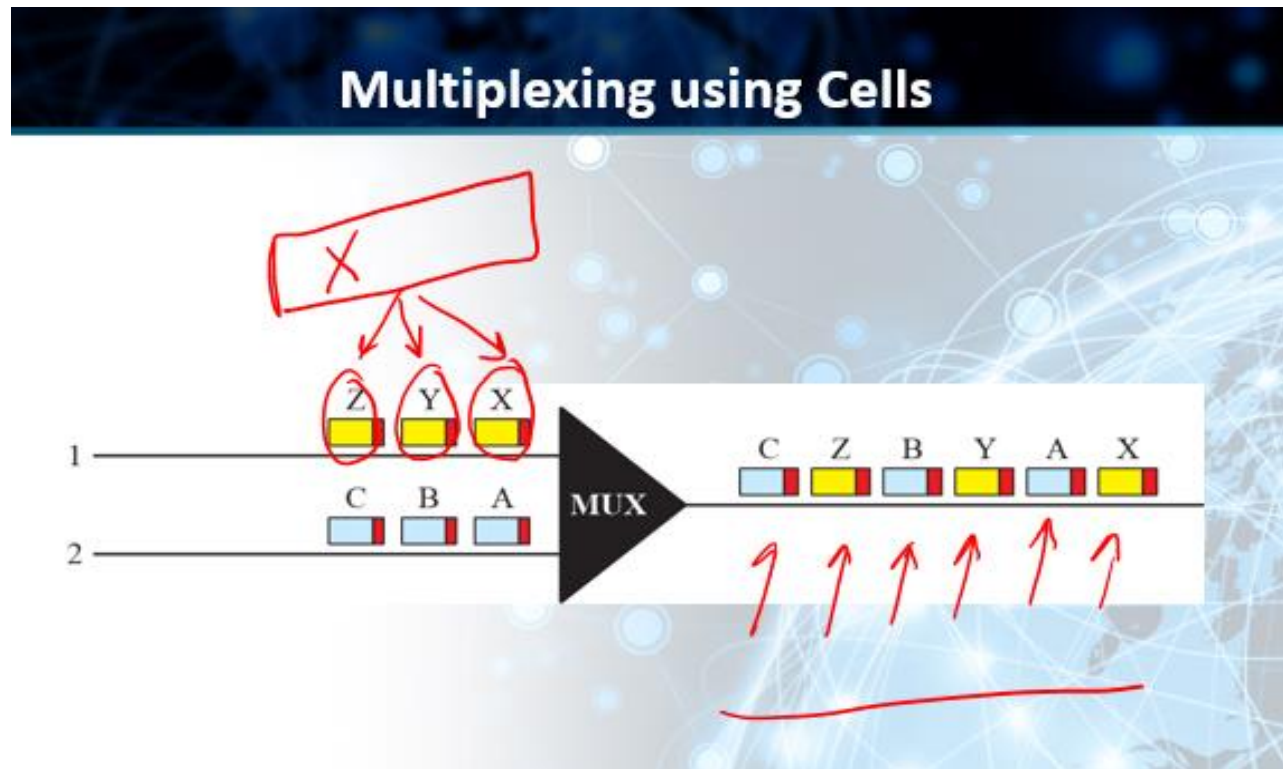


Visit Our Channel for CS601 Short Lectures

Learning With Abid Ali



<https://www.youtube.com/watch?v=-0kr2sG8JUQ&list=PLAUocDaOe9K6nDHAXKa-7fHsIFAKBPE8q&index=9>

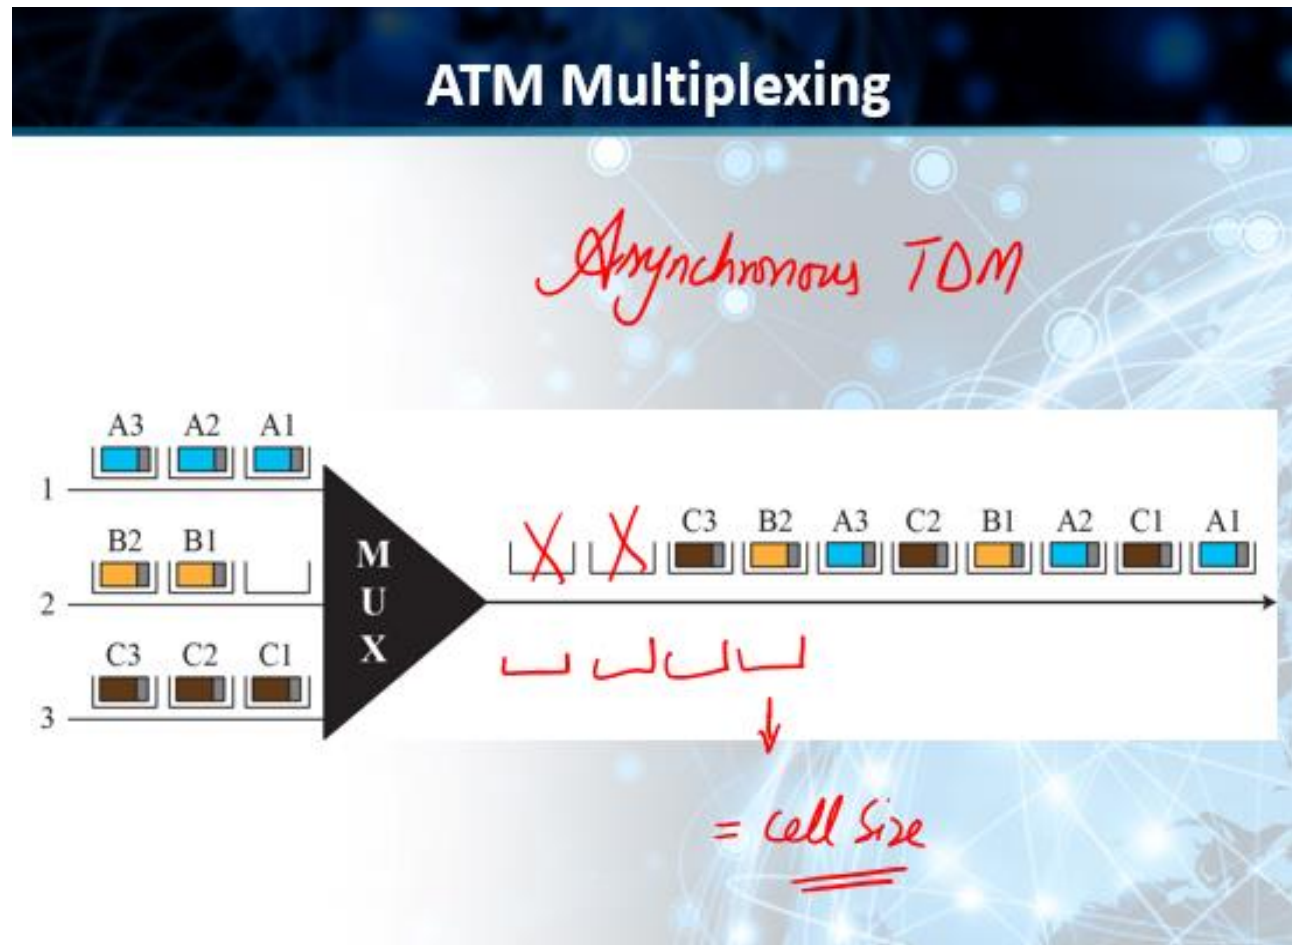


Architecture


- ATM is a cell-switched network
- The user access devices, called the endpoints, are connected through a user-to-network interface (UNI) to the switches inside the network
- The switches are connected through network-to-network interfaces (NNIs)

Visit Our Channel for CS601 Short Lectures

Learning With Abid Ali




<https://www.youtube.com/watch?v=-0kr2sG8JUQ&list=PLAUocDaOe9K6nDHAXKa-7fHsIFAKBPE8q&index=9>

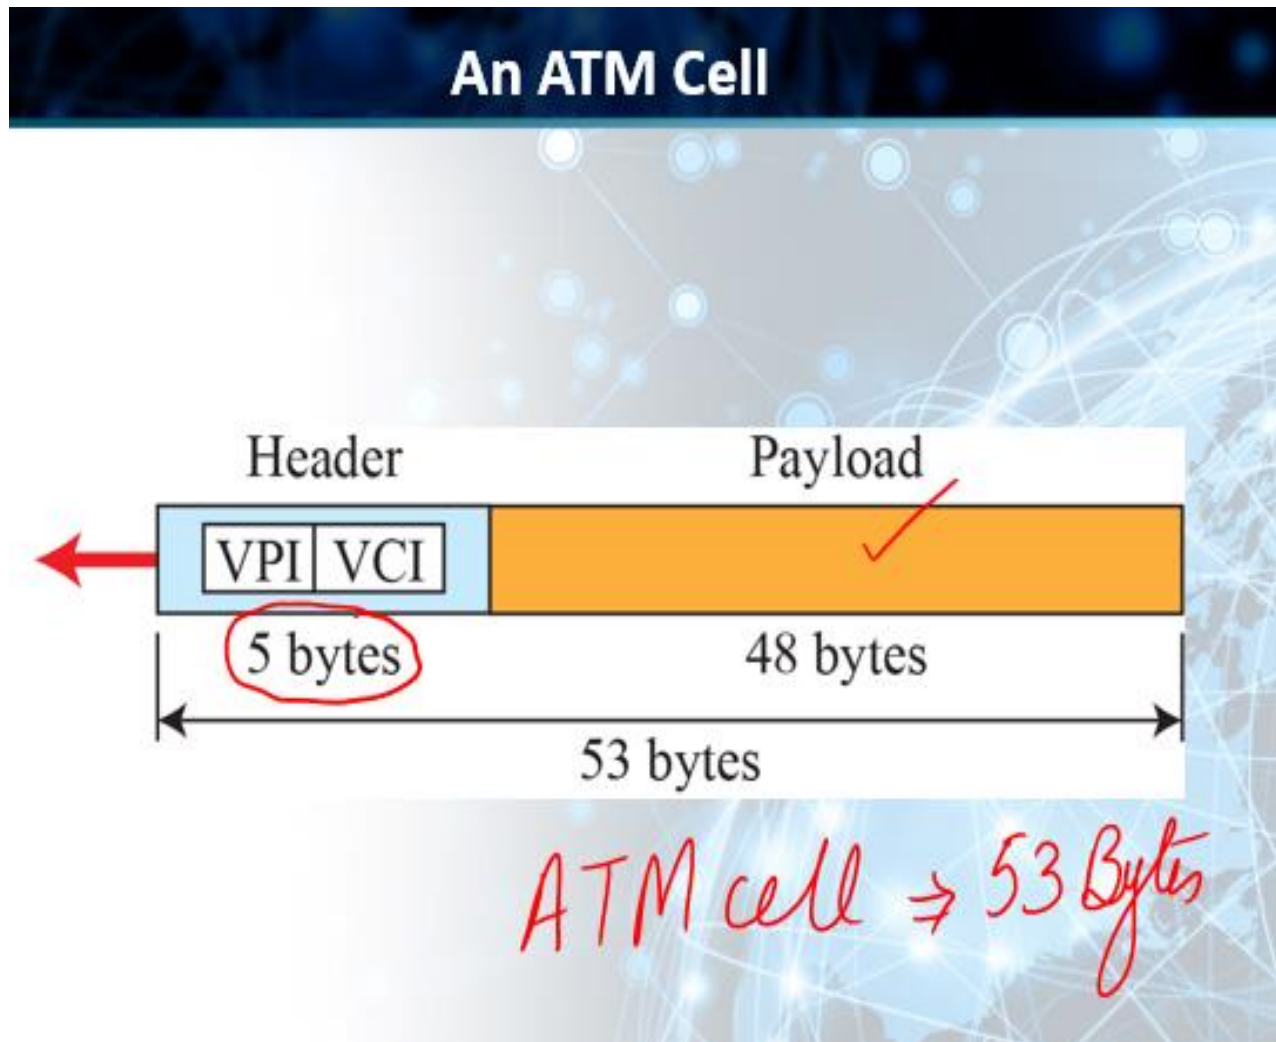


Visit Our Channel for CS601 Short Lectures

Learning With Abid Ali



<https://www.youtube.com/watch?v=-0kr2sG8JUQ&list=PLAUocDaOe9K6nDHAXKa-7fHsIFAKBPE8q&index=9>

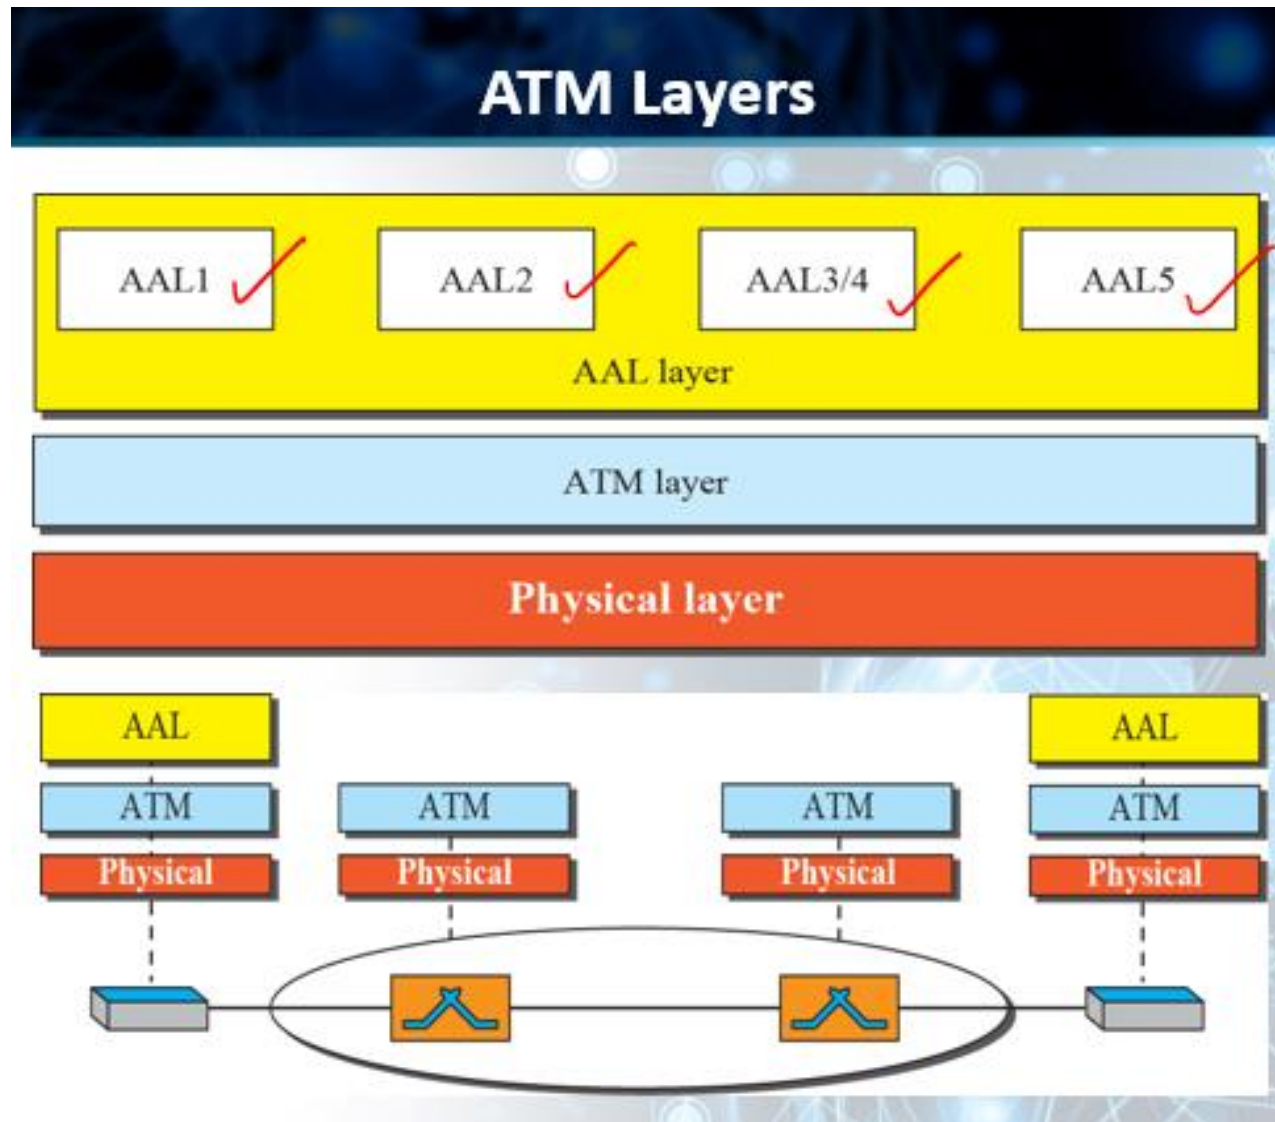

Visit Our Channel for CS601 Short Lectures

Learning With Abid Ali



<https://www.youtube.com/watch?v=-0kr2sG8JUQ&list=PLAUocDaOe9K6nDHAXKa-7fHsIFAKBPE8q&index=9>

بِسْمِ اللَّهِ الرَّحْمَنِ الرَّحِيمِ

Data Communication CS601 Lecture No 35

Lecture Prepared By
Muhammad Abid Ali

We are also Provide Online Classes for CS601

Contact Us on WhatsApp for join our online Classes

WhatsApp No 03449767315

CS601 Lecture No 35 Topic 205 to 212

Wireless communication

- **Wireless communication** is one of the fastest-growing technologies
- The demand for connecting devices without the use of cables is increasing everywhere

Visit Our Channel for CS601 Short Lectures

Learning With Abid Ali



<https://www.youtube.com/watch?v=-0kr2sG8JUQ&list=PLAUocDaOe9K6nDHAXKa-7fHsIFAKBPE8q&index=9>

- **Wireless LANs can be found on college campuses, in office buildings, and in many public areas**

Architectural Comparison


- **Architecture comparison of wired and wireless LANs**
 - ✓ **Medium**
 - ✓ **Hosts**
 - ✓ **Isolated LANs**
 - ✓ **Connection to other Networks**
 - ✓ **Moving between Environments**

Visit Our Channel for CS601 Short Lectures

Learning With Abid Ali



<https://www.youtube.com/watch?v=-0kr2sG8JUQ&list=PLAUocDaOe9K6nDHAXKa-7fHsIFAKBPE8q&index=9>

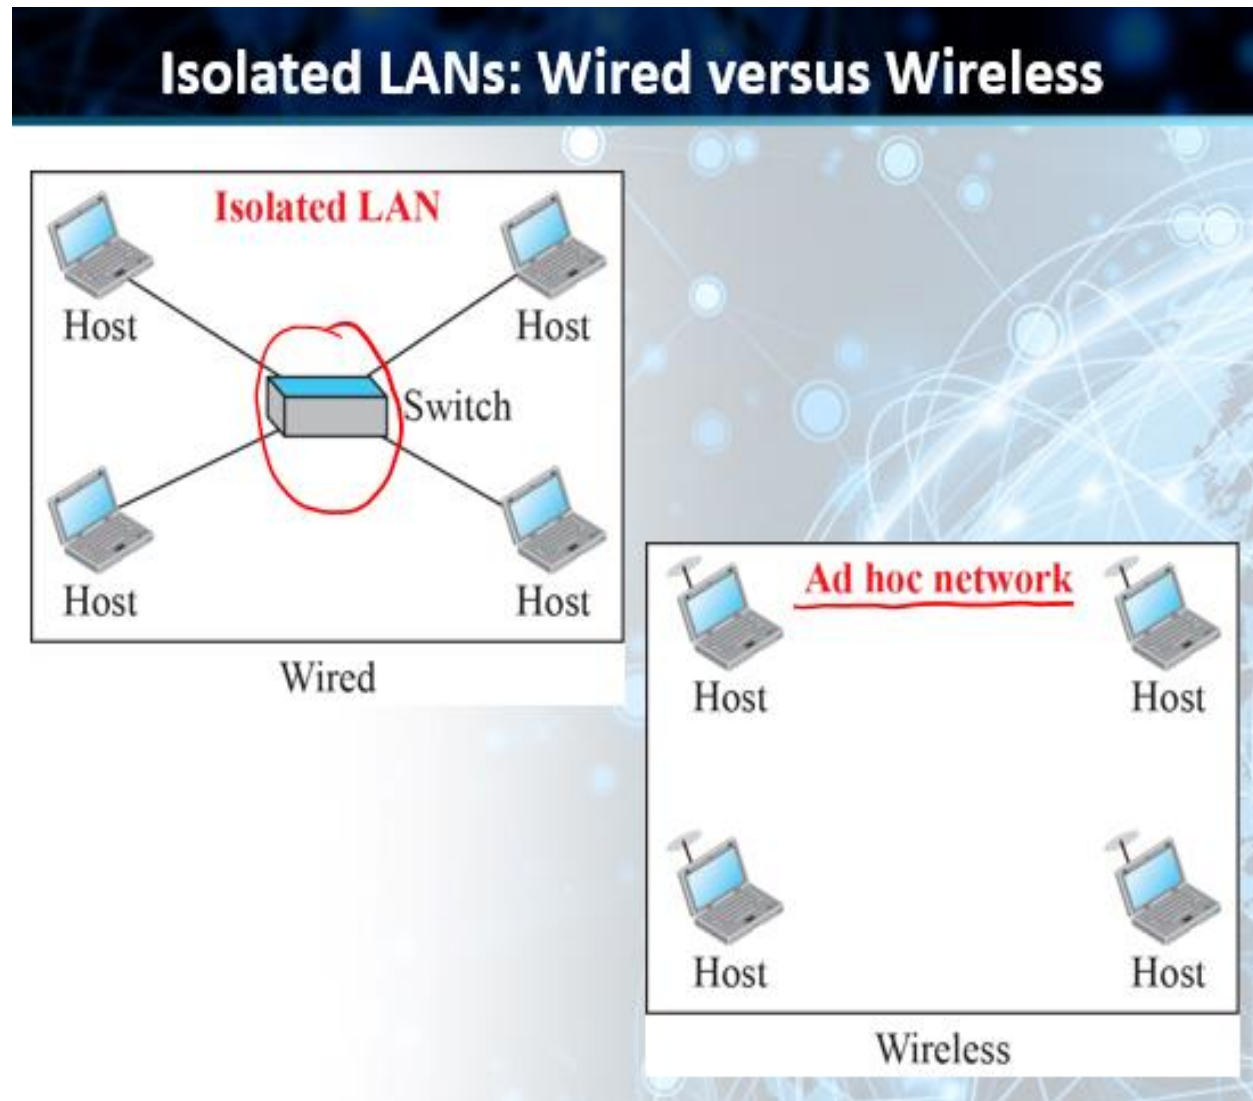

Characteristics of a Wireless LAN

- Several characteristics of wireless LANs either do not apply to wired LANs or the existence of these is negligible and can be ignored
 - ✓ Attenuation
 - ✓ Interference
 - ✓ Multipath Propagation

Visit Our Channel for CS601 Short Lectures

Learning With Abid Ali




<https://www.youtube.com/watch?v=-0kr2sG8JUQ&list=PLAUocDaOe9K6nDHAXKa-7fHsIFAKBPE8q&index=9>

✓ Error

Access Control

- Most important issue in a wireless LAN is how a wireless host can get access to the shared medium (air)
- CSMA/CD does not work in wireless LANs for three reasons:
 1. Wireless hosts don't have power to send and receive at the same time
- The hidden station problem prevents collision detection
- The distance between stations can be large

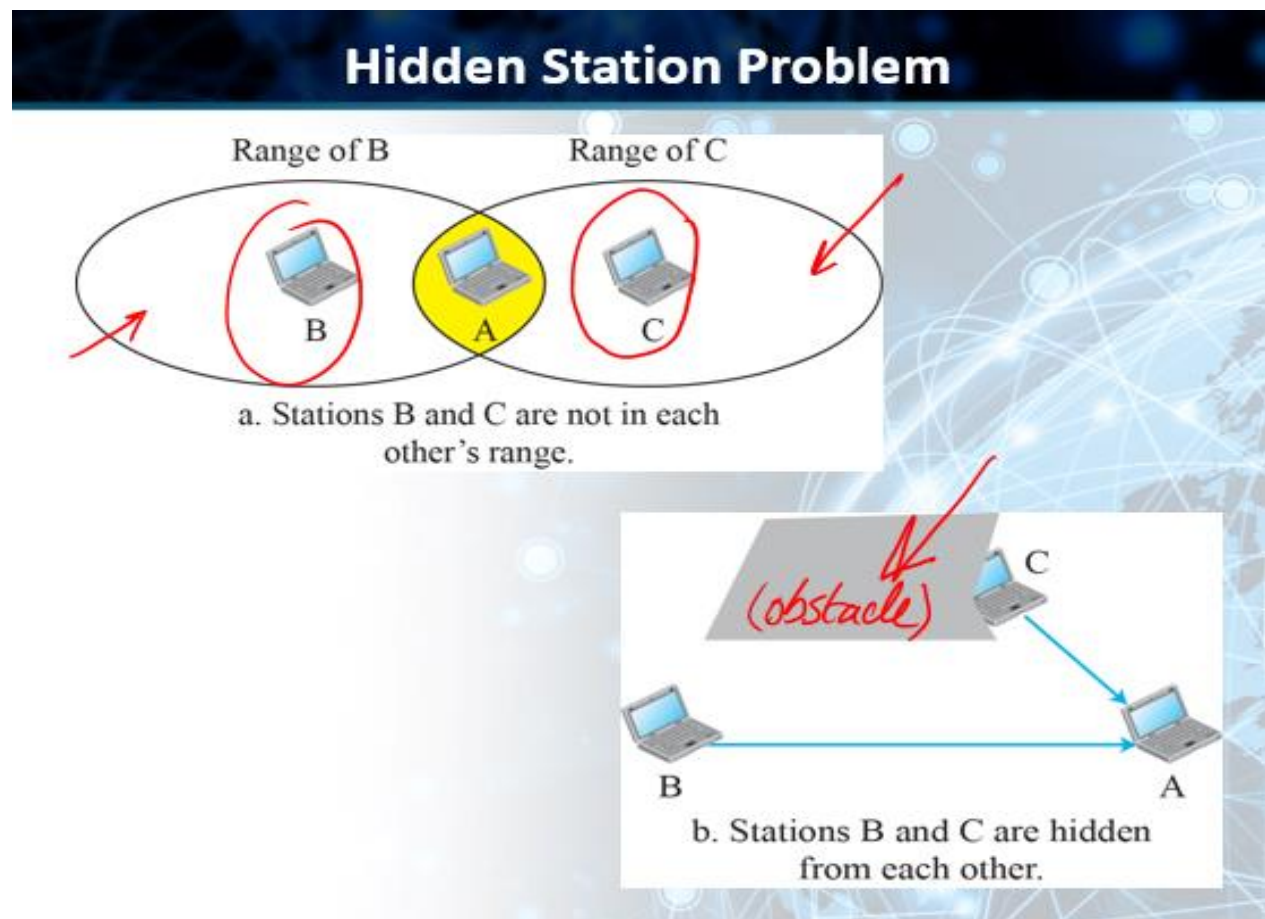

Visit Our Channel for CS601 Short Lectures

Learning With Abid Ali



<https://www.youtube.com/watch?v=-0kr2sG8JUQ&list=PLAUocDaOe9K6nDHAXKa-7fHsIFAKBPE8q&index=9>

IEEE 802.11 PROJECT

- IEEE has defined the specifications for a wireless LAN, called IEEE 802.11, which covers the physical and data-link layers
- It is sometimes called Wireless Ethernet
- The term WiFi (short for wireless fidelity) as a synonym for wireless LAN (certified by WiFi alliance)

Architecture

- The standard defines two kinds of services:
 - ✓ The basic service set (BSS); and
 - ✓ The Extended service set (ESS)


Visit Our Channel for CS601 Short Lectures

Learning With Abid Ali




<https://www.youtube.com/watch?v=-0kr2sG8JUQ&list=PLAUocDaOe9K6nDHAXKa-7fHsIFAKBPE8q&index=9>

Basic Service Sets (BSSs)

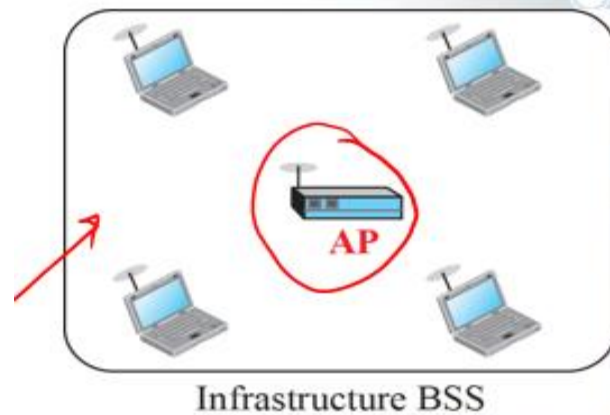

*Without AP → ad hoc network
With AP → Infrastructure BSS*

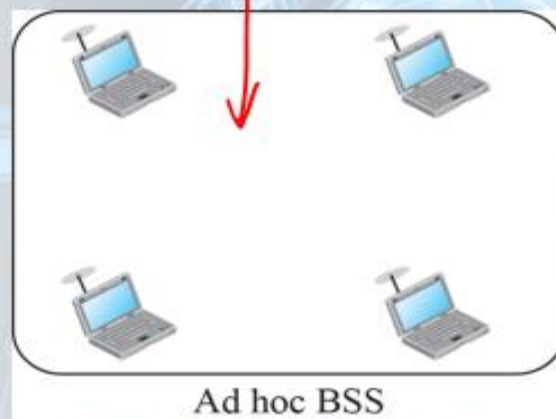


Visit Our Channel for CS601 Short Lectures

Learning With Abid Ali



<https://www.youtube.com/watch?v=-0kr2sG8JUQ&list=PLAUocDaOe9K6nDHAXKa-7fHsIFAKBPE8q&index=9>

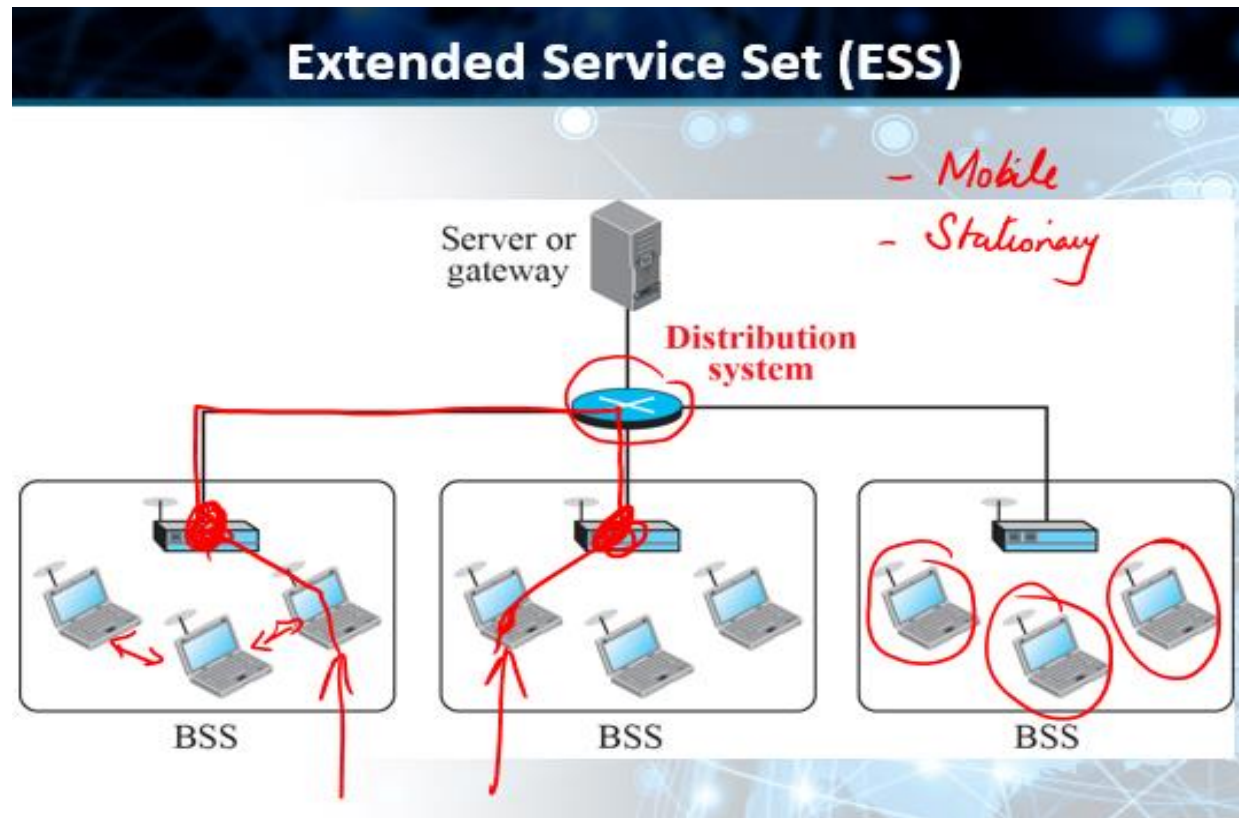

Types of Stations

- No-Transition Mobility
- BSS-Transition Mobility
- ESS-Transition Mobility

MAC Sub-layer Wireless communication

- IEEE 802.11 defines two MAC sub-layers:
 - ✓ The Distributed Coordination Function (DCF) ; and


Visit Our Channel for CS601 Short Lectures

Learning With Abid Ali



<https://www.youtube.com/watch?v=-0kr2sG8JUQ&list=PLAUocDaOe9K6nDHAXKa-7fHsIFAKBPE8q&index=9>

✓ The Point Coordination Function (PCF)

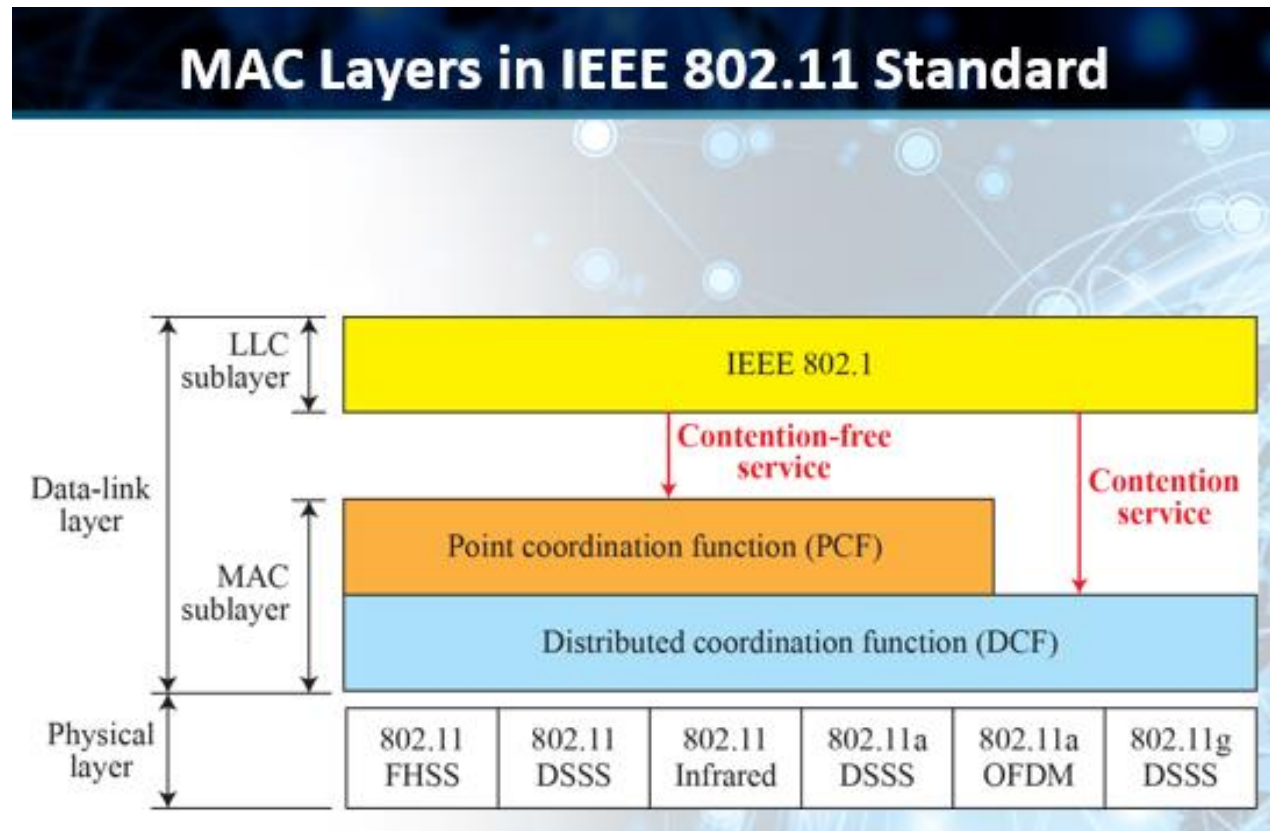


Visit Our Channel for CS601 Short Lectures

Learning With Abid Ali



<https://www.youtube.com/watch?v=-0kr2sG8JUQ&list=PLAUocDaOe9K6nDHAXKa-7fHsIFAKBPE8q&index=9>

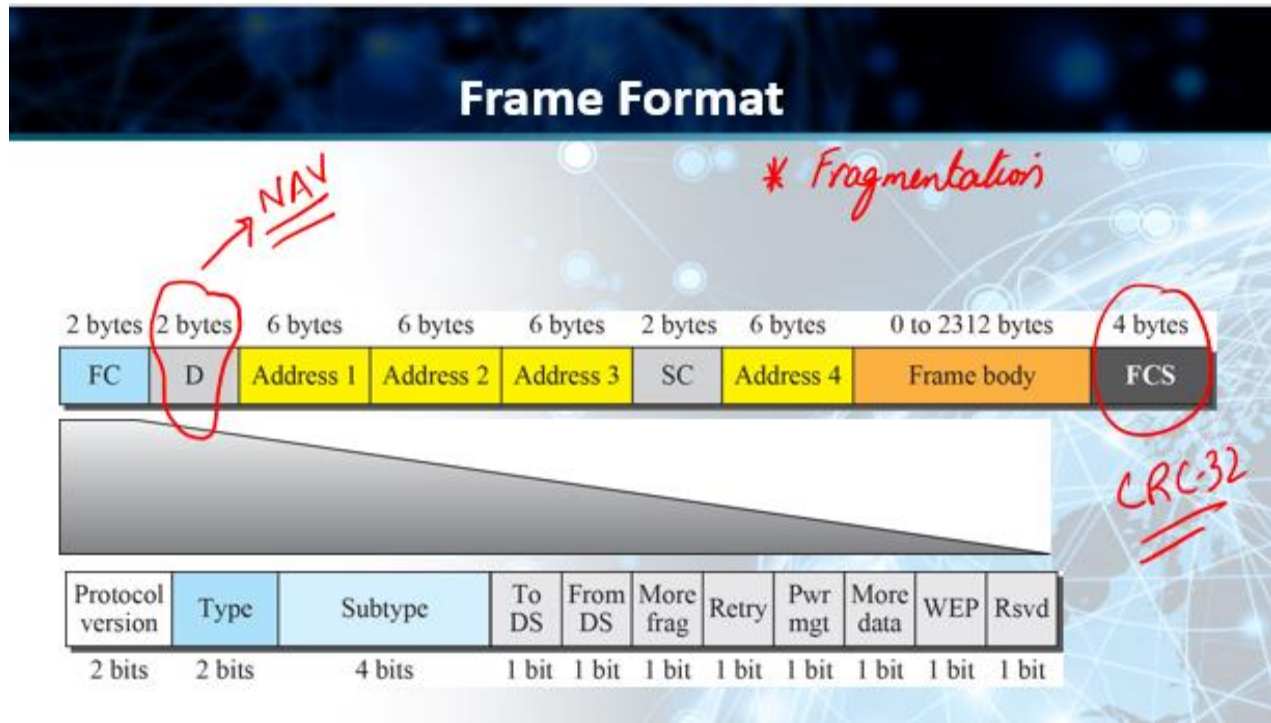

Frame Types

- Management Frames
- Control Frames
- Data Frames



Visit Our Channel for CS601 Short Lectures

Learning With Abid Ali



<https://www.youtube.com/watch?v=-0kr2sG8JUQ&list=PLAUocDaOe9K6nDHAXKa-7fHsIFAKBPE8q&index=9>

Control Frames

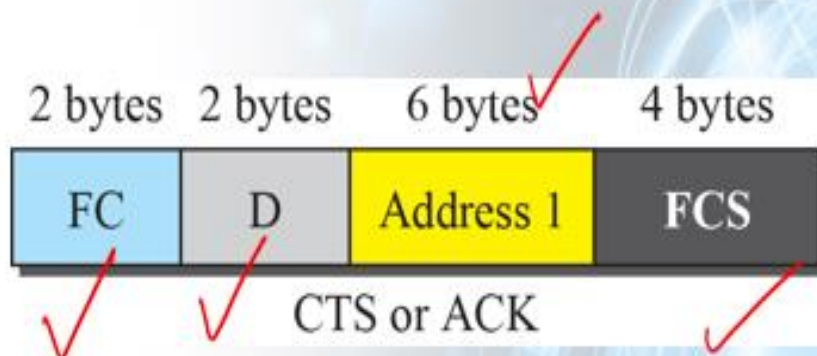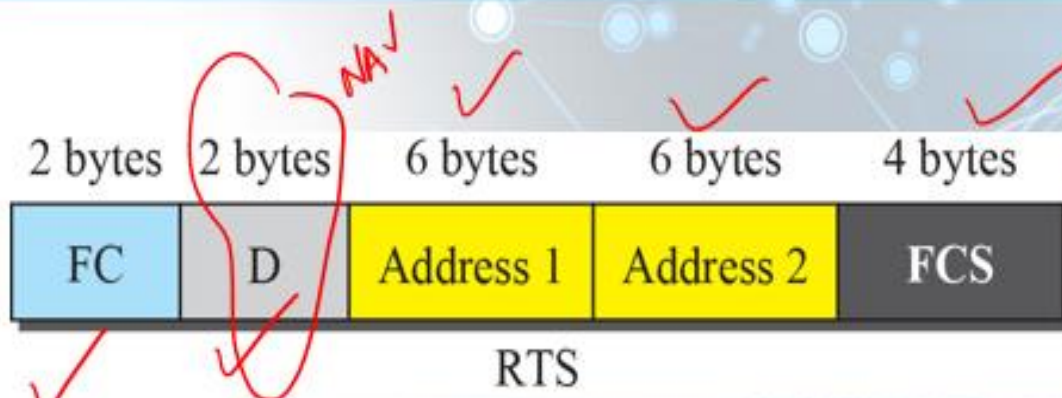

Visit Our Channel for CS601 Short Lectures

Learning With Abid Ali



<https://www.youtube.com/watch?v=-0kr2sG8JUQ&list=PLAUocDaOe9K6nDHAXKa-7fHsIFAKBPE8q&index=9>

Values of Subfields in Control Frames

<i>Subtype</i>	<i>Meaning</i>
1011	Request to send (RTS) ✓
1100	Clear to send (CTS) ✓
1101	Acknowledgment (ACK) ✓

Physical Layer

- All physical implementations, except the infrared, operate in the industrial, scientific, and medical (ISM) band, which defines 3 unlicensed bands in 3 ranges:
 - ✓ 902–928 MHz
 - ✓ 2.400–4.835 GHz
 - ✓ 5.725–5.850 GHz

BLUETOOTH

- Bluetooth is a wireless LAN technology designed to connect devices of different functions when they are at a short distance from each other
- A Bluetooth LAN is an ad hoc network

Visit Our Channel for CS601 Short Lectures

Learning With Abid Ali



<https://www.youtube.com/watch?v=-0kr2sG8JUQ&list=PLAUocDaOe9K6nDHAXKa-7fHsIFAKBPE8q&index=9>

- The devices, sometimes called **gadgets**, find each other and make a network called a **Piconet**
- **Bluetooth** is a wireless LAN technology designed to connect devices of different functions when they are at a short distance from each other
- A Bluetooth LAN is an **ad hoc** network
- The devices, sometimes called **gadgets**, find each other and make a network called a **Piconet**

Architecture


- Bluetooth defines two types of networks:
 - ✓ **Piconet**
 - ✓ **Scatternet**

Visit Our Channel for CS601 Short Lectures

Learning With Abid Ali



<https://www.youtube.com/watch?v=-0kr2sG8JUQ&list=PLAUocDaOe9K6nDHAXKa-7fHsIFAKBPE8q&index=9>

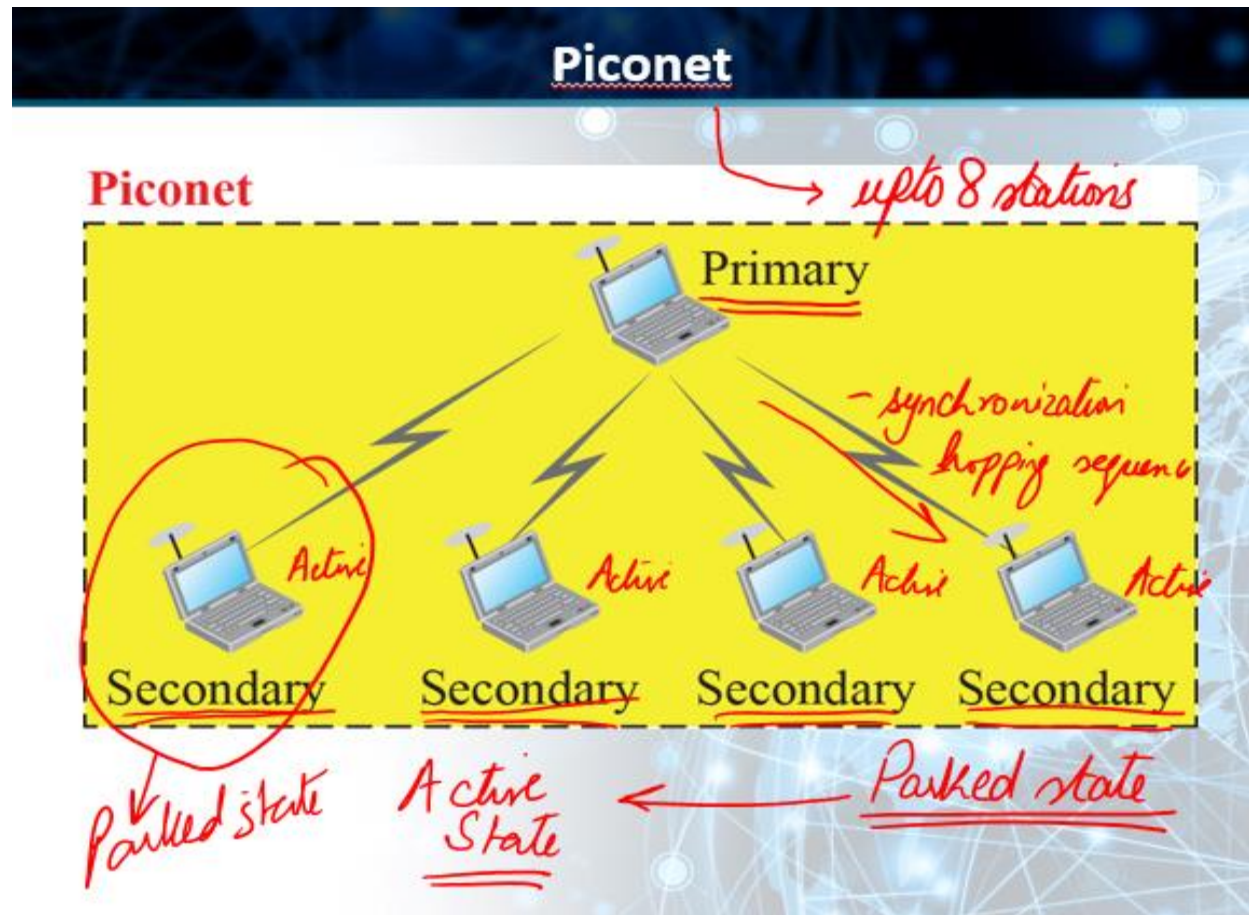


Visit Our Channel for CS601 Short Lectures

Learning With Abid Ali



<https://www.youtube.com/watch?v=-0kr2sG8JUQ&list=PLAUocDaOe9K6nDHAXKa-7fHsIFAKBPE8q&index=9>

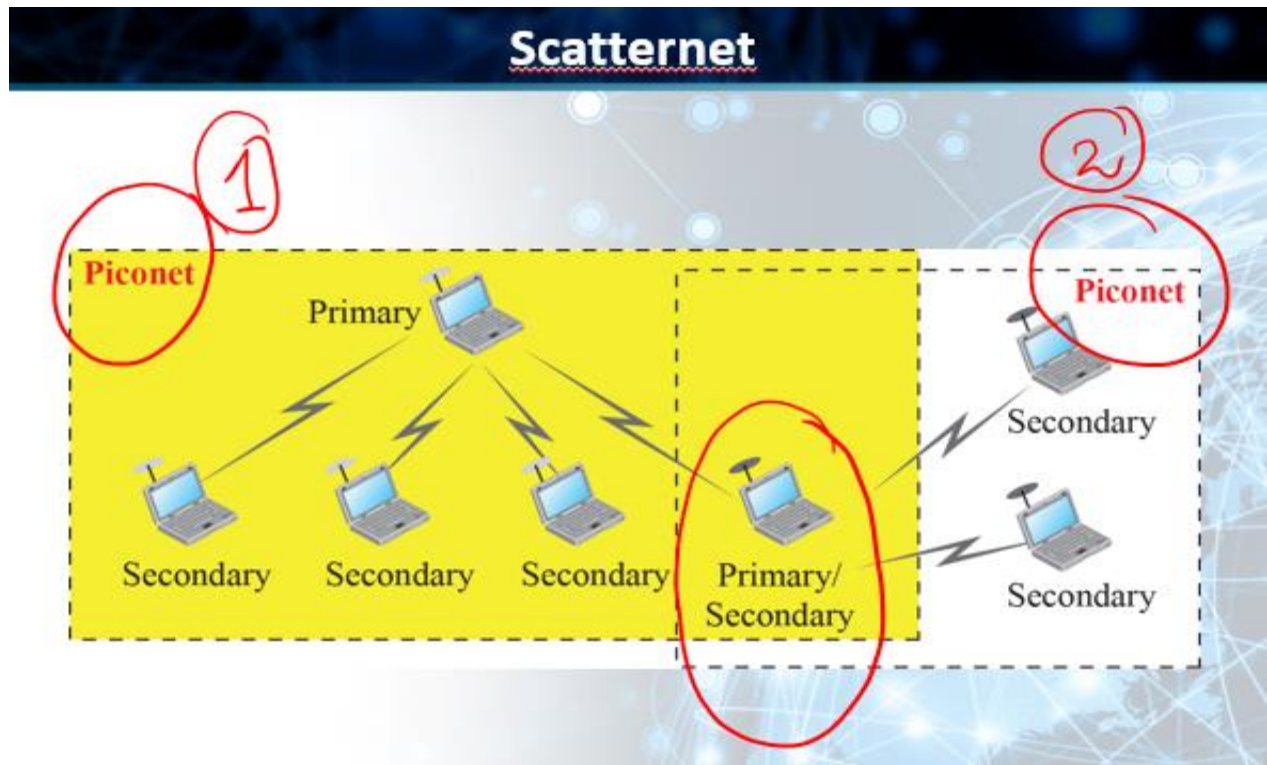

Bluetooth Devices

- A Bluetooth device has a built-in short-range radio transmitter
- The current data rate is 1 Mbps with a 2.4-GHz bandwidth
- This means that there is a possibility of interference between the IEEE 802.11b wireless LANs and Bluetooth LANs

Bluetooth Layers


- Bluetooth uses several layers that do not exactly match those of the Internet model we have defined already

Visit Our Channel for CS601 Short Lectures

Learning With Abid Ali



<https://www.youtube.com/watch?v=-0kr2sG8JUQ&list=PLAUocDaOe9K6nDHAXKa-7fHsIFAKBPE8q&index=9>

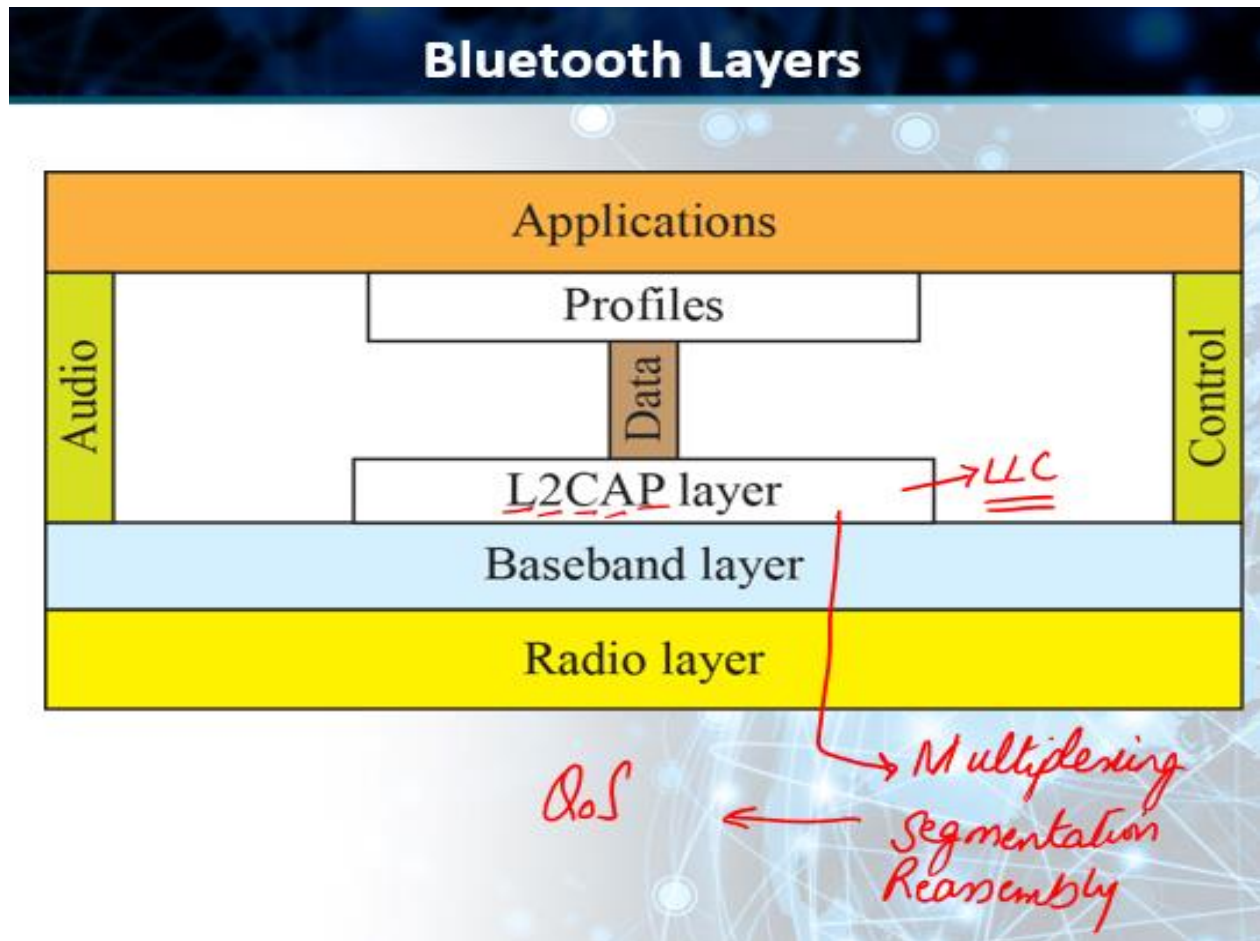


Visit Our Channel for CS601 Short Lectures

Learning With Abid Ali



<https://www.youtube.com/watch?v=-0kr2sG8JUQ&list=PLAUocDaOe9K6nDHAXKa-7fHsIFAKBPE8q&index=9>

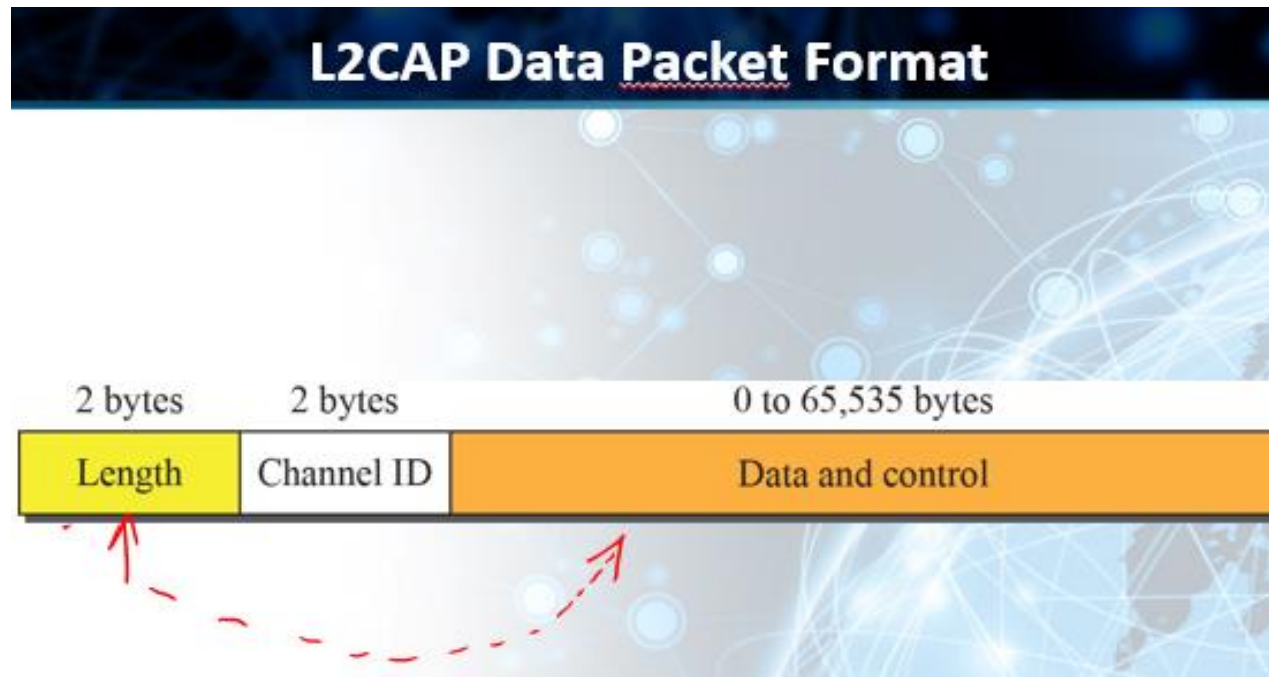

Visit Our Channel for CS601 Short Lectures


Learning With Abid Ali



<https://www.youtube.com/watch?v=-0kr2sG8JUQ&list=PLAUocDaOe9K6nDHAXKa-7fHsIFAKBPE8q&index=9>

Single-Secondary Communication

TDD-TDMA

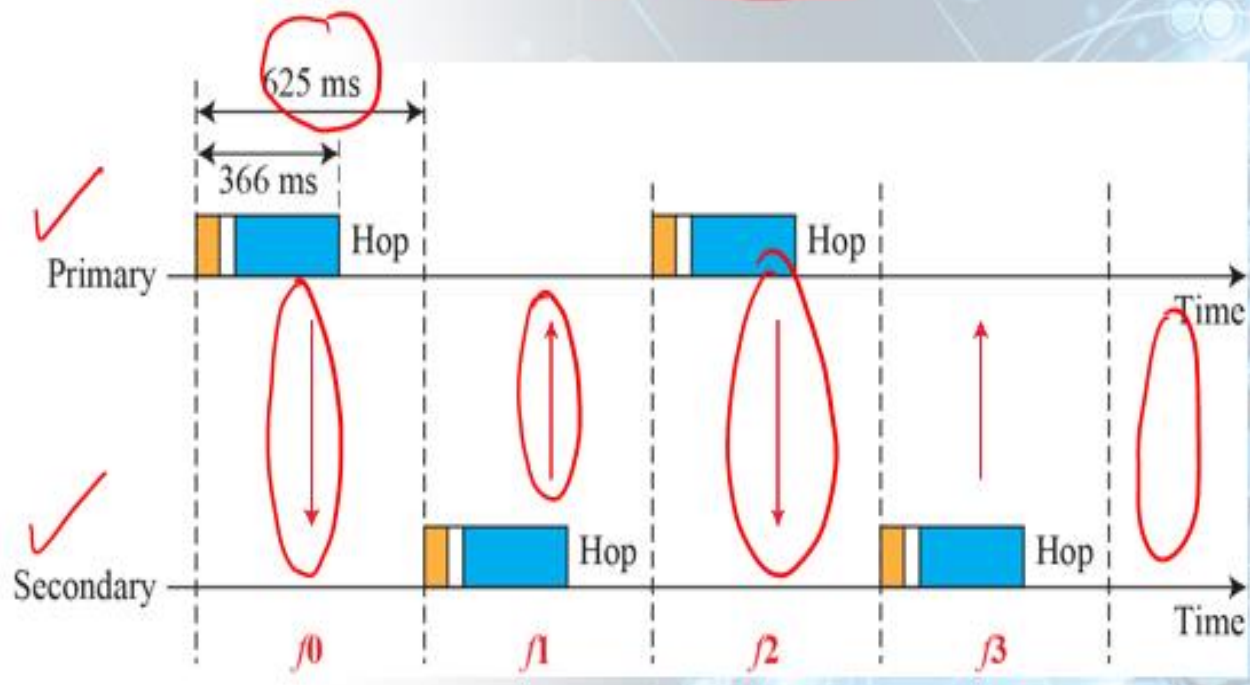


Visit Our Channel for CS601 Short Lectures

Learning With Abid Ali




<https://www.youtube.com/watch?v=-0kr2sG8JUQ&list=PLAUocDaOe9K6nDHAXKa-7fHsIFAKBPE8q&index=9>

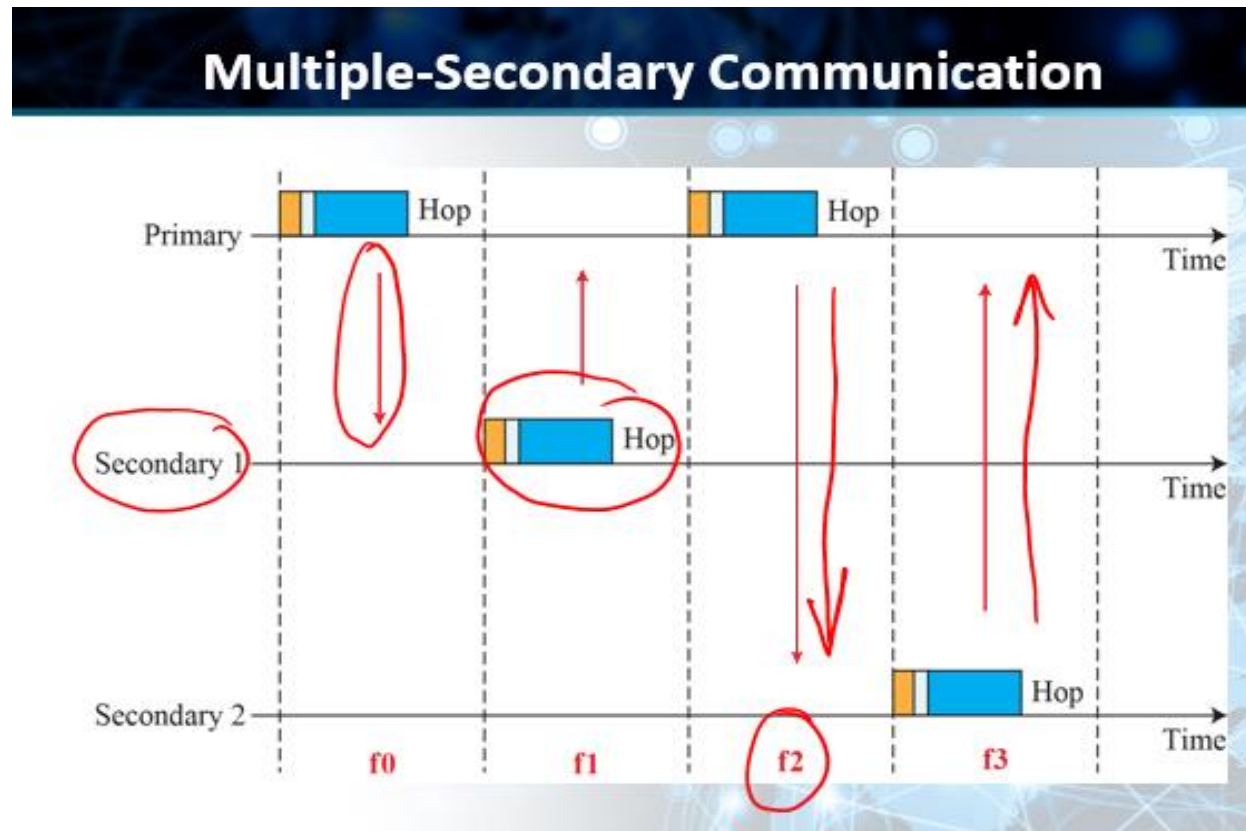

Visit Our Channel for CS601 Short Lectures

Learning With Abid Ali



<https://www.youtube.com/watch?v=-0kr2sG8JUQ&list=PLAUocDaOe9K6nDHAXKa-7fHsIFAKBPE8q&index=9>

بِسْمِ اللَّهِ الرَّحْمَنِ الرَّحِيمِ

Data Communication CS601 Lecture No 36

Lecture Prepared By
Muhammad Abid Ali

We are also Provide Online Classes for CS601

Contact Us on WhatsApp for join our online Classes

WhatsApp No 03449767315


CS601 Lecture No 36 Topic 213 to 220

Connecting Devices

- Hosts and networks do not normally operate in isolation
- Connecting devices connect hosts together to make a network or connect networks together to make an internet

Visit Our Channel for CS601 Short Lectures

Learning With Abid Ali




<https://www.youtube.com/watch?v=-0kr2sG8JUQ&list=PLAUocDaOe9K6nDHAXKa-7fHsIFAKBPE8q&index=9>

- Connecting devices can operate in different layers of the Internet model

Three kinds of connecting devices:

- ✓ Hubs
- ✓ Link-layer switches
- ✓ Routers

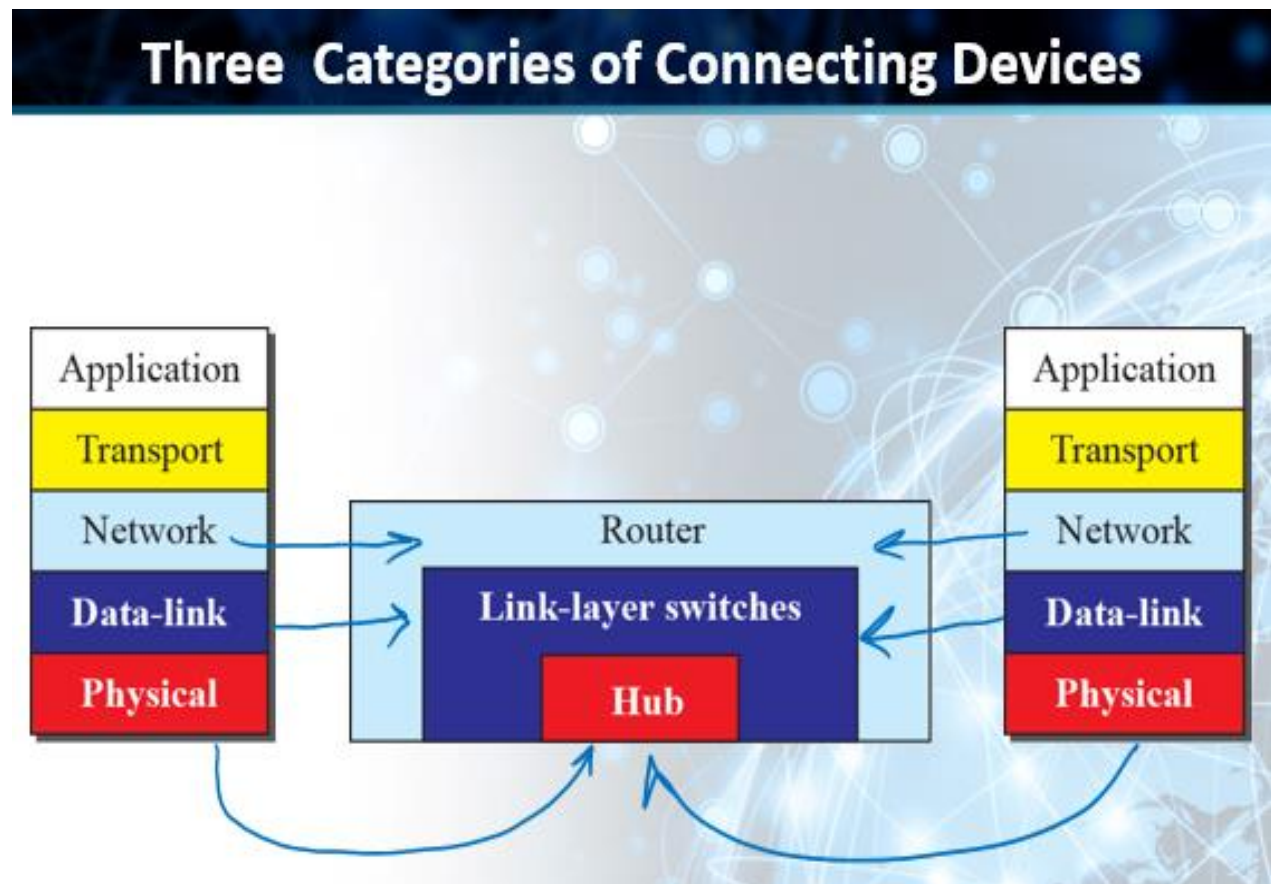


Hubs

- **Hub** is a device that operates only in the **physical layer**


Visit Our Channel for CS601 Short Lectures

Learning With Abid Ali



<https://www.youtube.com/watch?v=-0kr2sG8JUQ&list=PLAUocDaOe9K6nDHAXKa-7fHsIFAKBPE8q&index=9>

- Signals that carry information within a network can travel a fixed distance before attenuation **impacts the data**
- A **hub (repeater)** receives a signal and, before it becomes too weak or corrupted, regenerates it

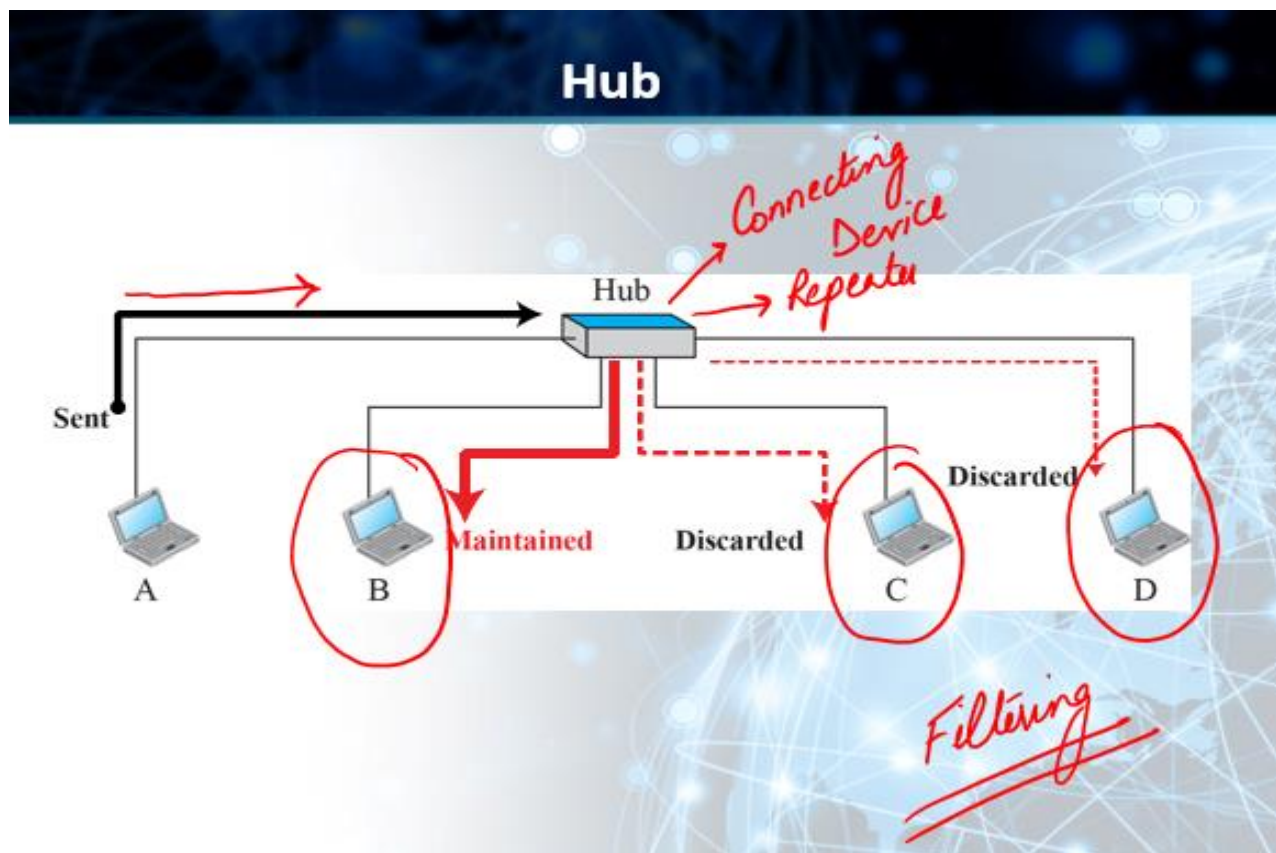


Link-Layer Switches

- A **link-layer switch** (or switch) operates in both the physical and the data-link layers
- As a physical-layer device, it regenerates the signal it receives
- As a link-layer device, **the link-layer switch** can check the MAC addresses (source and destination) contained in the frame

Visit Our Channel for CS601 Short Lectures


Learning With Abid Ali



<https://www.youtube.com/watch?v=-0kr2sG8JUQ&list=PLAUocDaOe9K6nDHAXKa-7fHsIFAKBPE8q&index=9>


Switch versus Hub

- **Switch** has the 'Filtering' capability
- Unlike hub, a **switch** can check the destination address of a frame and decide on outgoing port
- **Switch** eliminates collisions and does not require carrier sensing
- **Switches** connect heterogeneous devices

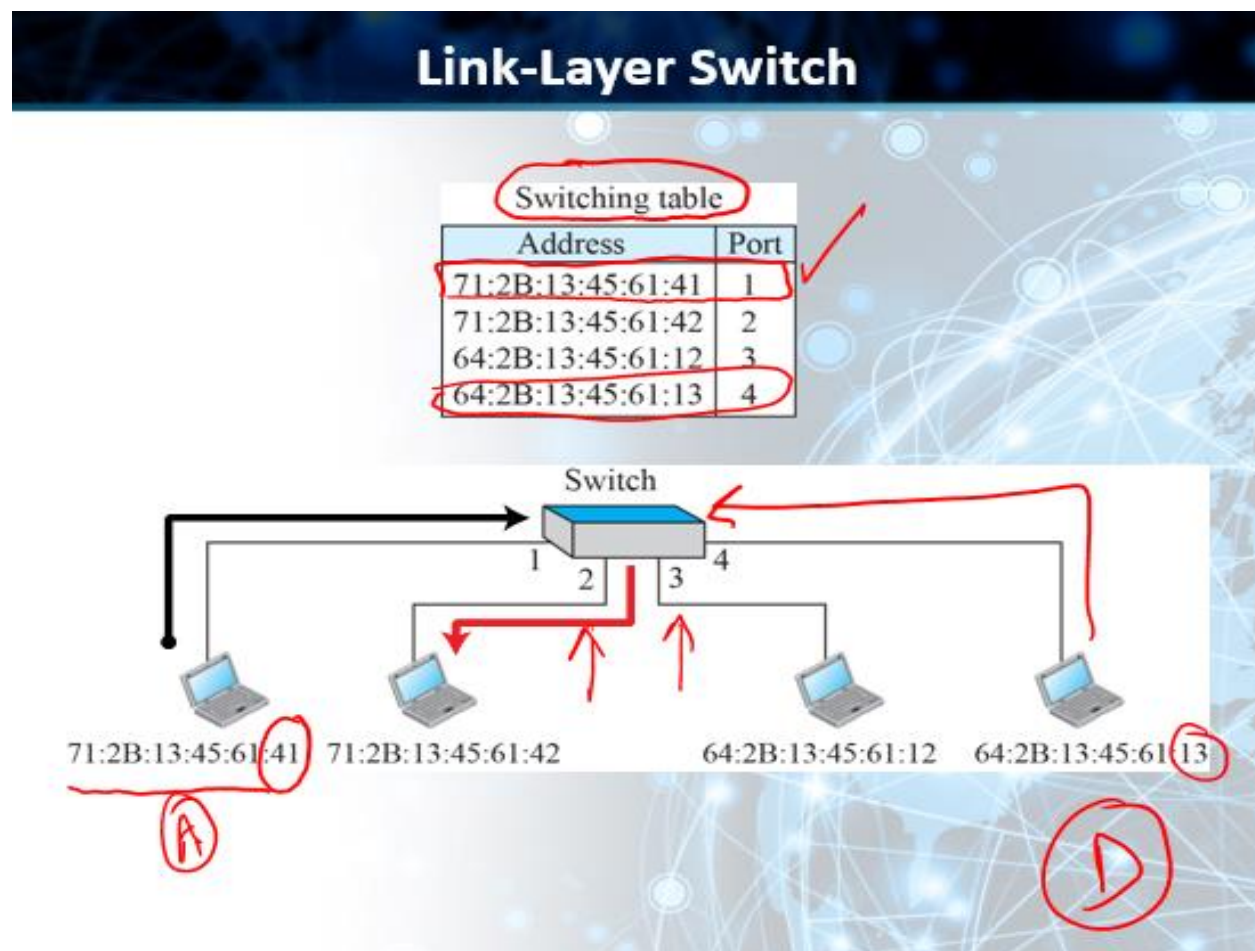

Visit Our Channel for CS601 Short Lectures

Learning With Abid Ali




<https://www.youtube.com/watch?v=-0kr2sG8JUQ&list=PLAUocDaOe9K6nDHAXKa-7fHsIFAKBPE8q&index=9>

Spanning Tree Algorithm

- In graph theory, **Spanning Tree** is a graph in which there is no loop
- In a switched LAN, this means creating a topology in which each LAN can be reached from any other LAN through one path only (no loop)
- To find the spanning tree, we assign a cost (metric) to each LAN link


A system of Connected LANs and its Graph (Part a)

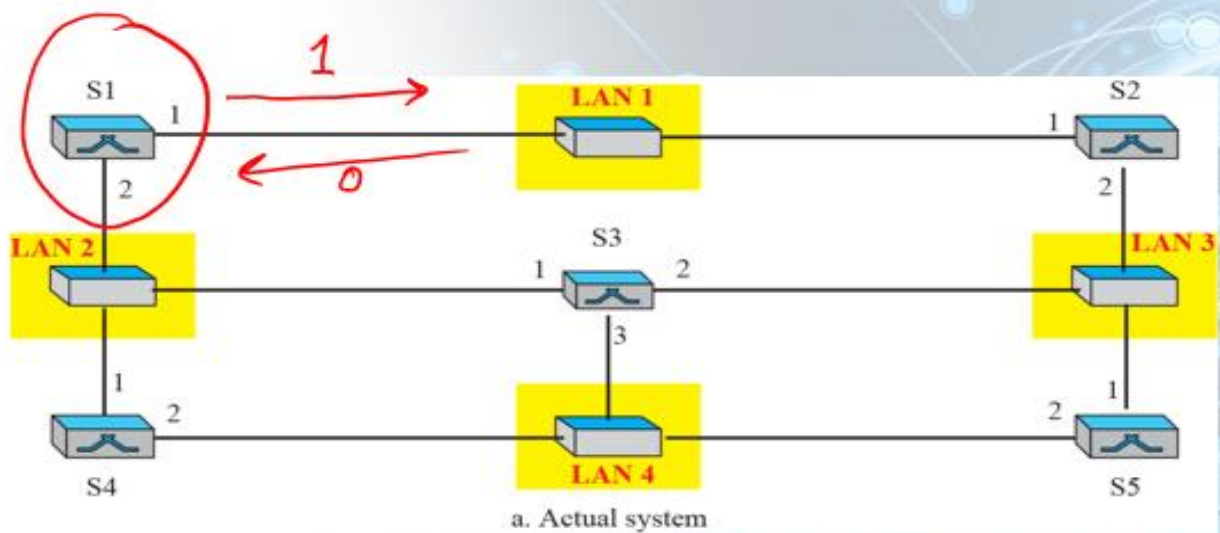

1. A **router** has a physical and logical (IP) address for each of its interfaces.
2. A **router acts** only on those packets in which the link-layer destination address matches the address of the interface at which the packet arrives.


Visit Our Channel for CS601 Short Lectures

Learning With Abid Ali



<https://www.youtube.com/watch?v=-0kr2sG8JUQ&list=PLAUocDaOe9K6nDHAXKa-7fHsIFAKBPE8q&index=9>


3. A **router** changes the link-layer address of the packet (both source and destination) when it forwards the packet.

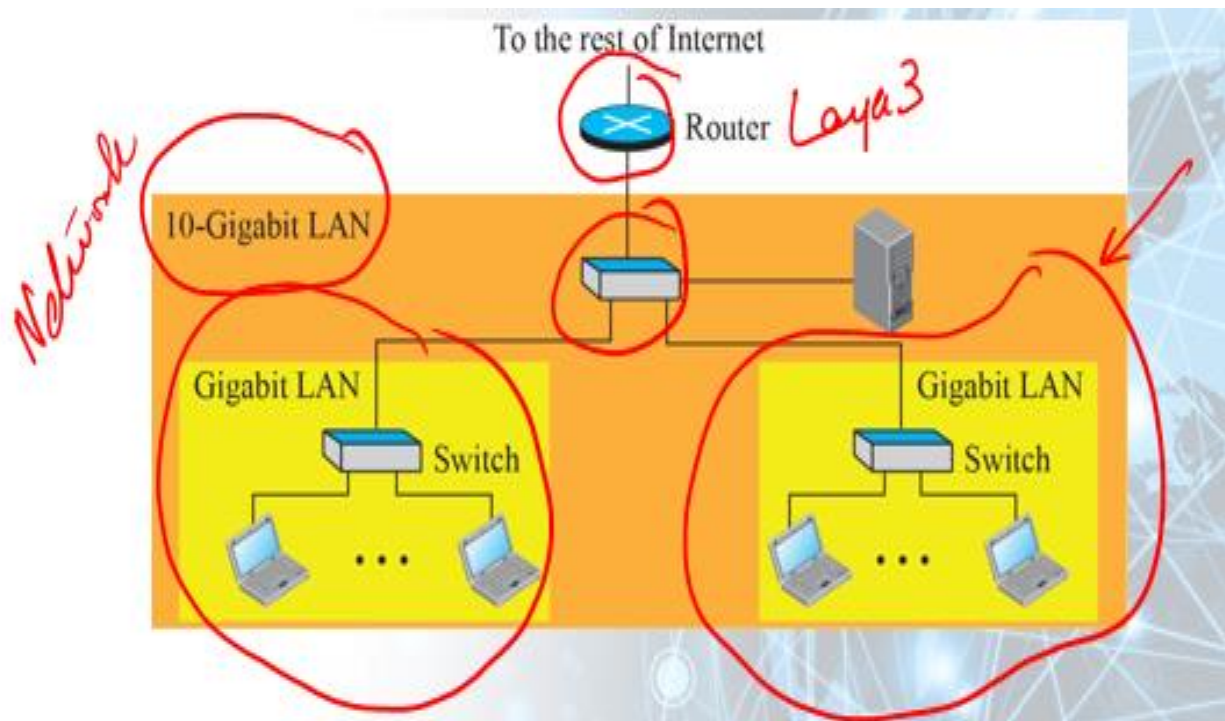


VIRTUAL LANS (VLAN)

Visit Our Channel for CS601 Short Lectures

Learning With Abid Ali



<https://www.youtube.com/watch?v=-0kr2sG8JUQ&list=PLAUocDaOe9K6nDHAXKa-7fHsIFAKBPE8q&index=9>

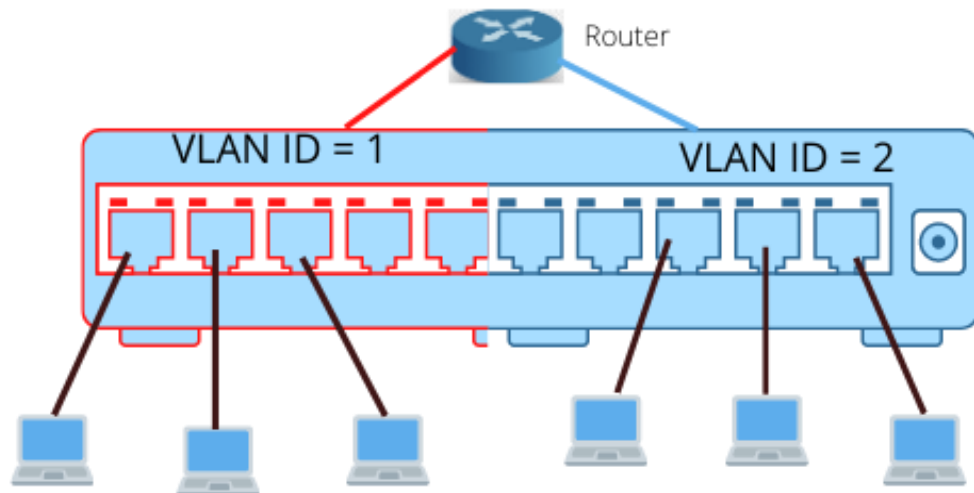


LAN With VLAN

- A VLAN is a LAN configured by software, not by physical wiring
- A station is considered part of a LAN if it physically belongs to that LAN i.e. The criterion of membership is geographic
- Provides a virtual connection between two stations belonging to two different physical LANs


Visit Our Channel for CS601 Short Lectures

Learning With Abid Ali



<https://www.youtube.com/watch?v=-0kr2sG8JUQ&list=PLAUocDaOe9K6nDHAXKa-7fHsIFAKBPE8q&index=9>

A Switch Connecting three LANs

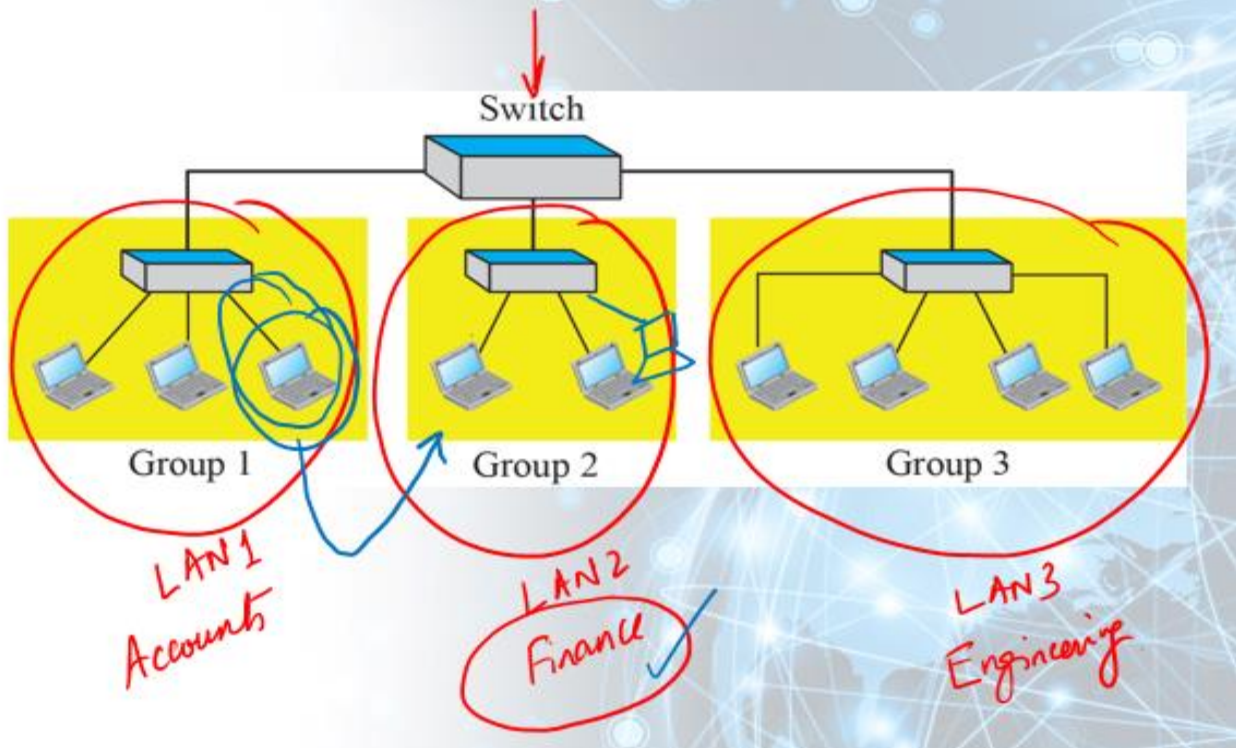


Visit Our Channel for CS601 Short Lectures

Learning With Abid Ali




<https://www.youtube.com/watch?v=-0kr2sG8JUQ&list=PLAUocDaOe9K6nDHAXKa-7fHsIFAKBPE8q&index=9>

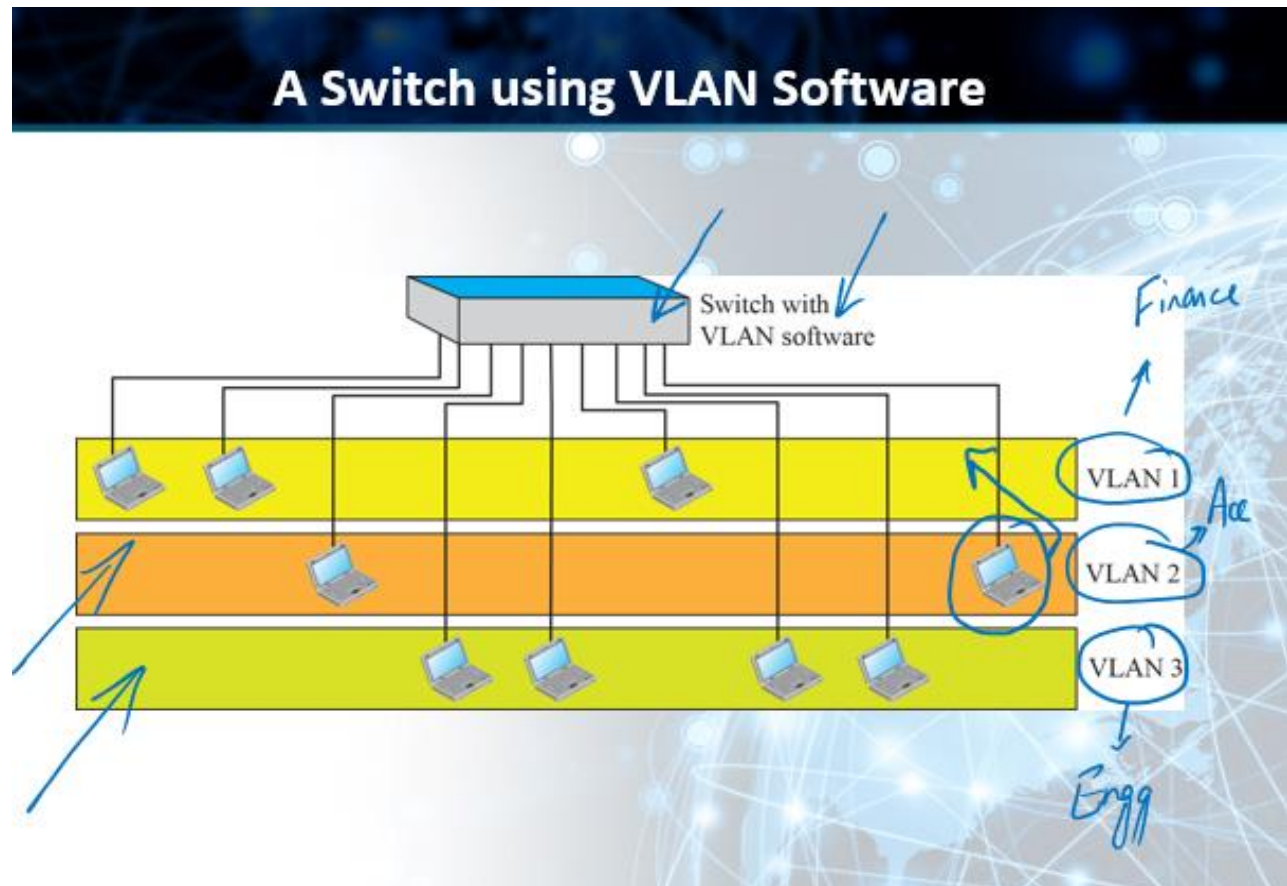


Visit Our Channel for CS601 Short Lectures

Learning With Abid Ali



<https://www.youtube.com/watch?v=-0kr2sG8JUQ&list=PLAUocDaOe9K6nDHAXKa-7fHsIFAKBPE8q&index=9>

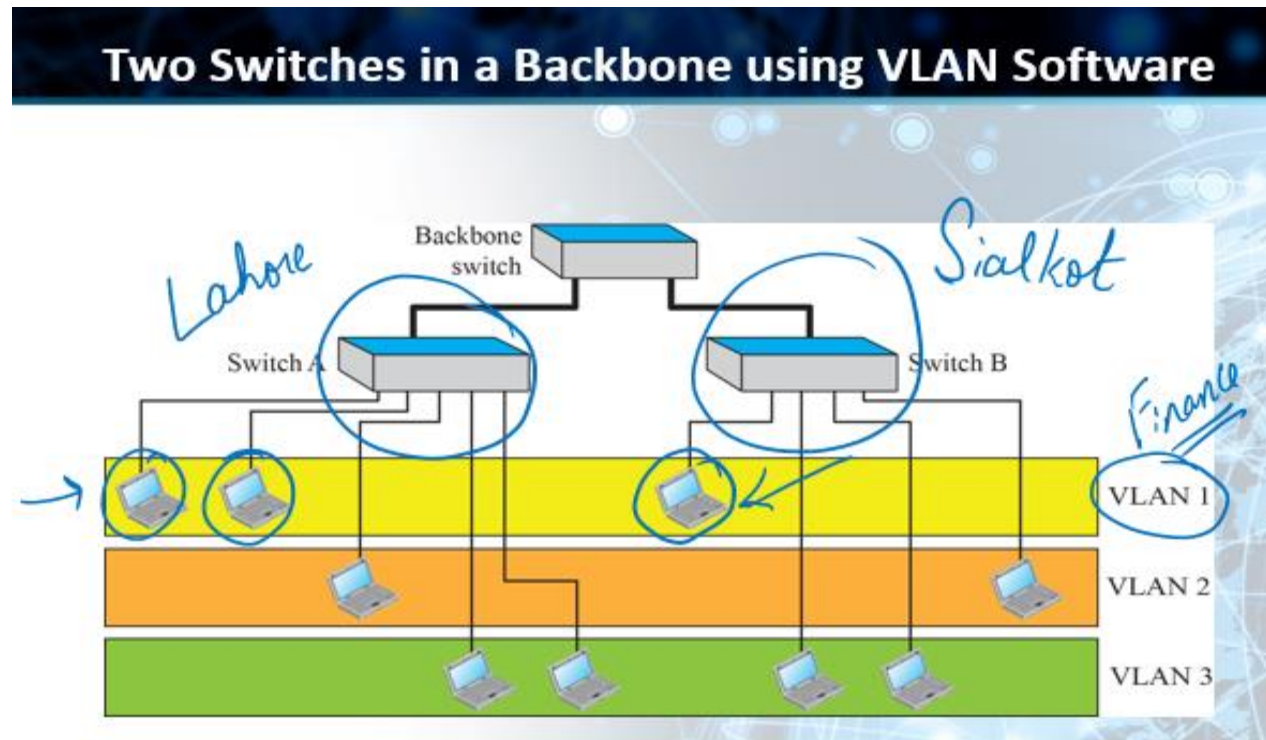

Membership of a VLAN

- What characteristic can be used to group stations in a VLAN?
- Vendors use different characteristics such as interface numbers, port numbers, MAC addresses, IP addresses, IP multicast addresses, or a combination of two or more of these

Communication between Switches

In a multi-switched backbone, each switch must know:

Which station belongs to which VLAN; and

The membership of stations connected to other switches

Visit Our Channel for CS601 Short Lectures

Learning With Abid Ali



<https://www.youtube.com/watch?v=-0kr2sG8JUQ&list=PLAUocDaOe9K6nDHAXKa-7fHsIFAKBPE8q&index=9>

Advantages of using VLANs


- **Cost and Time Reduction**
- **Creating virtual Workgroups**
- **Security**

Fiber To the Curb (FTTC)


- **An access network in which fiber is used for part, but not the entire link from the provider to the end-user**
- **An optical to electrical (O/E) conversion takes place somewhere near the end-user**
- **The terminal network segment of a FTTC network is usually twisted pair or coaxial cable**
- **The final optical receiver in a FTTC network typically serves several customers**

Visit Our Channel for CS601 Short Lectures

Learning With Abid Ali



<https://www.youtube.com/watch?v=-0kr2sG8JUQ&list=PLAUocDaOe9K6nDHAXKa-7fHsIFAKBPE8q&index=9>

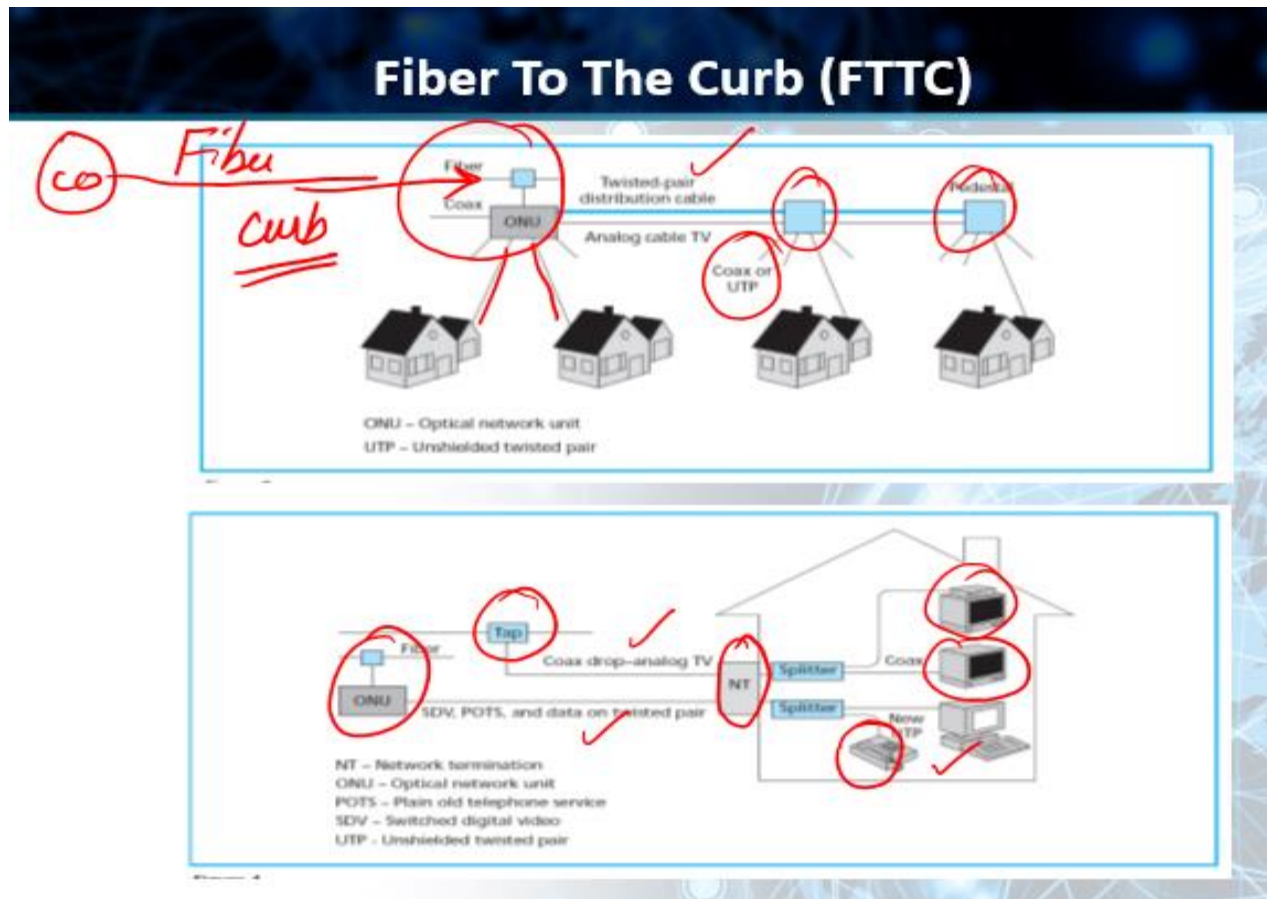

Fiber To the Home (FTTH)

- Need: High-speed data, reliable voice and high-quality video
- Problems:
 - ✓ How to get high speed lines out to each customer?
 - ✓ How to future-proof the architecture?
- Solution: FTTH
- Fiber-to-the-home (FTTH) is the installation of optical fiber from a telephone switch directly into the subscriber's home
- It is one of the latest access technologies

Visit Our Channel for CS601 Short Lectures

Learning With Abid Ali



Learning With
Abid Ali



Learning With
Abid Ali



Learning With
Abid Ali

<https://www.youtube.com/watch?v=-0kr2sG8JUQ&list=PLAUocDaOe9K6nDHAXKa-7fHsIFAKBPE8q&index=9>

- **FTTH is also referred to as Fiber-to-the-Building (FTTB)**