zmodo

Model:PT586

Smart Window Camera




User Manual

help@zmodo.com


WHAT'S IN THE BOX




x1 Window Camera



x (1+1 spare)
Velcro Mounts

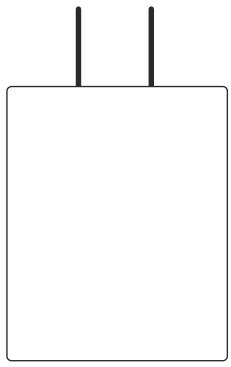

x1 Power Adapter



x1 2M Type-c Cable

Note:

1.Contents shown are for 1 unit. Multiply by the number of cameras in your package.

2.Check all items upon opening. Contact support if anything is missing or damaged.

CAMERA GUIDE

⚠ REMOVE LENS FILM BEFORE USE





☑ Indoor use on clean, clear glass only.
Not waterproof.

LED Indicator Status


	Slow Blink	Ready for Wi-Fi setup
	Fast Blink	Connecting to Wi-Fi
	Solid Blue	Wi-Fi connected

Operation	How to Do	LED Indicator
Power On	Plug the camera into a power outlet. The LED light will turn on 10 seconds after power is connected.	LED lights up after 10s
Power Off	Unplug the camera from the power outlet.	LED turns off
Reset	Press and hold the reset button for 6 seconds until you hear three beep sounds, then release. The camera will restart automatically.	LED blinks, then resets

START SETUP




Step 1: Plug in the camera

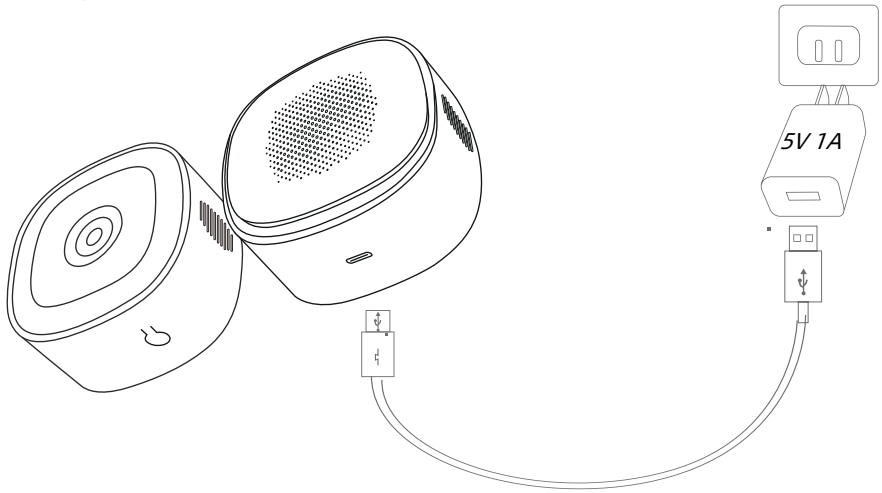

►Initial setup only :

⚠ Stay within 1.5ft
Phone · Router · Camera
For best Wi-Fi signal

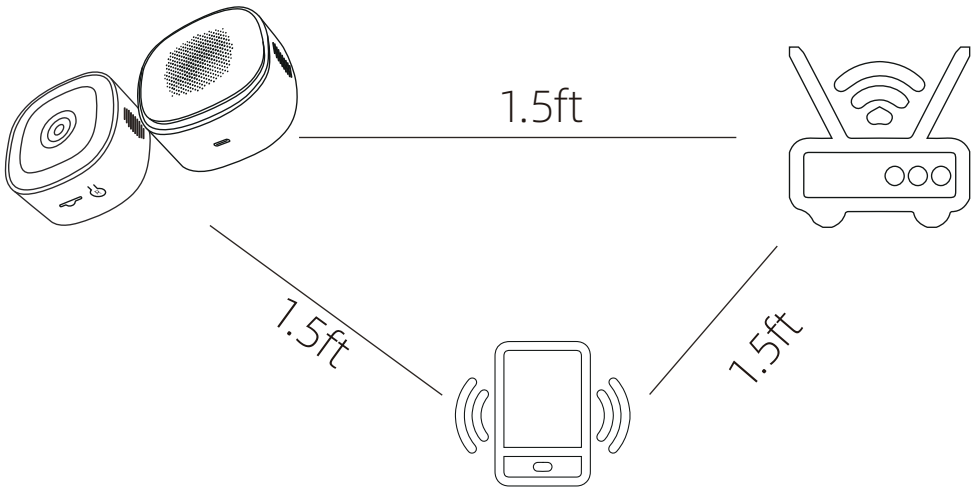

Step 2: Download the APP



Scan the QR code or search **Vistaflow** in APP Store or Google Play to download APP


Vistaflow


Download on the App Store

GET IT ON Google Play

Step 3: Register an Account


Click " Sign Up With Email " and follow the in-app instructions until the screen on the right appears.

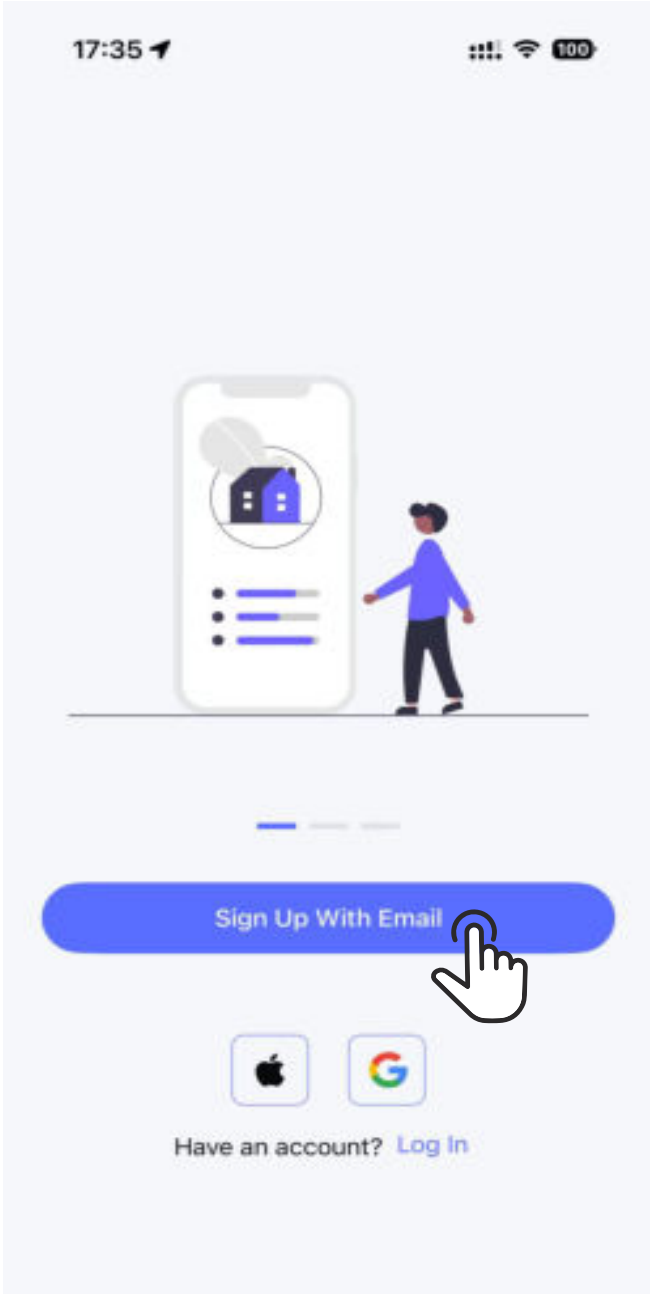

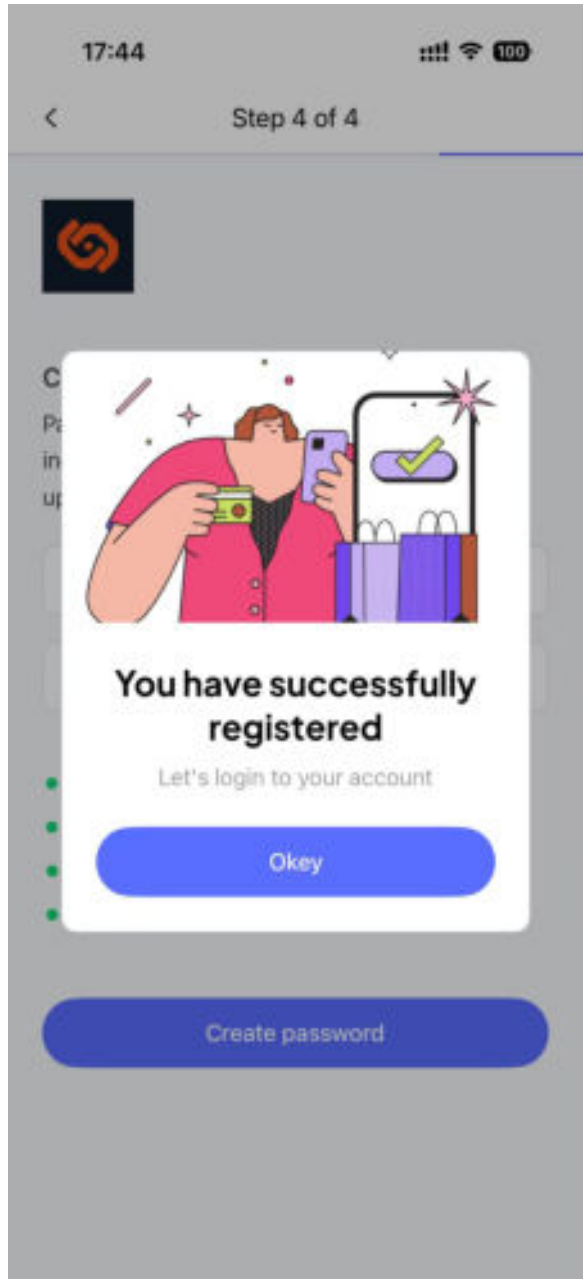


Step 4: Add Device

Note:
Make sure Bluetooth and Wi-Fi are enabled on your phone, and both devices are on the same Wi-Fi network before starting the setup.

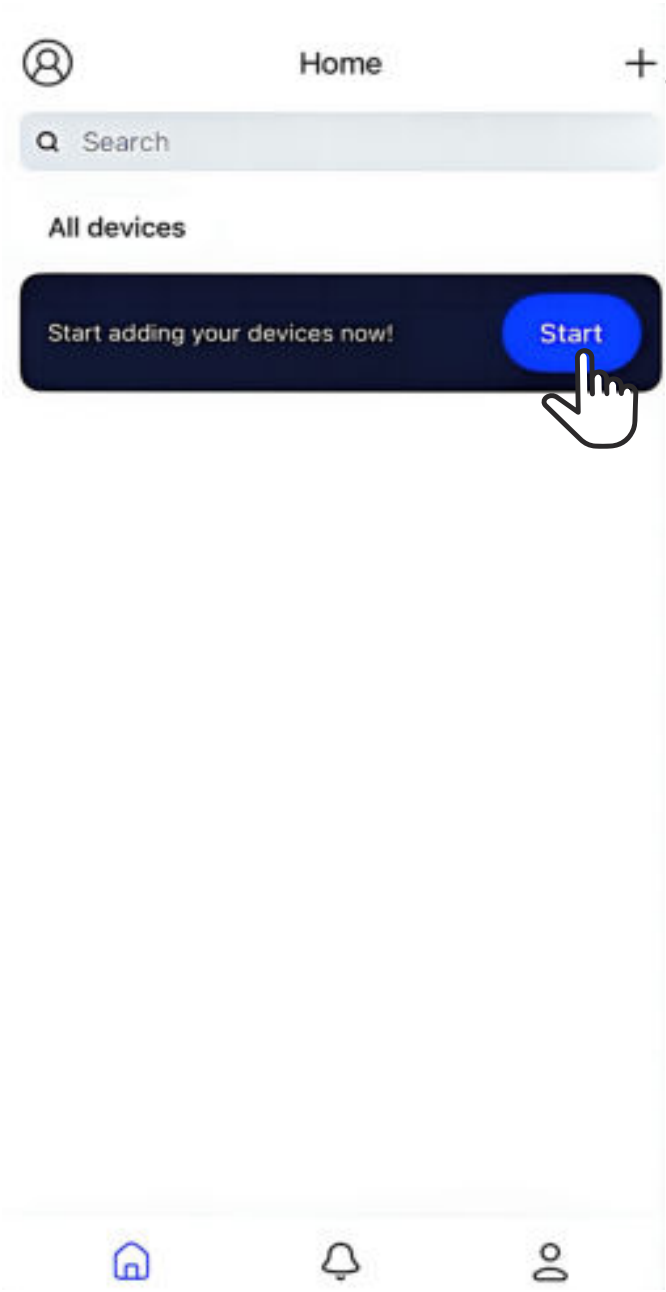

Click the "+" icon or "Start" button in the App to begin adding your device.

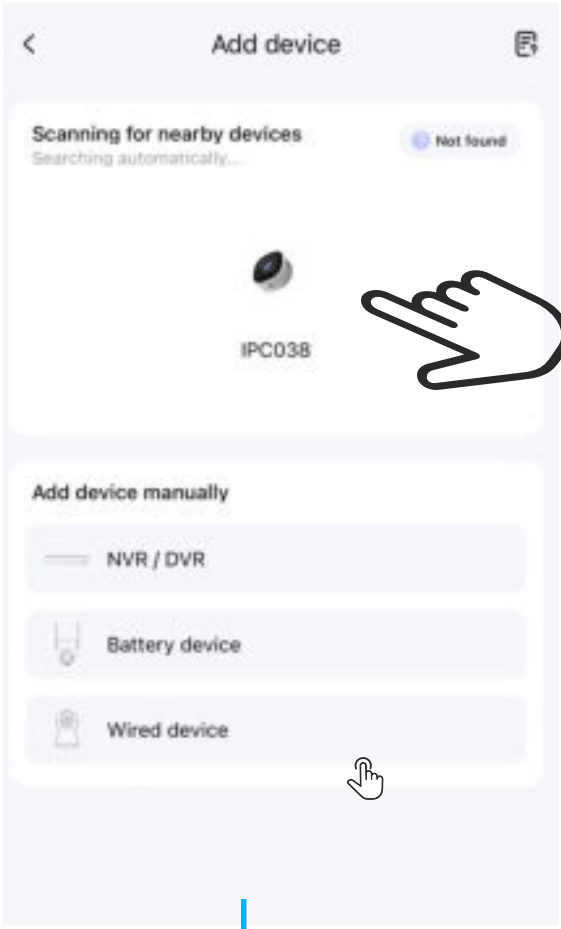


- Click the camera icon to start Wi-Fi setup.

- Select the same Wi-Fi as your phone, enter the password.

- Wait for the "Device added successfully" prompt. (see below)



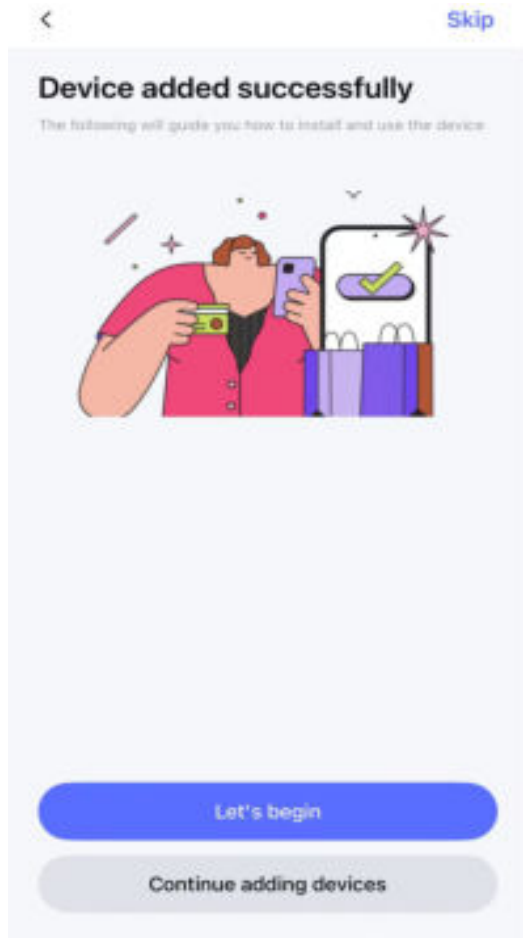

Step 5: Mounting Your Camera











Video Storage

Option 1: US-Based Cloud Storage


Option 2: TF Card Storage

Feature	Cloud Storage	Local TF Card Storage
Storage Location	Remote cloud server	Onboard TF card (local)
AI Smart Features	✅ Supported (AI Motion Recording, Smart Push, Porch Pirate Alerts, Fire Alerts, Kids Drowning Alerts)	❌ Not supported (basic motion recording only)
Recording Duration	7 / 15 / 30 days rolling (depending on plan)	Depends on TF card capacity (max 256GB), loop recording when full
Remote Playback	✅ Access anytime, anywhere via App	✅ Access via App (camera must be online)
Video Security	✅ High – encrypted cloud storage, low risk of data loss	⚠️ Medium – footage lost if TF card is damaged or stolen
Smart Push Notifications	✅ AI-powered, event-type specific alerts (low false alarms)	⚠️ Basic motion alerts only (higher false alarm rate)
Live View	✅ Supported (internet required)	✅ Supported (internet required)
Network Dependency	⚠️ Requires stable internet to upload	✅ Works offline (recording continues even without internet)
Cost	💰 Subscription fee (monthly/annual)	✅ One-time purchase (TF card cost only)

⚠️ **Note:**

1. TF card is not included in the package and must be purchased separately.
2. Free 7-day trial available upon cloud subscription.

Live View

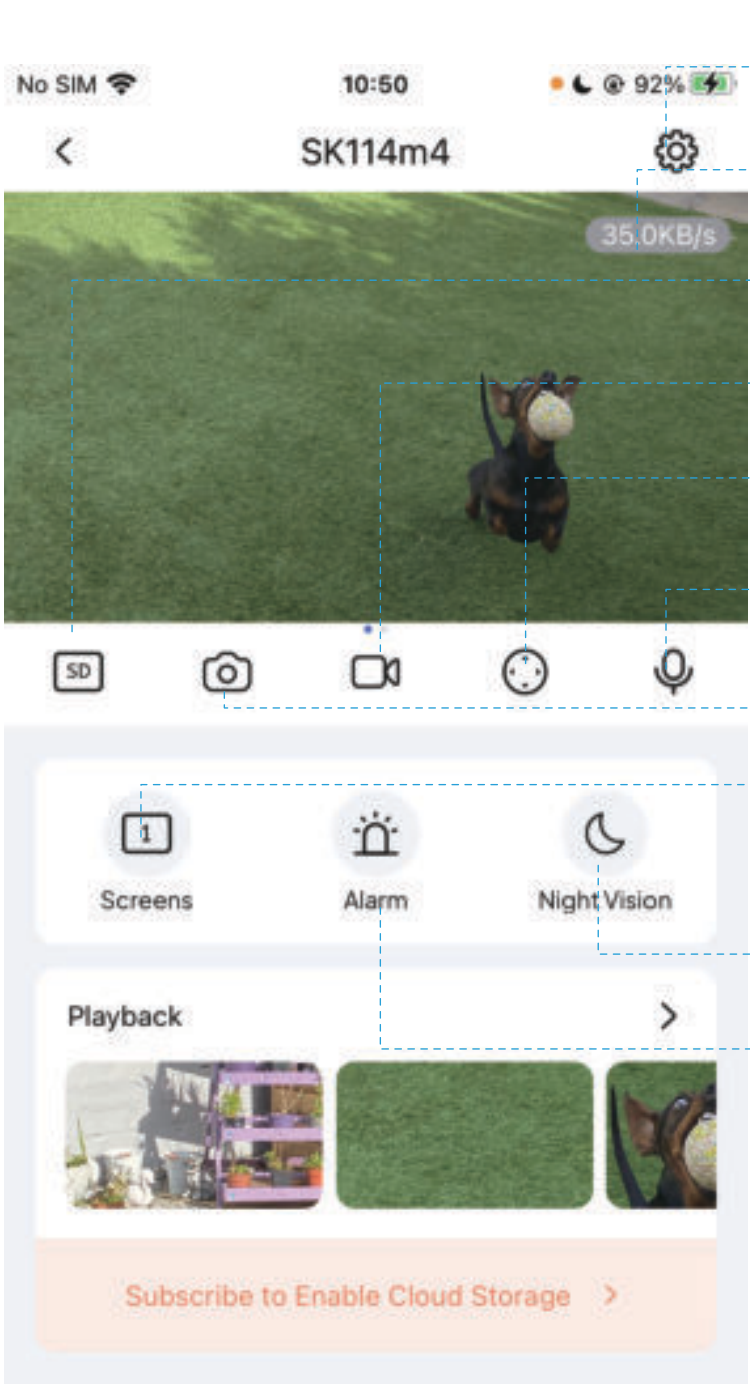

Camera Settings

Network Speed

Switch HD/SD Video Resolution

Record a Video Clip

PTZ Control

2-Way Audio

Take a screenshot

1/4/9/16 Screen

Night Vision Mode

Make a Siren

TROUBLESHOOTING

The security camera supports both 5GHz and 2.4GHz Wi-Fi. However, the 5GHz Wi-Fi has a smaller coverage area compared to the 2.4GHz. If the 5G network connection is unstable, please try resetting the camera and connecting it to a 2.4G network for testing.



5GHz
WiFi



2.4GHz
WiFi

1.If the camera configuration fails, please check that the camera is powered on and in pairing mode (indicated by the **slow** flashing light).

2.The camera will automatically shut down if it remains unconnected to the network for an extended period in pairing mode.

Q: Failed to connect the camera?

A.Replug the adapter and confirm the device is powered on.
B.Confirm the LED light is flashing slowly(Ready for Setup).If there's no light flashing,please hold the reset button for 6 second and try again.
C.Ensure Bluetooth and Location Services are enabled on your phone.Allow Vistaflow App to access the permissions.
D.Move the camera closer to the router(within 1.5ft)for wifi configuration.
E.Make sure your Wi- Fi name and password are correct (passwords are case- sensitive)

Q: Camera is offline or has stopped working?

A.Replug the power adapter and ensure the camera is powered on.
B.Check if your Wi- Fi network is working.You can test it with another device,like a laptop.
C.Ensure the camera is within Wi- Fi range.Move the camera closer to the router and test.2.4GHz has a longer range than 5GHz,try resetting the camera and switching to 2.4Ghz frequency to see if it fix.
D.If the Wi- Fi password has changed,please reset and reconnect the camera.
E.Make sure the camera is updated to the latest firmware version in the app.
F.Contact our support if you need more assistance.

Q: No notification and recordings when there's motion?

A:The camera is designed to detect motion within a range of 26ft and trigger alerts and video recording.
Please check the **Detection Alarm settings** and make sure **App Notifications** are enabled in the app.

Q:How to set 24/7 Recording Mode?

Access Device Setting- - >Recording Setting- - > Set Recording Mode to Continuous Recording

Q:How to reduce unnecessary notification?

A.Set the Detection Sensitivity to Low or Medium.
B.Set the Alarm Interval to receive lower frequency alarm according to your demand.
C.Customize your Detection Zones to focus on specific areas.
D.Set a Detection Schedule based on your daily needs.

Q:How to share the camera with family members?

Open the APP,Click Mine- - >Device Share- - >Select the Device you want to share- - >Input the Invitee's account of the Vistaflow APP. The Invitee open his own Vistaflow APP- - >Click Message- - > Accept the invitation.

SPECIFICATIONS	
Processor	High Performance SOC Processor
Image Resolution	Max.2560x1440
WDR	QHDR
Audio	Built-in Mic and Speaker
WiFi Connectivity	2.4Ghz or 5Ghz
Local Storage	TF Card(Max.256GB)
Power Supply	DC 5V/1A
Operating Condition	14F to 122F(-10℃~50℃)
Humidity	10%~95%