

Development of Control Strategies for Earthquake Reproduction on Shaking Platform

Afonso Costa Henrique
afonso.henrique@tecnico.ulisboa.pt
Instituto Superior Técnico, Lisboa, Portugal

May 2026

Abstract - This paper presents two model-based controllers for the accurate simulation of earthquakes using an experimental seismic shaking table. Reproducing recorded earthquake ground-motion time histories, along with the analysis of their effects on built structures through scaled laboratory experiments remains a challenging task. A primary concern is ensuring that the vibration response spectrum of the seismic shaking table accurately matches the target earthquake signal. During the experiments, the dynamic response of the mounted coupled physical structure must not interfere with the seismic shaking table motion intended to reproduce the earthquake excitation. This requirement can be formulated as a disturbance rejection problem, for which two model-based control strategies are proposed: a Filtered PID (PID-F) controller and a Linear Quadratic Integral (LQI) controller. In both approaches, the identification of the dynamic model of the combined system (the shaking table platform and the mounted coupled structure) is required, for which the two-stage closed-loop identification method is used. The performance of both controllers, and the OLI method, are evaluated using eight benchmark real earthquake ground-motion records, firstly, with a model of LNEC's uniaxial shaking table, and then, with a model of a small-scale eletrodynamic shaking table identified experimentally via two-stage method. The results show that the performance of both the PID-F and LQI controllers outperform the standard Online Iteration (OLI) method currently in use at the Laboratório Nacional de Engenharia Civil. Among the two proposed approaches, the LQI controller achieves the best results by minimizing the squared error between the target and measured response spectra of the earthquake reference signal. Overall, these results open the possibility of exploring new control techniques for reproducing simulated earthquakes in laboratory-scale experimental setups.

Keywords: Earthquake Engineering, Control Systems, Closed-loop System Identification

1. Introduction

Earthquakes are among the most catastrophic natural events, frequently causing severe loss of life, extensive property damage, and significant socio-economic disruption. One of the most effective ways to reduce seismic risk is by decreasing the structural vulnerability of the built environment, which can be assessed through experimental techniques such as shaking table testing.

Common seismic setups consist of a physical structure coupled to a stiff shaking table platform that is driven so as to reproduce the desired ground-motion time history (reference signal). This experimental concept was introduced in the 1940s and became widespread during the 1960s. Early systems relied on mechanical profiled cams to generate the excitation, but servo-hydraulic systems soon became the standard solution ([19],[5],[2]). At the Laboratório Nacional de Engenharia Civil (LNEC) a Goodmans model VG-108 electrodynamic shaker attached to a movable table was installed in the 60s to perform seismic tests [7]. A uniaxial seismic shaking table (ST1D) was developed and installed, consisting of a 3 m by 2 m horizontal steel platform and

a vertical platform body driven by a hydraulic actuator supplied by a dedicated oil-hydraulic circuit ([1], [6]). During this period, adaptive control strategies were developed, implemented, and validated both on a small scale shaking table and on the ST1D, for tracking reference earthquake spectrum (frequency domain), iteratively ([3],[4]). Increasingly demanding requirements for reproducing seismic excitation along all three directions motivated the development of the triaxial shaking table (ST3D), which has been installed and operational at LNEC since the mid-1990s [7]. The reproduction of earthquakes on a seismic shaking table depends strongly on: i) the hardware (mechanical and electrical system), which usually has limitations and therefore can distort the reference signal and; ii) the control system, whose performance is highly sensitive to the adopted control strategy and tuning. The hydraulic and control system supplier, MTS Systems Corporation (MTS), provided several control strategies: i) Three-Variable Control (TVC), also known in control theory literature as state variable control [12], which combines the displacement, velocity and acceleration feedback [19]; ii) Adaptive Harmonic Cancel-

lation (AHC), suitable for sinusoidal signals (fixed frequency or sweep); iii) Adaptive Inverse Control (AIC) [18], suitable for non-sinusoidal signals on linear systems; iv) Amplitude/Phase Control (APC), suitable for sinusoidal signals (fixed frequency and sweep) and predominantly linear systems, which is often used in conjunction with AHC to reduce distortions in nonlinear systems; v) Online Iteration (OLI), suitable for nonlinear systems and non-sinusoidal waveforms. This last strategy is the most appropriate for earthquake engineering applications, as structures may exhibit nonlinear behaviour or sustain damage during the tests. OLI is currently the control method implemented at LNEC's ST3D.

Seismic shaking-table control strategies are typically based on inverse model controllers. The offline generation of the drive signal is obtained through the inverse dynamic model of the system to be controlled. This drive signal is then used to feed a linear controller, e.g. a Proportional-Integral-Derivative (PID) controller, using the actuator feedback signals (displacement, velocity, or acceleration) ([19], [8]). PID controllers remain widely used in most testbed setups, including shaking table and hybrid testing platforms [16]. This is the basis of the OLI control strategy. Alternative control approaches have been proposed in the literature, including: i) Acceleration Trajectory Tracking Control (ATTC) [10]; ii) displacement feedforward-feedback controller using an optimal controller [13]; iii) Model-based feedforward-feedback controller for acceleration tracking [14]; iv) minimal control synthesis (MCS) strategy, which is feedback-feedforward adaptive control strategy including the inverse model in line with the reference signal [15].

The OLI strategy currently implemented at LNEC's seismic shaking table has several limitations: i) the PID controller parameters remain fixed and are not adjusted to reflect the characteristics of either the reference signal or the model under test; ii) the approach requires the offline computation of the drive signal to be fed into the system; iii) the procedure is iterative, often requiring multiple drive-signal updates to achieve the target response, which increases testing time and may induce additional damage to the coupled structure. In this paper, an alternative control methodology for shaking-table testing is presented. Two model-based controllers are proposed using a dynamic model obtained from the two-stage closed-loop system identification method [17]: i) a PID-F controller, i.e. a PID with a filter on the derivative TERM, tuned to maximize the bandwidth while maintaining a unitary frequency response function (FRF); ii) an LQI controller, i.e. an optimal controller augmented with an integral of the tracking error, whose weighting terms are tuned with the Nelder-Mead simplex op-

timization algorithm [9], such that the optimal state feedback law minimizes the mean squared error between the target and the output response spectra. Eight earthquake records [11] are used to evaluate the performance of the proposed controllers on a small-scale seismic shaking table. Numerical simulations demonstrate that the performance of the proposed controllers outperform the OLI control approach, with the LQI controller exhibiting the best performance. These results validate the effectiveness of the proposed control approach besides confirming previous results obtained with the numerical model of the ST1D shaking table [8].

This paper starts in Section I with a brief introduction to the seismic shaking table control problem, summarizes previous work, describes the proposed methodology outlining the control strategies to improve the system performance. The control strategy currently in use and the experimental set-up available at LNEC are described in Section II, followed by the detailed presentation of the control methodologies in Section III and the corresponding results in Section IV. The paper concludes with the main findings and outlook for future developments.

2. LNEC's Shaking Table Test Procedure & Control System

The current control strategy implemented in the LNEC's seismic shaking table tests is based on the OLI algorithm. It involves the iterative synthesis of a drive signal with progressively increasing severity, aiming to ensure that the platform accurately reproduces the response spectra of the reference signal, i.e., the target earthquake (Fig.1). The experimental test procedure consists in testing the structure to a series of test steps starting with a low severity earthquake (scaled earthquake) and then repeat for the same earthquake at a higher severity (higher amplitude), until a defined amplitude is reached which usually corresponds to the original amplitude of the earthquake - reference severity.

At each test step the structural damage is accessed and, before starting a new test step, the system's transfer function is identified using a band-limited pink noise input signal (with a slope of -10dB/decade). This transfer function is then used to generate the drive signal for each test step. Throughout this process, the amplitude of the reference signal increases progressively, and it is expected that the coupled physical structure will enter a non-linear regime, either due to the behaviour of some of its components or the damage accumulated during the various tests. At each test step, the system's performance is evaluated by comparing the response spectrums of the reference signal with the platform (Fig.2).

The response spectrum is a fundamental concept

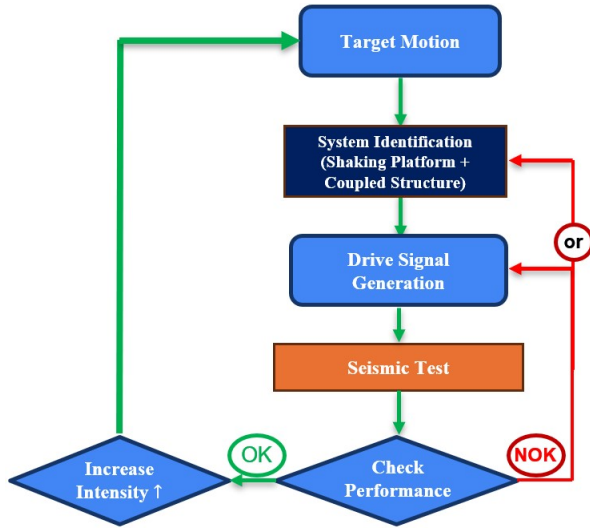


Figure 1: Current LNEC's seismic experimental test procedure

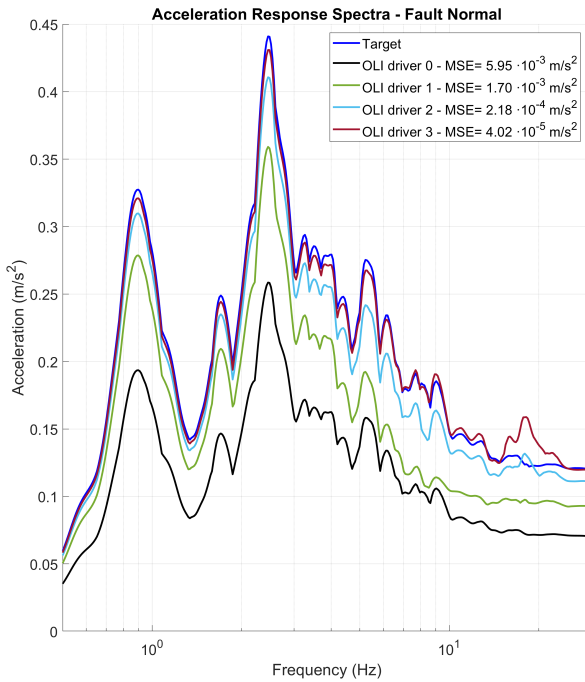


Figure 2: Acceleration response spectrum evolution for the scaled L'Aquila seismic signal using four iteratively generated drive signals.

in earthquake engineering and structural dynamics, as it represents the maximum response (such as displacement, velocity, or acceleration) for each natural frequency of a single degree of freedom mass-spring-damper system subjected to the ground motion. It represents how structures respond to a specific earthquake ground-motion record and is used to characterize earthquake severity.

Consequently, different earthquake time histories can correspond to the same response spectrum, meaning they have the same severity. However, it is not always possible to achieve satisfactory performance with the command signal synthesized initially, and it may be necessary to generate more than one command signal and carry out additional test steps. This procedure, although necessary to fit the spectrum, it induces additional damage to the structure. Additionally, physical limitations inherent to the equipment, namely with regard to the finite field of displacement, velocity and acceleration, must be duly considered during the tests.

To overcome these limitations a control methodology for shaking table using an optimized linear controller, the identified model of the system and earthquake recorded is being proposed. The performance of the system will be evaluated with two candidate controllers: a PID-F and an optimal LQI controller.

An experimental facility comprising a small-scale seismic shaking table with dedicated hardware and software is used to validate the methodology. The measurement and control chain is depicted on Fig.3 consisting on: i) Shaking Table, including a small-scale shaking table installed on a fixed base, along which it rolls over, driven by a Goodmans model 390A electrodynamic shaker, and a Linear Variable Differential Transformer (LVDT) measures the relative displacement of the platform; ii) Conditioning and Control unit, with a hardware rack comprising all required signal conditioning and control components, including sensor signal conditioners and a National Instruments PXI Real-Time Controller integrated with a CompactRIO system featuring a Virtex-5 FPGA, enabling autonomous real-time execution of control and acquisition tasks; iii) and, Data Acquisition System comprising a host PC, where the experimental setup is configured using the NI LabVIEW environment, including the implementation and supervision of the control strategy, the data acquisition set-up, as well as the measurement and visualization of the experimental results.

One key advantage of this system framework is the modularity, since both data acquisition system and the condition and control rack can be deployed with other experimental setups. In particular, the system can be reused with the ST1D shaking table, where the proposed control strategies will be

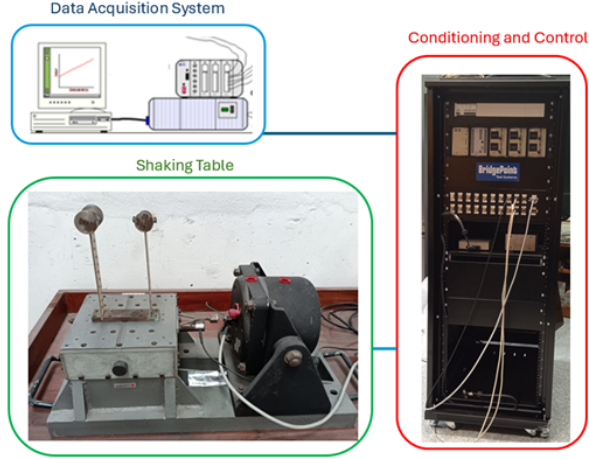


Figure 3: Experimental facility




Figure 4: Seismic shaking table control loop

subsequently validated.

The approach proposed in this paper considers the full system as a closed-loop control system schematically illustrated in Fig.4, comprising of two blocks: i) a given controller, which in this paper is a PID-F controller or an optimal LQI controller; and ii) the controlled system, consisting of the shaking-table hardware, including its mechanical and electrical components, together with the top-mounted coupled structure (also referred as the physical model). The controller is designed to minimize the error between the output signal y , corresponding to the shaking table motion, and the reference signal r , corresponding to the earthquake signal.

The control strategy currently implemented at LNEC is the OLI control approach. For the majority of applications, the PID controller parameters are tuned in advance for a specific test configuration and subsequently kept fixed throughout most experimental campaigns.

3. Methodology

This section details the identification of the models used in this study, the controllers design, and how controller performance was evaluated.

Firstly, the model for LNEC's uniaxial shaking table is introduced. Then, the two-stage closed-loop identification method [17] for the identification of the eletrodynamic shaker is addressed.

For the control strategies, the OLI method currently used at LNEC is described, and this method will serve as a baseline for different controller performance comparison. Finally, the design of the PID-F

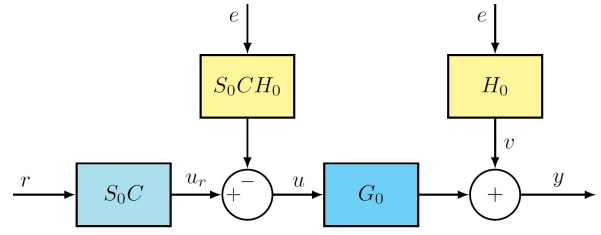


Figure 5: Block diagram illustrating the two-stage method, with S_0C being a Hammerstein-Wiener model to better represent the real system dynamics with control action saturation (C - controller; S_0 - sensitivity function; G_0 - model plant; H_0 - noise model; e - white noise; u_r - noise free control action).

and LQI controllers .

3.1. LNEC Uniaxial Shaking Table Model

In Tekeste [16], a model of the ST1D coupled with a 1DOF system was developed by parameterizing linearized analytical models of its individual components. To derive a model for the shaking table coupled with a 2DOF mass-spring-damper system (representative of the essential dynamics of typical test specimens) a block diagram comprising the controller, servo valve, and hydraulic system was first constructed. Subsequently, transfer functions for the complete system were derived. The resulting model was employed in all simulations of the ST1D.

3.2. Eletrodynamic Shaker Model

A dynamic model identification of the plant (shaking table and the mounted coupled structure) is needed for tuning the controllers. To this end an identification experiment is carried out using a band-limited pink noise driver signal, with amplitude of approximately ± 4 mm, with the controller set with proportional gain $K_p=10$ V/m, and data acquisition at 200 Hz. A sampling period of 5 ms is used throughout. The imperative of running experiments under closed-loop control poses additional challenges for identifying the plant. To address the particularities of a closed-loop identification, the two-stage method [17] illustrated in Fig.5 is applied.

Firstly, the sensitivity function with controller, S_0C , is identified by fitting a linear FIR model with 100 parameters (the order of the model needs to be high enough to reproduce the noise-free control action, and high variance is not of concern). Then a Hammerstein-Wiener model is defined, using the previously identified FIR model as the linear block, and with the output nonlinearity equal to that of the physical system (saturation of the control action at known values), resulting in a more refined model for the sensitivity function. This function is then used to compute the noise-free control action u_r ,

from which (by being uncorrelated with the output y) the plant G_0 can now be estimated without bias introduced by the controller in the feedback loop. The model resulting from the two-stage identification was employed in the simulations with the PID-F and LQI controllers.

3.3. Control Strategies

3.3.1 LNEC's Driver Signal Iterative Adaptation Process (OLI method)

This control technique is known as Online Iteration (OLI) [MTS Systems], as it iteratively modifies the command input on an individual sample-by-sample basis until the system response is close to the target. This method compensates the next drive signal with a drive correction signal which is computed from filtering the previous iteration error with the inverse model of the closed-loop frequency response function. The closed-loop frequency response function (FRF) is estimated via a nonparametric identification method by spectral analysis. To this end, the user interface of the driver iteration program allows many different settings for the identification. For the simulations of the OLI method, in the case of the ST1D model, the identification settings were 0.5 window overlap for 20 Hanning windows, with FRF mode set to H3, no filtering, and displacement/acceleration cross-over frequency turned off; And, in the case of the eletrodynamic shaker, the identification used the experimentally acquired data with the band-limited pink noise, using controller with proportional gain $K_p = 10$, and the FRF identification settings use Hanning window with the number of windows set to 8192 with 97% overlap, and the FRF mode is set to H3. During the driver adaptation process, settings such as correction factor and maximum frequency compensation are adjusted as needed, while the coherence threshold is left at 90%. The closed-loop transfer function used in the simulations of the OLI method was estimated by direct identification (from signals "r" and "y", resorting to figure 4), and its frequency response is shown in figure 10.

3.3.2 PID-F Controller

In the experimental test procedure followed at LNEC (Fig. 1), system identification is performed each time the target signal is scaled up. A natural and straightforward improvement arising from this procedure is the systematic updating of the controller tuning parameters in accordance with the identified plant dynamics. A further enhancement consists of augmenting the existing PI controller with a filtered derivative term, yielding a PID-F structure. This extension is particularly advantageous in the present context, as it requires minimal mod-

ifications to the existing control software architecture, representing a natural extension of the current controller structure, while simultaneously affording greater tuning flexibility. Accordingly, a PID-F controller is implemented and systematically tuned based on the identified dynamic characteristics of the system.

3.3.3 LQI Controller

From the plant transfer function identified via the two-stage method, a state-space representation in controllable canonical form is adopted, with the state vector $x(t)$ defined accordingly. This state-space representation is subsequently employed to determine the optimal state-feedback control law, $u(t) = -K \cdot x_{aug}(t)$, where the augmented state vector $x_{aug}(t) = [x(t)x_i(t)]^T$ incorporates the state $x_i(t)$ which is defined as the integral of the tracking error. The optimal static gain vector K is obtained through minimization of the LQI performance index: $J = \sum_{t=0}^{\infty} x_{aug}(t)^T Q x_{aug}(t) + u(t)^T R u(t)$, where Q and R have appropriate dimensions, with $R=1$ and Q being a diagonal matrix where each parameter was found via Nelder-Mead simplex algorithm [9] in order to minimize the acceleration response spectrum MSE for the seismic signal on test, computed for 100 logarithmically spaced points between 0.1Hz and 30Hz.

3.4. Performance Evaluation

A set of recorded earthquake ground-motion time histories covering a wide range of seismic characteristics were used to evaluate the performance of each control strategy, namely [11]: i) 1940 Imperial Valley earthquake, El Centro Fault Normal (FN) and Fault Parallel (FP) records; ii) 1992 Erzikan earthquake, Erzikan North-South (NS) and East-West (EW) record; iii) 1995 Kobe earthquake, Kobe NS and EW records; iv) 2009 L'Aquila earthquake; v) 1994 Northridge earthquake, Newhall FN and FP records; vi) 1994 Northridge earthquake, Rinaldi FN and FP records; vii) 1994 Northridge earthquake, Sylmar FN and FP records; viii) 1976 Friuli earthquake, Tolmezzo record.

To ensure that the imposed inputs remained within the displacement capacity of the shaking table, appropriate scale factors were computed by taking the quotient of maximum desired displacement with the maximum displacement of any direction of the seismic signal (rounded to 3 decimal places) and then applied to the ground-motion signals.

The performance of each control method is evaluated through the acceleration and displacement response spectrum mean squared error (MSE) for every input action described in the previous section. The acceleration response spectrum is computed from 0.1 Hz to 30 Hz for 500 logarithmically spaced

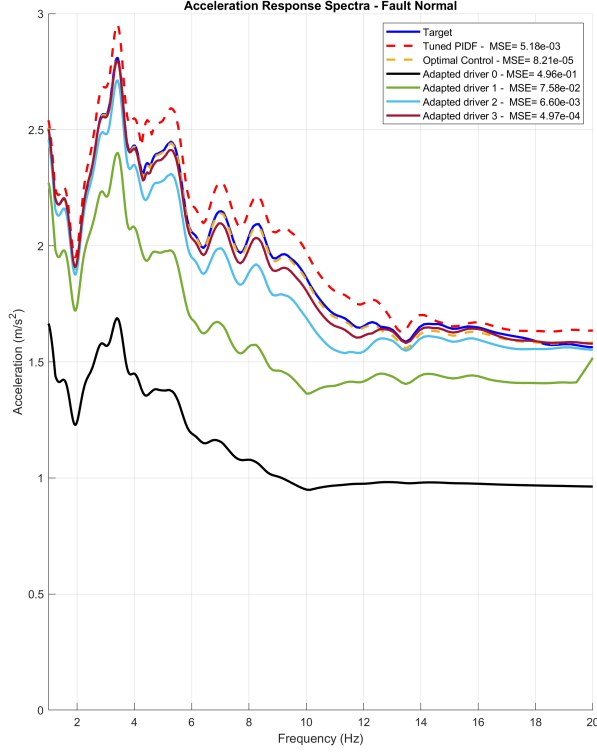


Figure 6: Erzikan fault North-South response spectra. For this case a 4th adapted driver was computed, which yielded better results then the PID-F (unlike the 3rd driver used in every other performance comparison), but only in terms of acceleration response spectrum and in the fault normal direction.

points, and the displacement response spectrum is computed for the same frequencies, however, for only the first 344 points, equating to a range from 0.1 Hz to 5.04 Hz.

For the case of the ST1D model, a 2DOF system coupled to the platen was considered, with both masses set to 2000 kg, and the modal properties: $f_1 = 1.5Hz$, $\zeta_1 = 0.02$, $f_2 = 6Hz$, $\zeta_2 = 0.05$.

4. Results

4.1. LNEC's Uniaxial Shaking Table Model

The ST1D model, the platen acceleration and displacement response spectrum MSE for each earthquake, for each control strategy is shown in figure 7 and 8. To highlight how the platen response spectra obtained for each control strategy (and iteration, in the case of OLI method) varies across the frequency range, the results for the Erzikan earthquake in the fault normal direction are shown in figure 6.

4.2. Eletrodynamic Shaker

For the identification, the indirect method yielded inconsistent results across experiments, and both the direct and two-stage methods produced mixed results. Based on the fundamental knowledge of

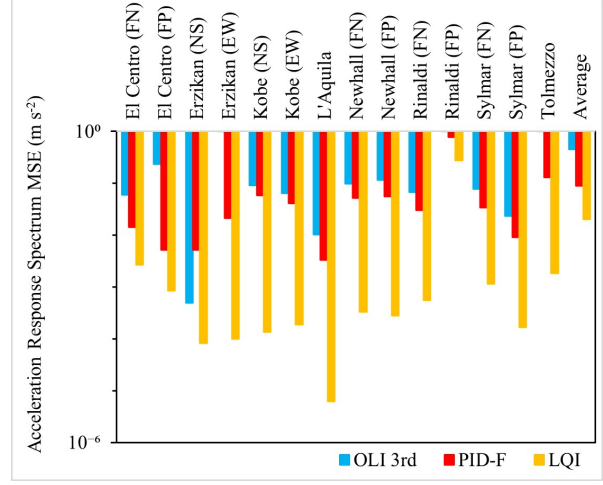


Figure 7: Acceleration response spectrum MSE

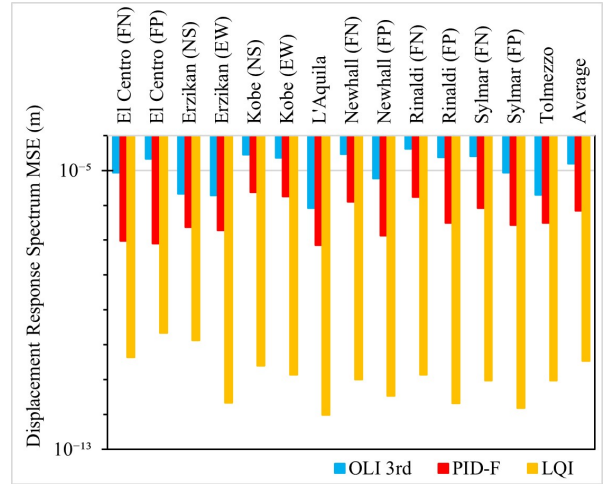


Figure 8: Displacement response spectrum MSE

Figure 9: ST1D model response spectra for benchmark seismic signals

applicability and limitations of each identification method in closed-loop systems, it was decided to proceed with the model identified via the two-stage method on the data from the run with the controller proportional gain set to $K_P = 10$.

The Bode plot of figure 10 displays the result of the direct identification of the closed-loop with the controller set as proportional gain $K_P = 10$, and the expected closed-loop response with the respectively tuned controllers, computed from the plant model.

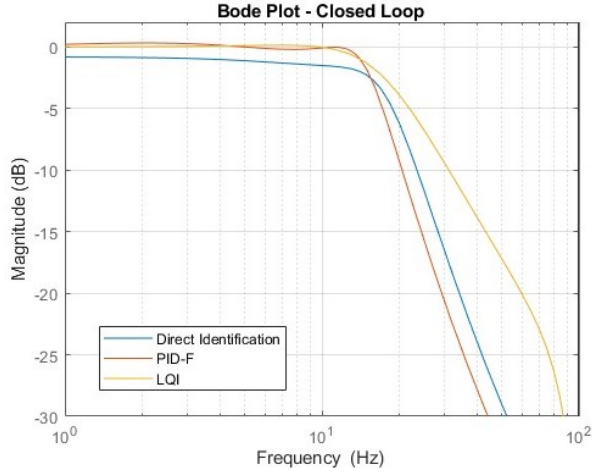


Figure 10: Shaking table control loop frequency response with controllers optimized for the Tolmezzo earthquake

The frequency responses clearly highlights the benefits of optimizing the controllers (PID-F and LQI) since a larger bandwidth is obtained while maintaining a unitary gain at lower frequencies. This directly translates to improvements in the response spectrum, which will meet the target on the first run, instead of not requiring several iterations.

The results obtained with the proposed methodology show how the tuning/optimization can improve significantly the performance of the system. It can be observed in 11 for acceleration and displacement response spectra of Newhall earthquake, respectively, that the PID-F controller closely matches the target response, the LQI achieves an even closer match, whereas the OLI method (LNEC's approach) remains further from the target even after the third drive iteration. The MSE values quantify the differences observed among the curves.

The results obtained for the remaining earthquakes exhibit the same trend, as shown in figures 12 and 13. This analysis confirms the benefits of using the proposed methodology, consistently identifying the LQI controller as the one that achieves the best closed-loop performance results.

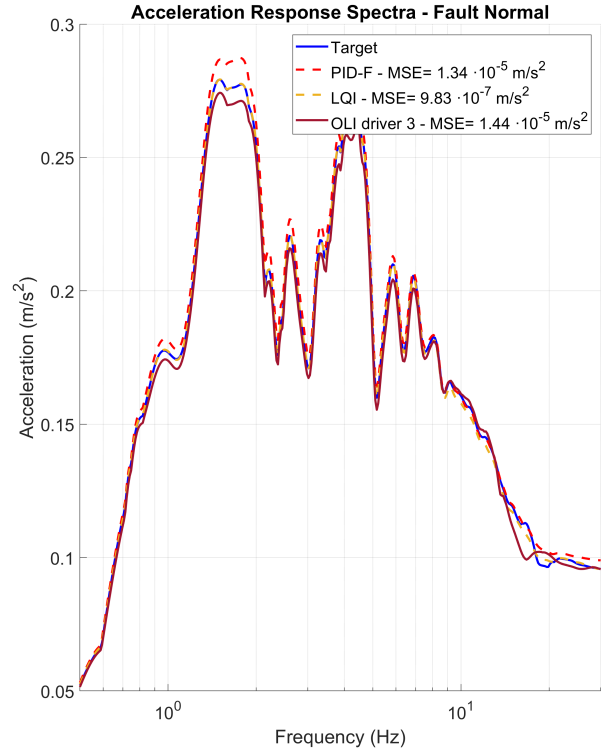


Figure 11: Acceleration response spectra for a scaled-down Newhall fault normal seismic signal

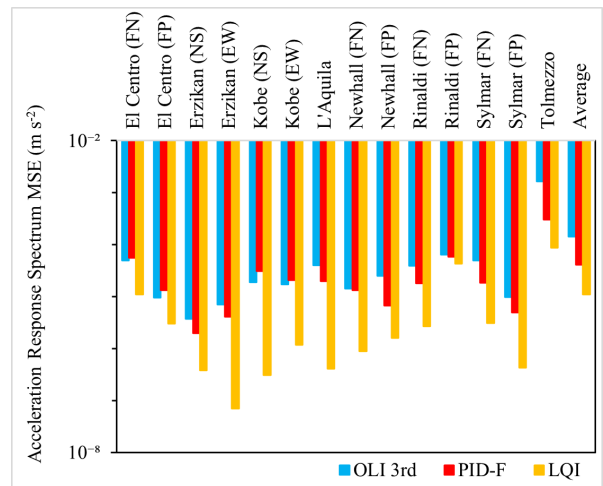


Figure 12: Acceleration response spectrum MSE

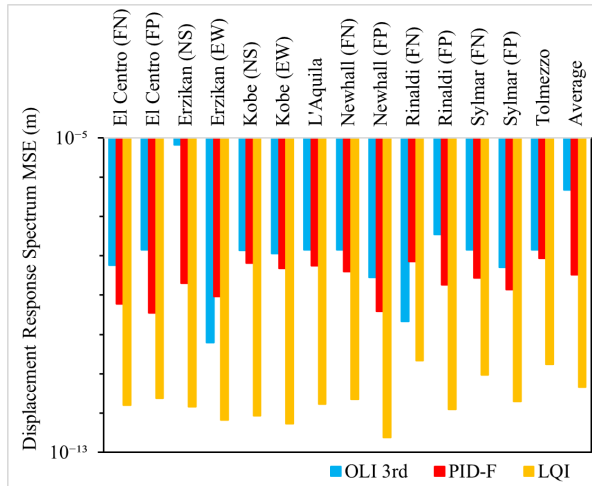


Figure 13: Displacement response spectrum MSE

Figure 14: Eletrodynamic shaker model response spectra for benchmark seismic signals

5. Conclusions & Outlook

This work presents an improved solution to the current OLI method used in LNEC to experimentally reproduce simulated earthquakes in laboratory shaking table setups. Based on model-based controllers and using the two-stage closed-loop identification method to identify the plant and optimize the controllers, the PID-F and the LQI controllers were shown to reproduce the target response spectra across the whole frequency spectrum of the earthquake signal more accurately on the first run when compared with the standard OLI method fourth run. The tuned controllers (PID-F and LQI) also require less user intervention, and, moreover, offer a systematic approach to the control problem, with LQI controller providing the best results by significant margin for all earthquake ground-motions simulations. Furthermore, the proposed control strategies may also be used in conjunction with the OLI method, which, being a combined open- and closed-loop strategy with no restrictions on the closed-loop controller, can incorporate the benefits of improved closed-loop control alongside open-loop driver signal adaptation.

The next step of the proposed methodology consists in implementing the optimized controllers on the physical system (electrodynamic shaker), which also requires the design and implementation of a state observer. Completing this step will enable the verification and confirmation of the results and the achieved performance. Subsequently, the methodology is intended to be implemented on LNEC's uniaxial shaking table, where the same analysis will be conducted to assess its effectiveness on larger-scale systems. This future stage aims to evaluate

the scalability, robustness, and practical applicability of the proposed control strategy under more demanding testing conditions. If the performance is proved superior against alternative approaches, the proposed methodology will be applied on future shaking table tests.

Given the nature of shaking table experimental testing, the test specimens are often driven to plastic deformation, some form of failure, or have significant nonlinear behaviour which is not detectable in the small intensity identification experiments. This results in non-negligible shifts in dynamic properties and excitation of unknown modes that may occur during the test, and the proposed method of optimizing controllers for the plant dynamics cannot account for this, so further investment should be directed to the implementation of adaptive online identification methods that can inform nonlinear control strategies in order to address both the evolving and nonlinear test specimen dynamics.

Acknowledgment

The author acknowledges LNEC for its financial support through the research fellowship under the LNEC Research Programme Modelação do Comportamento Estrutural- Mestr, and Fundação para a Ciência e a Tecnologia (FCT) for its financial support via LAETA (project <https://doi.org/10.54499/UID/50022/2025>).

References

- [1] R. Bairoão and Duque. Simulador sísmico uniaxial — descrição e operação. Technical Report Relatório LNEC 94/1998 - C3ES/SES, LNEC, Lisboa, 1998.
- [2] P. X. Candeias, A. A. Correia, and G. G. Tekeste. Shake table testing techniques: Current challenges and new trends. In C. Chastre, J. Neves, D. Ribeiro, M. G. Neves, and P. Faria, editors, *Advances on Testing and Experimentation in Civil Engineering*, Springer Tracts in Civil Engineering. Springer, 2023. doi: 10.1007/978-3-031-23888-8.8.
- [3] F. Carvalhal. Simulation of seismic disturbances using adaptive control. Msc thesis, Victoria University of Manchester, Institute of Science and Technology, October 1974.
- [4] F. Carvalhal. Controlo adaptativo na simulação de solicitações sísmicas. Tese para Especialista LNEC, STG/DPA, Proc. 76/13/5588, January 1979.
- [5] E. C. C. Carvalho. Seismic testing of structures. In *11th European Conference on Earthquake Engineering*, Rotterdam, 1998.

- [6] P. Castro. Mesa vibratória vertical (projeto). Technical Report Obra 76/53/1077, LNEC, Lisboa, June 1978.
- [7] T. Emílio, R. T. Duarte, F. Carvalhal, C. O. Costa, C. T. Vaz, and M. R. Corrêa. The new LNEC shaking table for earthquake resistance testing. Technical Report Memória 757, LNEC, Lisboa, 1989.
- [8] A. Henrique, M. Ayala Botto, and F. Oliveira. Development of control strategies for earthquake reproduction on uniaxial shaking table. In *13º Congresso Nacional de Mecânica Experimental – CNME2026*, Porto, 2026. Universidade do Porto.
- [9] J. C. Lagarias, J. A. Reeds, M. H. Wright, and P. E. Wright. Convergence properties of the Nelder–Mead simplex method in low dimensions. *SIAM Journal on Optimization*, 9(1): 112–147, 1998. doi: 10.1137/S1052623496303470.
- [10] N. Nakata. Acceleration trajectory tracking control for earthquake simulators. *Engineering Structures*, 32(8):2229–2236, 2010. doi: 10.1016/j.engstruct.2010.03.025.
- [11] S. Narasimhan, S. Nagarajaiah, E. A. Johnson, and H. P. Gavin. Smart base-isolated benchmark building. part i: problem definition. *Structural Control and Health Monitoring*, 13: 573–588, 2006.
- [12] K. Ogata. *Modern Control Engineering*. Pearson, Upper Saddle River, 5th edition, 2010.
- [13] B. M. Phillips and B. F. Spencer. Model-based feedforward-feedback actuator control for real-time hybrid simulation. *Journal of Structural Engineering*, 139(7):1205–1214, 2012. doi: 10.1061/(ASCE)ST.1943-541X.0000606.
- [14] B. M. Phillips, N. E. Wierschem, and B. F. Spencer Jr. Model-based multi-metric control of uniaxial shake tables. *Earthquake Engineering & Structural Dynamics*, 43(5):681–699, 2014. doi: 10.1002/eqe.2366.
- [15] D. P. Stoten and E. G. Gómez. Adaptive control of shaking tables using the minimal control synthesis algorithm. *Philosophical Transactions of the Royal Society A*, 359(1786):1697–1723, 2001. doi: 10.1098/rsta.2001.0862.
- [16] G. G. Tekeste. *Real-time hybrid simulation including a shaking table: development and application to soil-structure interaction*. Phd thesis, Universidade de Aveiro, 2021.
- [17] P. M. J. Van Den Hof and R. J. P. Schrama. An indirect method for transfer function estimation from closed loop data. *Automatica*, 29(6): 1523–1527, 1993. doi: 10.1016/0005-1098(93)90015-L.
- [18] B. Widrow and E. Walach. *Adaptive Inverse Control: A Signal Processing Approach*. Institute of Electrical and Electronic Engineers, July 2007. doi: 10.1002/9780470231616.
- [19] M. S. Williams and A. Blakeborough. Laboratory testing of structures under dynamic loads: an introductory review. *Philosophical Transactions of the Royal Society A*, 359:1651–1669, 2001. doi: 10.1098/rsta.2001.0860. URL <http://doi.org/10.1098/rsta.2001.0860>.