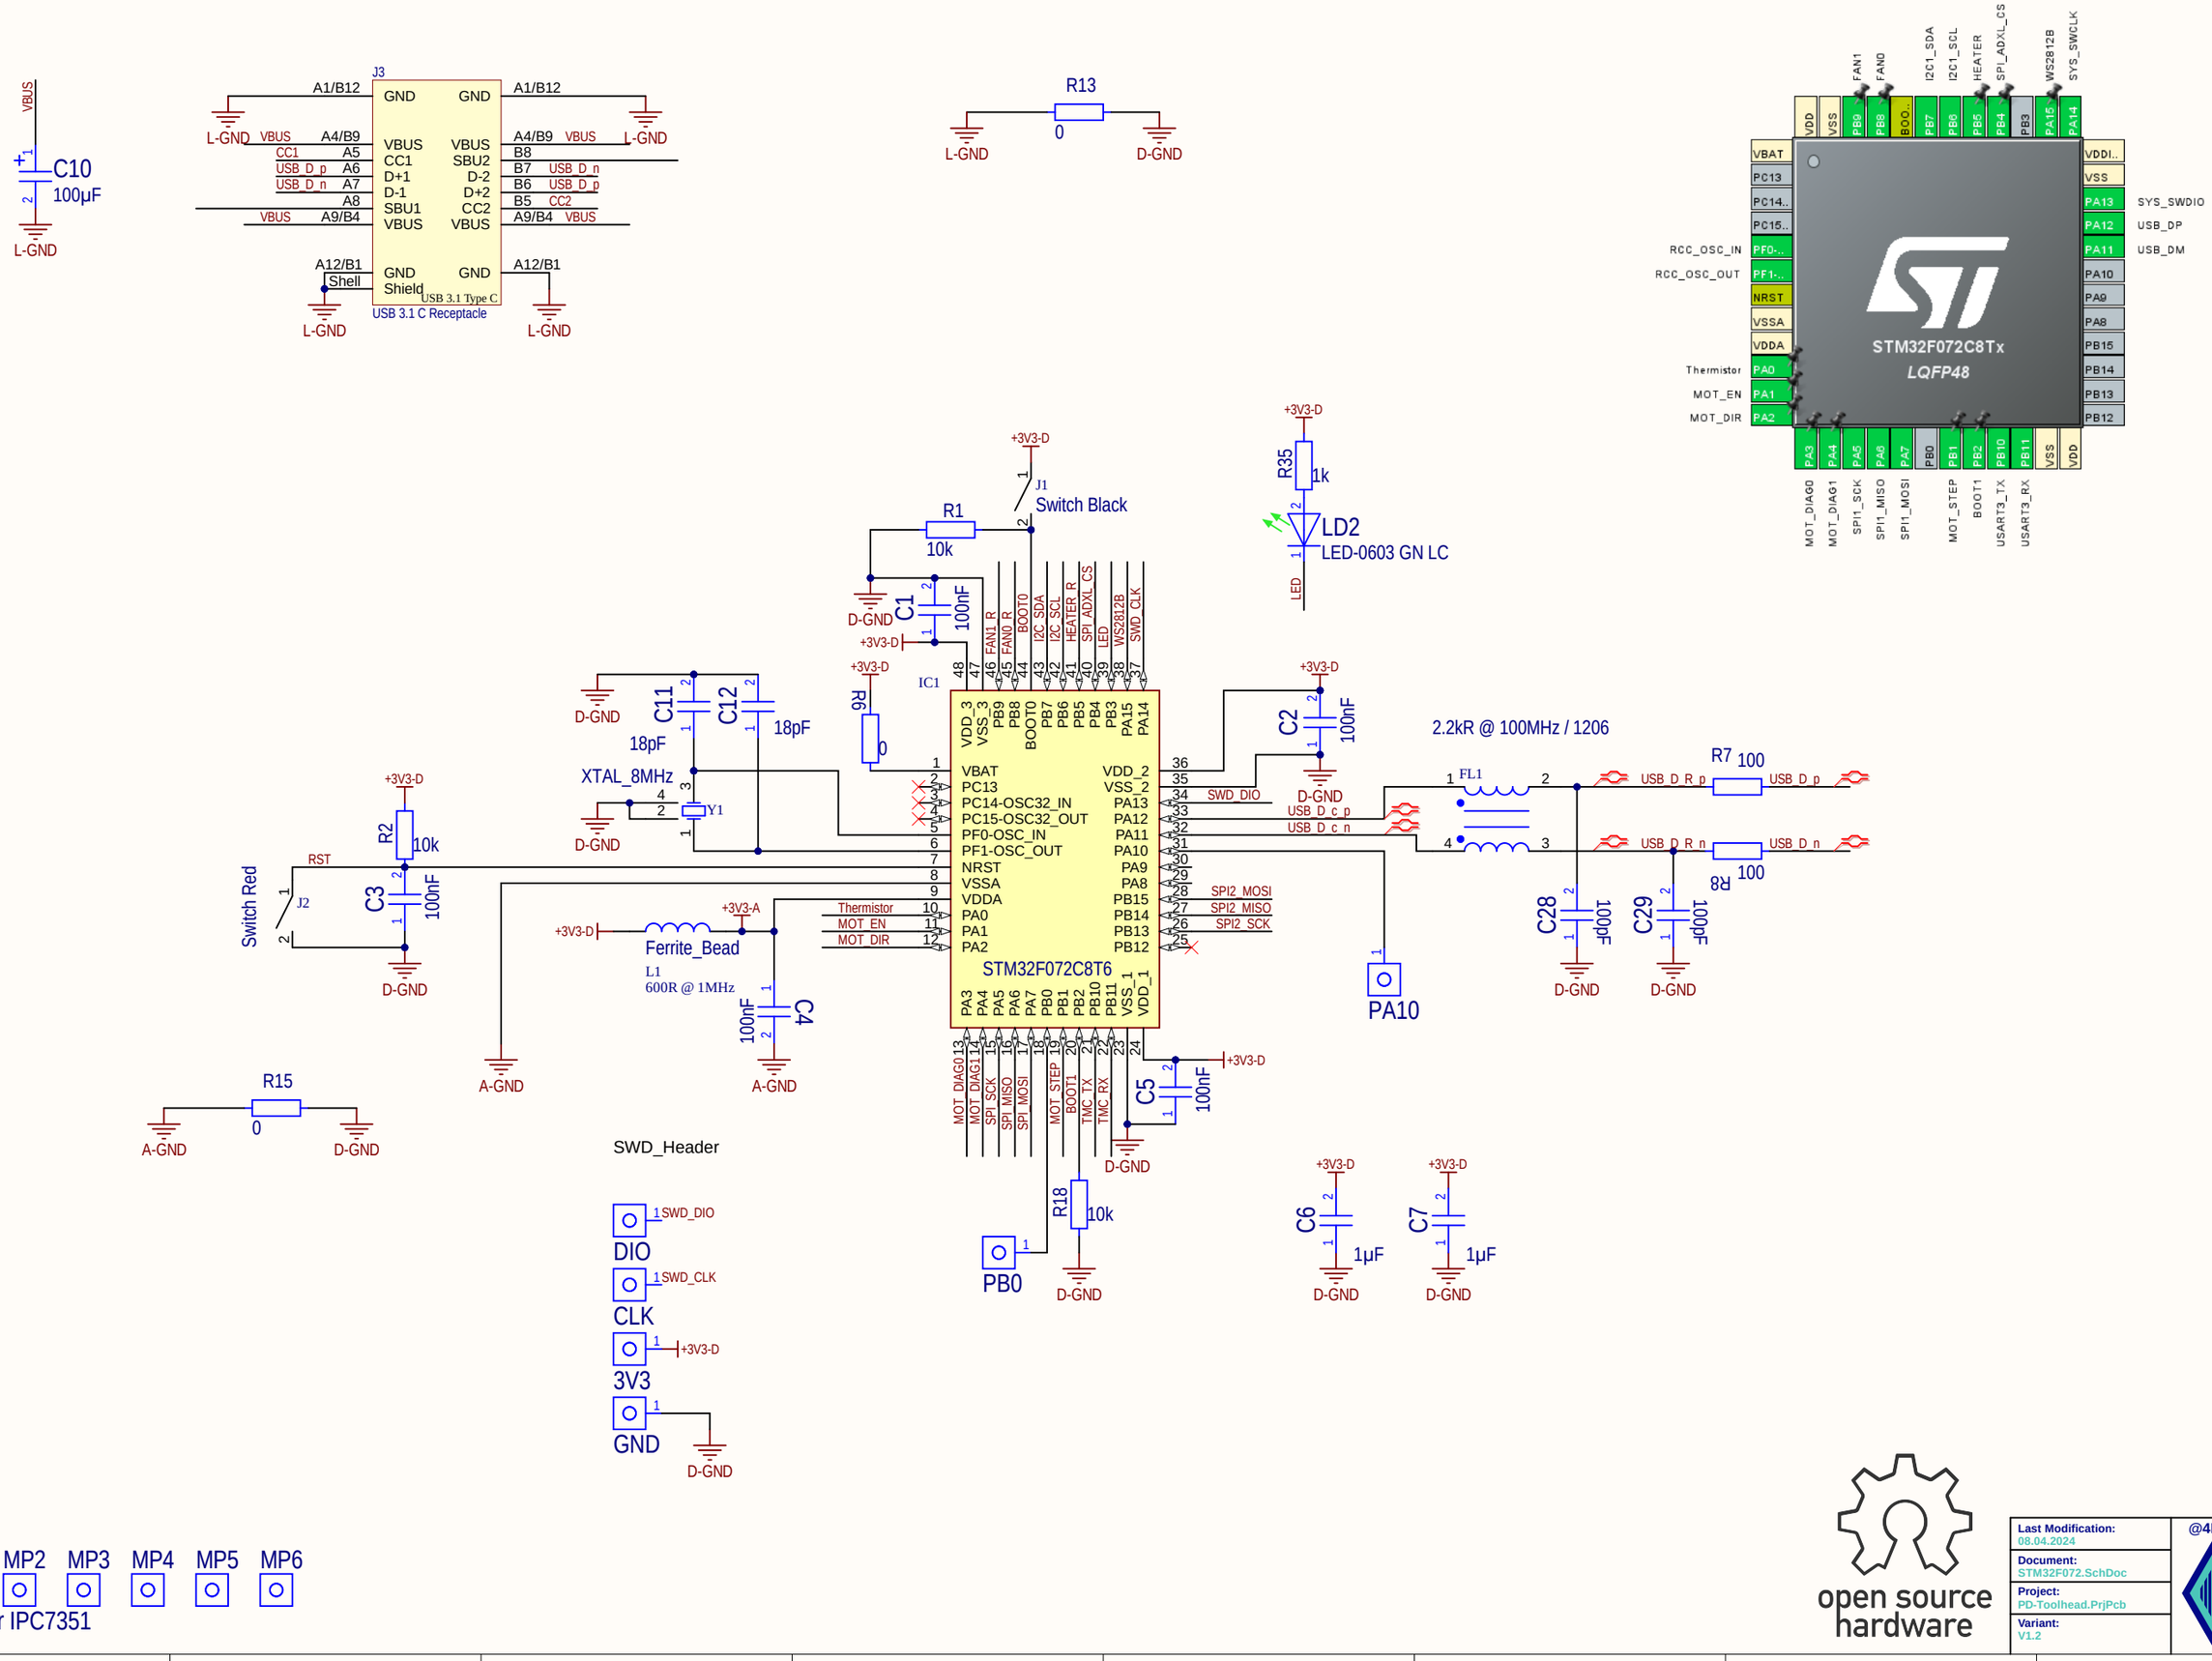
C10
100µF
J3
USB 3.1 C Receptacle
USB 3.1 Type C
R13
0
STM32F072C8Tx
LQFP48
R35
1k
LD2
LED-0603 GN LC
J1
Switch Black
R1
10k
C1
100nF
IC1
STM32F072C8T6
C2
100nF
2.2kR @ 100MHz / 1206
FL1
R7 100
R8 100
C28 100pF
C29 100pF
C11 18pF
C12 18pF
XTAL_8MHz
Y1
R2
10k
J2
Switch Red
C3
100nF
Ferrite_Bead
L1
600R @ 1MHz
C4
100nF
R9
0
R15
0
C5
100nF
R18
10k
PB0
PA10
C6
1µF
C7
1µF
SWD_Header
DIO
CLK
3V3
GND
MP1 MP2 MP3 MP4 MP5 MP6
Marker IPC7351
open source hardware
Last Modification: 08.04.2024
Document: STM32F072.SchDoc
Project: PD-Toolhead.PrjPcb
Variant: V1.2
@4R3Ngineering

Normally RX signal is routed to the CS/MS3 pin if TMC2208/TMC2209 are used

However there are some TMC2208/TMC2209 out which require RX signal to be routed to SCK/MS2 pin

With R4 & R5, signals can be rerouted to fit the needs for your stepper driver.

Remove R4 to disconnect SPI-SCK and populate R5 to use PB10 as software UART "RX"-Pin

VCC-POW_MOT VBUS

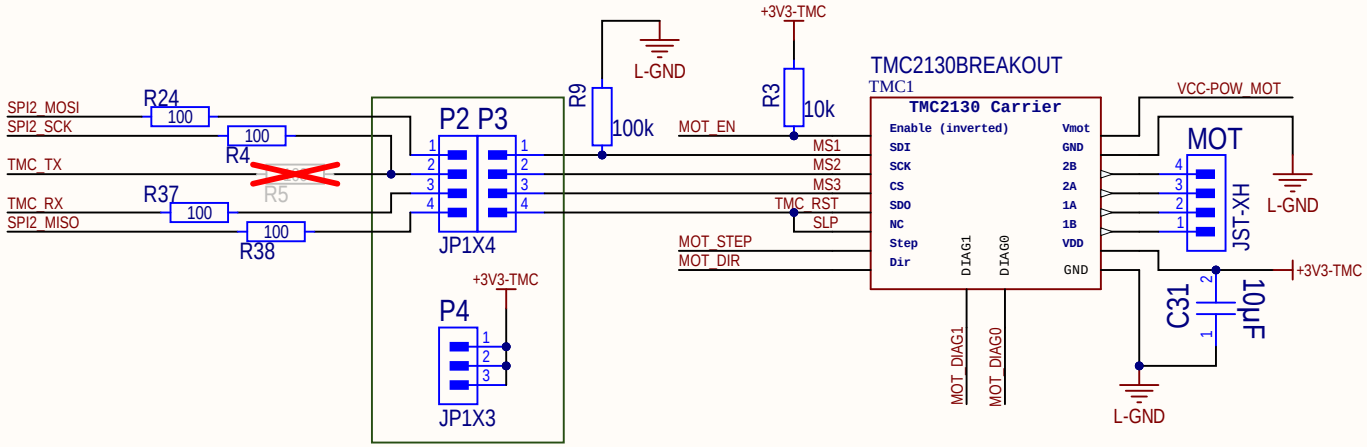

For SPI TMC Drivers: connect all 4 Pins from P2 to P3

For UART TMC Drivers: Connect P2.3 to P3.3 (or P2.2 to P3.2 is you are using "odd" drivers, see note above!)

For "dumb" Drivers: Use P3.1 - P3.3 with P4.1 to P4.3 to set MS1/MS2/MS3 pins

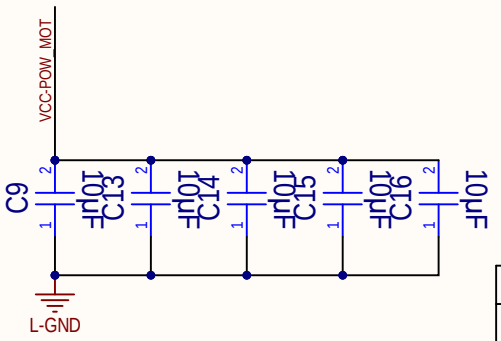

open source hardware

Last Modification:	08.04.2024
Document:	Stepper_Driver.SchDoc
Project:	PD-Toolhead.PrjPcb
Variant:	V1.2

@4R3Ngineering

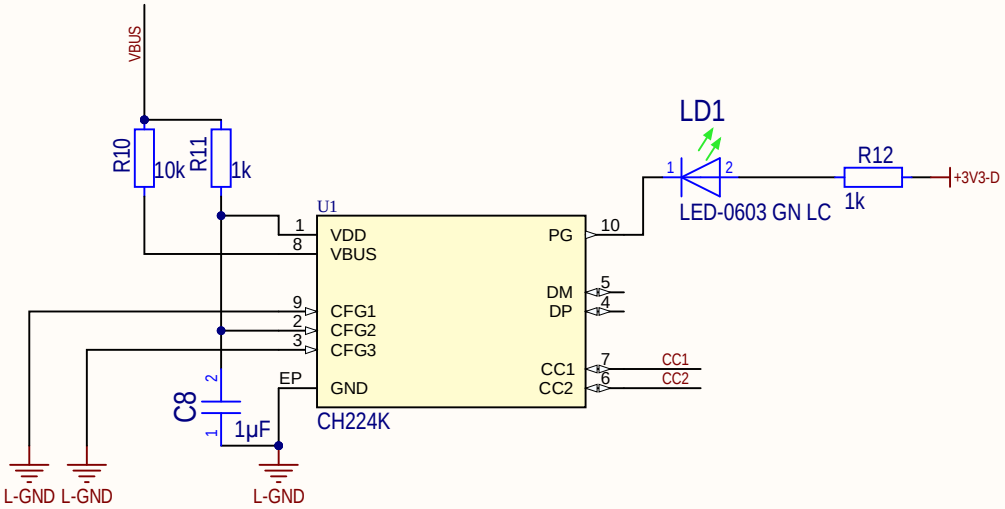

open source hardware

Last Modification:	08.04.2024
Document:	PD-Sink.SchDoc
Project:	PD-Toolhead.PrjPcb
Variant:	V1.2

@4R3Ngineering

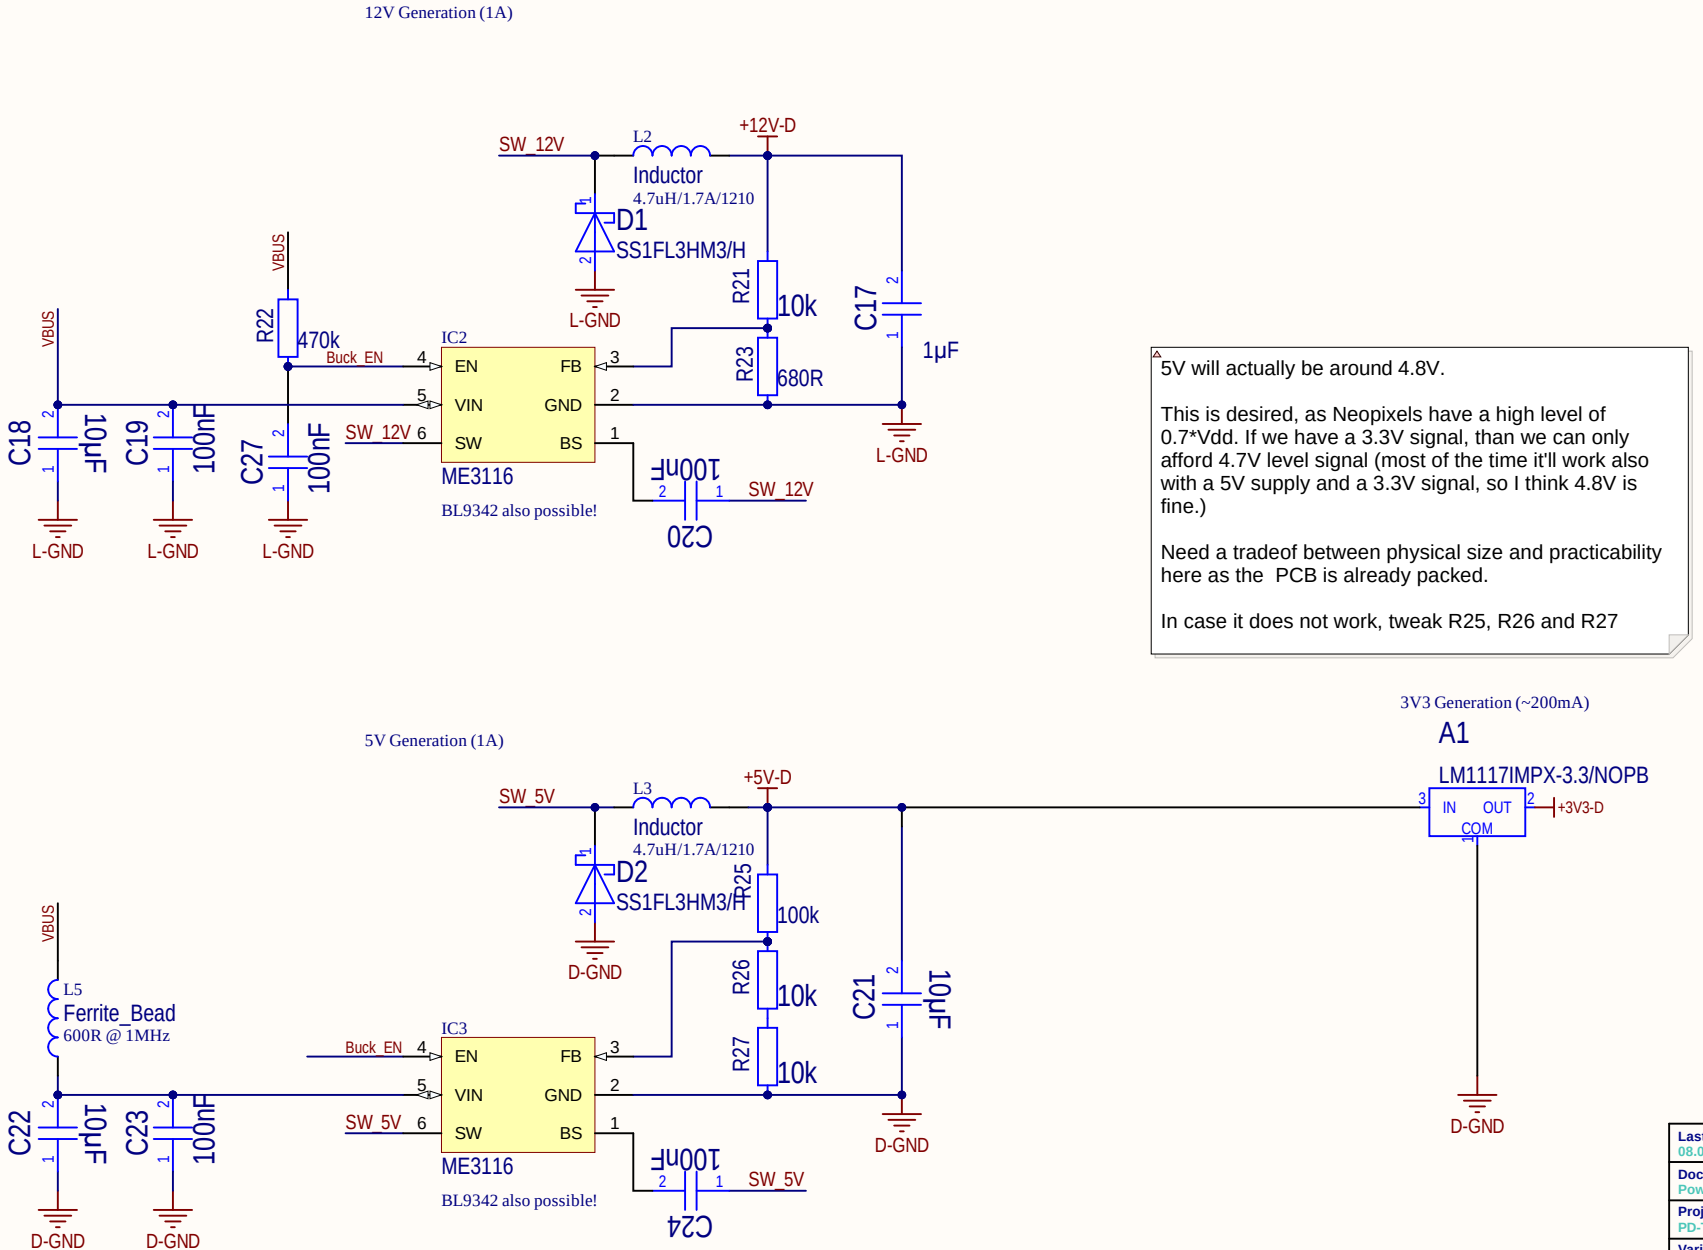
12V Generation (1A)
SW_12V
L2
Inductor
4.7uH/1.7A/1210
+12V-D
D1
SS1FL3HM3/H
L-GND
R21
10k
R23
680R
C17
1µF
VBUS
R22
470k
Buck_EN
IC2
EN
FB
VIN
GND
SW
BS
ME3116
BL9342 also possible!
C18
10µF
C19
100nF
C27
100nF
C20
100nF
SW_12V
5V will actually be around 4.8V.
This is desired, as Neopixels have a high level of 0.7*Vdd. If we have a 3.3V signal, than we can only afford 4.7V level signal (most of the time it'll work also with a 5V supply and a 3.3V signal, so I think 4.8V is fine.)
Need a tradeof between physical size and practicability here as the PCB is already packed.
In case it does not work, tweak R25, R26 and R27
3V3 Generation (~200mA)
A1
LM1117IMPX-3.3/NOPB
IN
OUT
COM
+3V3-D
5V Generation (1A)
SW_5V
L3
Inductor
4.7uH/1.7A/1210
+5V-D
D2
SS1FL3HM3/H
D-GND
R25
100k
R26
10k
R27
10k
C21
10µF
L5
Ferrite_Bead
600R @ 1MHz
IC3
ME3116
BL9342 also possible!
C22
10µF
C23
100nF
C24
100nF
SW_5V
open source hardware
Last Modification: 08.04.2024
Document: Power.SchDoc
Project: PD-Toolhead.PrjPcb
Variant: V1.2
@4R3Ngineering

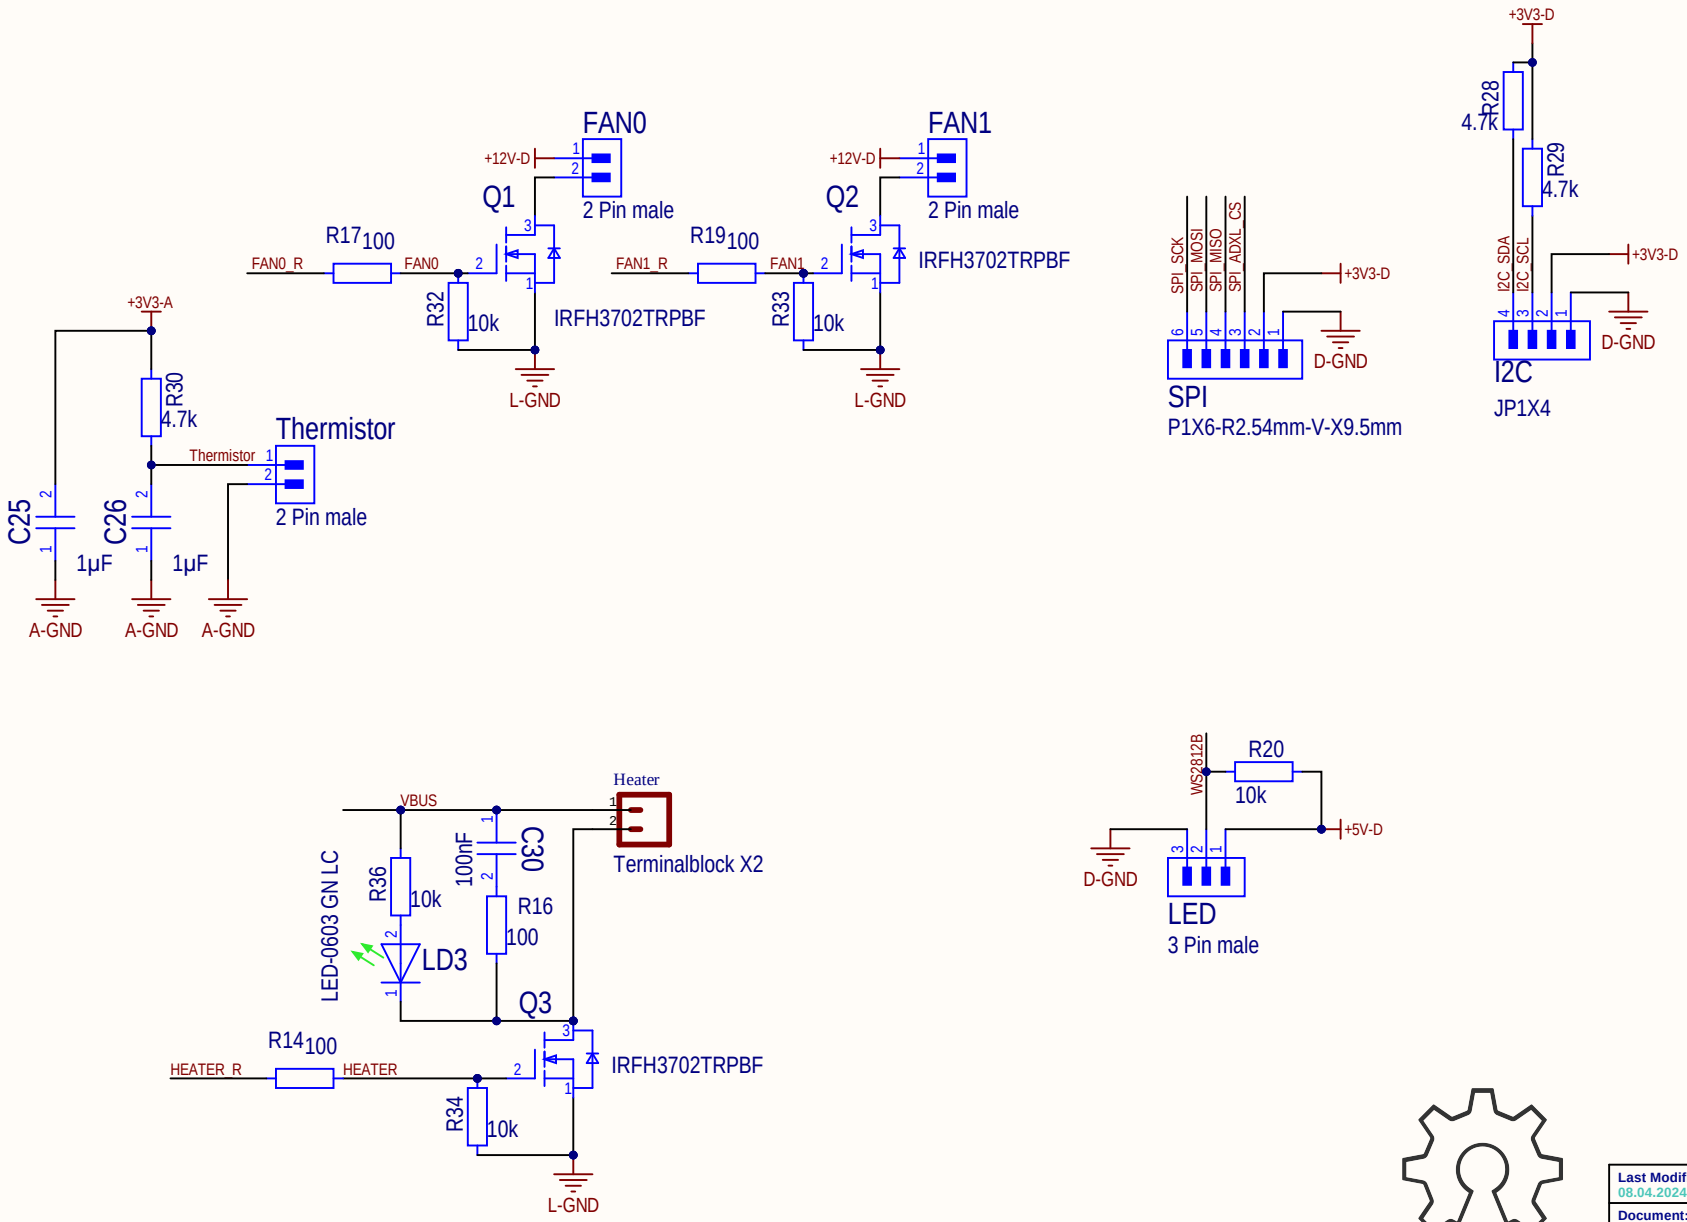
FAN0
FAN1
+12V-D
Q1
Q2
2 Pin male
R17 100
R19 100
FAN0_R
FAN1_R
FAN0
FAN1
R32
R33
10k
IRFH3702TRPBF
L-GND
+3V3-A
R30
4.7k
Thermistor
2 Pin male
C25
C26
1µF
A-GND
SPI_SCK
SPI_MOSI
SPI_MISO
SPI_ADXL_CS
SPI
P1X6-R2.54mm-V-X9.5mm
+3V3-D
D-GND
R28
R29
4.7k
I2C_SDA
I2C_SCL
I2C
JP1X4
Heater
VBUS
Terminalblock X2
LED-0603 GN LC
R36
C30
100nF
R16
100
LD3
Q3
R14 100
HEATER_R
HEATER
R34
WS2812B
R20
+5V-D
LED
3 Pin male
open source
hardware
Last Modification:
08.04.2024
Document:
MISC_Connectors.SchDoc
Project:
PD-Toolhead.PrjPcb
Variant:
V1.2
@4R3Ngineering