Cheat Sheet for EE463

Performance Parameters

$$FormFactor = \frac{V_{rms}}{V_{avg}}$$

$$CrestFactor = \frac{V_{peak}}{V_{rms}}$$

$$DistortionFactor = \frac{I_{1rms}}{I_{rms}}$$

ϕ : phase difference between fundamentals of current and voltage

$$DisplacementPowerFactor = \cos(\phi)$$

$$TruePowerFactor = \frac{P}{S} = DPF\frac{I_{1,RMS}}{I_{RMS}}$$

$$THD = \sqrt{(\frac{I_{rms}}{I_{1rms}})^2 - 1}$$

Single Phase Diode Rectifier

$$V_{av} = \frac{2\sqrt{2}V_s}{\pi}$$

u: commutation period

$$\cos(u) = 1 - \frac{2\omega L_s I_d}{\sqrt{2}V_s}$$

$$I_{d,avg} = \frac{\int_b^f i(\theta)d\theta}{\pi}$$

$$I_{d,shortcircuit} = \frac{V_s}{\omega L_s}$$

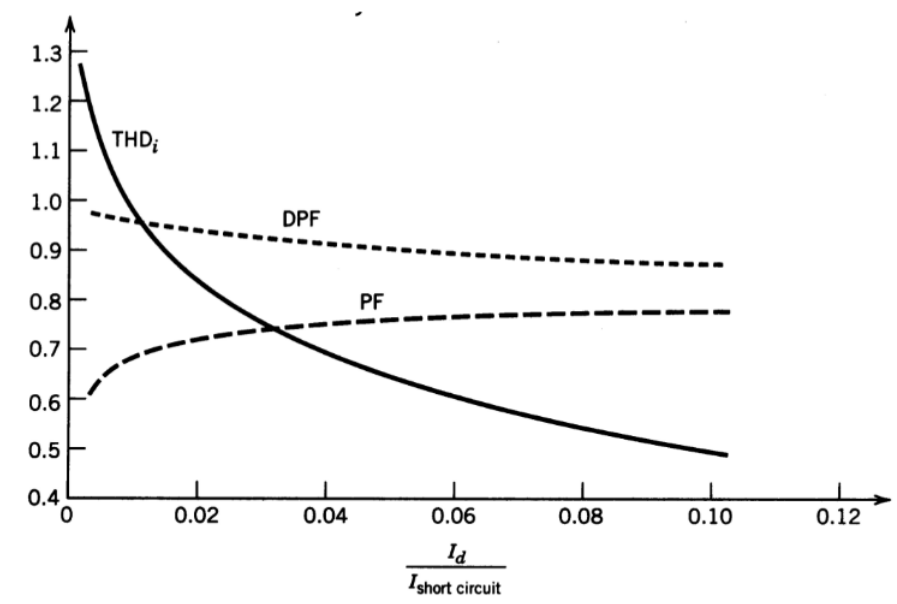

Figure 1: Characteristics of source current wrt w*Ls (battery on load side)

Three Phase Rectifier

- **Half Wave**

$$V_{av} = \frac{3\sqrt{6}V_s}{2\pi}$$

Crossing points (integration) on the waves are from $\pi/6$ to $5\pi/6$

- **Full Wave**

Full Bridge Rectifier Average Output V_s:rms value of source voltage

$$V_{av} = \frac{3\sqrt{6}V_s}{\pi} - \frac{3wL_sI_d}{\pi}$$

Single Phase Controlled Rectifiers-Thyristors

- Idealized Circuit α : firing angle

$$V_{av}(\alpha) = \frac{2\sqrt{2}V_d}{\pi} \cdot \cos\alpha$$

- Effect of Ls

$$\cos(\alpha + u) = \cos(\alpha) - \frac{2\omega L_s I_d}{\sqrt{2}V_s}$$

$$V_d = 0.9V_s cos(\alpha) - \frac{2\omega L_s I_d}{\pi}$$

- Inverter Mode

$$ExtinctionAngle = \gamma = 180 - (\alpha + u)$$

Three Phase Controlled Rectifiers-Thyristors

- Idealized Circuit α : firing angle

$$V_{av}(\alpha) = \frac{3\sqrt{2}V_{LL}}{\pi} \cdot \cos\alpha$$

- Effect of Ls

$$\cos(\alpha + u) = \cos(\alpha) - \frac{2\omega L_s I_d}{\sqrt{2}V_{LL}}$$

$$V_d = \frac{3\sqrt{2}}{\pi}V_{LL}cos(\alpha) - \frac{3\omega L_s I_d}{\pi}$$

- Output Waveforms

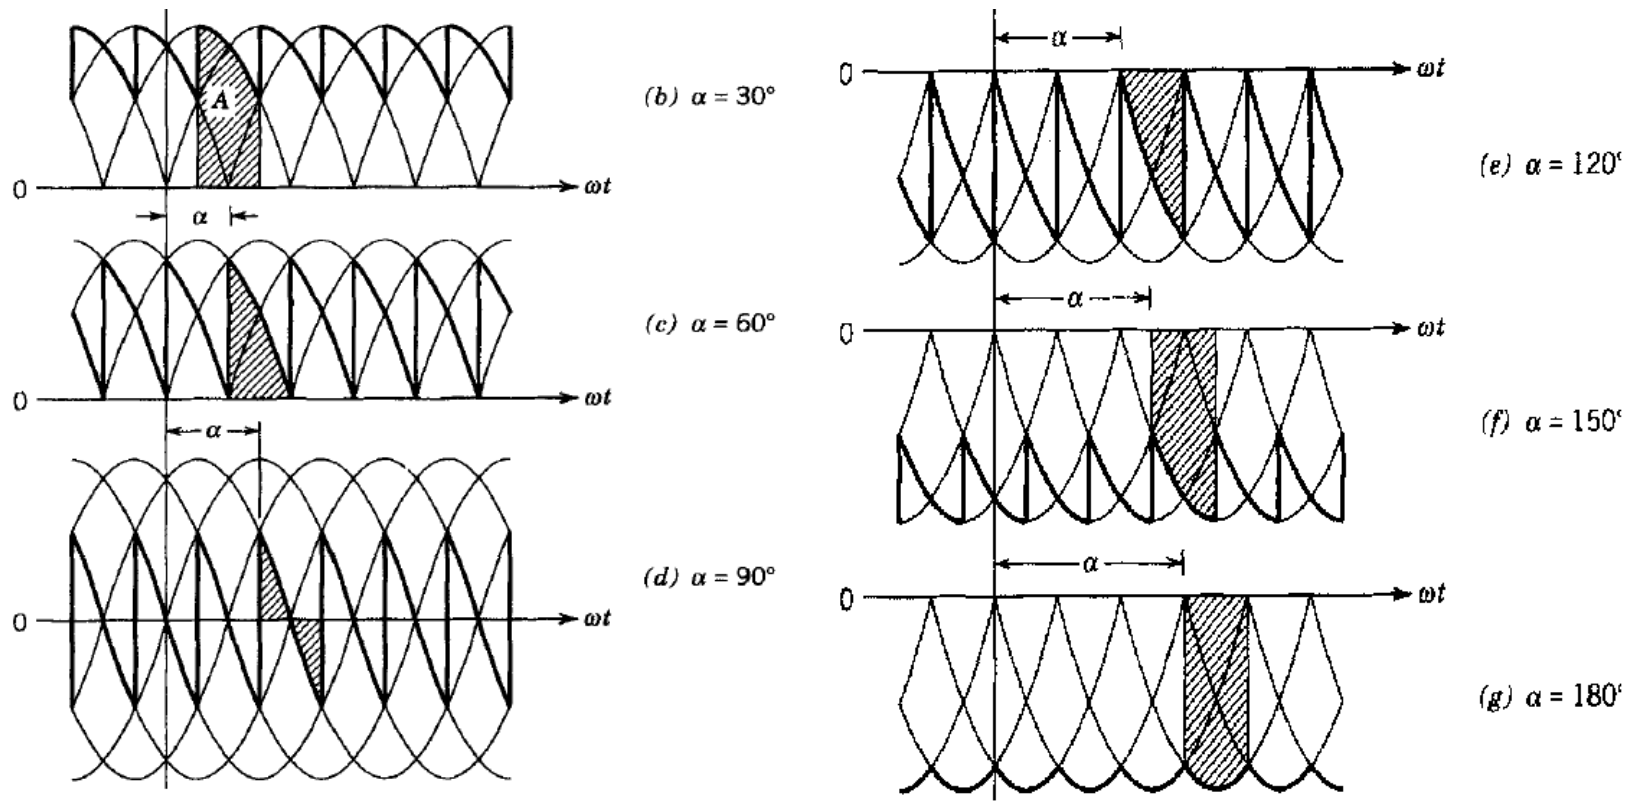

Figure 2: Output Voltage Waveforms

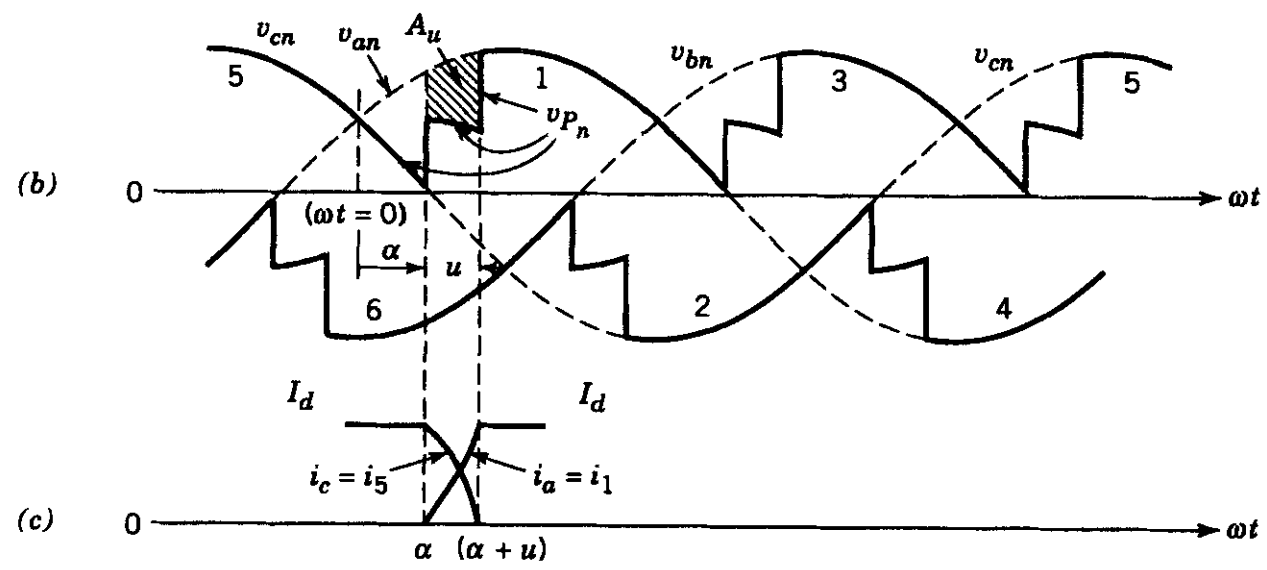

Figure 6-25 Commutation in the presence of L_s.

Figure 3: Effect of Commutation



Figure 6-30 Waveforms in a discontinuous-current-conduction mode.

Figure 4: Discontinuous Current Conduction Mode

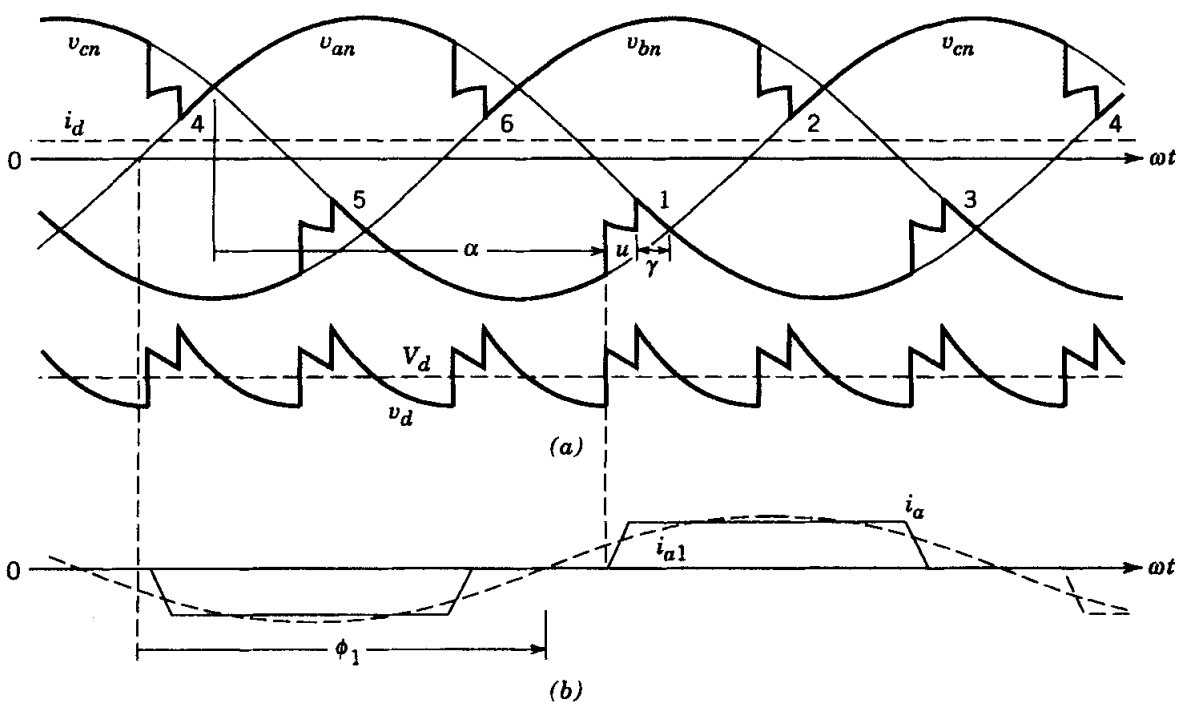

Figure 6-32 Waveforms in the inverter of Fig. 6-31.

Figure 5: Inverter Waveforms

Trigonometric

$$\sin A \cos B = \frac{1}{2}\left[\sin(A-B) + \sin(A+B)\right]$$

$$\sin A \sin B = \frac{1}{2}\left[\cos(A-B) - \cos(A+B)\right]$$

$$\cos A \cos B = \frac{1}{2}\left[\cos(A-B) + \cos(A+B)\right]$$

$$\cos A + \cos B = 2\cos\left(\frac{A+B}{2}\right)\cos\left(\frac{A-B}{2}\right)$$

$$\cos A - \cos B = -2\sin\left(\frac{A+B}{2}\right)\sin\left(\frac{A-B}{2}\right)$$

$$\sin^2(A) = \frac{1}{2} - \frac{\cos(2A)}{2}$$

$P_{cI} = m \cdot I_{Out} \cdot V_{CE}$ $\quad$ $P_{sI} = f_s \cdot (E_{on} + E_{off}) \cdot \left(1 + TC(T_J - T_{Ref})\right) \cdot (V_{CE}/V_{ref})^{K_V}$.

$P_{sD} = f_s \cdot E_{rec} \cdot \left(1 + TC(T_J - T_{Ref})\right) \cdot (V_{CE}/V_{ref})^{K_V}$. $\quad$ $P_{cD} = (1-m) \cdot I_{Out} \cdot V_F$

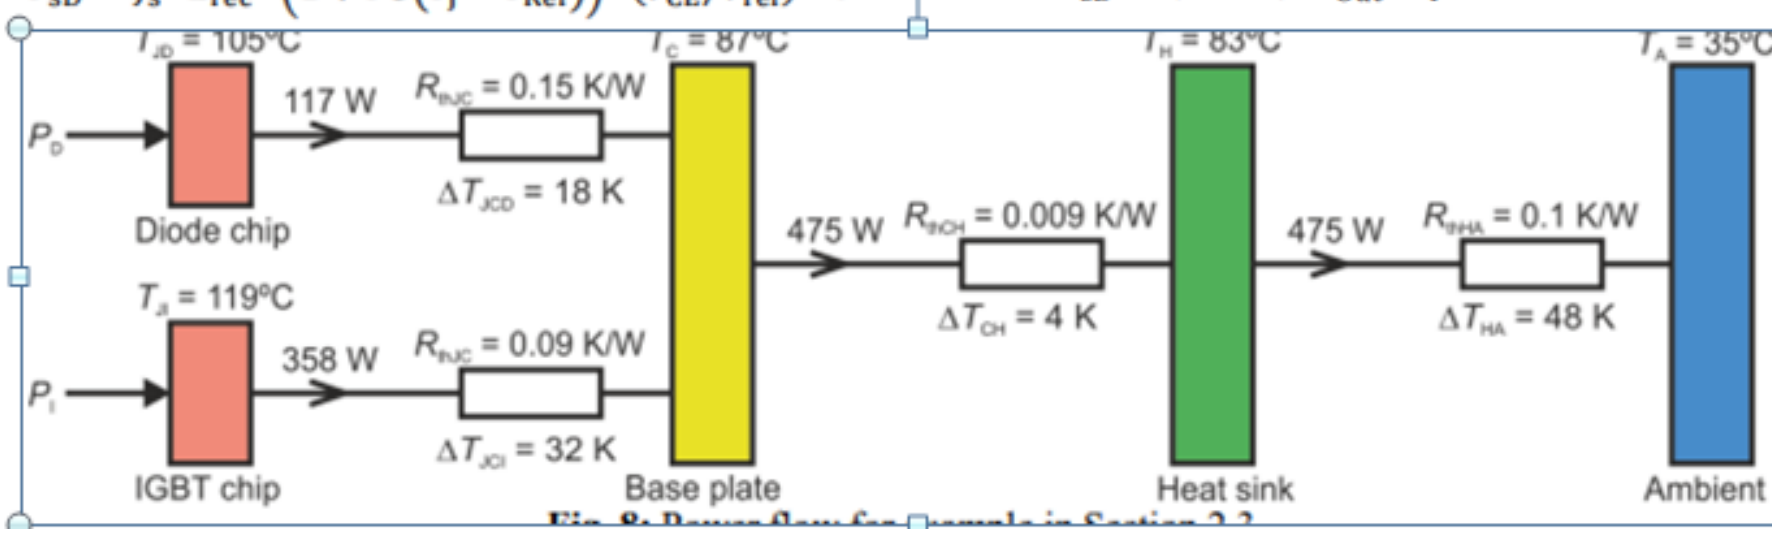

Symmetry	*Condition Required*	a_h and b_h
Even	$f(-t) = f(t)$	$b_h = 0 \quad a_h = \frac{2}{\pi}\int_0^{\pi} f(t)\cos(h\omega t)\, d(\omega t)$
Odd	$f(-t) = -f(t)$	$a_h = 0 \quad b_h = \frac{2}{\pi}\int_0^{\pi} f(t)\sin(h\omega t)\, d(\omega t)$
Half-wave	$f(t) = -f(t + \frac{1}{2}T)$	$a_h = b_h = 0$ for even h $a_h = \frac{2}{\pi}\int_0^{\pi} f(t)\cos(h\omega t)\, d(\omega t)$ for odd h $b_h = \frac{2}{\pi}\int_0^{\pi} f(t)\sin(h\omega t)\, d(\omega t)$ for odd h

Figure 6: Fourier Transform Table

Power Flow

$$P = V_s I_{s1} cos(\phi) = V_d I_d$$
$$S = V_s I_s$$