STM32F205RETx
ARM 32-bit 120 MHz
128 KB SRAM
2x USB, ADC, RTC

205 = Connectivity
R = 64 or 66 pins
E= 512 KB flash
T = TQFP
6 = –40 to 85 °C
7 = –40 to 105 °C

U1
STM32F205RET6

Y1
8MHz
HSCLKIN
HSCLKOUT
C1
13pF
C2
13pF
GND

C7
100nF
VCAP_1
GND
C8
100nF
VCAP_2
GND

3.3V Regulation

U2
1117-3.3
GND
V3P3
V5
GND/ADJ
Vout
Vin
C3
22uF
C4
22uF
C9
100nF
C6
10nF
C10
100nF
C11
100nF
C12
100nF

LEDs

LED1
V5
R2
POWER
2.2K
POWER_LED

V5
KBCLK
Q3
BSS84
P-Chan
R3
2.2K
LED2
GND
Keyboard

LED5
V5
R11
STATUS
2.2K
STATUS_LED

Power Options

D1
B5819W
KBD_V5
V5

D2
B5819W
P0_V5
V5

D3
B5819W
P1_V5
V5

USB headers for front panel? Dual USB header?
Maybe I should do a PCB specifically for inside Amiga.
Would need something to clip on multiplexer for joy/mouse
and something to go under 8520 handling keyboard
and maybe berg power connector

Mounting Holes

Keyboard

CN3
Keyboard
KBCLK
KBDAT
KBRC
GND
KBD_V5

H3
Keyboard
KBCLK
KBRC
KBD_V5
KBDAT
GND
KBRST

H9
SPI
SPI_CLK
SPI_CS1
SPI_CS2
GND
SPI_MISO
SPI_MOSI

H5
Power
GND
V5

R10
5.1K
USER_BTN
GND

Buttons

SW1 STM RESET
GND
STM_NRST

SW2 STM DFU
V3P3
STM_BOOT0

SW3 USER
V3P3
USER_BTN

Program and debug

H4
STM32 SWD
V3P3
STM_SWCLK
GND
STM_DIO
STM_NRST
STM_TDO


H10
Console
GND
CONS_TX
CONS_RX

DFU

R7
5.1K
STM_BOOT0
GND


TITLE: KeyJAM	REV: 1.0
EasyEDA	Company: eebugs.com / Sheet: 1/2
	Date: 2026-03-21 Drawn By: cdhooper

DSUB1
LD09S33E4GV00LF




This connector is in stock and has similar dimensions to others in stock.


USB ESD Protection

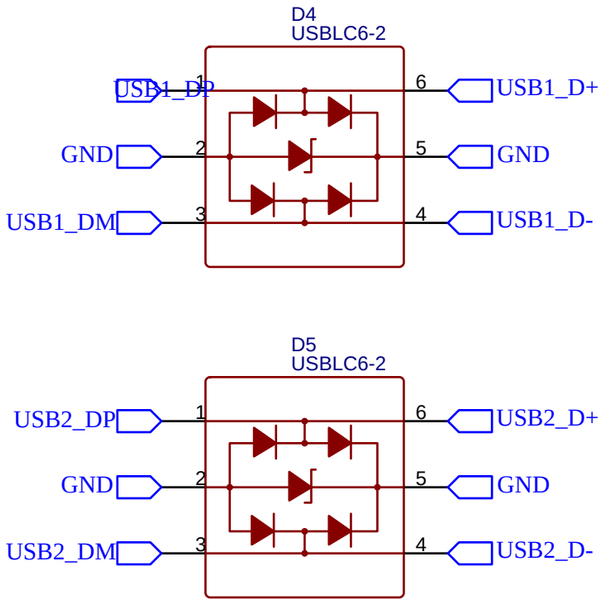


USB Type-C

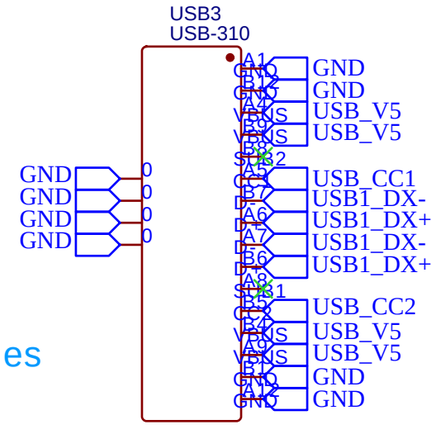


USB-C Enables

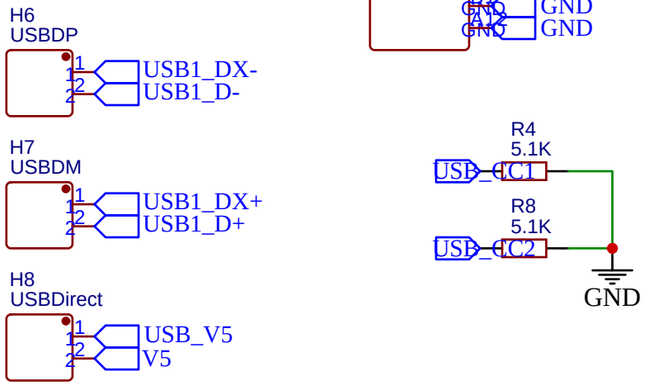


Mouse / Joystick

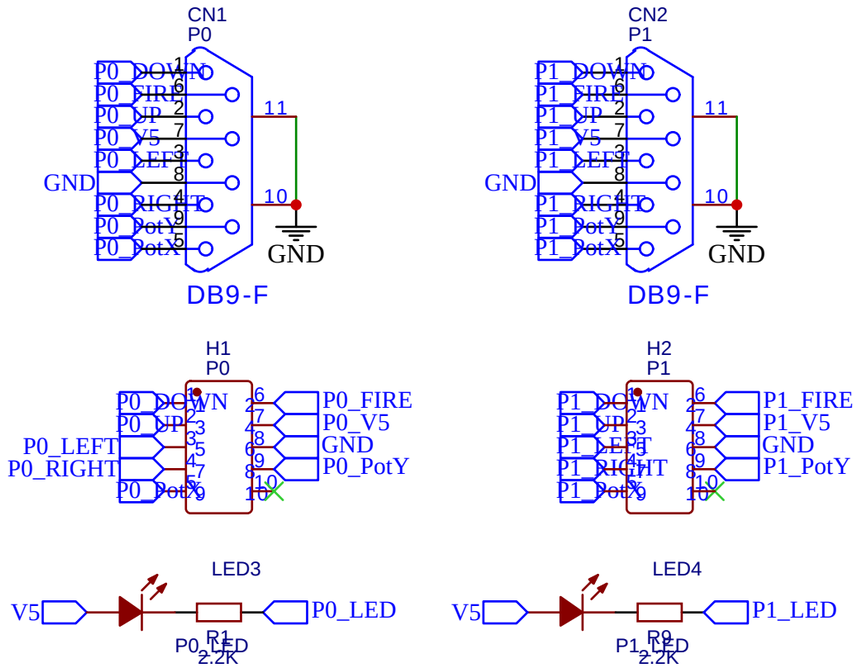

Stacked USB connector

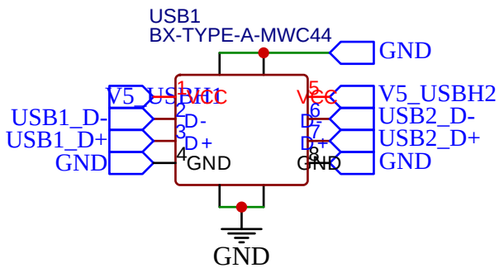

Power to USB Ports

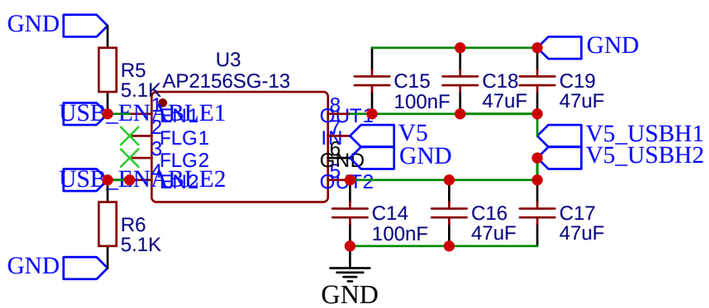

TITLE: USB and Mouse/Joystick ports		REV: 1.0
EasyEDA	Company: eebugs.com	Sheet: 2/2
	Date: 2026-03-21 Drawn By: cdhooper	