


EVB-LAN9354



Page No.	Schematic Page
1	Title
2	Block Diagram
3	Power Supply & RST
4	LAN9354 (Part1)
5	Copper Mode Interface
6	Fiber - SFP Interface
7	STRAP,GPIO,I2C & FXLOS
8	LAN9354 (Part2)






Part Number: EVB-LAN9354		Page: TITLE	
Size: B	Project Name: LAN9354	Board Name: EVB-LAN9354-REV-A	Rev: A
Date: Tuesday, June 30, 2015		Sheet 1 of 8	





EVB-LAN9354 Block Diagram

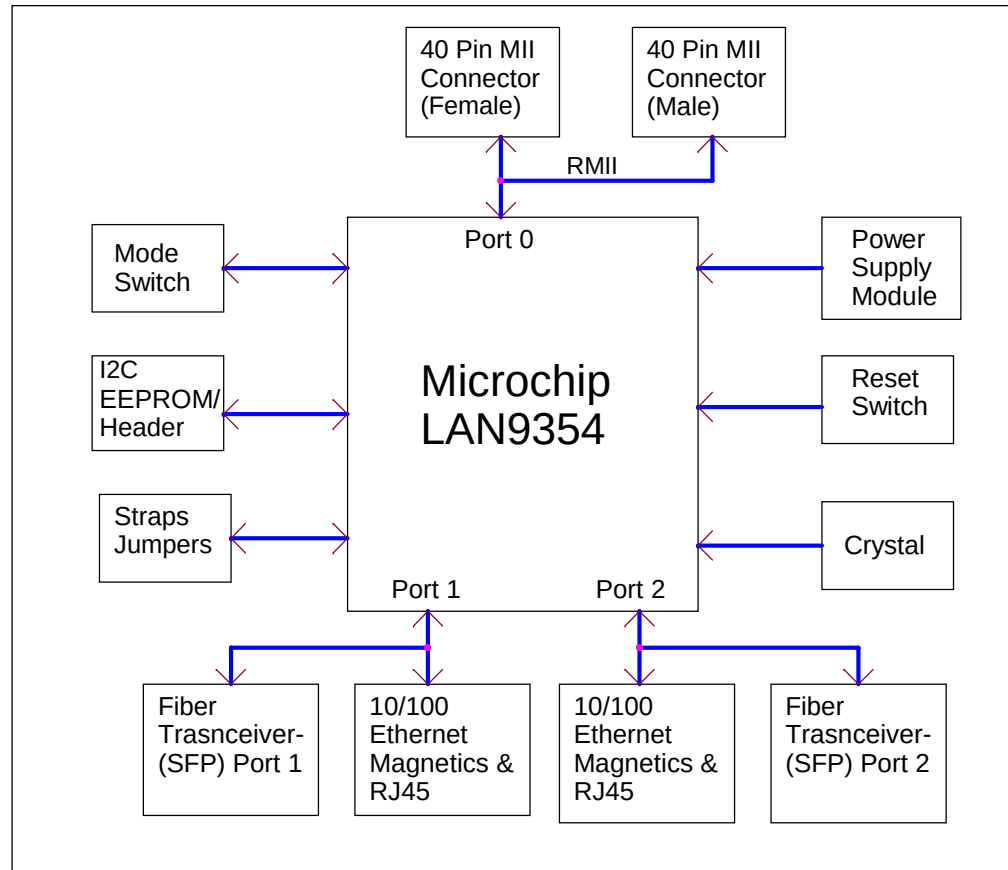


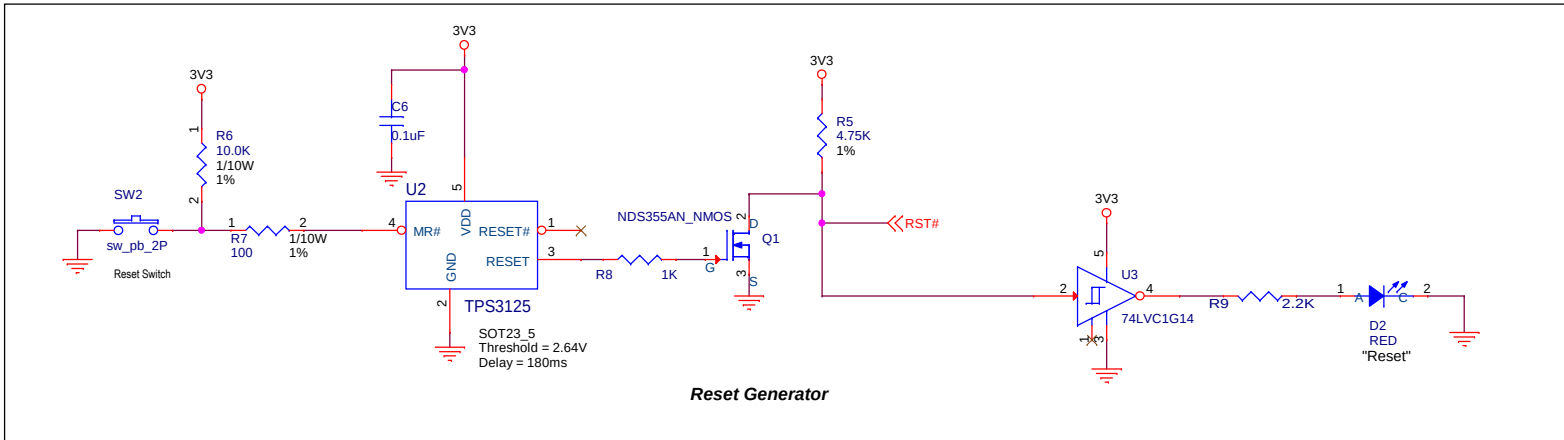

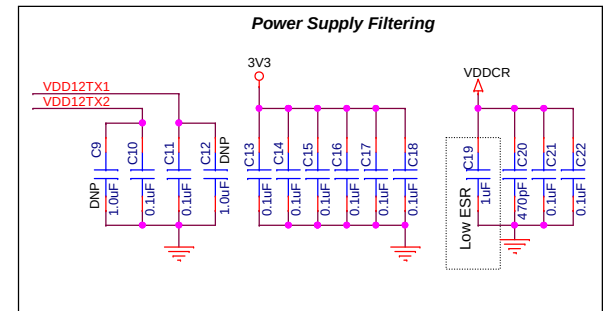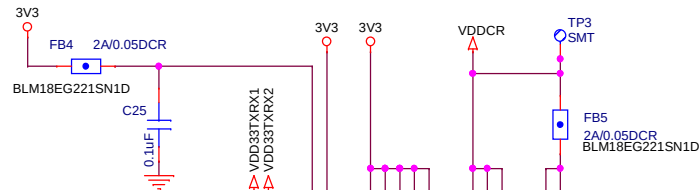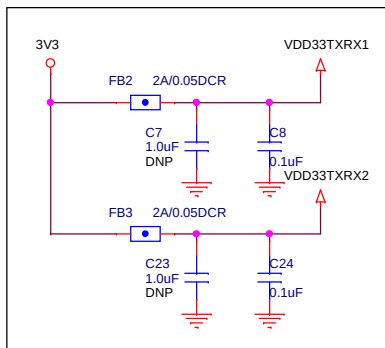


Note:
OSCVSS need to connect to Chip gnd.

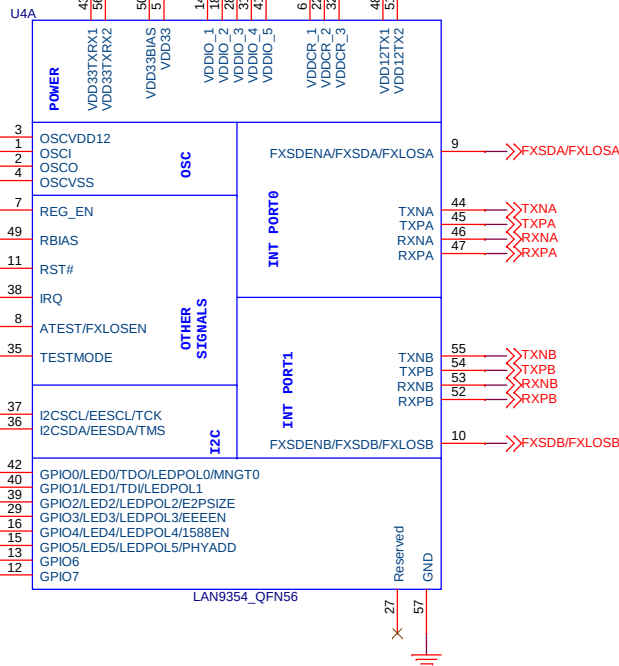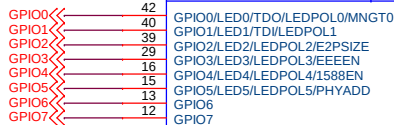

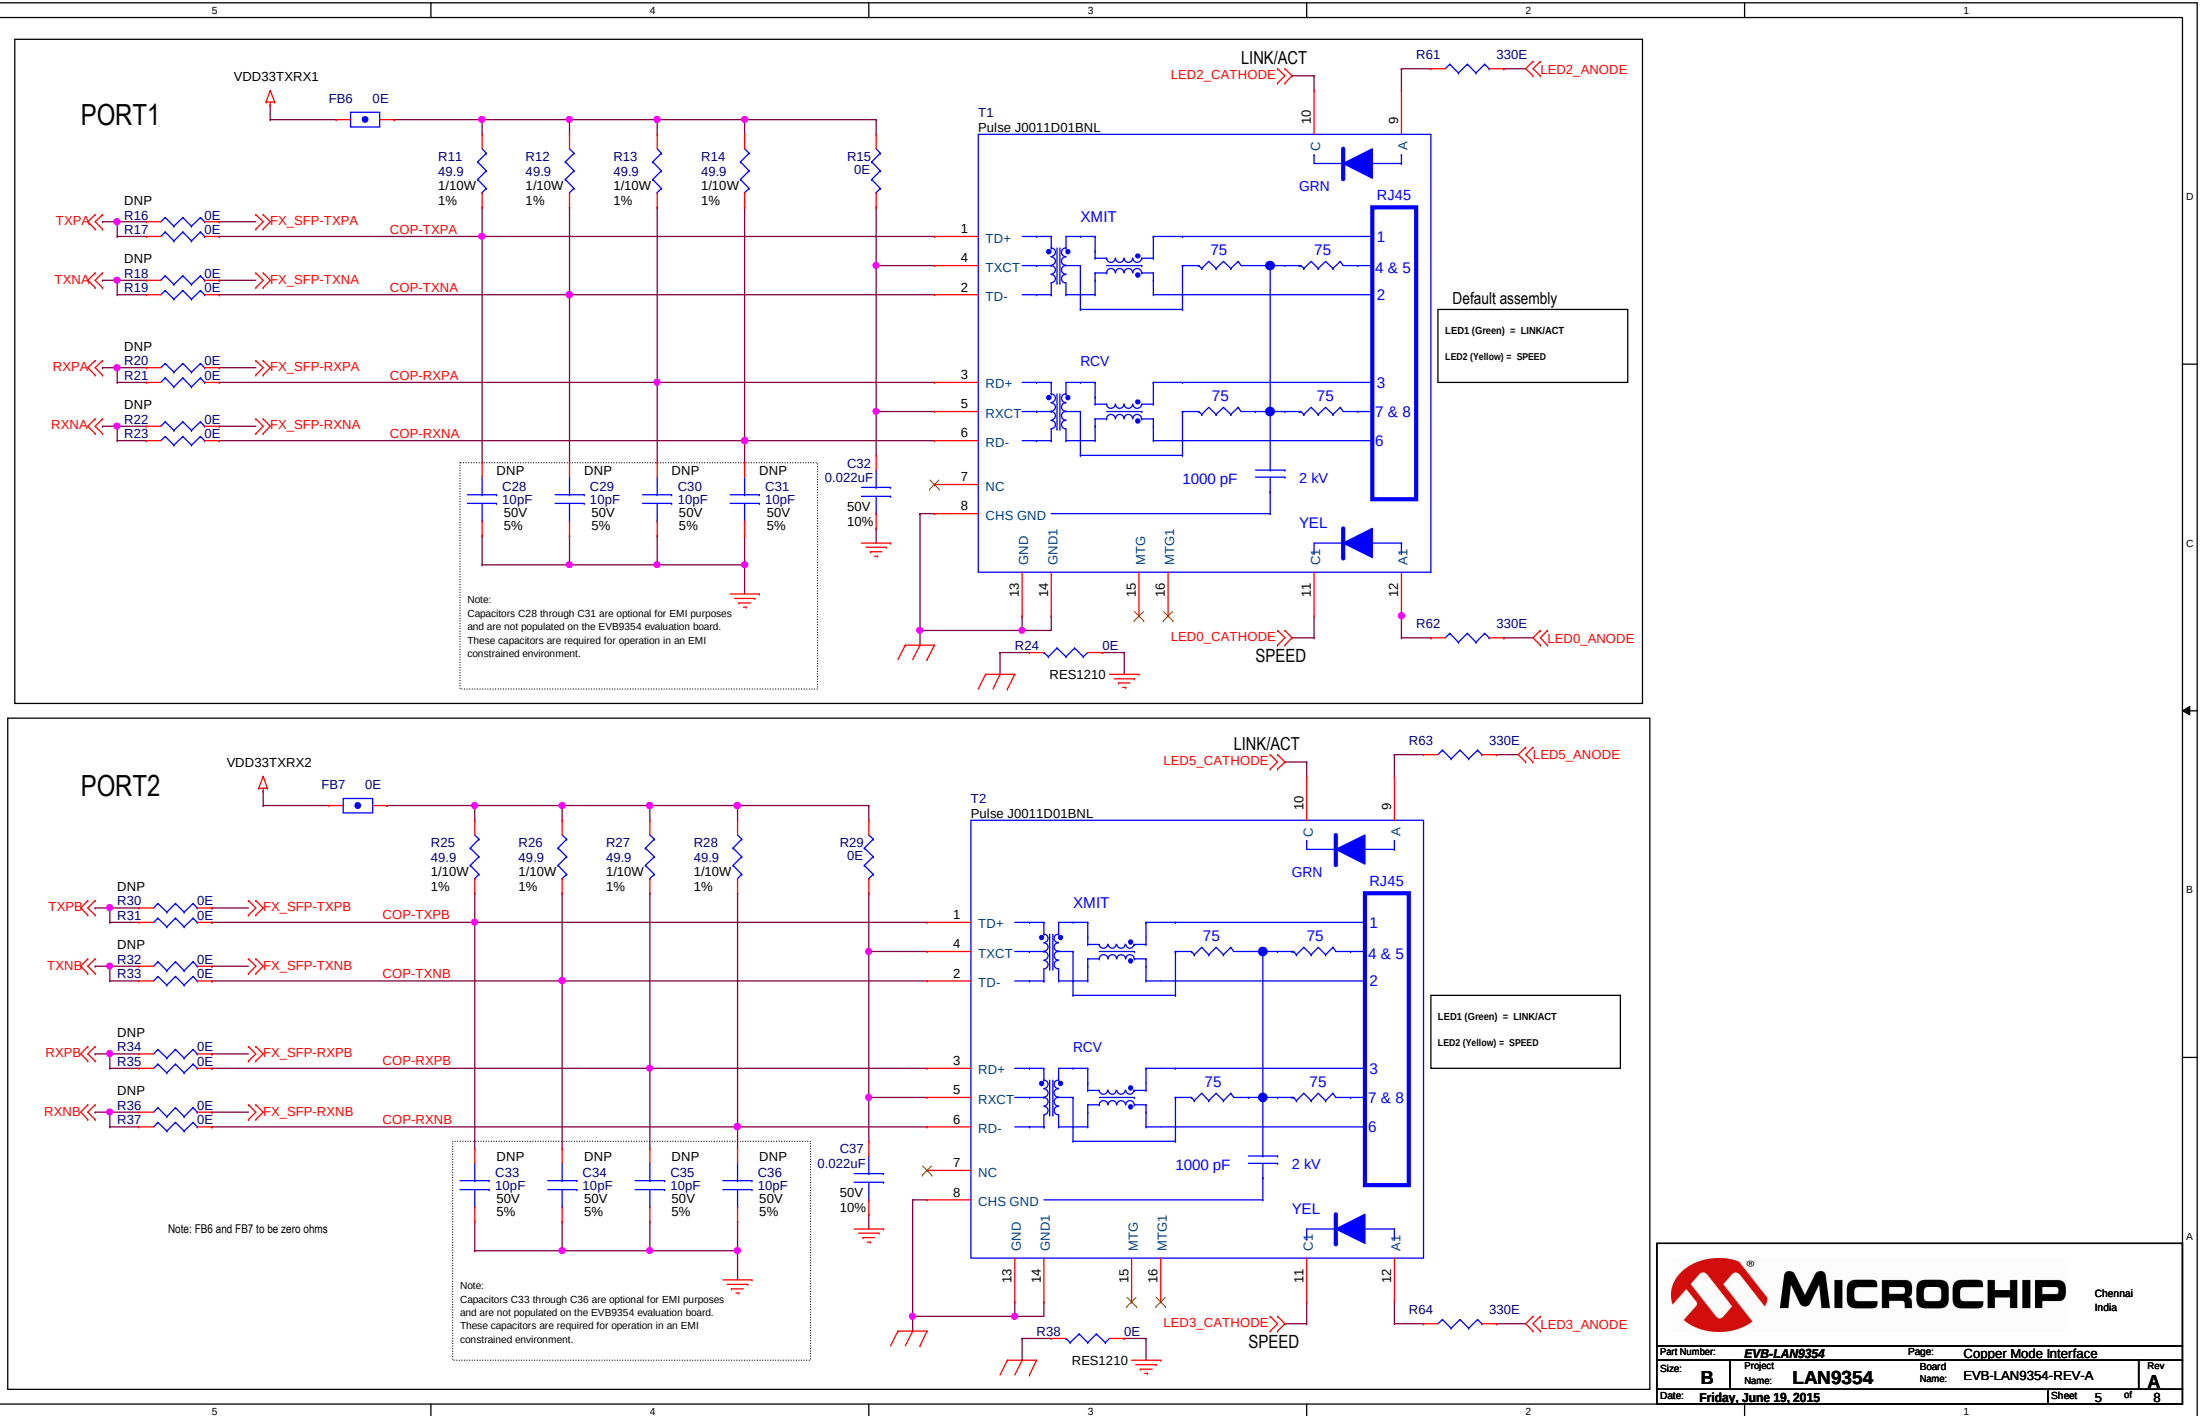


Part Number: EVB-LAN9354		Page: Copper Mode Interface	
Size: B	Project Name: LAN9354	Board Name: EVB-LAN9354-REV-A	Rev A
Date: Friday, June 19, 2015		Sheet 5 of 8	

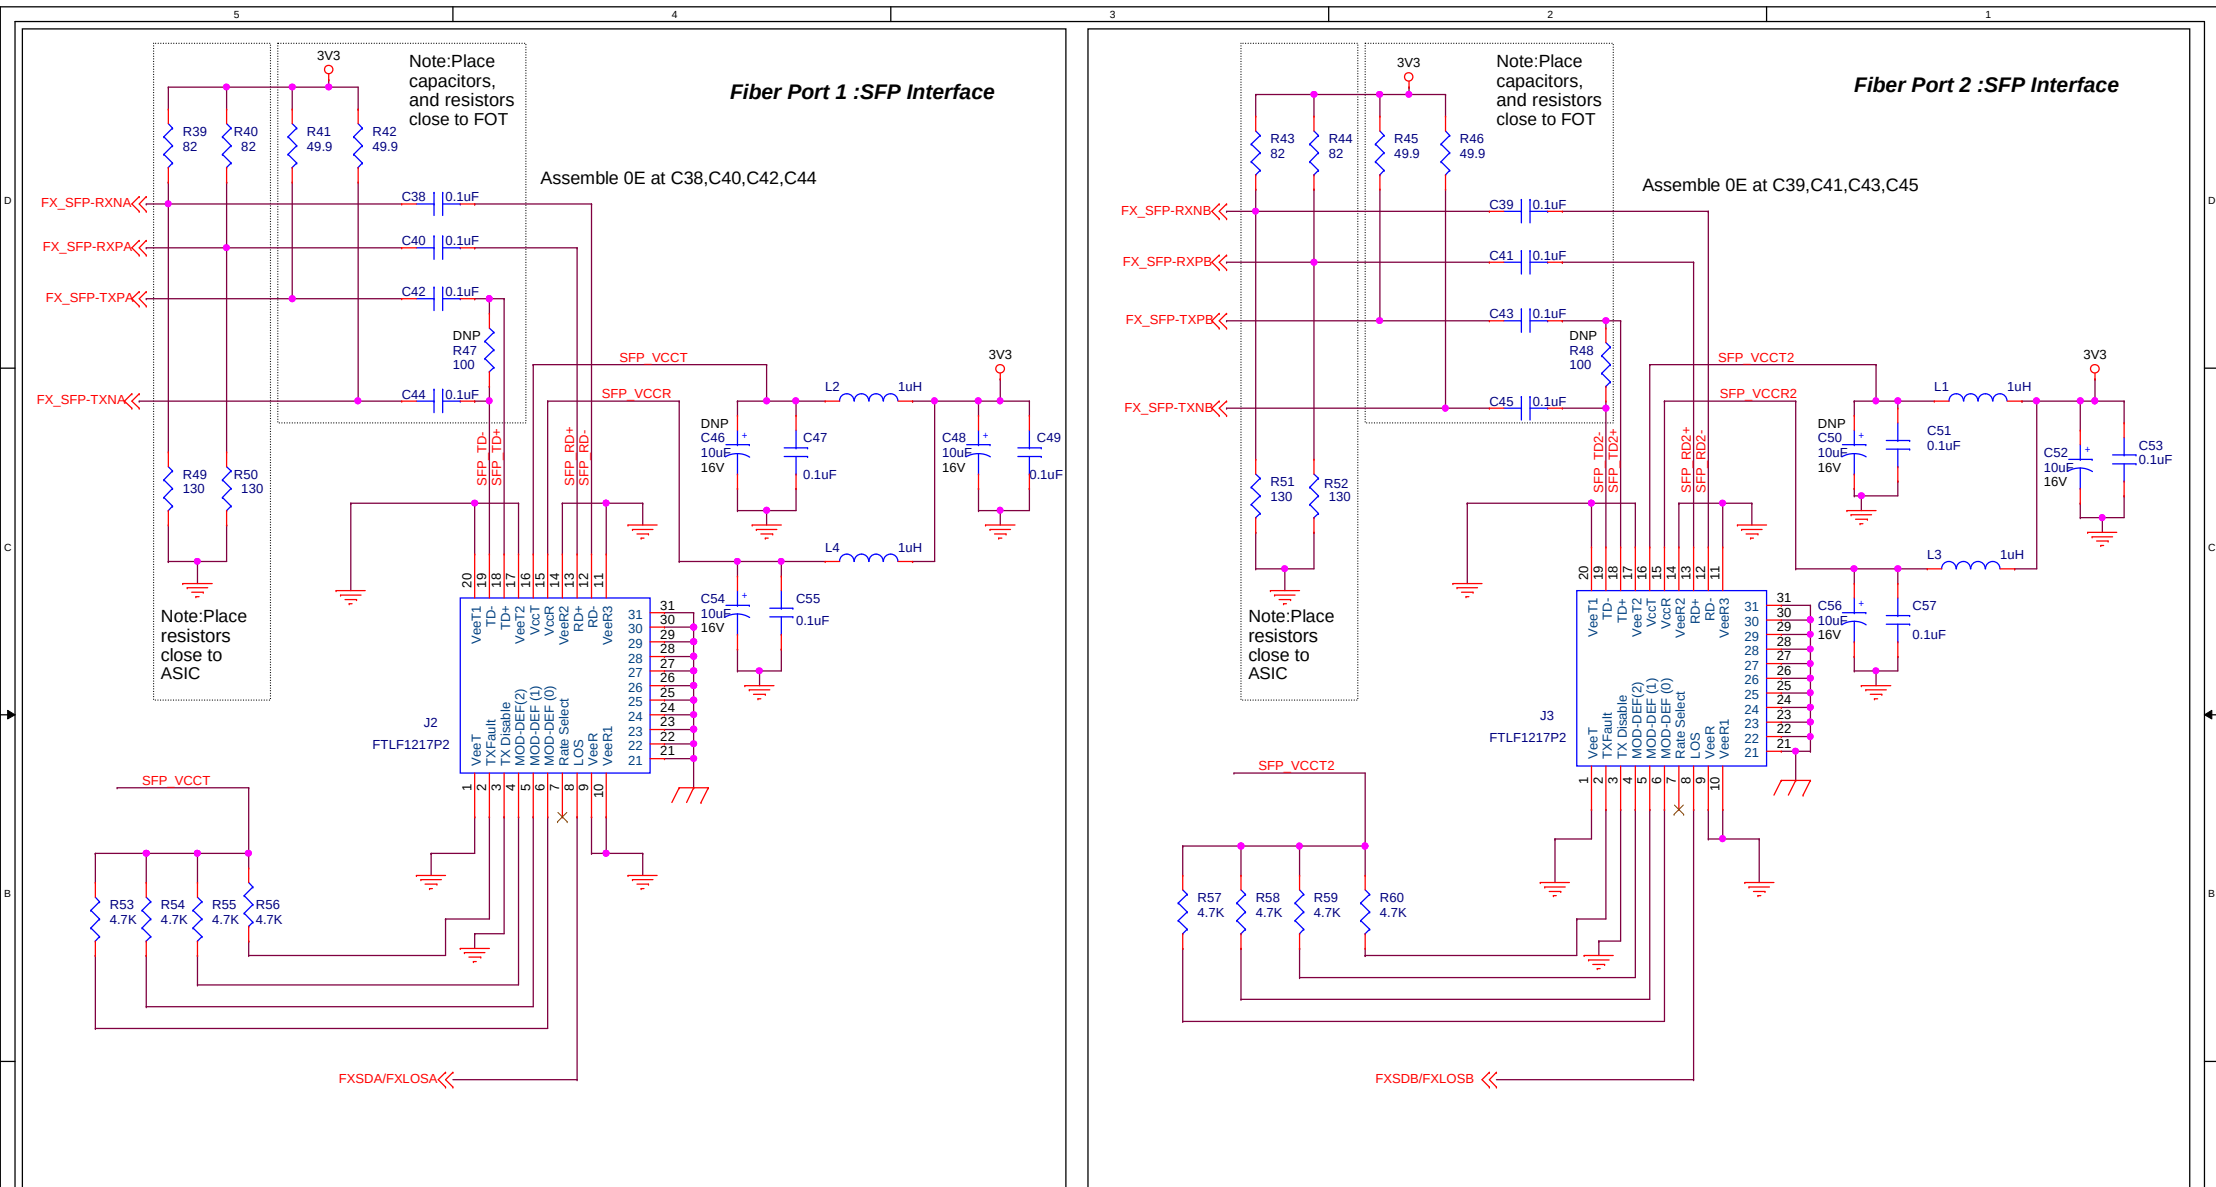


Note: Fiber mode related components are Not Populated on EVB (Default)


GPIO [0:5] & LED_POL_Strap

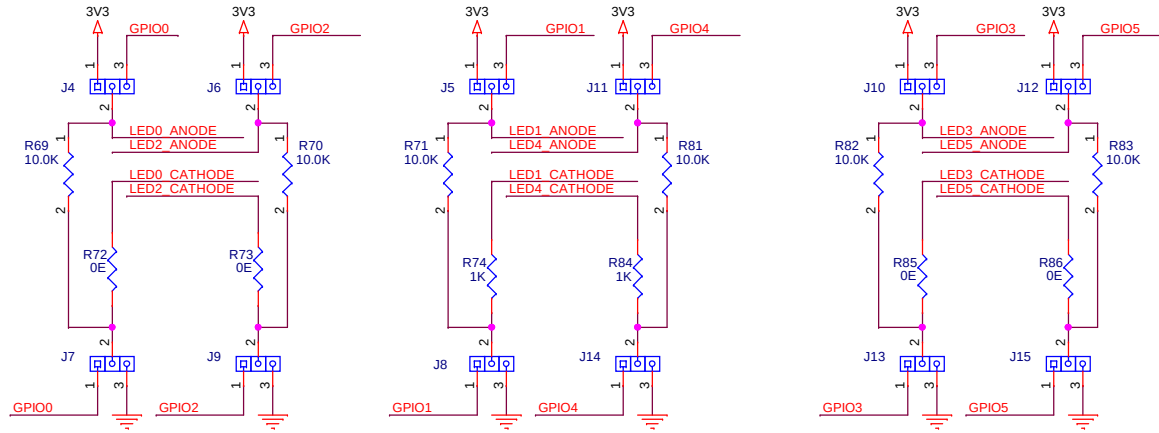

Port 1 LEDs

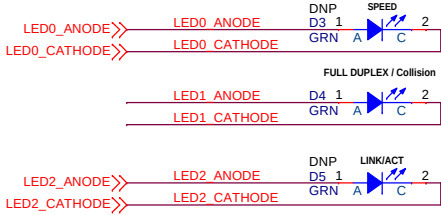


Port 2 LEDs

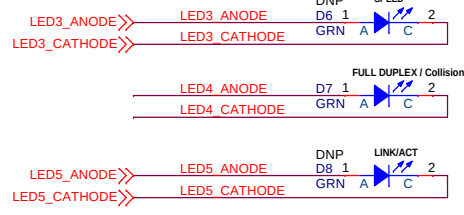


Strap Name	Logic	Connector	LED Polarity Strap
LED0/GPIO0/MNGT0	0	J4,J7 (2&3)	The LED is set as active high.
	1	J4,J7 (1&2) (Default)	The LED is set as active low.
LED1/GPIO1	0	J5,J8 (2&3)	The LED is set as active high.
	1	J5,J8 (1&2) (Default)	The LED is set as active low.
LED2/GPIO2/E2PSIZE	0	J6,J9 (2&3)	The LED is set as active high. EEPROM Size=1K bits (128 x 8) through 16K bits (2K x 8)
	1	J6,J9 (1&2) (Default)	The LED is set as active low. EEPROM Size=32K bits (4K x 8) through 512K bits (64K x 8) or 4Mbits (512K x 8) (LAN9252 only)
LED3/GPIO3/EEEEEN	0	J10,J13 (2&3)	The LED is set as active high. EEE Disable
	1	J10,J13 (1&2) (Default)	The LED is set as active low. EEE Enable
LED4/GPIO4/1588EN	0	J11,J14 (2&3)	The LED is set as active high. 1588 Disable
	1	J11,J14 (1&2) (Default)	The LED is set as active low. 1588 Enable
LED5/GPIO5/PHYADD	0	J12,J15 (2&3) (Default)	The LED is set as active high. PHYADD=0,1,2
	1	J12,J15 (1&2)	The LED is set as active low. PHYADD =1,2,3

GPIO0 = LED0/TD0/LEDPOL0/MNGT0
 GPIO1 = LED1/TD1/LEDPOL1
 GPIO2 = LED2/LEDPOL2/E2PSIZE
 GPIO3 = LED3/LEDPOL3/EEEEEN
 GPIO4 = LED4/LEDPOL4/1588EN
 GPIO5 = LED5/LEDPOL5/PHYADD




I2C EEPROM

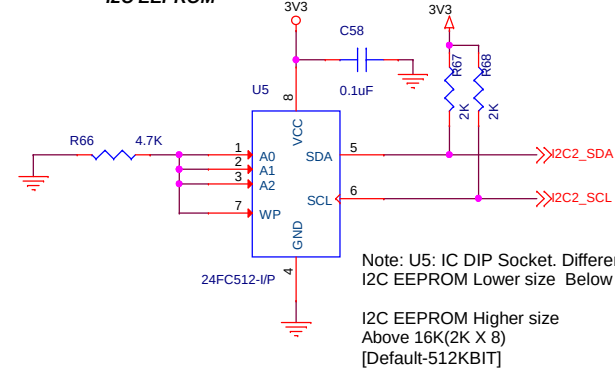


Note: U5: IC DIP Socket. Different sizes can be mounted
 I2C EEPROM Lower size Below 16K(2K X 8)
 I2C EEPROM Higher size Above 16K(2K X 8)
 [Default-512KBIT]

FX_Los_Strap_1 & 2

R77	R79	Ref.Voltage	Function
Poupulate	DNP	3V3	Above 2 V selects FX-LOS for ports 1 and 2
Poupulate	Poupulate	1V5	Level of 1.5 V selects FX-LOS for port 1 and FX-SD/copper twisted pair for port 2 further determined by FXSDB
DNP (Default)	Poupulate (Default)	0 (Default)	Level of 0V Selects FX-SD / copper twisted pair for ports A and B further determined by FXSDB.



FX_Mode_Strap_1 & 2

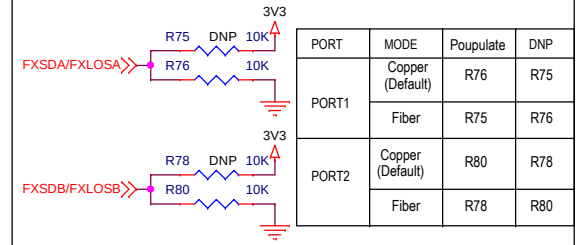

PORT	MODE	Poupulate	DNP
PORT1	Copper (Default)	R76	R75
	Fiber	R75	R76
PORT2	Copper (Default)	R80	R78
	Fiber	R78	R80



Part Number: EVB-LAN9354		Page: STRAP.GPIO.I2C & FXLOS	
Size: B	Project Name: LAN9354	Board Name: EVB-LAN9354-REV-A	Rev A
Date: Monday, June 22, 2015		Sheet 7 of 8	

