Neonatal Seizure Detection with a SKY130 EEG Front End and a Bit-Exact FPGA Detector

A Sai Chaithr Choudary
Department of Electronics and Communication Engineering
National Institute of Technology Warangal, India
chaithr45@gmail.com

***Abstract*—Most neonatal seizures have no clinical signs and are found only by continuous EEG review. We present a seizure monitor built from an EEG analog front end (AFE) in the open SKY130 process and a detector in the programmable logic of an AMD Kria KV260. The AFE fits a 1×2 Tiny Tapeout tile; in post-layout simulation it has 37.8 dB of gain, 2.95 μV_{rms} of input noise from 0.5 to 100 Hz and over 81 dB of PSRR at 28 µW, and post-layout simulation caught two parasitic couplings that DRC and LVS had passed. The detector scores 108 integer features with 100 gradient-boosted trees trained on the hardware's own integer arithmetic, so the evaluated and the built detector are identical. On the KV260 it matched its golden model in 106,359 of 106,359 values, with a measured worst-case latency of 24 µs per frame, in 9,592 LUTs and 62 DSP slices. Under nested patient-wise cross-validation on 79 neonates it finds 47.8% of seizures at 0.91 false alarms per hour; a CNN reference reaches only 49.8% under the same protocol, at about 300 times the operations. With the post-layout AFE model in the signal path, it finds [E10-B sensitivity]% at [E10-B FA/h] false alarms per hour.**

***Index Terms*—Neonatal seizure detection, EEG front end, SKY130, FPGA, gradient-boosted trees, bit-exact verification**

I. Introduction

In a video-EEG study, only 34% of 526 electrographic neonatal seizures had clinical signs, and staff recognised 9% [1]. Recognition therefore needs continuous EEG read by an expert, which most neonatal units cannot provide around the clock, and machine-learning decision support has reached a randomised trial [2]. Neonatal detectors, however, run as workstation software [3]–[5]. Seizure-detection hardware targets adult and paediatric data with patient-specific training [6]–[9], which a newborn cannot provide, and EEG amplifiers are reported by circuit figures of merit [10]–[12], not by what a detector needs.

Hardware also opens two gaps between the design that is evaluated and the one that is built. A model trained in floating point and quantised afterwards silently changes decisions, and tuning and testing on the same patients overstates performance [13]. An amplifier layout that passes DRC and LVS can still differ from its schematic through parasitic coupling. This paper closes both gaps. Its contributions are:

- a SKY130 [14] EEG AFE on a Tiny Tapeout [15] tile, generated as code and verified to post-layout simulation, which found two defects that rule checks cannot see;
- a neonatal seizure detector in FPGA logic, trained on the hardware's exact integer features and bit-exact from the Python reference to the board;
- a pre-registered, nested patient-wise evaluation on the public Helsinki dataset [16], repeated with the AFE model in the signal path.

To our knowledge, this is the first neonatal seizure detector in FPGA logic evaluated patient-independently. Design files and scripts are public.[1]

II. System

Each of four scalp electrodes (Fig. 1) is amplified single-ended against a common reference by one AFE; a tile has two analog pins, so each chip carries one channel. The outputs are digitised at 256 Hz, the rate of the Helsinki recordings, and the detector's bipolar derivations are formed by subtraction. The PS streams them as 16-bit samples to the detector in the PL and reads alarms and scores back.

III. Analog Front End

A. Circuit

The input is AC-coupled through $C_1 = 11.9$ pF to the inverting input of an operational transconductance amplifier (OTA), with $C_2 = 154$ fF, a pseudo-resistor and a reset switch in feedback, so the midband gain is $C_1/C_2 = 77.5$ V/V (Fig. 2) [10]. The non-inverting input sees C_1' to ground rather than to the signal, so noise on the reference VREF reaches the output with a gain of about 1 instead of 78 and a simple on-chip reference suffices. Each pseudo-resistor is two back-to-back PMOS pairs in series, about $2 \times 10^{13}\ \Omega$, which places the high-pass corner f_L at 0.04–0.14 Hz over corners at 37 °C. Pseudo-resistors take about 15 s to settle at power-up, so a 10-ms reset pulse ties their internal nodes and returns the output to within 1 mV of VREF after a 20-mV artifact.

The OTA is a two-stage Miller design with a 150/8-µm PMOS input pair at 2 µA per side. A first version, with short mirror devices, had 22 μV_{rms} of noise dominated by the mirror's $1/f$ noise; because that contribution falls roughly as $1/L^2$, each mirror device became three 7/20-µm transistors in series, and a larger C_1, which lowers the noise gain set by the 3-pF input capacitance, brought the total to 2.9 μV_{rms}. The open-loop gain is 99 dB and the loop phase margin 86°, so the OTA drives the pin and a 15-pF load without a buffer. A subthreshold beta-multiplier and a weak-inversion VREF are on the tile; the whole circuit draws 15.7 µA from 1.8 V.

[1] https://github.com/chaithr45/tt-eeg-afe

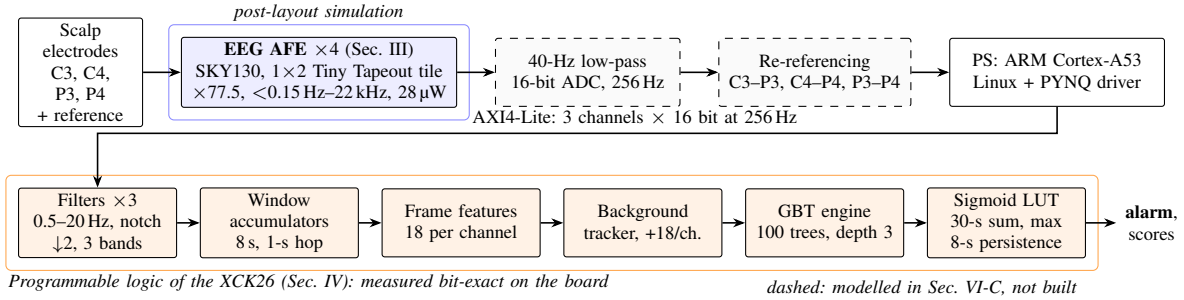


Fig. 1. The monitor: one single-ended AFE per electrode, digital re-referencing and the detector in the programmable logic (PL), fed by the processing system (PS).

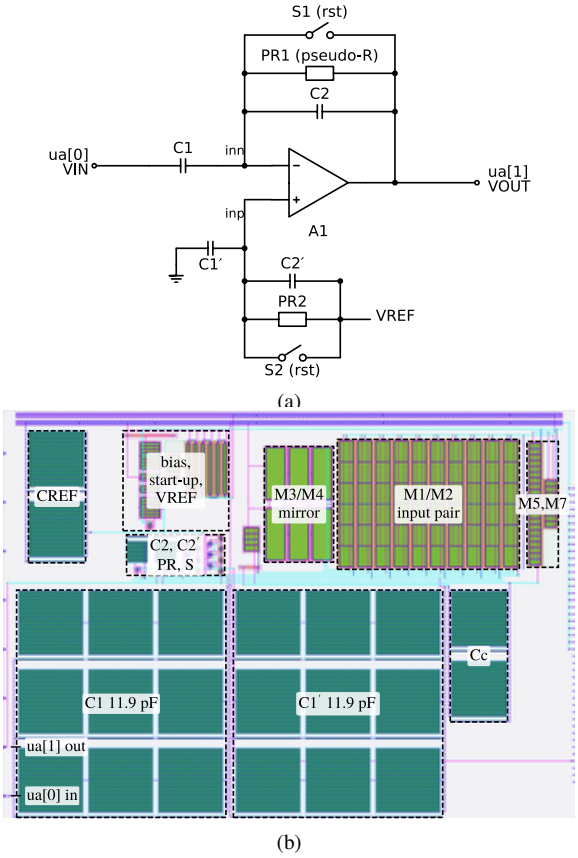


Fig. 2. (a) Capacitive-feedback amplifier: $C_1 = C_1' = 11.9\,\text{pF}$, $C_2 = C_2' = 154\,\text{fF}$; PR, pseudo-resistor; S1, S2, reset switches. (b) Layout of the 161×226-µm tile, rotated 90° and generated by Python scripts that drive Magic; C_c and CREF are 2-pF MIM capacitors.

TABLE I
AFE POST-LAYOUT RESULTS AND COMPARISON

	This work	[10]	[11]	[12]
Process	SKY130	1.5 µm	65 nm	110 nm
Supply (V)	1.8	5	0.8	1/1.5
Chopper	no	no	yes	yes
Gain (dB)	37.8	39.5	–	–
Noise (μV_{rms})	2.95[a]	2.2	0.38[a]	0.36[b]
Power (µW)	28[c]	80	4.5	3.8
NEF	≈10	4.0	3.32	1.54
PSRR at 50 Hz (dB)	>81[d]	–	–	–
Area (mm^2)	0.036[e]	0.16	–	–
Result	post-layout	measured	measured	measured

[a]0.5–100 Hz. [b]0.5–300 Hz. [c]Bias and VREF included. [d]All corners. [e]Whole 1×2 tile.

B. Layout and Post-Layout Verification

One build script regenerates the layout from code, runs Magic DRC and Netgen LVS on the core and the tile, and extracts parasitics [17]; the tile passes the Tiny Tapeout precheck locally and in continuous integration. The extracted core is simulated against the schematic with the on-chip bias, a model of the shuttle's analog pin path and a $15\,\text{pF} \parallel 1\,\text{M}\Omega$ load. The first complete layout passed every rule check, but post-layout simulation showed 0.56 dB of excess gain, caused by 12 fF between the output and the non-inverting input, and a 50-Hz PSRR of 77 instead of 96 dB, caused by 1.35 fF from the supply and bias lines onto the inverting input. A ground shield track removed the gain error, and 1.5 µm more spacing with a metal-1 line on the tail node raised the PSRR to 85.6 dB. Neither defect broke a rule or changed connectivity, so only extraction and simulation could find them.

Parasitics change the final gain by -0.04 dB and the in-band noise by $+0.02\,\mu\text{V}_{\text{rms}}$ at every simulated corner and with both SKY130 model sets (Table I). The noise is dominated by $1/f$ noise ($390\,\text{nV}/\sqrt{\text{Hz}}$ at 10 Hz against a $48\text{-nV}/\sqrt{\text{Hz}}$ floor). In 200 Monte Carlo samples the gain spread is $\sigma = 0.06\%$. The NEF of about 10 is high because only 4 of the 15.7 µA flow in the input pair; the chopper designs of [11], [12] are nearly an order of magnitude quieter, and chopping is the path to closing that gap.

IV. Seizure Detector

A. Data and Evaluation Protocol

The Helsinki dataset [16] holds EEG from 79 term neonates (111.9 h) at 256 Hz, annotated by three experts; the majority gives 492 seizures in 46 neonates. We use C3–P3, C4–P4 and P3–P4. All results use nested patient-wise cross-validation: five outer folds of neonates are each tested once, and every choice of features, model and threshold is made by cross-validation inside the training neonates, with the threshold set for 1 false alarm per hour (FA/h) on inner out-of-fold scores. Success criteria were committed before any result was

computed. We report event sensitivity, FA/h, AUC and Cohen's κ [18], with 95% confidence intervals from resampling neonates.

B. Features and Hardware-Exact Training

Ten second-order sections per channel give a 0.5–20-Hz band, a 50-Hz notch and three sub-bands. Every second, 18 features are computed over the last 8 s, among them line length [19], band energies, a spectral entropy from the band energies and Hjorth parameters, each paired with a version normalised to a running per-channel background: 36 per channel, 108 in all. Windows are formed from eight 1-s partial sums, so an 8-s window costs eight accumulators instead of 1,024 stored samples, and no feature needs a divider.

A gradient-boosted tree ensemble [20] (100 trees, depth 3) scores each channel; the alarm is raised when the maximum over channels of a 30-s sum of sigmoid outputs stays above a threshold for 8 s. Quantising a floating-point ensemble after training cannot be made exact: at Q16, 401 of 500,000 node comparisons took a different branch, because some feature values lay within 10^{-12} of a split. We therefore define the features in the RTL's integer arithmetic and train on these integers, so every split is an integer comparison the hardware makes exactly. Against training on floating-point features, all paired differences include zero (pooled AUC $+0.001$ [-0.004, $+0.005$]; sensitivity 0.0 [-1.1, $+1.2$] points), so exactness cost no measurable accuracy.

C. Architecture

The detector is an AXI4-Lite peripheral at 100 MHz. Between two samples there are 390,625 cycles, so arithmetic units are shared and sequenced and state lives in RAM: once per second the features, background tracker and tree engine run for each channel in turn, 2,399 cycles in the worst case. The tree engine holds the model in two 1,500-word RAMs written over AXI, so a retrained model needs no new bitstream, and uses 162 LUTs.

V. Verification and Measurement

Both halves are checked against one reference each (Table II). The AFE's reference is its schematic; the detector's is a Python golden model that follows the RTL's operation order, and any difference counts as a defect. On the KV260, a PYNQ driver streamed 300 s of EEG from each of three neonates; all 106,359 values (every feature, tree output, score and decision state) matched, and the 1,500 model words read back unchanged. These neonates were in the training set, so this run establishes correctness, not accuracy. The busy-cycle counter read a maximum of 2,399 cycles over a full 62-min recording, equal to simulation.

TABLE II
Verification and On-Board Measurement

Check	Reference	Result
AFE (SKY130)		
DRC, LVS, core and tile	rules, schematic	0 errors, match
Tiny Tapeout precheck	shuttle rules	pass (local, CI)
Post-layout simulation	schematic	-0.04 dB, $+0.02\,\mu V_{rms}$
Detector		
Blocks and core (xsim)	golden model	2.66 M values, 0 diff.
AXI, 62-min record (xsim)	golden model	453,739 reads, 0 diff.
KV260, 3 neonates (board)	golden model	106,359 values, 0 diff.
KV260, worst-case latency	simulation	2,399 cycles, equal

TABLE III
Detectors on Identical Nested Folds (1 FA/h Target)

Detector	Pooled AUC	Sens. % (FA/h)	Neonates detected	κ
Threshold rule	0.700	26.6 (1.22)	11/46	0.220
RBF SVM	0.837	44.3 (0.91)	31/46	0.375
CNN on raw EEG (reference)	0.888	49.8 (1.10)	39/46	0.573
Hardware-exact trees (built)	**0.816**	**47.8 (0.91)**	**33/46**	**0.422**
Built detector behind the AFE model (Sec. VI-C)				
AFE, 40-Hz low-pass, 16-bit ADC	[TBD]	[TBD]	[TBD]	[TBD]
AFE, no anti-alias filter	[TBD]	[TBD]	[TBD]	[TBD]
AFE, f_L 0.04 vs 0.14 Hz	[TBD]	[TBD]	[TBD]	[TBD]

VI. Results

A. Detection

Table III compares detectors scored on the same folds. The built detector finds 47.8% of seizures (95% CI 34.5–60.4%) at 0.91 FA/h and at least one seizure in 33 of 46 neonates. The CNN reference has the highest AUC but only 2 points more event sensitivity, at about 300 times more operations per second, and the RBF SVM's support vectors exceed the device's block RAM in three of five folds.

B. Implementation

After place and route (xck26-sfvc784-2LV-c) the detector uses 9,592 LUTs (8.2%), 10,494 flip-flops, 62 DSP slices (5.0%, 60 of them in the filters) and four 36-Kb block RAMs, and meets timing at 100 MHz; its worst case is 0.61% of the cycle budget. Vivado estimates 53 mW for the detector logic; measured board power rose from 3.10 to 3.42 W while streaming, a figure that includes the processor feeding the samples. The same integer detector in C on one Cortex-A53 core needs **[E11: median / max time per frame]** per frame. Table IV places the design among seizure-detection hardware; of these designs it is the only one evaluated across patients and the only one for neonates.

C. AFE in the Signal Path

To join the halves, the electrode signals of every recording were passed through the post-layout AFE model before re-referencing: its gain and high-pass response, its input-referred noise spectrum folded into the 0–128-Hz band by sampling at 256 Hz, an optional single-pole 40-Hz anti-alias filter and a 16-bit converter. The detector, its fold models and thresholds were unchanged. The recordings already contain the clinical amplifier's noise, so the AFE's noise adds to it. With the anti-alias filter the bipolar derivations carry **[E10: 0.5–20 Hz noise]** of AFE noise and the built detector finds **[E10-B]**% of seizures

TABLE IV
COMPARISON WITH SEIZURE-DETECTION HARDWARE

	[7]	[8]	[9]	This work
Platform	65-nm ASIC	65-nm ASIC	iCE40 FPGA	KV260 FPGA
Classifier	GBT	oblique tree	SNN	GBT
Patients	iEEG	paed. EEG	paed. EEG	neonates
	26	24	9	79
Protocol	per patient	per patient	per patient	**across patients**
Result	F1 87.9%	sens. 95.6%	100% events	47.8% at
		spec. 96.8%	0.3 FP/h	0.91 FA/h
Power or	41.2	0.227	9.1 mW	53 mW
energy	nJ/class	µJ/class	(meas.)	(est.)
Latency	1.1 s[a]	–	0.5 µs	24 µs

Per-patient models are trained and tested on the same patient and are not directly comparable with across-patient results. [a]Delay from seizure onset to detection; the other latencies are processing times per inference or frame.

at **[FA/h]** FA/h (Table III). **[One sentence on what the no-filter and f_L-mismatch rows show.]**

VII. LIMITATIONS AND CONCLUSION

The AFE is pre-silicon: pseudo-resistors are poorly modelled and may differ by an order of magnitude on silicon, and the AFE is specified for 0–50 °C. The converter and re-referencing are modelled, not built. The detector is not at expert level: its κ of 0.42 is below the experts' 0.76, and 13 of the 46 neonates with seizures have none detected. The configuration was fixed after the model search on hardware-cost grounds, which we disclose as a protocol amendment; the pre-declared trees-only procedure scored 50.2%.

A SKY130 EEG front end fits a Tiny Tapeout tile at 2.95 μV_{rms} and 28 µW in post-layout simulation, and a neonatal seizure detector trained on its own integer arithmetic runs bit-exactly on an FPGA SoC in under 9% of its logic and 24 µs per frame. Evaluated across patients and with the front end in the loop, the system shows that the AFE's $1/f$ noise, not the detector's arithmetic, is the next limit to remove.

ACKNOWLEDGMENT

The author used an AI assistant (Claude, Anthropic) for simulation and layout scripting, software development and manuscript drafting. All reported results come from the project repositories and their simulation, evaluation and board logs.

REFERENCES

[1] D. M. Murray *et al.*, "Defining the gap between electrographic seizure burden, clinical expression and staff recognition of neonatal seizures," *Arch. Dis. Child. Fetal Neonatal Ed.*, vol. 93, no. 3, pp. F187–F191, 2008.

[2] A. M. Pavel *et al.*, "A machine-learning algorithm for neonatal seizure recognition: A multicentre, randomised, controlled trial," *Lancet Child Adolesc. Health*, vol. 4, no. 10, pp. 740–749, 2020.

[3] A. Temko *et al.*, "EEG-based neonatal seizure detection with support vector machines," *Clin. Neurophysiol.*, vol. 122, no. 3, pp. 464–473, 2011.

[4] A. H. Ansari *et al.*, "Neonatal seizure detection using deep convolutional neural networks," *Int. J. Neural Syst.*, vol. 29, no. 4, 2019, art. no. 1850011.

[5] A. O'Shea *et al.*, "Neonatal seizure detection from raw multi-channel EEG using a fully convolutional architecture," *Neural Netw.*, vol. 123, pp. 12–25, 2020.

[6] N. Verma *et al.*, "A micro-power EEG acquisition SoC with integrated feature extraction processor for a chronic seizure detection system," *IEEE J. Solid-State Circuits*, vol. 45, no. 4, pp. 804–816, 2010.

[7] M. Shoaran *et al.*, "Energy-efficient classification for resource-constrained biomedical applications," *IEEE J. Emerg. Sel. Topics Circuits Syst.*, vol. 8, no. 4, pp. 693–707, 2018.

[8] U. Shin *et al.*, "NeuralTree: A 256-channel 0.227-μJ/class versatile neural activity classification and closed-loop neuromodulation SoC," *IEEE J. Solid-State Circuits*, vol. 57, no. 11, pp. 3243–3257, 2022.

[9] P. Busia *et al.*, "Wearable epilepsy seizure detection on FPGA with spiking neural networks," *IEEE Trans. Biomed. Circuits Syst.*, vol. 19, no. 6, Dec. 2025, doi: 10.1109/TBCAS.2025.3575327.

[10] R. R. Harrison and C. Charles, "A low-power low-noise CMOS amplifier for neural recording applications," *IEEE J. Solid-State Circuits*, vol. 38, no. 6, pp. 958–965, 2003.

[11] J. Lee *et al.*, "A 0.8-V 82.9-μW in-ear BCI controller IC with 8.8 PEF EEG instrumentation amplifier and wireless BAN transceiver," *IEEE J. Solid-State Circuits*, vol. 54, no. 4, pp. 1185–1195, 2019.

[12] Y. Park *et al.*, "A 3.8-μW 1.5-NEF 15-GΩ total input impedance chopper stabilized amplifier with auto-calibrated dual positive feedback in 110-nm CMOS," *IEEE J. Solid-State Circuits*, vol. 57, no. 8, pp. 2449–2461, 2022.

[13] S. Varma and R. Simon, "Bias in error estimation when using cross-validation for model selection," *BMC Bioinformatics*, vol. 7, 2006, art. no. 91.

[14] SkyWater Technology and Google, "SKY130 open-source process design kit," https://github.com/google/skywater-pdk.

[15] Tiny Tapeout, "Multi-project shuttles for digital and analog designs," https://tinytapeout.com, accessed Oct. 2026.

[16] N. J. Stevenson *et al.*, "A dataset of neonatal EEG recordings with seizure annotations," *Sci. Data*, vol. 6, 2019, art. no. 190039.

[17] "Open-source tools Xschem, Magic, Netgen, KLayout, ngspice," http://opencircuitdesign.com, https://www.klayout.de.

[18] J. Cohen, "A coefficient of agreement for nominal scales," *Educ. Psychol. Meas.*, vol. 20, no. 1, pp. 37–46, 1960.

[19] R. Esteller *et al.*, "Line length: An efficient feature for seizure onset detection," in *Proc. 23rd Annu. Int. Conf. IEEE Eng. Med. Biol. Soc.*, vol. 2, 2001, pp. 1707–1710.

[20] J. H. Friedman, "Greedy function approximation: A gradient boosting machine," *Ann. Statist.*, vol. 29, no. 5, pp. 1189–1232, 2001.