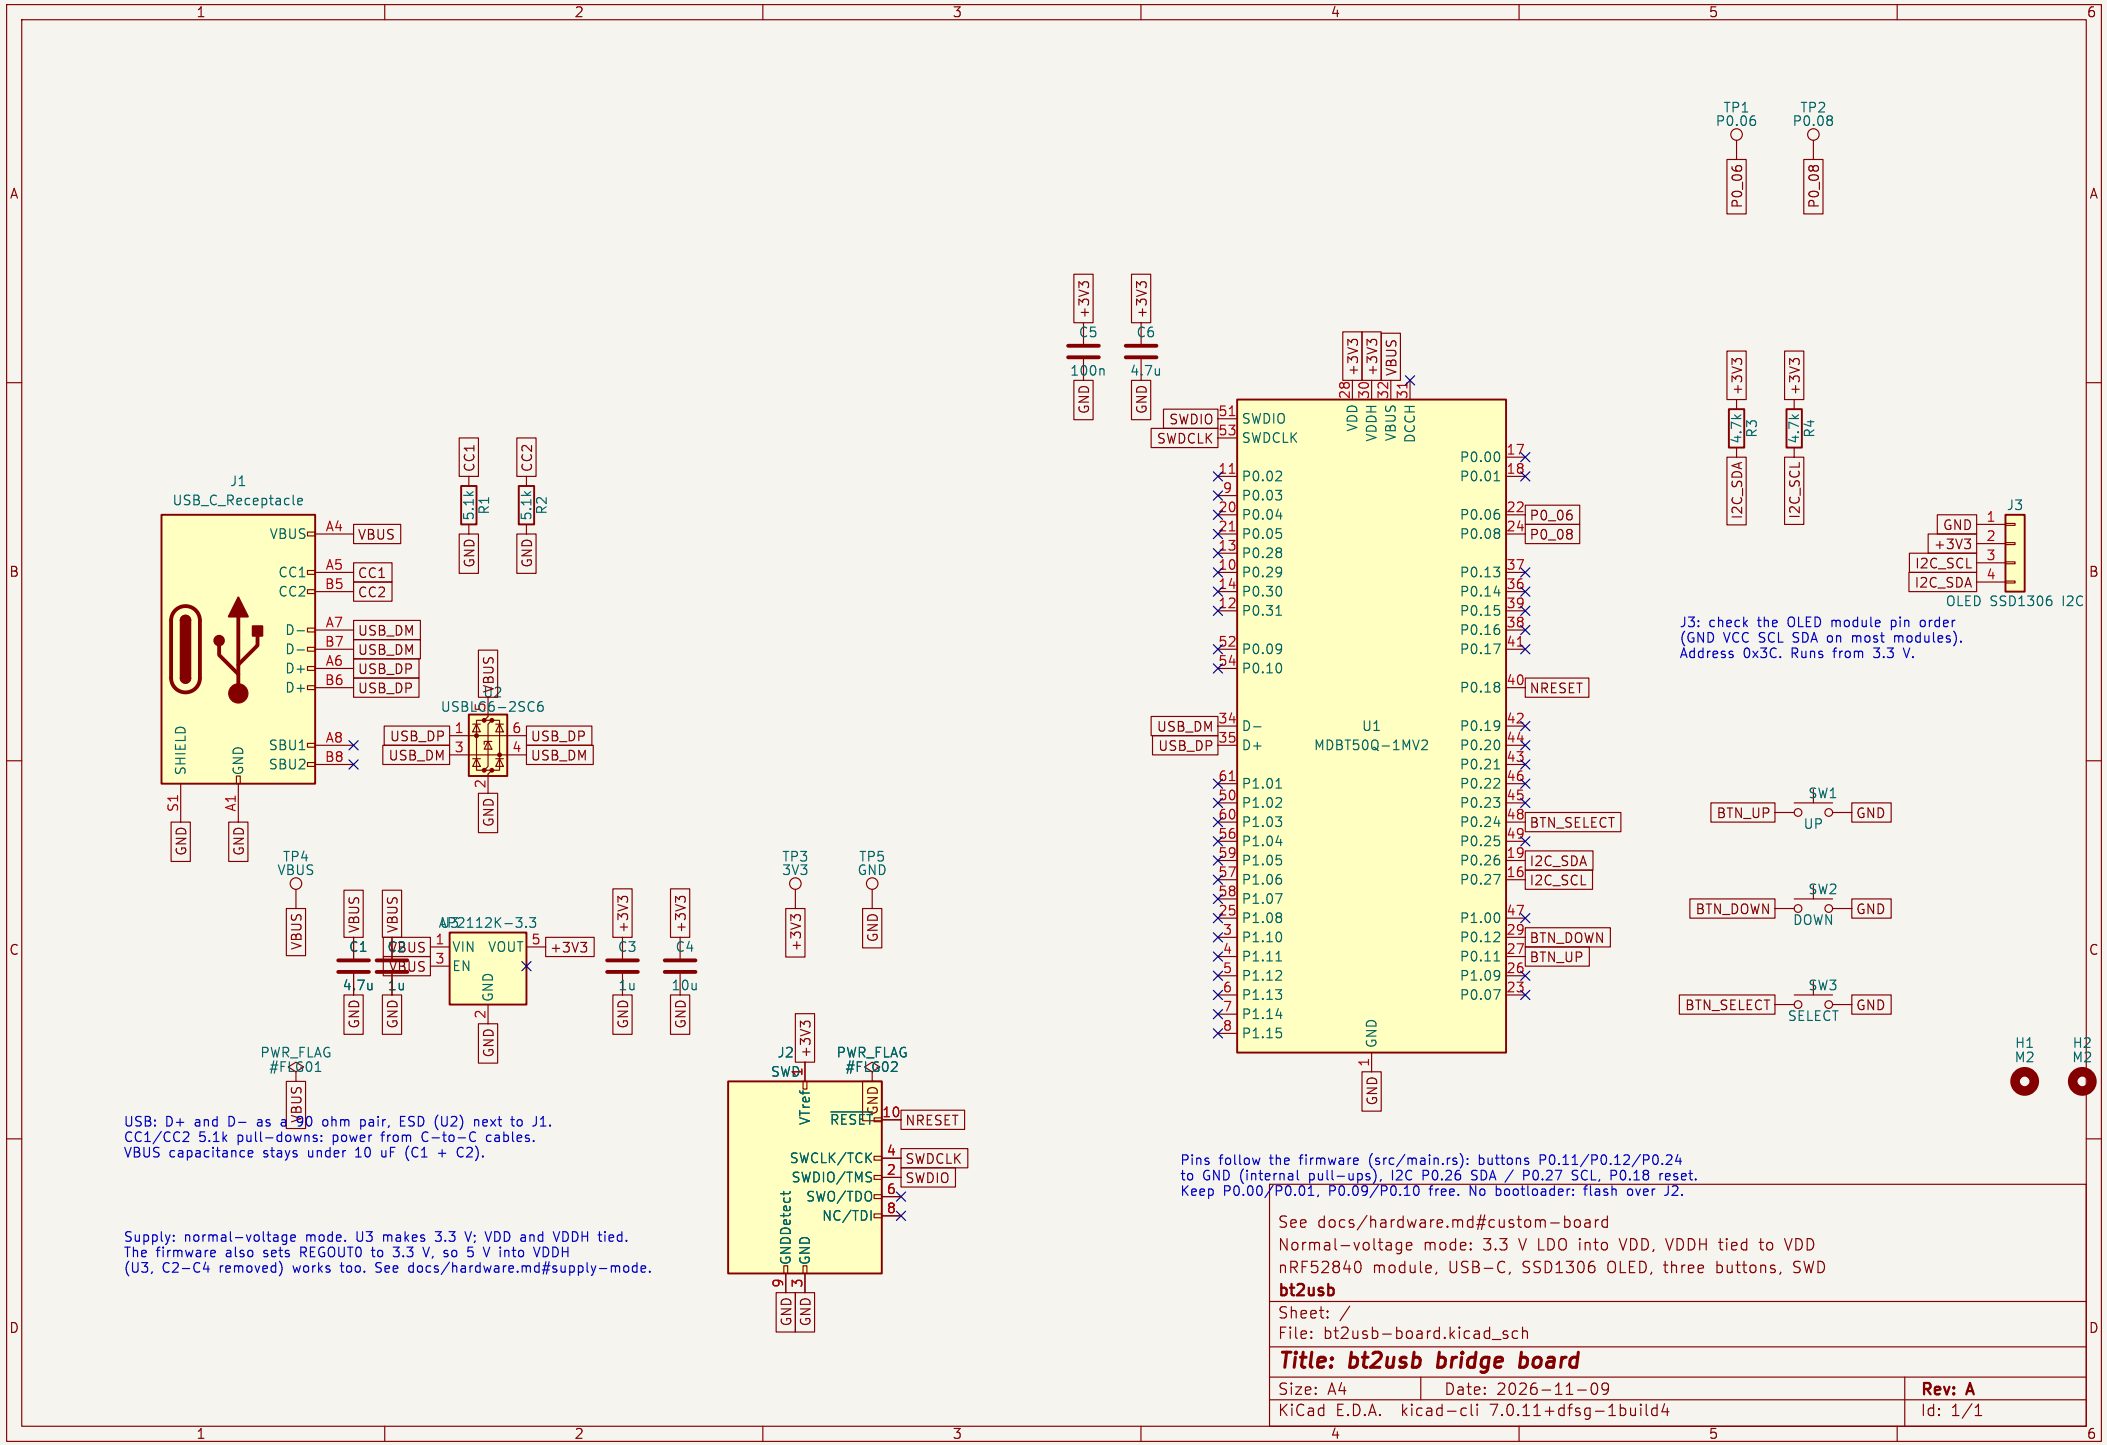


USB: D+ and D− as a 90 ohm pair, ESD (U2) next to J1.
CC1/CC2 5.1k pull-downs: power from C-to-C cables.
VBUS capacitance stays under 10 uF (C1 + C2).

Supply: normal-voltage mode. U3 makes 3.3 V; VDD and VDDH tied.
The firmware also sets REGOUT0 to 3.3 V, so 5 V into VDDH
(U3, C2-C4 removed) works too. See docs/hardware.md#supply-mode.

J3: check the OLED module pin order
(GND VCC SCL SDA on most modules).
Address 0x3C. Runs from 3.3 V.

Pins follow the firmware (src/main.rs): buttons P0.11/P0.12/P0.24
to GND (internal pull-ups), I2C P0.26 SDA / P0.27 SCL, P0.18 reset.
Keep P0.00/P0.01, P0.09/P0.10 free. No bootloader: flash over J2.

See docs/hardware.md#custom-board
Normal-voltage mode: 3.3 V LDO into VDD, VDDH tied to VDD
nRF52840 module, USB-C, SSD1306 OLED, three buttons, SWD

bt2usb

Sheet: /
File: bt2usb-board.kicad_sch

Title: bt2usb bridge board

Size: A4	Date: 2026-11-09	**Rev: A**
KiCad E.D.A. kicad-cli 7.0.11+dfsg-1build4		Id: 1/1