

A

B

C

D

E

ASSEMBLY NOTES:

Assembly shall conform to IPC-A-610 Class 2.

Assembly shall conform with RoHS Directive 2011/65/EU.

Components shall be placed according to the associated CPL and BOM documents.

Lead-free SAC305 solder shall be used.

Reflow profile shall comply with J-STD-20C Lead-Free Reflow Profile.

BGA components shall be 100% checked with x-ray for solder bridges after reflow.

Finished assemblies shall be removed from panel prior to delivery.


Notes:

1 Camera module will be supplied and installed by customer. J2 is SMT connector only.

2

3

[Variant:]: View from Bottom side (Scale 4:1)

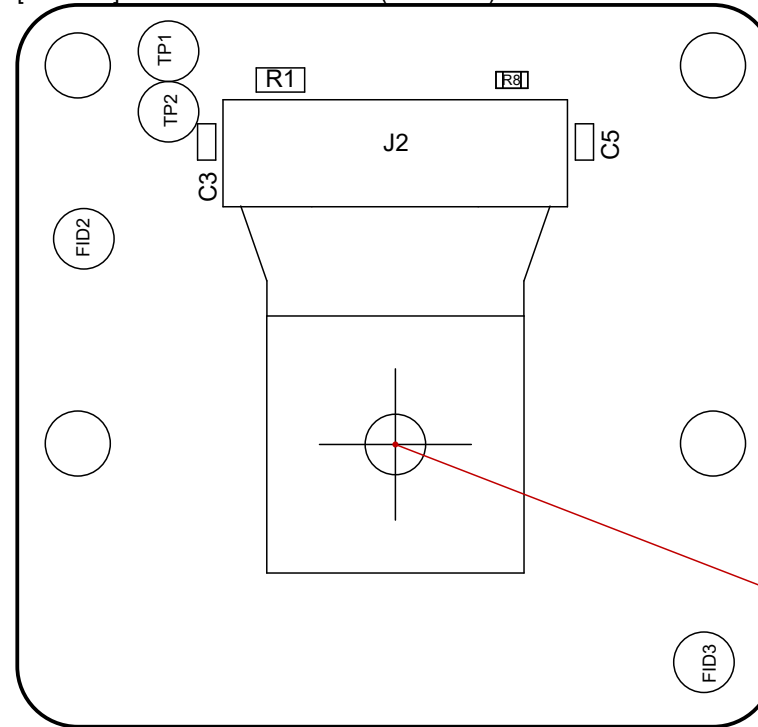

Title: **DM0260**

Number: D0000999 Revision: R1M0
E0

Date: 19/08/2022 Sheet: 1 of 2

Drawn by: David Malovrh

LUXonjs

PROPRIETARY AND CONFIDENTIAL

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF LUXONIS HOLDING CORPORATION. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION IS PROHIBITED.

A


B


C


D


E

View from Top side (Scale 4:1)

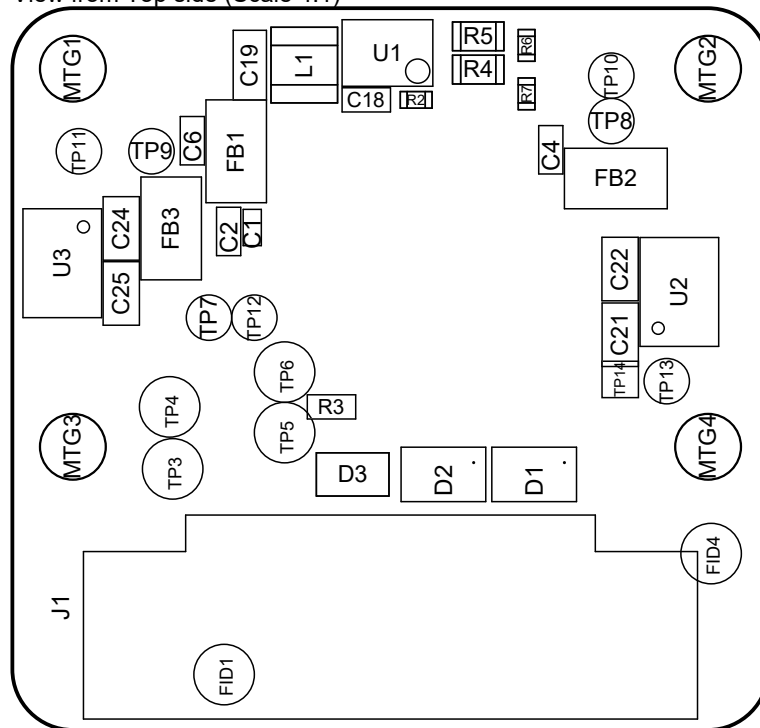

Title: DM0260		
Number: D0000999	Revision: R1M0 E0	
Date: 19/08/2022	Sheet: 2 of 2	PROPRIETARY AND CONFIDENTIAL
Drawn by: David Malovrh		THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF LUXONIS HOLDING CORPORATION. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION IS PROHIBITED.

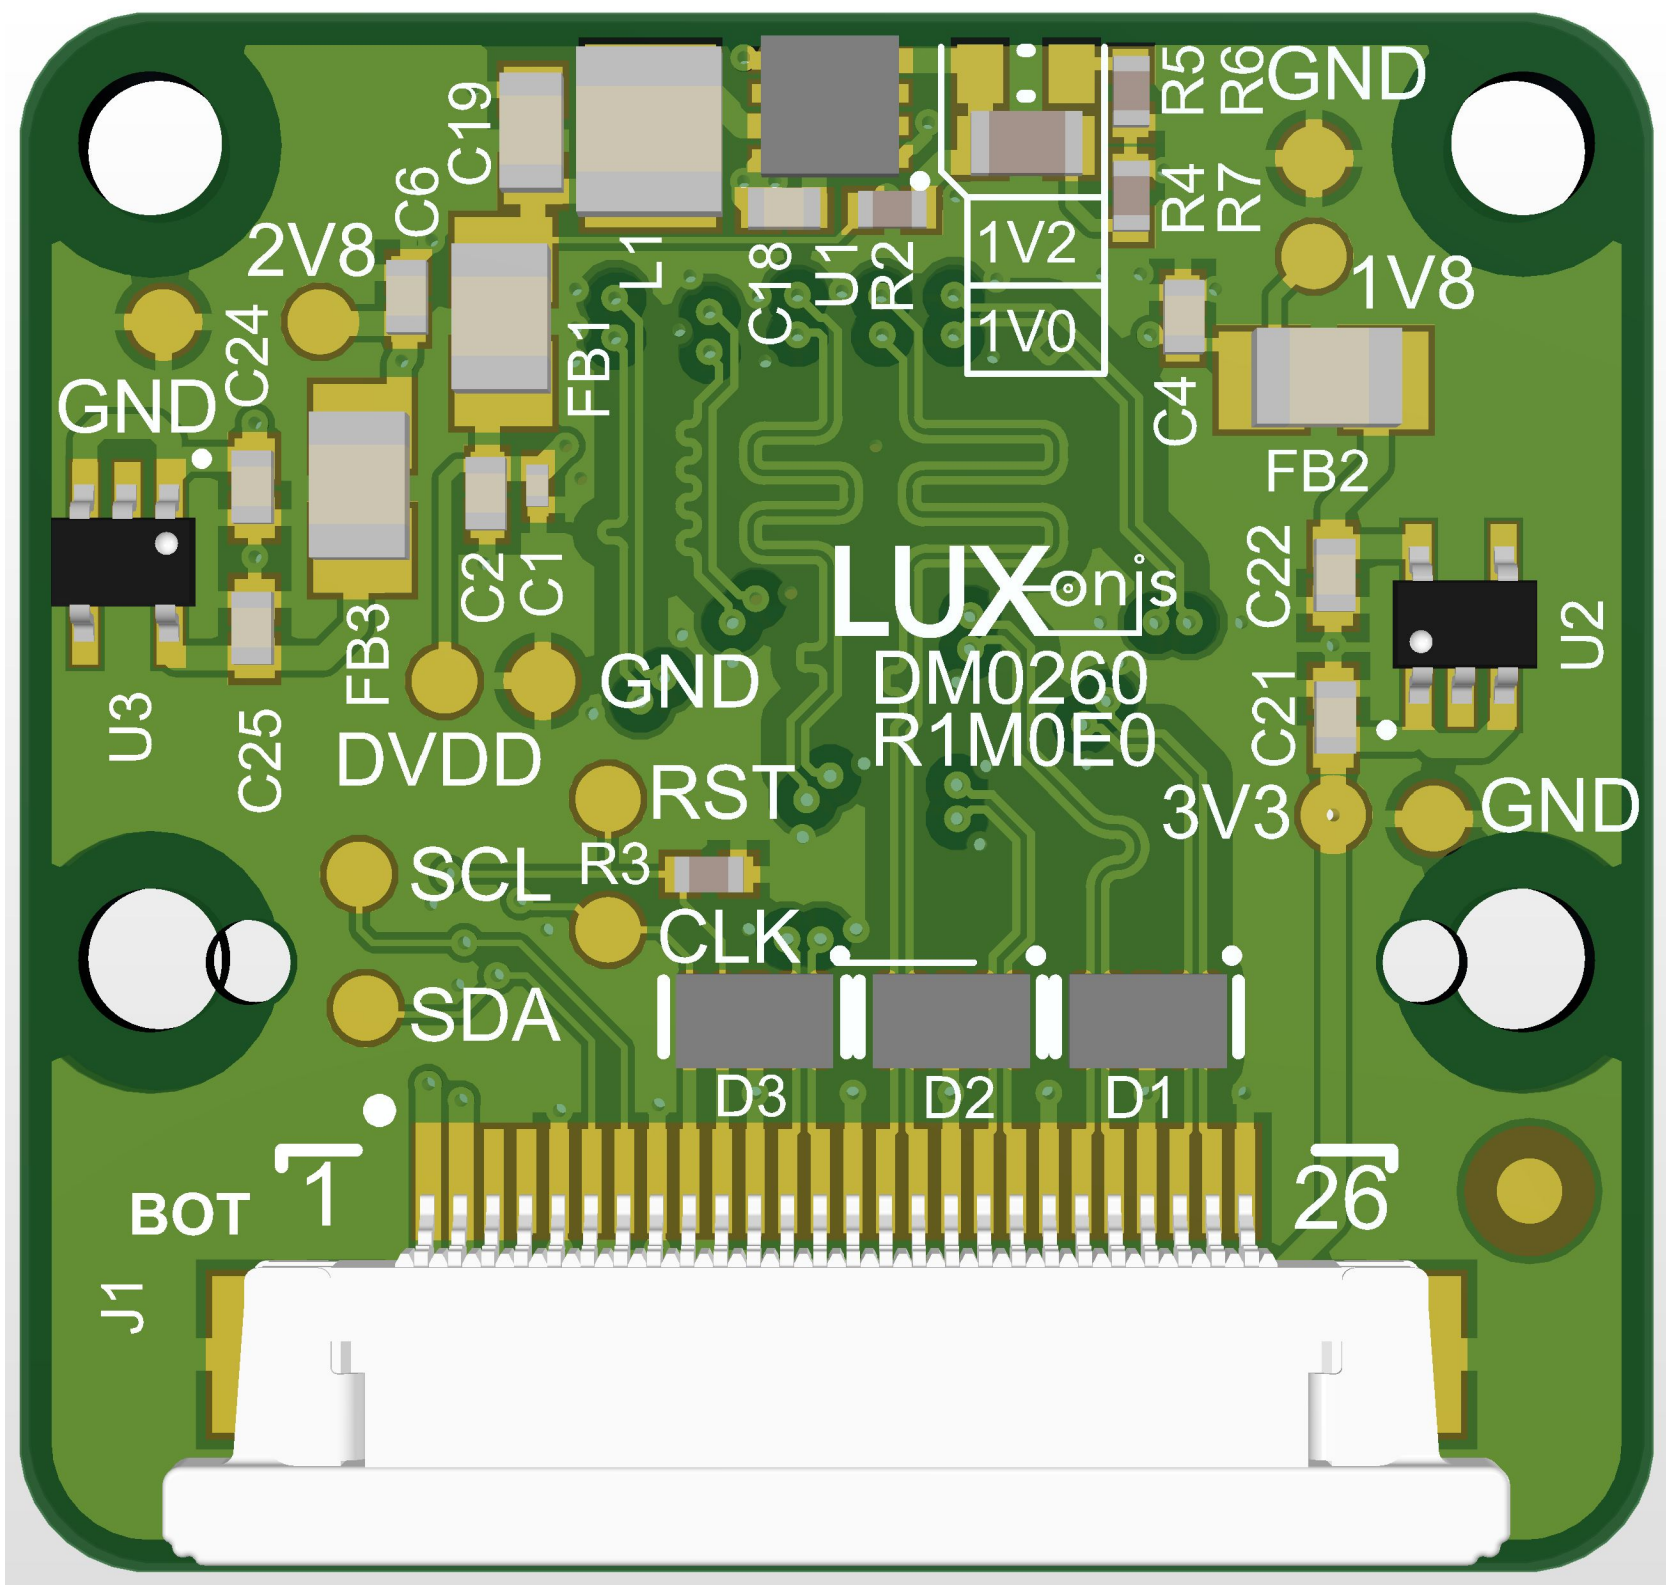

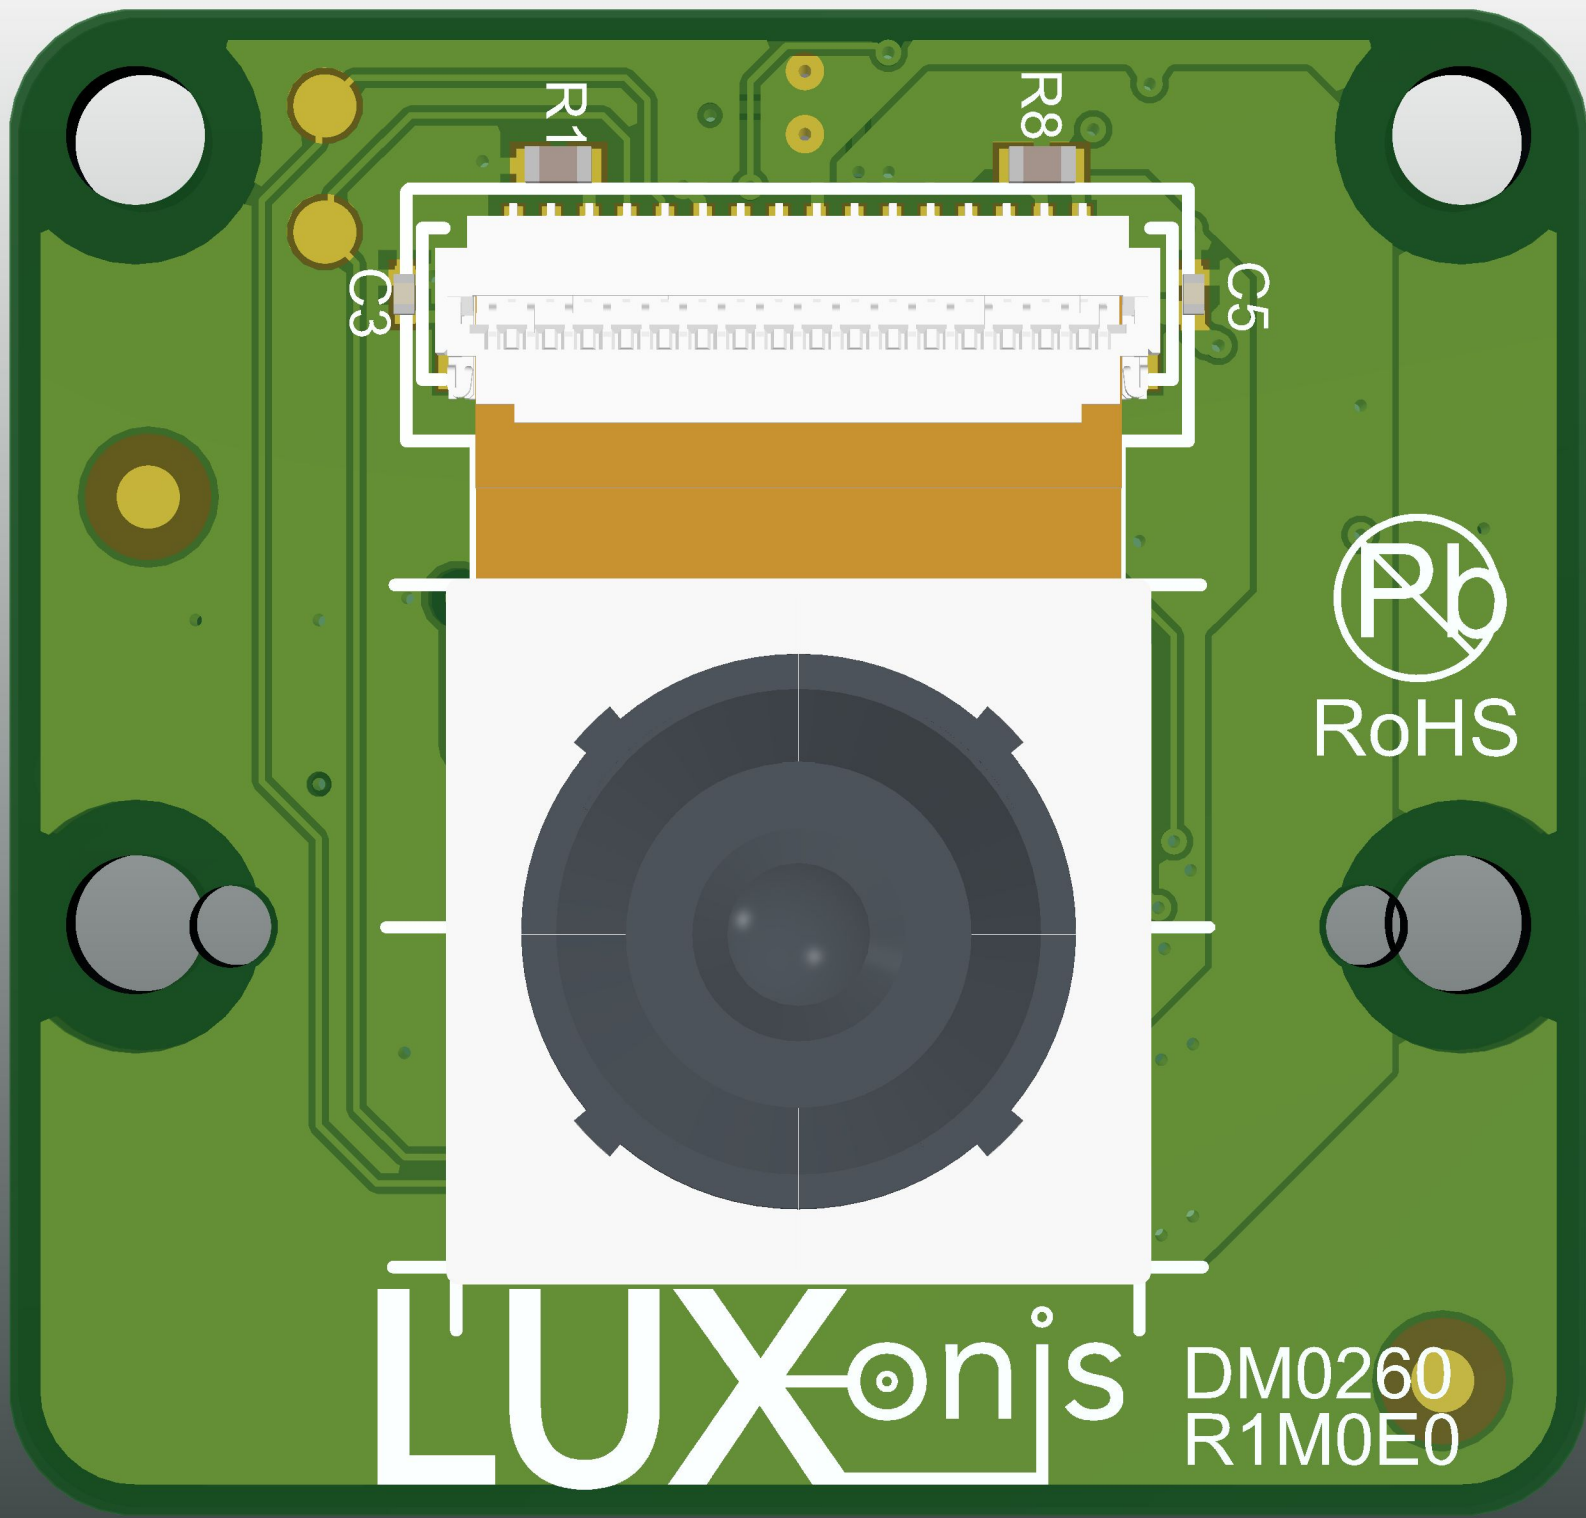

LUXonjs

DM0260
R1M0E0