OAK-D Pro (USB boot with 256Mbit NOR flash)

1   Features

- Movidius Myriad X VPU
- 256/512/1024MBit QSPI NOR Flash
- 32Kb I2C EEProM
- USB3.1, gen2 10gbps
- 2x 2-lane MIPI connects OV9282 1MP global shutter cameras with no IR filter
- 1x center 4-lane MIPI connects IMX378 12 MP color rolling shutter camera
- Active IR stereo
- IR Laser dot projector (Belago 1.1)
- IR Flood LED light (SFH 4725AS)
- ¼ -20 tripod mount on the bottom of the unit
- VESA-spec (7.5cm, M4) set of mounting holes on the back of the unit

2   Applications

- Industrial automation
- Robotics
- Surveillance IP camera
- Security systems
- Remote intelligence

3   Description

The Luxonis OAK-D Pro is an AI Edge vision system driven by Movidius Myriad X VPU. The system is powered over a USB Type-C. OAK-D Pro has three on-board cameras which implement stereo and RGB vision, piped directly into the DepthAI Myriad X VPU for depth and AI processing. The data is then output to a host via USB 3.1 Gen1. In addition to stereo cameras the OAK-D Pro also features IR active illumination in the form of a laser dot projector. It actively illuminates the area in the camera field of view using 4700 laser dots. The OAK-D Pro also features an IR LED flood light to help in low light situations.

Device Information

PART NUMBER	SIZE (WxDxH)
OAK-D Pro	97mm x 22.9mm x 29.5mm

Figure 1 – OAK-D Pro

Table of Contents

4 Electrical Characteristics

4.1 Absolute Maximum Ratings[1]

SYMBOL	RATINGS	MIN	MAX	UNIT
V_{BUS}	USB input supply voltage range.[2]	3.5	5.5	V
I_{VBUS}	Maximum input current requirement		2	A
T_{stq}	Ambient temperature	0	60	C

4.2 Recommended Operating Conditions

SYMBOL	RATINGS	MIN	TYP	MAX	UNIT
V_{BUS}	VBUS input supply voltage		5V	5.25	V
P	Power consumption requierent	4	6	7.5	W
P_{IDLE}	VBUS idle power draw (Myriad X booted)		2.5		W
T_A	Ambient operating temperature			50	°C

1) Stresses beyond those listed under *Absolute Maximum Ratings* may cause permanent damage to the device. These are stress ratings only, which do not imply functional operation of the device at these or any other conditions beyond those indicated under *Recommended Operating Conditions.* Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.
2) According to industry standard Universal Serial Bus (USB) specifications

5   Camera sensors characteristics

5.1 Center Color Camera

The color sensor on the stereo depth module in addition to color image provides texture information. Usages for the texture information include overlay on a depth image to create a color point cloud and overlay on a 3D model for reconstruction.

Parameter	Value
Image sensor	Sony IMX378
Active pixels	4056x3040@60fps
Output video format	RAW12/10/8
Focus type	Auto Focus 8cm - ∞ / Fixed Focus 50cm- ∞
FOV	78°
Shutter Type	Rollign shutter
IR sensitive	No

5.2 Stereo vision grayscale camera

Stereo cameras compare the features and based on the disparity determines the distance/depth of the object tracked on by the product. It also provides the depth map in color and raw depth map in gray scale.

Parameter	Value
Image sensor	OmniVision OV9282
Active pixels	1280x800@120FPS
Output video format	8/10-bit RAW
Focus type	Fixed Focus 19.6cm - ∞
FOV	89.5°
Shutter Type	Global shutter
IR sensitive	Yes

6   Active illumination

6.1 IR dot projector

OAK-D Pro doesn't include IR filter on mono cameras (production version will have notch IR filters at 940nm), which allows only visible light and IR light from illumination LED/laser dot projector to the camera..

Laser dot projector projects 4700 dots in front of the device, which helps with disparity matching, especially for low-visual-interest surfaces (blank surfaces with little to no texture), such as a wall or floor. Technique that we use is called ASV - conventional active stereo vision - as stereo matching is performed on device the same way as on OAK-D (passive stereo). The projector meets the CLASS 1 specification which means no harm can be done with the laser source either to human skin or eye.

Parameter	Value
Projector	Dot-Pattern Infrared Illuminator
Projector type	VCSEL (vertical cavity surface emitting laser)
Control	Using strobe signal from the left stereo camera (PWM)
Compliance	Class 1, IEC 60825-1:2014 Edition 3
FOI (Field of illumination)	HFOI: 61°+/-4°, VFOI: 78°+/-4°

6.2 IR flood illumination LED

Blanket IR LED illumination allows perceiving low-light and no-light environments. You can run your AI/CV processes on frames that are illuminated by the IR LED. Note that color camera doesn't perceive IR light, so you would need to use mono camera stream for your AI/CV processes.

Parameter	Value
Projector	IR Light Emitting Diode
Wavelength	940 nm
Control	Using strobe signal from the left stereo camera (PWM)
Compliance	IEC 62471:2006
FOI (Field of illumination)	FOI: 80°

7   OAK-D Pro with use of Y-adapter

Due to IR light sources the consumption of OAK-D Pro can be higher and will fall out of the USB2 maximum specified range of 900mA. If the host is capable delivering only 900mA current over a single USB port then Y-adapter provides an option to have a separate power supply connected to the same USB device along with the data connection from the host. This allows that OAK-D Pro can still be run on devices such as Raspberry Pi4 and similar host with lower power capabilities on USB ports.

8   Mechanical Information

The following information is the most current data available for the designated device. This data is subject to change without notice and without revision of this document.
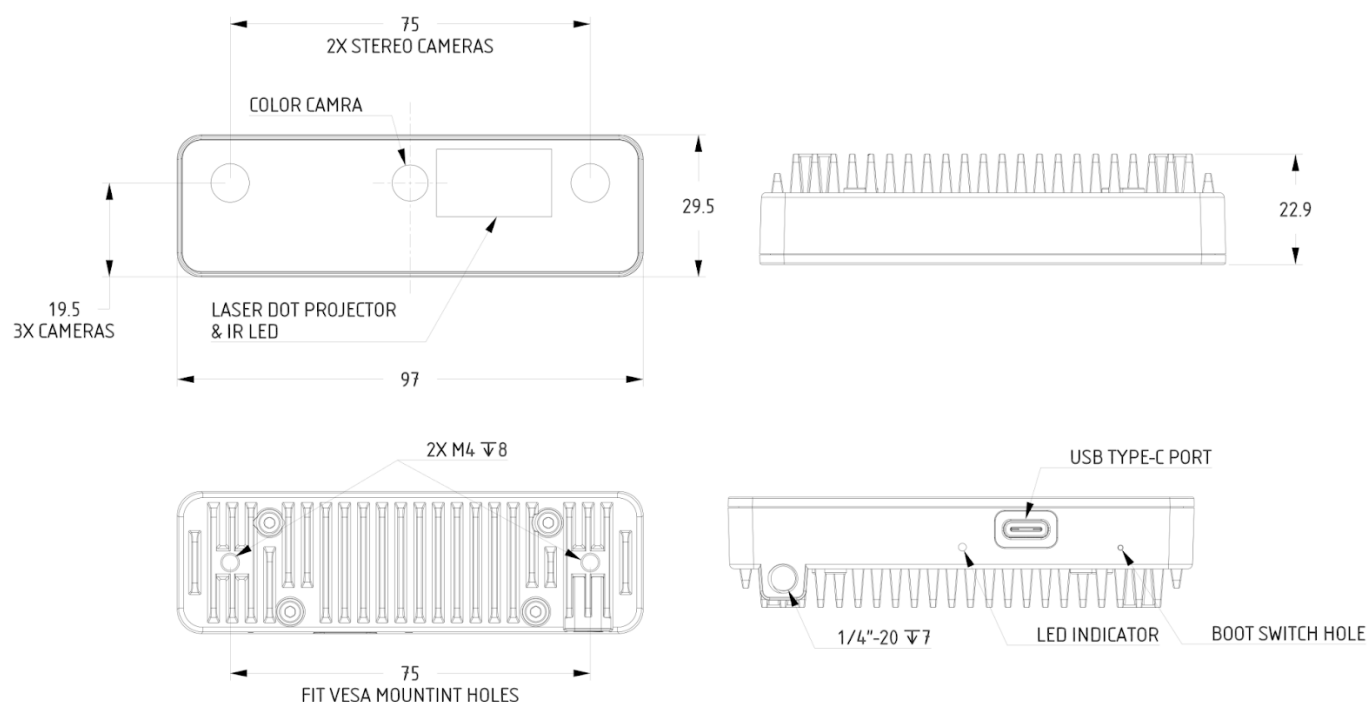

Figure 2 – OAK-D Pro Mechanical measurements